

rexroth
A Bosch Company

Basic mechanic elements 15.0





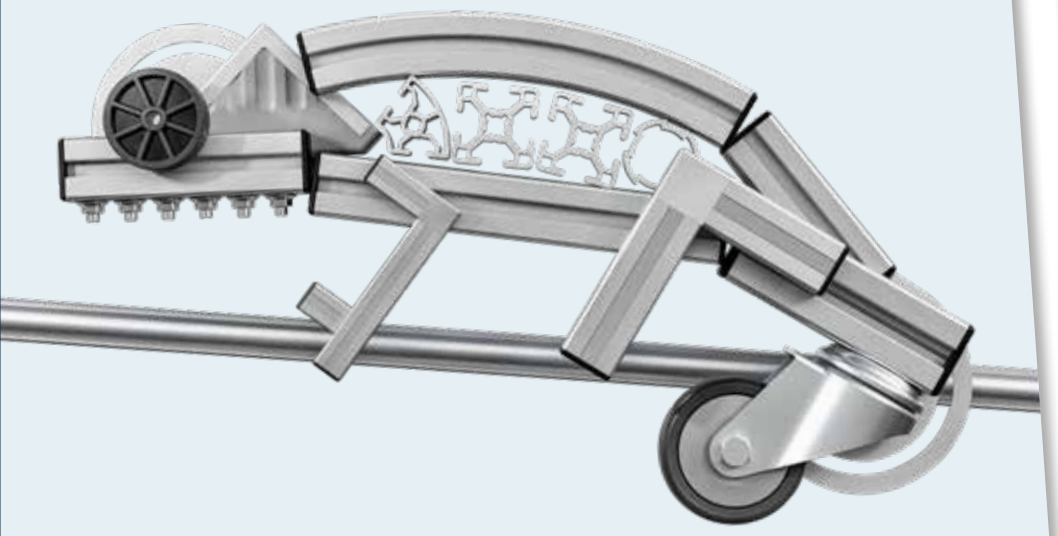

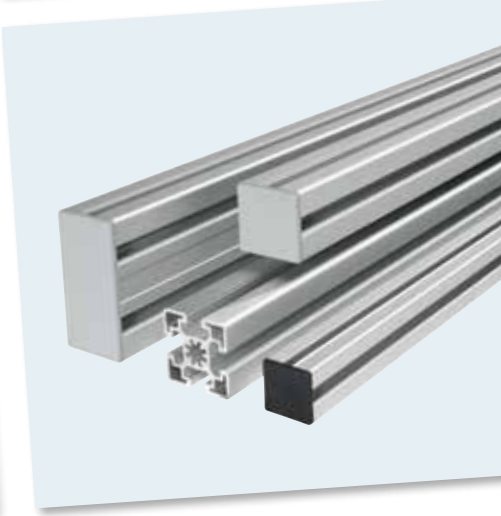

www.boschrexroth.com

Explanations

40x40 HR		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 256 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 257 / L**
20 pcs		6070	**3 842 529 381**

Product available for delivery as:
Single component of variable length, e.g.
Order: 1 x 3 842 993 257 / 785
Delivery: 1 x 40 x 40 HR with M12 profile finishing on both sides, L = 785 mm
Delivery unit (: here 20 pcs) of fixed length, e.g.
Order: 1 x 3 842 529 381
Delivery: 20 x 40 x 40 HR (without profile processing), L = 6070 mm
M12 M12 Notes on profile finishing, see Section 2

50/50	Slot	ESD		No.
Bracket (standard)	10		20	**3 842 530 381**


The product is delivered in packaging units (: in this case 20 units); i.e. the order quantity must at least equal the specified quantity or a multiple of it; differing quantities will be rounded up.
Order examples:
Order: 1 x 3 842 530 381 – delivery: 20 x brackets 50/50
Order: 20 x 3 842 530 381 – delivery: 20 x brackets 50/50
Order: 30 x 3 842 530 381 – delivery: 40 x brackets 50/50

Threaded sleeve	No.
	3 842 504 790

For order tables without the column , the following applies: = 1
Order examples:
Order: 1 x 3 842 504 790 – delivery: 1 x threaded sleeve incl. fastening material (FS) enclosed with the product for peripheral mounting



Profiles with slot width 6, 8, 10 mm; accessories suitable for mounting on profiles with specified slot width



Profile with slot width 10 mm; modular dimension 40 mm, 45 mm, 50 mm, 60 mm; accessories suitable for mounting on profiles with the specified slot width and modular dimension

Conductive material version in accordance with DIN EN 61340-5-1; suitable for use in ESD-sensitive areas

Suitable for use in clean rooms

Profile finishing required (drilling, thread cutting, milling)

The centering tab can be broken off for offset assembly or assembly at an angle to the profile slot


Screw with Torx profile

Weight

F_{max} Permissible load (N)

Introduction	**1**
Strut profiles	**2**
Connection elements	**3**
Joints	**4**
Air-supply elements	**5**
Feet and wheels	**6**
Mounting of panel elements	**7**
Doors and fittings	**8**
Accessories for protective equipment	**9**
Protective equipment and partition walls EcoSafe	**10**
Installation elements	**11**
Elements for manual movement	**12**
Linear guides	**13**
Tools	**14**
FiFo station	**15**
Components for lateral guides	**16**
Components for ESD applications	**17**
Technical data	**18**
Material number overview	**19**
Index	**20**

FRAME YOUR FACTORY – with the modular aluminum profile system

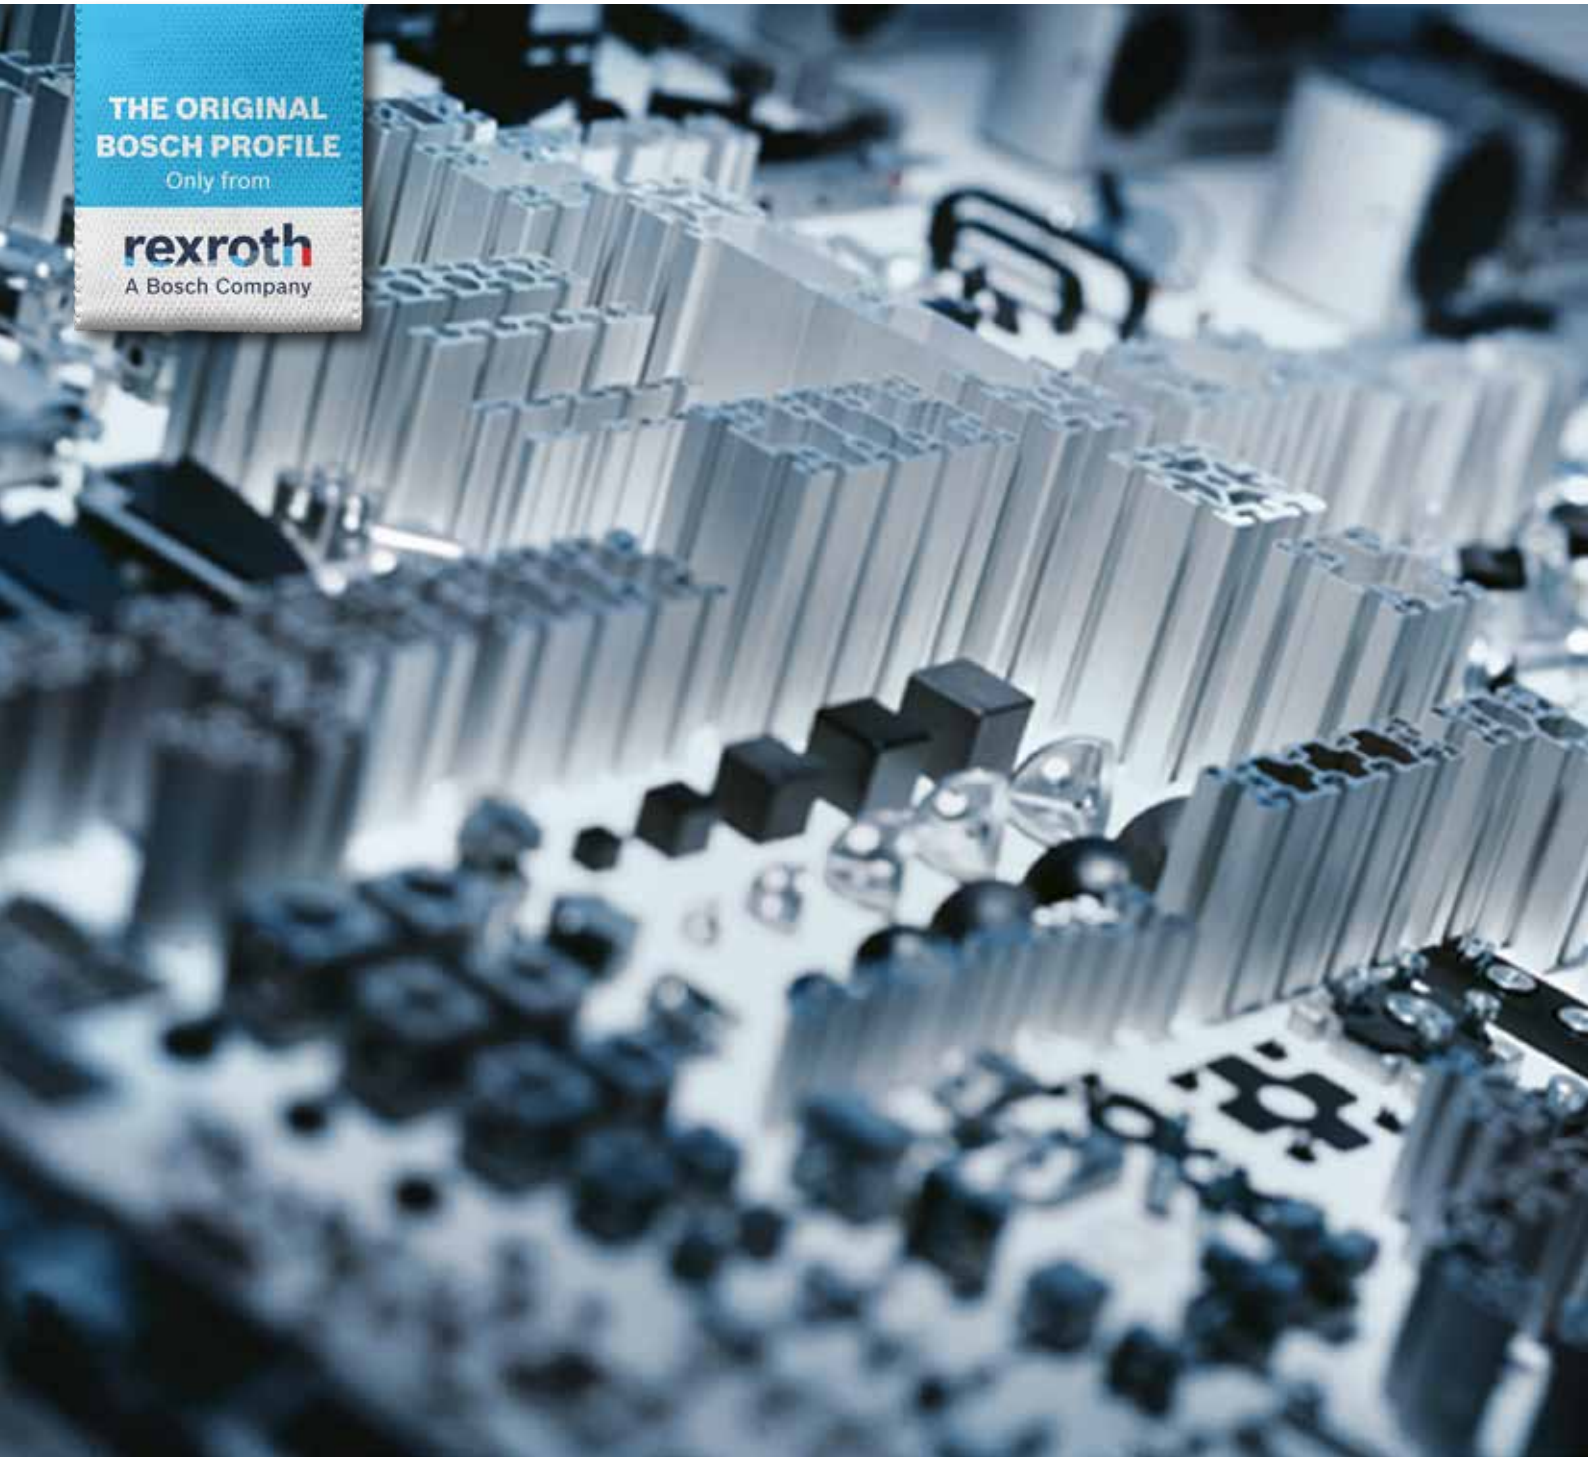

Bosch Rexroth AG, 3 842 540 392 (2025-10)

Realize ideas



Virtually limitless possibilities with the versatile modular aluminum profile system

From flow racks and frames made of aluminum profiles, enclosures, ergonomic assembly work stations through to fully automated production lines with transfer systems – the well-designed and versatile assembly technology from Bosch Rexroth sets the benchmark. Based on decades of practical experience, it is continuously being enhanced.

With its modular, perfectly coordinated components, the Bosch Rexroth modular profile system offers tailored and economical solutions – for every challenge in production, assembly, and workplace design.

Your benefits:

Smart product concept
Proven design and modular construction with optimally matched accessories

Short time to value
Time-saving assembly, standardized elements, maximum availability

Maximum planning security
Free planning software, CAD data, high flexibility, and a wide range of options

Highest quality and safety
Durable, corrosion-resistant and made of 100 % recyclable aluminum, meets common standards, guaranteed performance values

Competent partner
Worldwide network, personal advice, fast and timely delivery

One construction kit, limitless possibilities





Versatile

A wide selection of aluminum profiles, versatile connection elements, and a broad range of accessories combine to form a comprehensive portfolio that offers you utmost freedom to create innovative, safe, and productive solutions – in production, assembly, or workplace design.

Thanks to the simple design and standardized components, adaptations and expansions can be implemented quickly and efficiently – with minimal use of tools.

Strong profiles

- Over 140 profile cross-sections
- Finely tuned profile dimensions
- Economical choice for any load scenario

Secure connection technology

- More than 300 connector variants
- Well-thought-out design
- The Rexroth connectors keep a firm hold

Accessories that fit perfectly

- Over 1000 accessories
- Easy assembly in profile slot or central hole

Maximize load capacity and safety

- Robust profiles and stable connectors able to withstand high forces
- Comprehensive color concept
- ESD-compatibility according to DIN EN 61340-5-1
- Integrated anti-torsion elements and positioning aids

Design elements – perfect look and clear labeling




designLINE – The perfect combination of quality and function

Do you value good design?
The *designLINE* version of our proven die-cast connectors features an impressive and high-quality appearance. The special finish in “RAL 9006 white aluminum” gives your application an elegant and timeless look.




Signal gray

The signal gray (RAL 7004) color variant meets the market requirement for a subtle color scheme for superstructures and thus gives the application a harmonious and understated design.

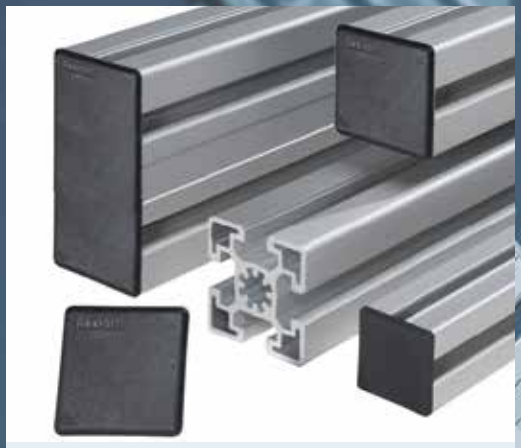

ESD black

Across its range, Bosch Rexroth offers a choice between standard grey accessories and ESD accessories in black. The conductive plastic components can discharge voltages.

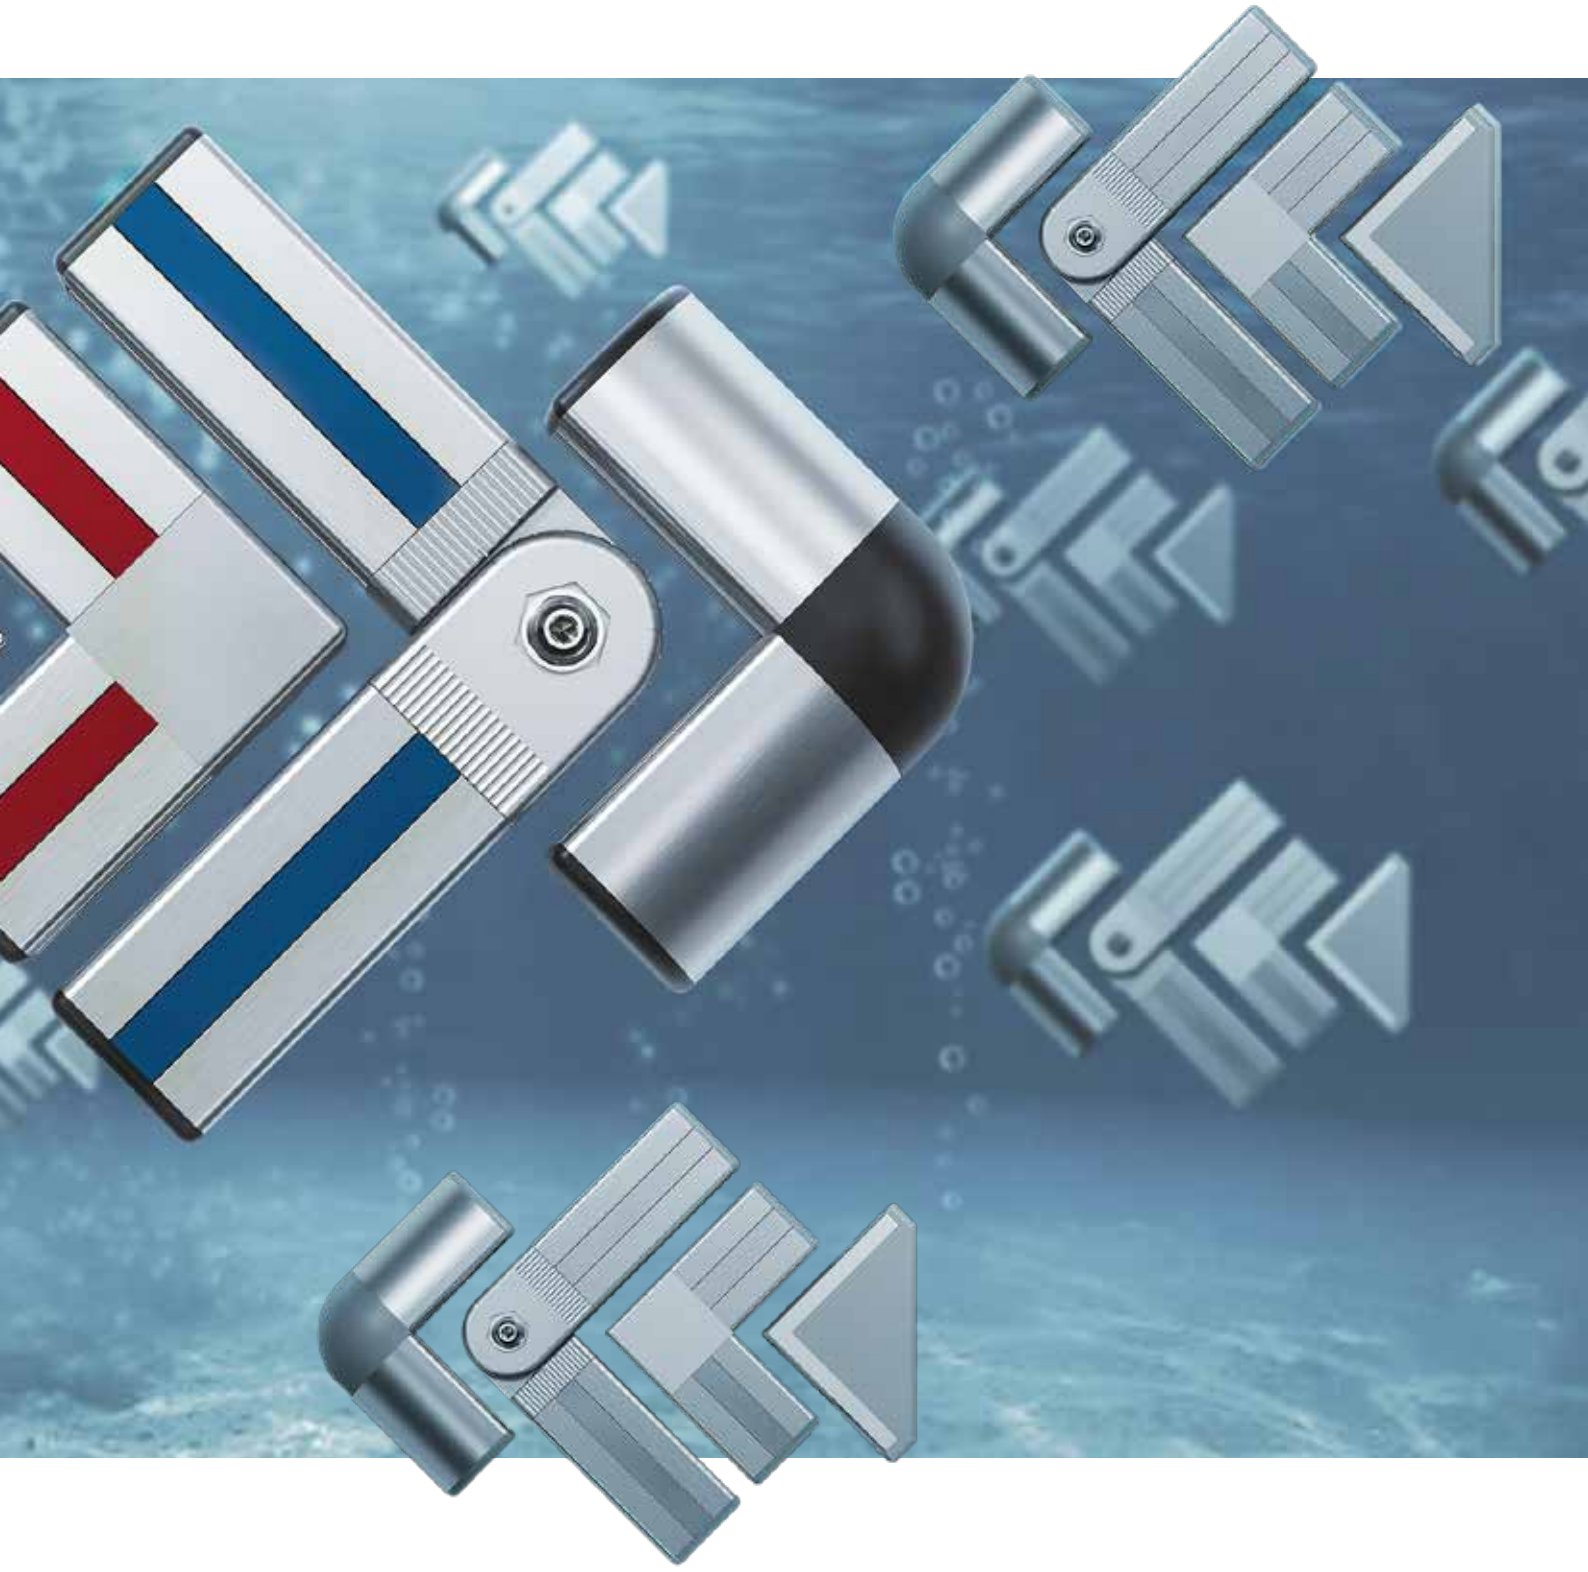

Robust connection technology – secure and field-tested

Bosch Rexroth has the right connection element for every application – whether rectangular, variable-angle, flexible, internal, vibration-resistant, or torsion-resistant. The sophisticated technology of the heavy-duty elements not only ensures maximum stability, but also meets the highest requirements in terms of functionality and safety, including use in ESD-sensitive areas.



Bracket

- Quick and precise installation with centering lugs – even overhead
- Plug-through screws



Quick connector

- Easy and quick installation
- Free slots for panel mounting, movable on profile slot



Bolt connector

- Reliable and strong connection for challenging requirements like permanent vibration or dynamic load
- High torsion resistance



Cubic connector

- Well-designed connector with high rigidity
- Quick installation without profile preparation
- Cut-out for gap-free mounting of panel elements



Coupling

- Well-designed corner connection without end finishing
- Lying in the slot, therefore no external interfering contour



T-connectors and end connectors

- Very high load-bearing capacity
- Exact and quick installation without profile finishing and movable on the slot

Matching accessories – versatile, secure, and perfectly fitting

The accessories are precisely tailored to the modular profile system and can be easily attached in the profile slot or central hole. More than 1000 accessories ensure the right solution for every application.



Cover caps

- Protection against injury at open cutting edges
- Attractive design in “signal gray” and “black ESD”



Feet and wheels

- Secure support
- Wide range of supports and wheels



Mounting of panel elements

- Securing of panel elements (e.g. protective pane) in the slot
- Design in compliance with Machinery Directive



Installation elements

- Well-arranged installation of power lines
- Low-maintenance electrical installation with cable ducts and cable brackets



Doors and fittings

- Construction of hatches and doors
- Attachment via profile slot or directly at panel element



Manual movement

- Wide range of sliders, support wheels, etc.
- Individual solutions with standard products


worldwide

Experience and expertise

Comprehensive experience, in-depth know-how, a professional worldwide network, and reliable production capacities ensure timely and speedy supply.

Worldwide, reliable, professional

- Dealers, systems providers and regional and national subsidiaries are always near at hand for you – worldwide
- Highly efficient central warehouse in Stuttgart
- Local warehouses at Rexroth sites
- “Made to order” production capacities

On-time, speedy supply

- All components available
- Pre-assembled modules, complete frames
- Prompt delivery and excellent adherence to deadlines

Professional point of contact

- Personalized advice
- Comprehensive services
- Local sales partners
- Highly skilled experts

For more information, visit:
www.boschrexroth.com/contact

professional

reliable

Systematic safety – playing it safe from the start



For more information, visit:
www.boschrexroth.com/aluminumprofiles



Thanks to the overall system of the Rexroth modular profile system, accident risks are avoided and safety regulations reliably complied with.

As a company, you are responsible for safety in the workplace. Rexroth components help you to reliably comply with legal regulations and various safety guidelines. Safety and quality throughout the entire product life cycle are fundamental to our business. Dealing with product liability regulations, certifications, regular inspections, verifications, and documentation is complex. We are familiar with these and would be happy to advise you.

- **Standard-compliant components**
- **Certified quality management**
- **ESD protection for production systems**
- **EcoSafe safety fences**
- **Personalized advice**

FRAMEpro – the intelligent CAD plug-in



For more information, visit:
www.boschrexroth.com/framepro

Bosch Rexroth AG, 3 842 540 392 (2025-10)



Quick, simple, and secure construction of all types of frames.

The FRAMEpro plug-in from Bosch Rexroth integrates a complete component library with all Basic Mechanic Elements directly into Autodesk Inventor and SOLIDWORKS: Selected profiles are placed in a 3D line model before accessories are added. Intuitive user guidance and intelligent macros significantly simplify and speed up the design process. FRAMEpro automatically sets suitable connectors, adjusts profile lengths, positions holes and threads, and inserts cover caps. FRAMEpro checks designs for missing parts and generates automated parts lists.

Efficient design directly in your familiar CAD environment without manual imports


Safe and error-free planning with 3D line models and intelligent design support functions

Automated order list generation and integrated ordering option

Fast time to market and reduced engineering costs

Download for free

Rapid planning with MTpro planning software

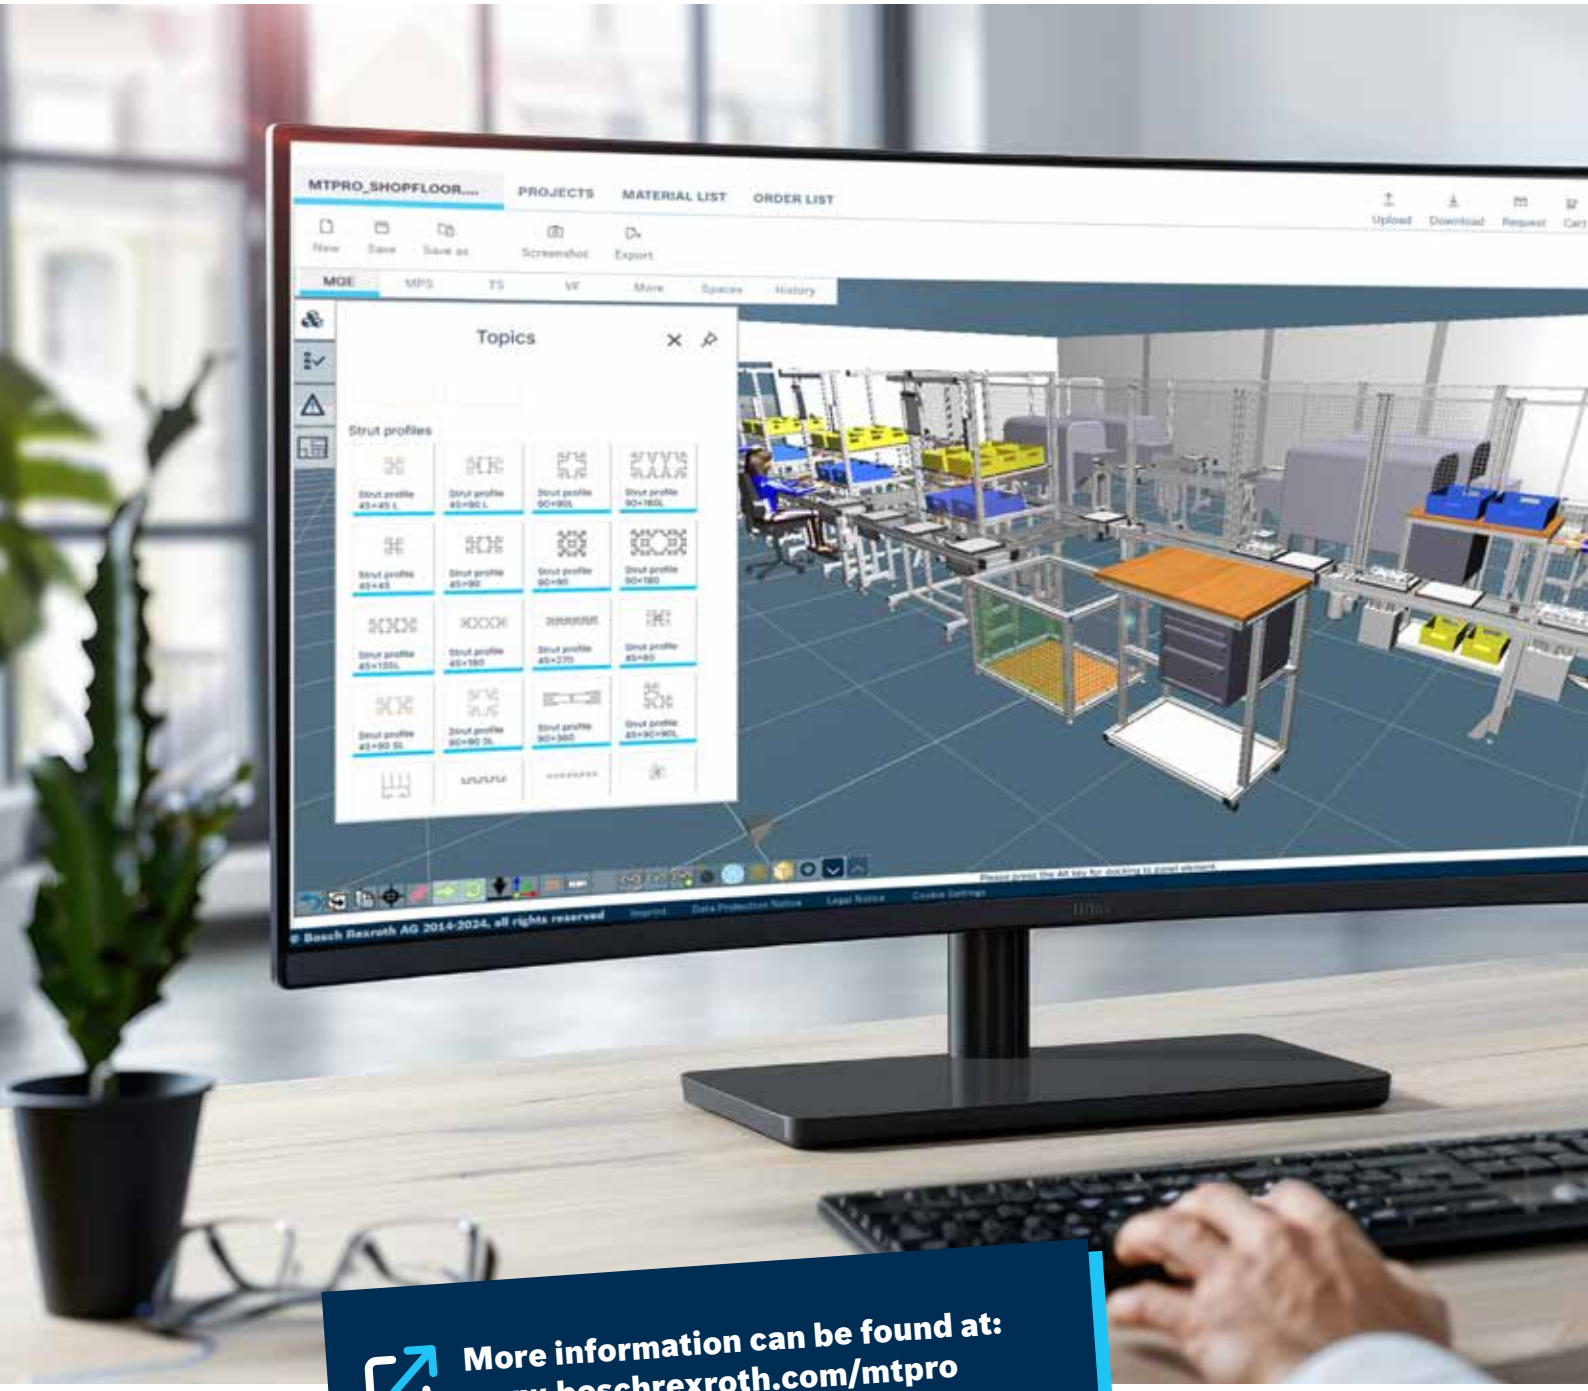

More information can be found at: www.boschrexroth.com/mtpro



Simplify and accelerate your planning and design

MTpro is an intuitive piece of software used for planning assembly systems. It assists you from selection and configuration through to ordering components. Plan, calculate, and document your assembly systems in just a few steps with the free planning and project planning software MTpro. Design even the most complex constructions and system layouts in no time.

- **Quick and simple 3D planning in the Layout Designer**
- **CAD library with all product information**
- **Automatic order list generation**
- **Integrated ordering option**
- **Direct export to various CAD formats (STEP, SAT, IGES, etc.)**
- **Comprehensive courses and training videos**
- **Free download and online version**

Frame your ideas! Solutions for all sectors

A compelling concept for providing application-oriented solutions for all sectors, from the automotive industry to logistics, automation, electronics, or exhibition stand construction.



Solution #1

Implementation of a flexible assembly line at Robert Bosch GmbH including automated stations and manual workstations



Solution #2

Frame enclosure of an assembly plant for steering systems.



Solution #3

A tightening station for manufacturing generators made from Rexroth aluminum profiles makes work processes easier to carry out.



Solution #4

EcoSafe safety fences form an important part of the safety concept of a battery recycling plant at BLC.



1

Rexroth assembly technology

Flexible. Versatile. Application-oriented.

- **Workstations**
- **Flow racks and material shuttles**
- **Linear guides**
- **Frame and plant construction**
- **EcoSafe protective equipment**
- **Creative profile applications**

For more information, visit:
www.boschrexroth.com/assembly-technology

At a glance: Assembly technology from Bosch Rexroth



Conveying and transfer systems

Modular and flexible conveyor and transfer systems automate material flows in production, optimize production processes, and shorten throughput times. They are robust, reliable, and suitable for a wide variety of workpieces. As a result, they increase productivity and improve profitability in industries such as automotive, electronics, and pharmaceuticals.

www.boschrexroth.com/transfer_systems



Manual Production Systems (MPS)


The manual production system enables quick and efficient adaptation of workstations and entire production lines to the work to be carried out.

www.boschrexroth.com/mps


Strut profiles




Strut profiles, 6 mm slot,
20 mm modular dimension
(p. 2-11)



Strut profiles, 8 mm slot,
30 mm modular dimension
(p. 2-16)




Strut profiles, 10 mm slot,
40 mm modular dimension
(p. 2-24)




Strut profiles, 10 mm slot,
45 mm modular dimension
(p. 2-37)




Strut profiles, 10 mm slot,
50 mm modular dimension
(p. 2-54)



Strut profiles, 10 mm slot,
60 mm modular dimension
(p. 2-56)




Rectangular tube (p. 2-58)
Clamping profile (p. 2-59)
Al angle profile 19″ (p. 2-60)




Frame profile
22.5x30 (p. 2-61)
22.5x45 (p. 2-62)




Angle profile (p. 2-63)
Suspension profile (p. 2-64)
Container mount (p. 2-65)



Slotted plate (p. 2-66)




Material chute (p. 2-67)




Profile rail (p.2-71)




Profiles for installing
conveyor media (p. 2-72)




Round tube D28 (p. 2-75)
Strut profile D28x55
(p. 2-75)



EcoShape tubular framing
system (p. 2-78)



Function-integrated profiles
(p. 2-98)



Cover profiles, additional
accessories (p. 2-93)

Strut profiles

With more than 140 strut profiles for all load cases, Bosch Rexroth AG offers a wide product range for different requirements:

- Square and rectangular profiles
- Light profiles with optimized cross-sections
- Round profiles and profiles with smooth lateral surfaces

Connectors with high load-bearing capacities combined with ultra robust slots and large central bores make profile connections possible which can handle high static and dynamic loads.

Bosch Rexroth AG offers you six different profile ranges. All profiles within one profile range have the same slot dimensions and spacing to ensure perfect coordination during construction.
Due to their high degree of robustness, the 10 mm slotted profiles are suitable for constructions ranging from tables to heavy machine frames. They are available in four profile series with a slot spacing of 40 mm, 45 mm, 50 mm, or 60 mm.

The profiles with 8 mm and 6 mm slots are used in the assembly of lightweight equipment, partition walls, stands, or show cases.


Profile length in profile packaging units ( )
The stated length of the profile packaging units relates to the guaranteed usable length.
During anodizing as part of the manufacturing process bare areas which are approx. 30 mm long are left at each end of the profile (= contact areas), so the profiles are generally supplied incorporating an excess length of 100 mm.

Example:

45x45L		**L** (mm)	**No.**
20 pcs		6070	**3 842 553 611**

Notice: The length dimension “L” in the table equals the usable length, whereas the actual length is approx. 100 mm longer.

Strut profiles – slot sizes and modular dimensions

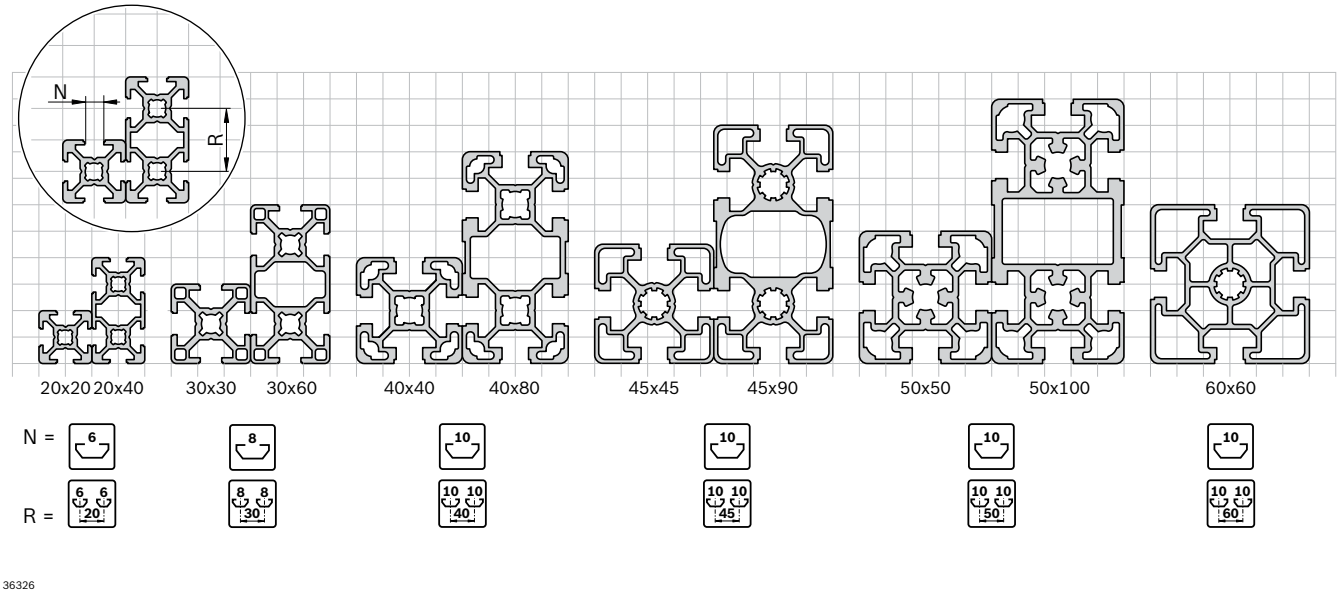

Slot size N = 6 mm, 8 mm, 10 mm
Modular dimensions R = 20 mm, 30 mm, 40 mm, 45 mm, 50 mm, 60 mm

Technical data – profiles

Profile		Slot	Profile surface	Moment of inertia		Moment of resistance		Torsion index		Weight	Page
			A (cm^2)	I_x (cm^4)	I_y (cm^4)	W_x (cm^3)	W_y (cm^3)	I_t (cm^4)	W_t (cm^3)	**m** (kg/m)	
20x20		6	1.6	0.7	0.7	0.7	0.7	0.08	0.17	0.4	2-12
20x20 1N		6	1.9	0.8	0.8	0.8	0.8	0.60	0.67	0.5	2-12
20x20 2N		6	1.8	0.7	0.8	0.7	0.8	0.31	0.52	0.5	2-12
20x20 2NVS		6	1.8	0.7	0.7	0.7	0.7	0.37	0.52	0.5	2-13
20x20 3N		6	1.7	0.7	0.8	0.7	0.7	0.19	0.34	0.5	2-13
20x20 R		6	1.6	0.6	0.6	0.5	0.5	0.21	0.39	0.4	2-13
20x40		6	2.9	4.6	1.2	2.5	1.4	0.68	0.91	0.8	2-14
20x60		6	3.5	14.2	1.7	4.7	1.7	2.30	2.00	0.9	2-14
20x40x40		6	4.2	6.0	6.0	2.6	2.6	1.50	1.30	1.1	2-14
10x40		6	2.1	3.2	0.2	1.6	0.4	–	–	0.6	2-15
30x30		8	3.1	2.8	2.8	1.8	1.8	0.29	0.33	0.9	2-17
30x30 1N		8	3.7	3.1	3.5	2.0	2.3	2.80	1.50	1.0	2-17
30x30 2N		8	3.5	2.8	3.5	2.1	2.7	1.50	1.20	1.0	2-17
30x30 2NVS		8	3.5	3.1	3.1	2.0	2.0	1.70	1.10	1.0	2-18
30x30 3N		8	3.3	3.1	2.8	2.3	2.1	0.86	0.73	0.9	2-18
30x30°		8	3.7	3.5	3.6	2.0	1.9	1.50	2.00	1.0	2-18
30x45°		8	4.0	3.6	5.1	2.1	2.3	2.10	2.40	1.1	2-19
30x60°		8	3.6	3.0	4.1	1.7	1.9	1.50	2.00	1.0	2-19
30x30 R		8	2.9	2.3	2.3	1.4	1.4	0.81	1.20	0.8	2-19
30x60		8	5.5	19.6	5.1	7.0	3.9	2.60	2.10	1.5	2-20
30x60 4N		8	5.8	20.2	5.5	6.7	3.8	4.80	2.40	1.6	2-20
30x60x60		8	8.2	26.2	26.2	7.6	7.6	6.40	3.60	2.2	2-20
30x90		8	7.7	60.7	7.3	13.5	4.9	5.10	3.80	2.1	2-21
30x120		8	9.9	136.3	9.6	22.7	6.4	7.60	5.60	2.7	2-21
30x45		8/10	4.0	8.1	3.9	3.9	2.9	1.30	1.30	1.1	2-22
60x60 8N		8	9.8	39.7	39.7	13.2	13.2	19.30	6.80	2.6	2-22
11x20		8	1.0	0.5	0.1	0.7	0.3	–	–	0.3	2-22
15x120		8	9.0	110.4	2.2	18.4	2.7	–	–	2.4	2-23
40x40L		10	5.6	9.1	9.1	4.5	4.5	1.30	0.74	1.5	2-26
40x40L 0N		10	6.3	10.4	10.4	5.2	5.2	10.70	4.30	1.7	2-26
40x40L 1N		10	6.1	9.8	10.3	4.7	5.1	6.90	3.70	1.7	2-26
40x40L 2N		10	6.0	9.0	10.3	4.5	5.2	4.00	3.00	1.6	2-27
40x40L 2NVS		10	6.0	9.7	9.7	4.9	4.9	4.50	2.70	1.6	2-27
40x40L 3N		10	5.8	9.7	9.0	4.8	4.5	2.60	1.70	1.6	2-27
40x30°		10	6.2	9.4	11.8	4.7	5.9	3.00	3.10	1.7	2-28
40x45°		10	6.8	9.9	16.6	5.0	8.3	4.20	3.70	1.8	2-28
40x60°		10	6.3	8.7	13.1	4.3	6.5	3.00	3.10	1.7	2-28
40x40L R		10	5.0	7.2	7.2	3.6	3.6	2.50	2.00	1.3	2-29
40x40 HR		10	5.5	8.1	7.6	4.0	3.6	4.60	2.80	1.5	2-29


Profile		Slot	Profile surface	Moment of inertia		Moment of resistance		Torsion index		Weight	Page
			A (cm^2)	I_x (cm^4)	I_y (cm^4)	W_x (cm^3)	W_y (cm^3)	I_t (cm^4)	W_t (cm^3)	**m** (kg/m)	
40x80L		10	9.9	63.4	17.3	15.9	8.7	8.02	4.80	2.7	2-30
40x80L 2N		10	10.9	66.6	20.8	16.6	10.4	22.40	7.58	2.9	2-30
40x80L 4N		10	10.4	65.2	19.1	16.3	9.9	13.30	4.40	2.8	2-30
40x80L 2NVS		10	10.7	67.8	19.0	17.0	9.5	19.24	7.55	2.9	2-31
40x80L 3NVS		10	10.6	67.8	19.0	17.0	9.5	15.90	5.20	2.9	2-31
40x80x80L		10	15.4	96.6	96.6	24.2	24.2	19.60	9.80	4.2	2-31
40x120L		10	15.5	203.2	27.8	33.9	13.9	17.20	10.00	4.2	2-32
40x120L 5N		10	15.8	212.4	30.1	35.3	15.5	–	–	4.3	2-32
40x160L		10	20.5	466.7	37.2	58.3	18.6	25.80	14.60	5.5	2-33
80x80L		10	18.2	132.1	132.1	33.0	33.0	59.80	17.20	4.9	2-34
80x80L 4N		10	19.1	142.5	142.5	35.6	35.6	83.90	15.4	5.2	2-34
80x80L 4NVS		10	19.3	142.5	142.5	35.6	35.6	92.00	16.80	5.2	2-35
80x80L 6N		10	18.8	134.1	140.9	33.5	36.2	72.60	15.00	5.1	2-35
40x120x120L		10	24.6	318.0	318.0	42.2	42.2	37.10	19.00	6.7	2-35
80x120L		10	25.6	389.2	192.8	64.9	48.2	119.00	29.10	6.9	2-36
80x160L		10	32.9	850.7	253.4	106.3	63.4	182.00	41.10	8.9	2-36
45x45L		10	6.0	11.7	11.7	5.2	5.2	1.46	0.75	1.6	2-37
45x45L 0N		10	6.7	13.5	13.5	6.0	6.0	16.20	6.10	1.8	2-37
45x45L 1N		10	6.5	12.6	13.5	5.5	6.0	10.00	5.20	1.8	2-38
45x45L 2N		10	6.4	11.6	13.5	5.2	6.0	5.50	4.30	1.7	2-38
45x45L 2NVS		10	6.4	12.6	12.6	5.6	5.6	6.30	3.80	1.7	2-38
45x45L 3N		10	6.2	12.6	11.7	5.4	5.2	3.40	2.40	1.7	2-39
45x30°		10	6.9	12.7	15.2	5.0	5.3	6.60	5.70	1.9	2-39
45x45°		10	7.6	13.4	21.4	5.2	6.4	9.00	6.80	2.0	2-39
45x60°		10	6.8	11.4	16.9	4.4	5.2	6.80	4.30	1.8	2-40
45x45L R		10	4.9	8.6	8.6	5.0	5.0	3.30	2.80	1.3	2-40
45x45HR		10	6.6	11.0	10.7	4.8	4.4	7.60	3.40	1.8	2-40
45x45		10	7.5	13.8	13.8	6.1	6.1	2.65	0.96	2.0	2-41
45x60		10	11.0	37.2	22.7	12.4	10.1	6.70	4.09	3.0	2-42
45x90SL		10	9.0	73.4	18.1	16.3	8.0	8.57	4.00	2.4	2-42

Profile		Slot	Profile surface	Moment of inertia		Moment of resistance		Torsion index		Weight	Page
			A (cm^2)	I_x (cm^4)	I_y (cm^4)	W_x (cm^3)	W_y (cm^3)	I_t (cm^4)	W_t (cm^3)	m (kg/m)	
45x90L		10	11.3	82.0	23.6	18.2	10.5	15.10	4.40	3.0	2-43
45x90L 2N		10	12.0	85.6	26.9	38.1	6.0	31.70	7.70	3.2	2-21
45x90L 2NVS		10	12.0	90.6	25.9	40.3	5.7	23.34	9.65	3.3	2-44
45x90L 3NVS		10	11.8	87.2	25.2	38.8	5.6	25.70	6.60	3.2	2-44
45x90L 4N		10	11.6	83.6	25.2	18.6	10.9	27.61	6.08	3.2	2-45
45x135L		10	16.8	267.4	36.2	39.6	16.1	29.50	8.20	4.6	2-45
45x135L 5N		10	17.3	274.4	38.6	40.7	17.6	32.50	10.90	4.7	2-45
45x90		10	15.4	124.6	32.8	27.7	14.6	15.40	6.61	4.2	2-46
45x180		10	25.5	766.7	57.3	85.2	25.5	44.40	17.00	6.9	2-46
45x270		10	61.9	3962.0	118.0	300.2	61.6	–	–	16.7	2-47
45x90x90L		10	21.2	152.1	152.1	19.1	19.1	34.90	11.60	5.7	2-47
45x90x90L 4N		10	22.1	160.8	160.8	30.6	30.6	65.30	17.20	6.0	2-48
90x90SL		10	14.1	130.2	130.2	28.9	28.9	42.50	13.90	3.8	2-48
90x90L		10	24.1	211.1	211.1	46.9	46.9	82.10	20.10	6.5	2-48
90x90L 4N		10	24.2	227.4	214.7	50.5	47.7	122.00	22.20	6.5	2-49
90x90L 4NVS		10	24.2	220.9	220.9	49.2	49.2	127.00	22.00	6.5	2-49
90x90		10	38.4	299.8	299.8	66.7	66.7	118.60	26.00	10.4	2-49
90x135L		10	32.9	629.4	305.2	93.3	67.8	163.70	39.6	8.9	2-50
90x180L		10	42.8	1380.0	401.0	153.3	89.1	257.00	47.10	11.6	2-51
90x180		10	63.6	2138.3	544.3	237.6	121.0	429.00	64.00	17.2	2-51
90x360		10	90.2	14065.0	710.0	781.4	157.7	937.10	117.60	24.4	2-52
15x22.5		10	1.3	0.8	0.3	0.9	0.6	–	–	0.3	2-52
15x180		10	11.6	321.7	3.2	35.7	4.2	–	–	3.1	2-53
22.5x45		10	4.7	7.1	2.9	3.2	2.6	–	–	1.3	2-53
22.5x180		10	21.6	581.0	11.8	66.8	14.7	–	–	5.8	2-53
50x50L		10	9.3	21.2	21.2	8.5	8.5	5.37	4.30	2.5	2-54
50x100L		10	17.2	162.8	42.6	32.6	17.0	29.43	10.70	4.6	2-54
50x150L		10	25.8	540.0	64.2	72.0	25.7	52.10	20.50	6.9	2-55

Profile		Slot	Profile surface	Moment of inertia		Moment of resistance		Torsion index		Weight	Page
			A (cm^2)	I_x (cm^4)	I_y (cm^4)	W_x (cm^3)	W_y (cm^3)	I_t (cm^4)	W_t (cm^3)	**m** (kg/m)	
100x100L		10	29.9	318.3	318.3	63.7	63.7	153.53	31.40	8.1	2-55
100x200L		10	54.0	2133.1	602.1	213.3	120.4	421.00	75.70	14.6	2-56
60x60L		10	9.6	32.4	32.4	10.8	10.8	13.20	8.70	2.6	2-56
60x60		10	14.4	52.2	52.2	17.4	17.4	15.90	8.80	3.9	2-57
60x90		10	25.8	214.2	90.5	47.6	30.2	45.80	18.00	7.0	2-57
50x50 Rectangular tube		10	4.5	15.1	15.1	5.7	5.7	–	–	1.2	2-58
Frame profile 22.5x30		10	3.2	1.7	3.0	1.5	2.0	–	–	0.9	2-61
Frame profile 22.5x45		10	3.4	6.7	1.7	2.8	1.3	–	–	0.9	2-62
Angle profile		10	4.5	8.8	6.9	3.2	2.3	–	–	1.2	2-63
Suspension profile		8	2.0	2.0	0.5	2.7	0.3	–	–	0.6	2-64
30x100 L/R Slotted plate		10	9.7	88.8	9.2	17.8	6.0	–	–	2.6	2-66
30x100 M Slotted plate		10	9.7	88.8	9.2	17.8	6.0	–	–	2.6	2-66
Profile rail 30x45C		10	4.4	10.3	5.6	4.2	3.7	–	–	1.2	2-71
U-profile		10	4.4	10.4	8.3	4.6	4.1	–	–	1.2	2-72
SP 2/R		8	5.2	4.3	11.7	2.4	5.2	–	–	1.4	2-72
SP 2/B		10	10.4	49.6	25.8	12.1	11.5	–	–	2.8	2-73
SP 2/B-50		8/10	6.9	16.1	16.9	5.3	7.5	–	–	1.9	2-73
SP 2/B-100		10	11.9	95.1	30.4	20.0	13.5	–	–	3.2	2-73
SP 2/BH		10	12.4	53.7	28.6	14.0	13.8	–	–	3.3	2-74
D28			2.4	1.5	1.5	1.1	1.1	–	–	0.7	2-76
D28x55			5.9	3.2	88.3	2.3	32.1	–	–	1.6	2-77
D28L			1.8	1.3	1.3	1.0	1.0	–	–	0.5	2-80
D28L; N10			2.6	1.0	2.0	1.4	0.8	–	–	0.7	2-80
60x120 Cable guide profile		10	14.9	31.2	232.5	7.8	38.7	–	–	4.0	2-100
120x120 Cable guide profile		10	21.9	211.3	412.5	24.7	68.4	–	–	5.9	2-101

Profile		Slot	Profile surface	Moment of inertia		Moment of resistance		Torsion index		Weight	Page
			A (cm^2)	I_x (cm^4)	I_y (cm^4)	W_x (cm^3)	W_y (cm^3)	I_t (cm^4)	W_t (cm^3)	**m** (kg/m)	
120x120 6N Cable guide profile		10	23.9	366.4	457.4	50.5	70.5	–	–	6.5	2-101
40x120x120 Cable guide profile		10	27.2	411.7	411.7	54.8	54.8	–	–	7.3	2-102
Frame profile 30x30 WG30		8	3.2	2.5	3.0	1.6	1.9	–	–	0.9	10-28
Frame profile 30x30 WG40		8	3.2	2.4	2.9	1.5	1.8	–	–	0.9	10-28
Frame profile 30x45 WG30		8	4.5	7.3	4.2	3.2	2.7	–	–	1.2	10-28
Frame profile 30x45 WG40		8	4.5	6.9	4.1	4.3	1.8	–	–	1.2	10-28
Frame profile 22.5x45 PG		10	3.4	6.3	1.9	2.7	1.7	–	–	0.9	10-32
Frame profile 45x45 PG		10	5.5	11.1	11.7	4.7	5.2	–	–	1.5	10-42
Section profile MV45x45		10	6.2	11.8	10.5	5.3	4.7	–	–	1.7	12-27










Profile finishing

Profile finishing is required whenever interlocking connectors are used. For instance, holes need to be drilled for bolt connectors or threads need to be cut into central hole. This requires machining with standard dimensions. However, individual customer requirements can only be satisfied by customized profile finishing for all points along the profile.
Rexroth enables even these complex requirements to be met as standard. This is because we offer three options for ordering the right profile finishing:

Example: 40x40L

3 842 993 126 / 255 D17 D17V

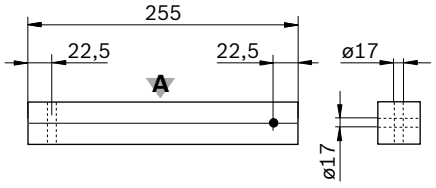



00133799

Standard profile finishing with fixed material numbers
For certain profiles, you can receive selected profile finishing with a fixed material number. This is the easiest way to order the appropriate profile finishing for our proven interlocking profile connectors.
The available profile finishing is shown in pictograms in the order tables.

Example: 40x40L 2N

3 842 993 720 / 255 /
A=D17/-; B=-/D17



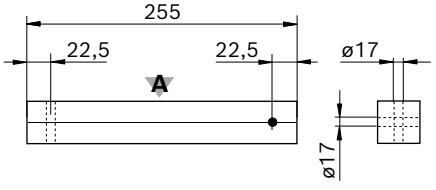



00133800

Quick & Easy – standard profile finishing
All profile finishing with standard dimensions: available for all profiles thanks to simple configuration with Quick & Easy.
For more information on the available profile finishing, see page 18-2 onwards as well as the fold-out section at the end of the catalog.

Example: 20x60

3 842 993 698 / 255 /
[B=DI; PS=58; OS=20;DM=9,8]



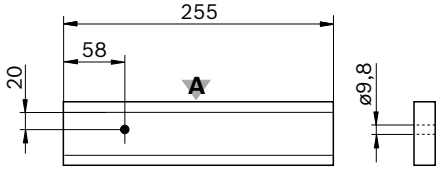

00133801

Quick & Easy – individual profile finishing
Get the greatest possible flexibility in defining your profile finishing. Individual finishing options can be achieved in virtually any combination and nearly every point along the profile.
For more information, see page 18-2 onwards as well as the fold-out section at the end of the catalog.




MT*pro*, *FRAMEpro* and Rexroth Store – software tools for designers, planners, and buyers

Quick & Easy is supported by the project planning tools *MTpro* and *FRAMEpro* as well as the profile configurator in the Rexroth Store.

We offer:

- Tool-based design and configuration
- Automated generation of profile finishings
- Generation of 3D CAD models for designers
- Dimension drawings at the press of a button
- Automatic parts lists for ordering in the Rexroth Store

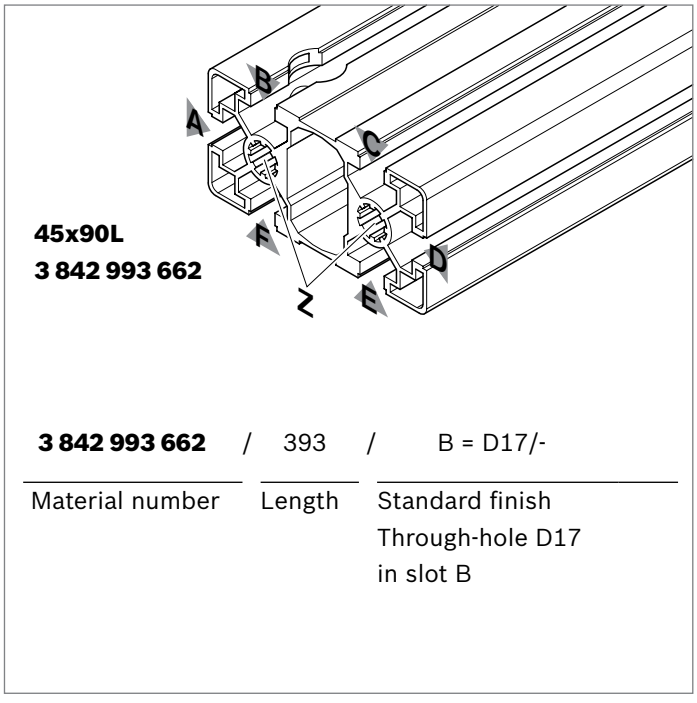


3 842 993 662	/ 393	/ B = D17/-
Material number	Length	Standard finish Through-hole D17 in slot B

Quick & Easy – four steps for simple ordering



The type of profile finishing is defined in an order key; all finishes for a profile can be summarized in one order key.

1. Select profile cross-section and length
2. Specify slot for finishing:
all profile slots are identified by letters (A; B; C; ...) – ascending in clockwise direction (see profile dimension drawings)
3. Define the parameters:
   - Type of finishing (drilling, milling, miter cutting)
   - Distance from profile end
4. Place order:
Conventionally by fax or, preferably online in our eShop


Logical structure of the order key
Material number / length / [slot designation = finishing; parameter set]

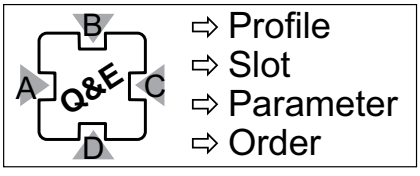

Notice:
For a detailed description of the order key, please refer to page 18-2 onwards






Profile finishing

Rexroth offers numerous connection options for putting strut profiles together. The wide variety of connector types is due to the differing demands made of the applications:

- Right-angled
- Variable-angle
- Internal
- Torsion-resistant
- Vibration-resistant
- With or without profile finishing

If you require a finished profile, it can be provided for you in an installation-ready form.
When you select the corresponding material number the profile is provided in cut, burr-free form, or alternatively fully finished with drilled holes or threads. This eliminates risk for you and reduces your production workload.

If you wish to undertake the finishing yourself, here are a few tips:

Saw and saw blade
Segmental metal circular saw blade, carbide-tipped
Number of teeth: 92 or 96
Rotational speed: at least 2500 rpm

Finishing of central holes
As a rule, the threads can be directly formed and cut, but countersinks facilitate their production. The central holes of the strut profiles are designed for the following thread manufacturing processes.

Threads	Finishing	Notices
M6	Thread forming	–
M8	Thread forming	–
M12	Thread cutting	–
M16	Thread forming	Pre-drilling in some cases


Drilling jigs
In the tools section you will find useful drilling jigs for the Rexroth standard finishes (p. 14-2).


Strut profiles with 6 mm slot

Strut profiles with 6 mm slot for light structures, such as supports and lab fixtures.


The 20x40 and 20x60 profiles are especially suitable for reinforcing; the 20x40x40 profile is suitable for constructing showcases, flow racks, and enclosures.


Slot, modular dimensions, central bore

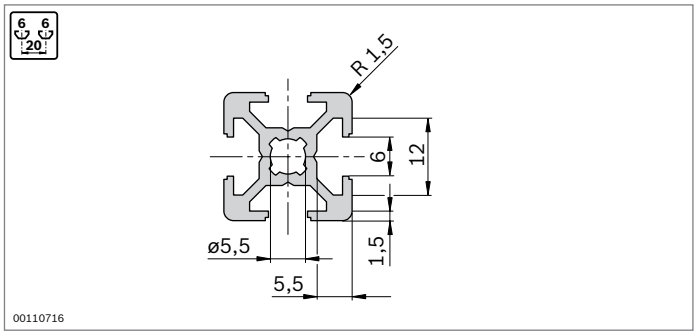


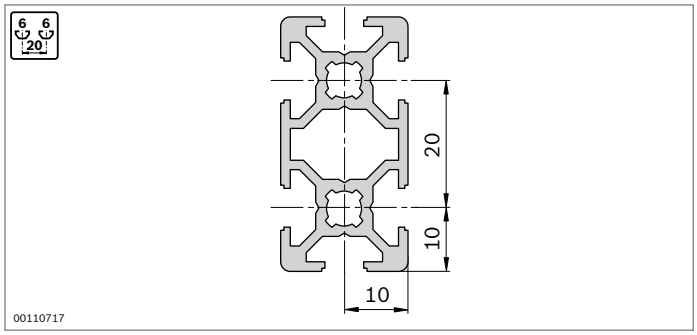


Profile finishing









Minimum profile lengths (mm) for Quick & Easy standard profile finishing on one or both sides


	–	M6	D5.8	D8/DB8
–	50	50	50	50
M6	50	70	50	70
D5.8	50	50	50	50
D8/DB8	50	70	50	50

Reduced maximum profile lengths $L_{max\,i}$ with individual profile finishing

L_{max} (mm)	$L_{max\,i}$ (mm)
6070	5400
3000	2300
2000	1300

20x20

A = 1,6 cm²
I_x = 0,7 cm⁴
I_y = 0,7 cm⁴
W_x = 0,7 cm³
W_y = 0,7 cm³
m = 0,4 kg/m



19168

20x20			L (mm)	No.
1 pc			50 ... 3000	**3 842 992 888 / L**
1 pc	M6		50 ... 3000	**3 842 993 230 / L**
1 pc	M6	M6	70 ... 3000	**3 842 993 231 / L**
1 pc	M6	D8	70 ... 3000	**3 842 993 494 / L**
1 pc	D8		50 ... 3000	**3 842 993 493 / L**
1 pc	D8	D8	50 ... 3000	**3 842 993 495 / L**
1 pc	D8	D8V	50 ... 3000	**3 842 993 496 / L**
1 pc			3000	**3 842 517 173**
20 pcs			3000	**3 842 517 179**

Cover cap	Color	ESD		No.
20x20 (1x)	Signal gray		100	**3 842 548 742**
20x20 (1x)	Black		20	**3 842 548 743**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

20x20	3 842 993 694 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 335 / 370 mm

20x20 1N

A = 1,9 cm²
I_x = 0,8 cm⁴
I_y = 0,8 cm⁴
W_x = 0,8 cm³
W_y = 0,8 cm³
m = 0,5 kg/m



19169

Cover cap: see 20x20

20x20 1N			L (mm)	No.
1 pc			50 ... 3000	**3 842 993 421 / L**
1 pc			3000	**3 842 536 476**
20 pcs			3000	**3 842 536 475**


Quick & Easy (p. 2-8, see fold-out section)

20x20 1N	3 842 993 690 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 335 / 370 mm

20x20 2N

A = 1,8 cm²
I_x = 0,7 cm⁴
I_y = 0,8 cm⁴
W_x = 0,7 cm³
W_y = 0,8 cm³
m = 0,5 kg/m



19170

Cover cap: see 20x20

20x20 2N			L (mm)	No.
1 pc			50 ... 3000	**3 842 993 422 / L**
1 pc			3000	**3 842 536 479**
20 pcs			3000	**3 842 536 478**


Quick & Easy (p. 2-8, see fold-out section)

20x20 2N	3 842 993 691 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 335 / 370 mm

20x20 2NVS

A = 1,8 cm²
I_x = 0,7 cm⁴
I_y = 0,7 cm⁴
W_x = 0,7 cm³
W_y = 0,7 cm³
m = 0,5 kg/m



19171

Cover cap: see 20x20

20x20 2NVS		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 924 / L**
1 pc		3000	**3 842 519 657**
20 pcs		3000	**3 842 519 658**


Quick & Easy (p. 2-8, see fold-out section)

20x20 2NVS	3 842 993 692 / ....
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 335 / 370 mm

20x20 3N

A = 1,7 cm²
I_x = 0,7 cm⁴
I_y = 0,8 cm⁴
W_x = 0,7 cm³
W_y = 0,7 cm³
m = 0,5 kg/m



19172

Cover cap: see 20x20

20x20 3N		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 889 / L**
1 pc		3000	**3 842 517 174**
20 pcs		3000	**3 842 517 180**


Quick & Easy (p. 2-8, see fold-out section)

20x20 3N	3 842 993 693 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 335 / 370 mm

20x20 R

A = 1,6 cm²
I_x = 0,6 cm⁴
I_y = 0,6 cm⁴
W_x = 0,5 cm³
W_y = 0,5 cm³
m = 0,4 kg/m



19173

Cover cap	Color	ESD		No.
20x20 R (1x)	Signal gray		20	**3 842 548 826**
20x20 R (1x)	Black		20	**3 842 548 827**
Material:	PP			


20x20 R		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 890 / L**
1 pc		3000	**3 842 517 177**
20 pcs		3000	**3 842 517 183**

Quick & Easy (p. 2-8, see fold-out section)

20x20 R	3 842 993 695 / ....
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	–

20x40

A = 2,9 cm²
I_x = 4,6 cm⁴
I_y = 1,2 cm⁴
W_x = 2,5 cm³
W_y = 1,4 cm³
m = 0,8 kg/m



19174

Cover cap	Color	ESD		No.
20x20 (2x)	Signal gray		100	**3 842 548 742**
20x20 (2x)	Black	⚠	20	**3 842 548 743**
Material:	PP			

20x40		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 891 / L**
1 pc	D8	50 ... 3000	**3 842 993 497 / L**
1 pc	D8 D8	50 ... 3000	**3 842 993 499 / L**
1 pc	D8 D8V	50 ... 3000	**3 842 993 500 / L**
1 pc	D8V	50 ... 3000	**3 842 993 498 / L**
1 pc	D8V D8V	50 ... 3000	**3 842 993 501 / L**
1 pc		3000	**3 842 517 178**
24 pcs		3000	**3 842 537 816**

Profile finishing: D8: in slots B/F, C/E
D8V: in slots A/D


Quick & Easy (p. 2-8, see fold-out section)

20x40	3 842 993 696 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

20x60

A = 3,5 cm²
I_x = 14,2 cm⁴
I_y = 1,7 cm⁴
W_x = 4,7 cm³
W_y = 1,7 cm³
m = 0,9 kg/m

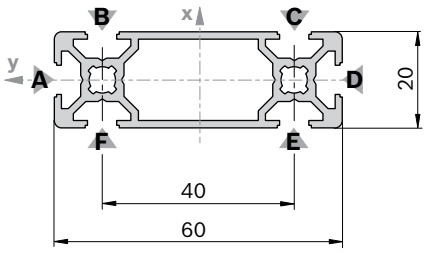

19175

Cover cap	Color	ESD		No.
20x60 (1x)	Signal gray		20	**3 842 548 828**
20x60 (1x)	Black	⚠	20	**3 842 548 829**
Material:	PP			

20x60		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 992 / L**
1 pc		3000	**3 842 523 239**
16 pcs		3000	**3 842 537 819**


Quick & Easy (p. 2-8, see fold-out section)

20x60	3 842 993 698 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 (B,C,E,F)[1] / D8 (B,C,E,F)[1] / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 404 /508 mm

20x40x40

A = 4,2 cm²
I_x = 6,0 cm⁴
I_y = 6,0 cm⁴
W_x = 2,6 cm³
W_y = 2,6 cm³
m = 1,1 kg/m



19176

Cover cap	Color	ESD		No.
20x20 (3x)	Signal gray		100	**3 842 548 742**
20x20 (3x)	Black	⚠	20	**3 842 548 743**
Material:	PP			

20x40x40		L (mm)	No.
1 pc		50 ... 3000	**3 842 992 991 / L**
1 pc		3000	**3 842 523 241**
16 pcs		3000	**3 842 537 818**


Quick & Easy (p. 2-8, see fold-out section)

20x40x40	3 842 993 697 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	M6 / D5.8 / D8 / DB8
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

10x40

A = 2,1 cm²
I_x = 3,2 cm⁴
I_y = 0,2 cm⁴
W_x = 1,6 cm³
W_y = 0,4 cm³
m = 0,6 kg/m

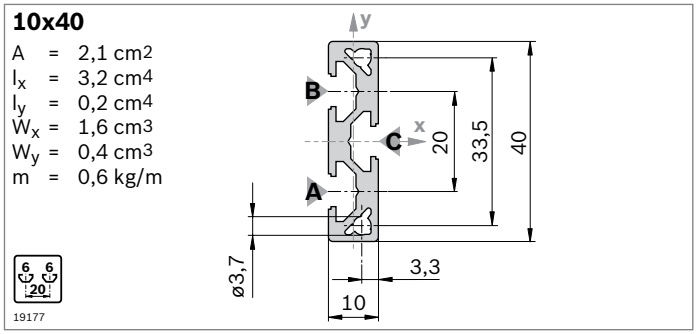

19177

Cover cap	Color	ESD		No.
10x40 (1x)	Signal gray		20	**3 842 548 766**
10x40 (1x)	Black		20	**3 842 548 767**
Material:	PP			

10x40		L (mm)	No.
1 pc		50 ... 3000	**3 842 993 077 / L**
1 pc		3000	**3 842 526 816**
10 pcs		3000	**3 842 526 817**

Quick & Easy (p. 2-8, see fold-out section)


10x40	3 842 993 683 / ...
Length L (mm)	50 ... 3000
Standard profile finishing (note minimum length, p. 2-11)	D5.8 / D8
Customized profile finishing	–


Strut profiles with 8 mm slot

Strut profiles with a 8 mm slot are suitable for medium loads, such as material shuttles, light fixtures, frames and partition walls.


Profile 30x60x60 is suitable for constructing showcases and flow racks. Attractive covers and hoods can be designed with radius profiles.


Slot, modular dimensions, central bore

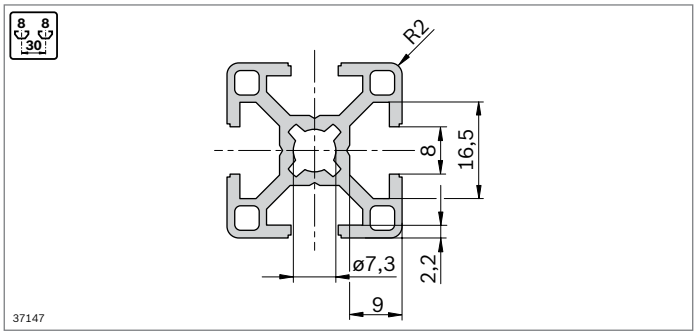


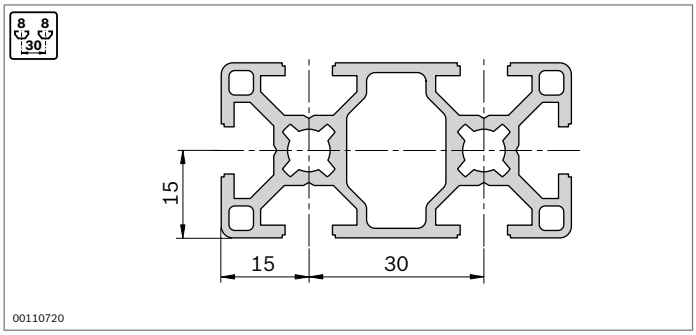


Profile finishing









Minimum profile lengths (mm) for Quick & Easy standard profile finishing on one or both sides


	–	M8	D7.8	D11/DB11
–	50	50	50	50
M8	50	80	62	70
D7.8	50	62	60	50
D11/DB11	50	70	50	60

Reduced maximum profile lengths $L_{max\ i}$ with individual profile finishing

L_{max} (mm)	$L_{max\ i}$ (mm)
6070	5400
3000	2300
2000	1300

30x30

A = 3,1 cm²
I_x = 2,8 cm⁴
I_y = 2,8 cm⁴
W_x = 1,8 cm³
W_y = 1,8 cm³
m = 0,9 kg/m



19178

30x30			L (mm)	No.
1 pc			50 ... 6070	**3 842 990 720 / L**
1 pc	M8		50 ... 6000	**3 842 990 721 / L**
1 pc	M8	M8	80 ... 6000	**3 842 990 723 / L**
1 pc	M8	D11	70 ... 6000	**3 842 990 724 / L**
1 pc	D7,8	D7,8	60 ... 6000	**3 842 992 965 / L**
1 pc	D11		50 ... 6000	**3 842 990 722 / L**
1 pc	D11	D11	60 ... 6000	**3 842 990 725 / L**
1 pc	D11	D11V	60 ... 6000	**3 842 990 726 / L**
1 pc			6070	**3 842 557 216**
20 pcs			6070	**3 842 557 206**

Quick & Easy (p. 2-8, see fold-out section)

30x30	3 842 993 703 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

Cover cap	Color	ESD		No.
30x30 (1x)	Signal gray		100	**3 842 548 744**
30x30 (1x)	Black	⚠	20	**3 842 548 745**
Material:	PP			

Cover cap with hole	Color	ESD		No.
30x30 (1x)	Signal gray		20	**3 842 548 774**
30x30 (1x)	Black	⚠	20	**3 842 548 775**
Material:	PP			


Cover cap ZN	ESD	No.	FS
30x30-ZN	⚠	**3 842 518 204**	FS1
Material:	Cover cap: Diecast zinc Fastening material: Steel; zinc-plated		

FS1

DIN 7991 M4x16

30x30 1N

A = 3,7 cm²
I_x = 3,1 cm⁴
I_y = 3,5 cm⁴
W_x = 2,0 cm³
W_y = 2,3 cm³
m = 1,0 kg/m



19179

Cover cap: see 30x30

30x30 1N			L (mm)	No.
1 pc			50 ... 6070	**3 842 992 397 / L**
1 pc			6070	**3 842 557 218**
20 pcs			6070	**3 842 557 208**


Quick & Easy (p. 2-8, see fold-out section)

30x30 1N	3 842 993 704 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 2N

A = 3,5 cm²
I_x = 2,8 cm⁴
I_y = 3,5 cm⁴
W_x = 2,1 cm³
W_y = 2,7 cm³
m = 1,0 kg/m



19180

Cover cap: see 30x30

30x30 2N			L (mm)	No.
1 pc			50 ... 6070	**3 842 992 399 / L**
1 pc			6070	**3 842 557 230**
20 pcs			6070	**3 842 557 220**


Quick & Easy (p. 2-8, see fold-out section)

30x30 2N	3 842 993 705 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 2NVS

A = 3,5 cm²
I_x = 3,1 cm⁴
I_y = 3,1 cm⁴
W_x = 2,0 cm³
W_y = 2,0 cm³
m = 1,0 kg/m



19181

Cover cap: see 30x30

30x30 2NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 398 / L**
1 pc		6070	**3 842 557 219**
20 pcs		6070	**3 842 557 209**


Quick & Easy (p. 2-8, see fold-out section)

30x30 2NVS	3 842 993 706 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30 3N

A = 3,3 cm²
I_x = 3,1 cm⁴
I_y = 2,8 cm⁴
W_x = 2,3 cm³
W_y = 2,1 cm³
m = 0,9 kg/m



19182

Cover cap: see 30x30

30x30 3N		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 400 / L**
1 pc		6070	**3 842 557 231**
20 pcs		6070	**3 842 557 221**


Quick & Easy (p. 2-8, see fold-out section)

30x30 3N	3 842 993 707 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm

30x30°

A = 3,7 cm²
I_x = 3,5 cm⁴
I_y = 3,6 cm⁴
W_x = 2,0 cm³
W_y = 1,9 cm³
m = 1,0 kg/m



19183

30x30°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 010 / L**
1 pc		6070	**3 842 558 313**
20 pcs		6070	**3 842 557 951**


Quick & Easy (p. 2-8, see fold-out section)

30x30°	3 842 993 708 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8
Customized profile finishing	–

Cover cap	Color	ESD		No.
30x30° (1x)	Signal gray		20	**3 842 551 008**
30x30° (1x)	Black		20	**3 842 551 009**
Material:	PP			

30x45°

A = 4,0 cm²
I_x = 3,6 cm⁴
I_y = 5,1 cm⁴
W_x = 2,1 cm³
W_y = 2,3 cm³
m = 1,1 kg/m



19184

30x45°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 011 / L**
1 pc		6070	**3 842 558 314**
20 pcs		6070	**3 842 557 952**


Quick & Easy (p. 2-8, see fold-out section)

30x45°	3 842 993 711 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8
Customized profile finishing	–

Cover cap	Color	ESD		No.
30x45° (1x)	Signal gray		20	**3 842 551 010**
30x45° (1x)	Black	⚠	20	**3 842 551 011**
Material:	PP			

30x60°

A = 3,6 cm²
I_x = 3,0 cm⁴
I_y = 4,1 cm⁴
W_x = 1,7 cm³
W_y = 1,9 cm³
m = 1,0 kg/m



19185

30x60°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 012 / L**
1 pc		6070	**3 842 558 315**
20 pcs		6070	**3 842 557 953**


Quick & Easy (p. 2-8, see fold-out section)

30x60°	3 842 993 714 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8
Customized profile finishing	–

Cover cap	Color	ESD		No.
30x60° (1x)	Signal gray		20	**3 842 551 012**
30x60° (1x)	Black	⚠	20	**3 842 551 013**
Material:	PP			

30x30 R

A = 2,9 cm²
I_x = 2,3 cm⁴
I_y = 2,3 cm⁴
W_x = 1,4 cm³
W_y = 1,4 cm³
m = 0,8 kg/m



19186

30x30 R		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 896 / L**
1 pc		6070	**3 842 558 309**
20 pcs		6070	**3 842 557 947**


Quick & Easy (p. 2-8, see fold-out section)

30x30 R	3 842 993 709 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-15)	M8 / DB11
Customized profile finishing	–

Cover cap	Color	ESD		No.
30x30 R (1x)	Signal gray		20	**3 842 548 776**
30x30 R (1x)	Black	⚠	20	**3 842 548 777**
Material:	PP			

30x60

A = 5,5 cm²
I_x = 19,6 cm⁴
I_y = 5,1 cm⁴
W_x = 7,0 cm³
W_y = 3,9 cm³
m = 1,5 kg/m



19187

30x60		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 457 / L**
1 pc	M8	50 ... 6000	**3 842 992 458 / L**
1 pc	M8 M8	80 ... 6000	**3 842 992 926 / L**
1 pc	D11	50 ... 6000	**3 842 992 459 / L**
1 pc	D11 D11	60 ... 6000	**3 842 992 460 / L**
1 pc	D11 D11V	60 ... 6000	**3 842 992 463 / L**
1 pc	D11V D11V	60 ... 6000	**3 842 992 462 / L**
1 pc		6070	**3 842 557 215**
10 pcs		6070	**3 842 557 205**

Profile finishing: M8: in all core holes
D11: in slots B/F, C/E
D11V: in slots A/D

Cover cap	Color	ESD		No.
30x30 (2x)	Signal gray		100	**3 842 548 744**
30x60 (1x)	Signal gray		20	**3 842 548 780**
30x30 (2x)	Black	ESD	20	**3 842 548 745**
30x60 (1x)	Black	ESD	20	**3 842 548 781**
Material:	PP			

Cover cap with hole	Color	ESD		No.
30x30 (2x)	Signal gray		20	**3 842 548 774**
30x30 (2x)	Black	ESD	20	**3 842 548 775**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

30x60	3 842 993 712 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm

30x60 4N

A = 5,8 cm²
I_x = 20,2 cm⁴
I_y = 5,5 cm⁴
W_x = 6,7 cm³
W_y = 3,8 cm³
m = 1,6 kg/m



19188

Cover cap: see 30x60

30x60 4N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 420 / L**
1 pc		6070	**3 842 536 473**
10 pcs		6070	**3 842 536 472**


Quick & Easy (p. 2-8, see fold-out section)

30x60 4N	3 842 993 713 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm

30x60x60

A = 8,2 cm²
I_x = 26,2 cm⁴
I_y = 26,2 cm⁴
W_x = 7,6 cm³
W_y = 7,6 cm³
m = 2,2 kg/m



19189

30x60x60		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 016 / L**
1 pc		6070	**3 842 557 248**
20 pcs		6070	**3 842 557 241**

Quick & Easy (p. 2-8, see fold-out section)


30x60x60	3 842 993 715 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm

Cover cap	Color	ESD		No.
30x30 (3x)	Signal gray		100	**3 842 548 744**
30x30 (3x)	Black	ESD	20	**3 842 548 745**
Material:	PP			

30x90

A = 7,7 cm²
I_x = 60,7 cm⁴
I_y = 7,3 cm⁴
W_x = 13,5 cm³
W_y = 4,9 cm³
m = 2,1 kg/m

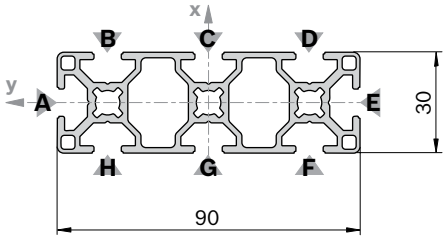

19190

30x90		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 618 / L**
20 pcs		6070	**3 842 541 937**

Quick & Easy (p. 2-8, see fold-out section)

30x90	3 842 993 762 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 (B,C,D,F, G,H)[1]/ D11 (B,C,D, F,G,H)[1] / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots


[2] DG_{max} = 45°; L_{min1} / L_{min2} = 150 / 150 mm

Cover cap	Color	ESD		No.
30x30 (3x)	Signal gray		100	**3 842 548 744**
30x30 (3x)	Black	ESD	20	**3 842 548 745**
Material:	PP			

Cover cap with hole	Color	ESD		No.
30x30 (3x)	Signal gray		20	**3 842 548 774**
30x30 (3x)	Black	ESD	20	**3 842 548 775**
Material:	PP			

30x120

A = 9,9 cm²
I_x =136,3 cm⁴
I_y = 9,6 cm⁴
W_x = 22,7 cm³
W_y = 6,4 cm³
m = 2,7 kg/m

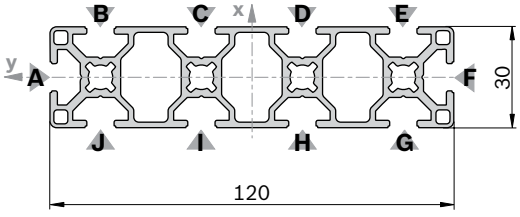

19191

30x120		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 841 / L**
20 pcs		6070	**3 842 541 939**

Quick & Easy (p. 2-8, see fold-out section)

30x120	3 842 993 763 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 (B,C,D,E, G,H,I,J)[1] / D11 (B,C,D, E,G,H,I,J)[1] / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots


[2] DG_{max} = 45°; L_{min1} / L_{min2} = 150 / 150 mm

Cover cap	Color	ESD		No.
30x30 (4x)	Signal gray		100	**3 842 548 744**
30x60 (2x)	Signal gray		20	**3 842 548 780**
30x30 (4x)	Black	ESD	20	**3 842 548 745**
30x60 (2x)	Black	ESD	20	**3 842 548 781**
Material:	PP			

Cover cap with hole	Color	ESD		No.
30x30 (4x)	Signal gray		20	**3 842 548 774**
30x30 (4x)	Black	ESD	20	**3 842 548 775**
Material:	PP			

30x45

A = 4,0 cm²
I_x = 8,1 cm⁴
I_y = 3,9 cm⁴
W_x = 3,9 cm³
W_y = 2,9 cm³
m = 1,1 kg/m

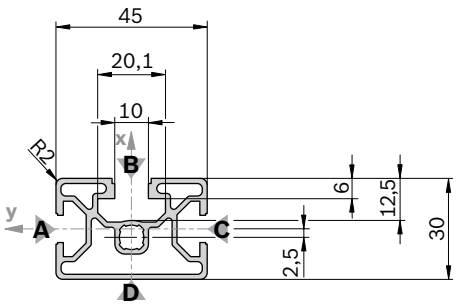

19192

Cover cap	Color	ESD		No.
30x45 (1x)	Signal gray		20	**3 842 548 778**
30x45 (1x)	Black	⚠	20	**3 842 548 779**
Material:	PP			

30x45		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 430 / L**
1 pc	M8	50 ... 6000	**3 842 992 431 / L**
1 pc		6070	**3 842 557 213**
18 pcs		6070	**3 842 557 203**


Quick & Easy (p. 2-8, see fold-out section)

30x45	3 842 993 710 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length,p. 2-16)	M8 / D7.8 (A,C)[1] / D9.8 (B)[1]/ D11 (A,C)[1] / DB11 / D17 (B)[1]
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

60x60 8N

A = 9,8 cm²
I_x = 39,7 cm⁴
I_y = 39,7 cm⁴
W_x = 13,2 cm³
W_y = 13,2 cm³
m = 2,6 kg/m

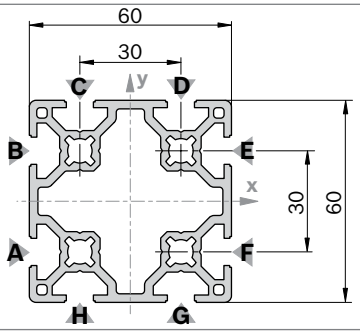

19193

Cover cap	Color	ESD		No.
60x60 8N (1x)	Signal gray		20	**3 842 551 046**
60x60 8N (1x)	Black	⚠	20	**3 842 551 047**
Material:	PP			

60x60 8N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 033 / L**
1 pc		6070	**3 842 564 215**
20 pcs		6070	**3 842 535 176**


Quick & Easy (p. 2-8, see fold-out section)

60x60 8N	3 842 993 669 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-16)	M8 / D7.8 / D11 / DB11
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[2] DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm

11x20

A = 1,0 cm²
I_x = 0,5 cm⁴
I_y = 0,1 cm⁴
W_x = 0,7 cm³
W_y = 0,3 cm³
m = 0,3 kg/m



19194

Cover cap	Color	ESD		No.
11x20 (1x)	Signal gray		20	**3 842 551 044**
11x20 (1x)	Black	⚠	20	**3 842 551 045**
Material:	PP			


11x20		L (mm)	No.
1 pc		50 ... 2000	**3 842 992 476 / L**
1 pc		2000	**3 842 564 213**
10 pcs		2000	**3 842 513 581**

Quick & Easy (p. 2-8, see fold-out section)

11x20	3 842 993 688 / ...
Length L (mm)	50 ... 2000
Standard profile finishing (note minimum length, p. 2-16)	D7.8 / D11
Customized profile finishing	–

15x120

A = 9,0 cm²
I_x = 110,4 cm⁴
I_y = 2,2 cm⁴
W_x = 18,4 cm³
W_y = 2,7 cm³
m = 2,4 kg/m

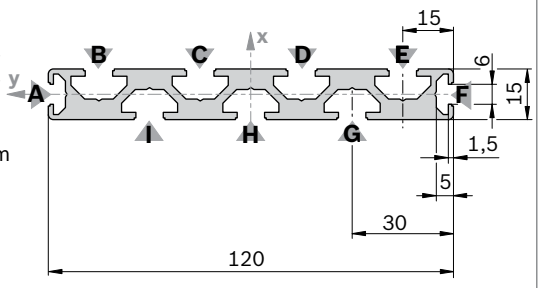

19195

Cover cap	Color	ESD		No.
15x120 (1x)	Signal gray		20	**3 842 548 768**
15x120 (1x)	Black	⚠	20	**3 842 548 769**
Material:	PP			

15x120		L (mm)	No.
1 pc		50 ... 3000	**3 842 993 078 / L**
1 pc		3000	**3 842 526 818**
10 pcs		3000	**3 842 537 821**

Quick & Easy (p. 2-8, see fold-out section)

15x120	3 842 993 684 / ...
Length L (mm)	80 ... 3000
Standard profile finishing (note minimum length, p. 2-16)	D7.8 (B,C,D,E,G,H,I)[1] / D11 (B,C,D,E,G,H,I)[1]
Individual profile finishing ($L_{max\ i}$ = 2300 mm)	DI / DIS / MT / MTS / MI / MIS

[1] For the specified slots


2

Strut profiles with 10 mm slot

The Rexroth modular profile system, with profiles with 10 mm slots in the modular dimensions 40 mm, 45 mm, 50 mm, and 60 mm, covers all conventional profile grids.

Thanks to their computer-optimized design, the strut profiles L with 10 mm slot (modular dimensions 40 mm, 45 mm, and 50 mm, e.g. 50x50L) combine high strengths with minimum use of materials. This gives you a cost-effective and stable solution for the construction of tables, protective equipment or frames, for instance.

Slot, modular dimensions, central bore

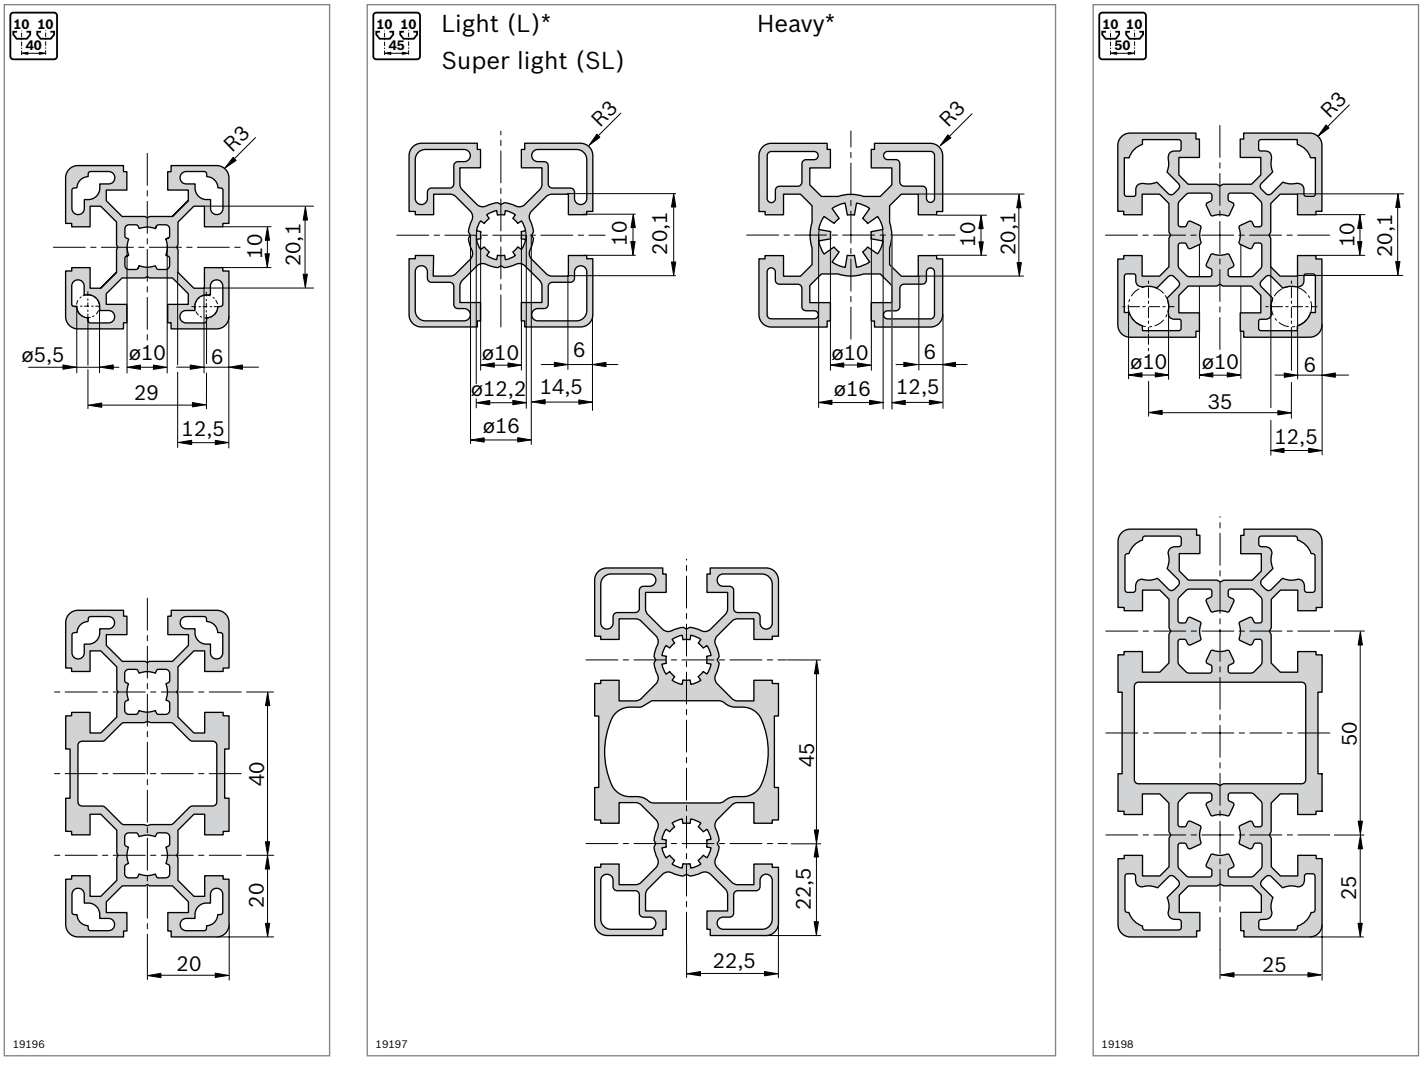

*) The following L-profiles have a “heavy” slot geometry:
45x90x90L; 45x90x90L 4N; 90x90L; 90x90L 4N; 90x90L 4NVS; 90x180L

Minimum profile lengths (mm) for Quick & Easy standard profile finishing on one or both sides

	–	M12	M16	D9.8	D17/DB17	F1
–	50	60	120	50	60	60
M12	60	110	180	90	90	110
M16	120	180	240	150	170	170
D9.8	50	90	150	80	70	90
D17/DB17	60	90	170	70	80	90
F1	60	110	170	90	90	80


For applications with high loads, we recommend especially stable profiles with 10 mm slots, e.g. for heavy work tables, fixtures, machine frames, transport shuttles, protective enclosures, and handling systems.


Reduced maximum profile lengths $L_{max\,i}$ with individual profile finishing


L_{max} (mm)	$L_{max\,i}$ (mm)
6070	5400
3000	2300
2000	1300


Due to its very sturdy design, this slot allows maximum strength connections.


Profile finishing



















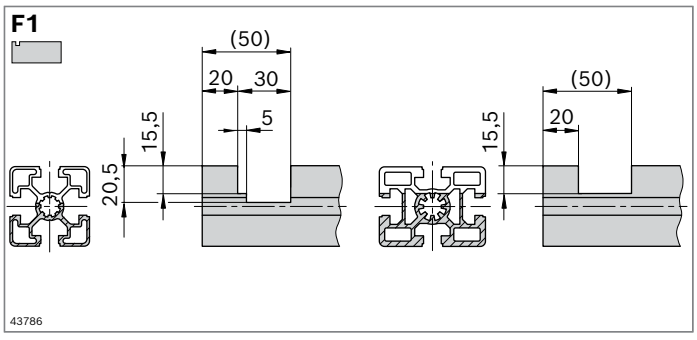

F1 exception: 45x60 and sliding door profile 45x45

40x40L

A = 5,6 cm²
I_x = 9,1 cm⁴
I_y = 9,1 cm⁴
W_x = 4,5 cm³
W_y = 4,5 cm³
m = 1,5 kg/m



19199

40x40L			L (mm)	No.
1 pc			50 ... 6070	**3 842 993 120 / L**
1 pc	M12		60 ... 6000	**3 842 993 121 / L**
1 pc	M12	M12	110 ... 6000	**3 842 993 122 / L**
1 pc	M12	D17	90 ... 6000	**3 842 993 123 / L**
1 pc	D17		60 ... 6000	**3 842 993 124 / L**
1 pc	D17	D17	80 ... 6000	**3 842 993 125 / L**
1 pc	D17	D17V	80 ... 6000	**3 842 993 126 / L**
1 pc	D9,8	D9,8	80 ... 6000	**3 842 993 129 / L**
1 pc			6070	**3 842 529 340**
20 pcs			6070	**3 842 529 339**

Quick & Easy (p. 2-8, see fold-out section)

40x40L	3 842 993 724 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

Cover cap	Color	ESD		No.
40x40 (1x)	Signal gray		100	**3 842 548 746**
40x40 (1x)	Black		20	**3 842 548 747**
Material:	PP			

Cover cap with hole	Color	ESD		No.
40x40 (1x)	Signal gray		20	**3 842 548 782**
40x40 (1x)	Black		20	**3 842 548 783**
Material:	PP			


Cover cap ZN	ESD	No.	FS
40x40-ZN		**3 842 541 807**	FS2
Material:	Cover cap: Diecast zinc Fastening material: Steel; zinc-plated		

FS2

DIN 7991
M6x16

40x40L 0N

A = 6,3 cm²
I_x = 10,4 cm⁴
I_y = 10,4 cm⁴
W_x = 5,2 cm³
W_y = 5,2 cm³
m = 1,7 kg/m



19200

Cover cap: see 40x40

40x40L 0N			L (mm)	No.
1 pc			50 ... 6070	**3 842 993 876 / L**
20 pcs			6070	**3 842 540 954**


Quick & Easy (p. 2-8, see fold-out section)

40x40L 0N	3 842 993 760 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x40L 1N

A = 6,1 cm²
I_x = 9,8 cm⁴
I_y = 10,3 cm⁴
W_x = 4,7 cm³
W_y = 5,1 cm³
m = 1,7 kg/m



19201

Cover cap: see 40x40

40x40L 1N			L (mm)	No.
1 pc			50 ... 6070	**3 842 993 185 / L**
1 pc	M12	M12	110 ... 6000	**3 842 993 186 / L**
1 pc			6070	**3 842 529 362**
20 pcs			6070	**3 842 529 361**


Quick & Easy (p. 2-8, see fold-out section)

40x40L 1N	3 842 993 719 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x40L 2N

A = 6,0 cm²
I_x = 9,0 cm⁴
I_y = 10,3 cm⁴
W_x = 4,5 cm³
W_y = 5,2 cm³
m = 1,6 kg/m





19202

Cover cap: see 40x40

40x40L 2N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 187 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 188 / L**
1 pc		6070	**3 842 529 364**
20 pcs		6070	**3 842 529 363**


Quick & Easy (p. 2-8, see fold-out section)

40x40L 2N	3 842 993 720 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x40L 2NVS

A = 6,0 cm²
I_x = 9,7 cm⁴
I_y = 9,7 cm⁴
W_x = 4,9 cm³
W_y = 4,9 cm³
m = 1,6 kg/m





19203

Cover cap: see 40x40

40x40L 2NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 189 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 190 / L**
1 pc		6070	**3 842 529 366**
20 pcs		6070	**3 842 529 365**


Quick & Easy (p. 2-8, see fold-out section)

40x40L 2NVS	3 842 993 721 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x40L 3N

A = 5,8 cm²
I_x = 9,7 cm⁴
I_y = 9,0 cm⁴
W_x = 4,8 cm³
W_y = 4,5 cm³
m = 1,6 kg/m





19204

Cover cap: see 40x40

40x40L 3N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 191 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 192 / L**
1 pc		6070	**3 842 529 368**
20 pcs		6070	**3 842 529 367**


Quick & Easy (p. 2-8, see fold-out section)

40x40L 3N	3 842 993 722 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x30°

A = 6,2 cm²
I_x = 9,4 cm⁴
I_y = 11,8 cm⁴
W_x = 4,7 cm³
W_y = 5,9 cm³
m = 1,7 kg/m



19205

40x30°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 195 / L**
1 pc		6070	**3 842 529 372**
12 pcs		6070	**3 842 529 371**


Quick & Easy (p. 2-8, see fold-out section)

40x30°	3 842 993 718 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
40x30° (1x)	Signal gray		20	**3 842 551 014**
40x30° (1x)	Black	⚠	20	**3 842 551 015**
Material:	PP			

40x45°

A = 6,8 cm²
I_x = 9,9 cm⁴
I_y = 16,6 cm⁴
W_x = 5,0 cm³
W_y = 8,3 cm³
m = 1,8 kg/m



19206

40x45°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 197 / L**
1 pc		6070	**3 842 529 374**
12 pcs		6070	**3 842 529 373**


Quick & Easy (p. 2-8, see fold-out section)

40x45°	3 842 993 726 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
40x45° (1x)	Signal gray		20	**3 842 551 016**
40x45° (1x)	Black	⚠	20	**3 842 551 017**
Material:	PP			

40x60°

A = 6,3 cm²
I_x = 8,7 cm⁴
I_y = 13,1 cm⁴
W_x = 4,3 cm³
W_y = 6,5 cm³
m = 1,7 kg/m



19207

40x60°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 198 / L**
1 pc		6070	**3 842 529 376**
12 pcs		6070	**3 842 529 375**


Quick & Easy (p. 2-8, see fold-out section)

40x60°	3 842 993 727 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
40x60° (1x)	Signal gray		20	**3 842 551 018**
40x60° (1x)	Black	⚠	20	**3 842 551 019**
Material:	PP			

40x40L R

A = 5,0 cm²
I_x = 7,2 cm⁴
I_y = 7,2 cm⁴
W_x = 3,6 cm³
W_y = 3,6 cm³
m = 1,3 kg/m



19208

Cover cap	Color	ESD		No.
40x40 R (1x)	Signal gray		20	**3 842 548 784**
40x40 R (1x)	Black	⚠	20	**3 842 548 785**
Material:	PP			

40x40L R		L (mm)	No.
1 pc	▭	50 ... 6070	**3 842 993 184 / L**
1 pc	▭	6070	**3 842 529 360**
20 pcs	▭	6070	**3 842 529 359**


Quick & Easy (p. 2-8, see fold-out section)

40x40L R	3 842 993 725 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / DB17 (A,B)[1]
Customized profile finishing	–

[1] For the specified slots

40x40 HR

A = 5,5 cm²
I_x = 8,1 cm⁴
I_y = 7,6 cm⁴
W_x = 4,0 cm³
W_y = 3,6 cm³
m = 1,5 kg/m



19209

Cover cap	Color	ESD		No.
40x40 HR (1x)	Signal gray		20	**3 842 548 786**
40x40 HR (1x)	Black	⚠	20	**3 842 548 787**
Material:	PP			

Cover cap with hole[1]	Color	ESD		No.
40x40 HR (1x)	Signal gray		20	**3 842 548 786**
40x40 HR (1x)	Black	⚠	20	**3 842 548 787**
Material:	PP			

[1] The cover cap is also suitable for use with a hole; hole can be broken out

40x40 HR		L (mm)	No.
1 pc	▭	50 ... 6070	**3 842 993 256 / L**
1 pc	M12 ▬ M12	110 ... 6000	**3 842 993 257 / L**
1 pc	▭	6070	**3 842 564 216**
20 pcs	▭	6070	**3 842 529 381**


Quick & Easy (p. 2-8, see fold-out section)

40x40 HR	3 842 993 723 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 370 / 440 mm

40x80L

A = 9,9 cm²
I_x = 63,4 cm⁴
I_y = 17,3 cm⁴
W_x = 15,9 cm³
W_y = 8,7 cm³
m = 2,7 kg/m



19210

40x80L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 130 / L**
1 pc	M12	60 ... 6000	**3 842 993 131 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 132 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 135 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 993 136 / L**
1 pc	D17V	60 ... 6000	**3 842 993 137 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 993 138 / L**
1 pc		6070	**3 842 529 342**
12 pcs		6070	**3 842 529 341**

Profile finishing: M12: in all core holes
D17: in slots B/F, C/E
D17V: in slots A/D

Cover cap	Color	ESD		No.
40x80 (1x)	Signal gray		20	**3 842 548 748**
40x80 (1x)	Black		20	**3 842 548 749**
Material:	PP			

Cover cap with hole	Color	ESD		No.
40x80 (1x)	Signal gray		20	**3 842 548 788**
40x80 (1x)	Black		20	**3 842 548 789**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

40x80L	3 842 993 728 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Individual profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x80L 2N

A = 10,9 cm²
I_x = 66,6 cm⁴
I_y = 20,8 cm⁴
W_x = 16,6 cm³
W_y = 10,4 cm³
m = 2,9 kg/m



33094

Cover cap: see 40x80

40x80L 2N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 877 / L**
12 pcs		6070	**3 842 555 650**


Quick & Easy (p. 2-8, see fold-out section)

40x80L 2N	3 842 993 768 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x80L 4N

A = 10,4 cm²
I_x = 65,2 cm⁴
I_y = 19,1 cm⁴
W_x = 16,3 cm³
W_y = 9,9 cm³
m = 2,8 kg/m



19211

Cover cap: see 40x80

40x80L 4N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 424 / L**
1 pc		6070	**3 842 536 485**
12 pcs		6070	**3 842 536 484**


Quick & Easy (p. 2-8, see fold-out section)

40x80L 4N	3 842 993 729 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x80L 2NVS

A = 10,7 cm²
I_x = 67,8 cm⁴
I_y = 19,0 cm⁴
W_x = 17,0 cm³
W_y = 9,5 cm³
m = 2,9 kg/m



33093

Cover cap: see 40x80

40x80L 2NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 997 / L**
12 pcs		6070	**3 842 555 649**


Quick & Easy (p. 2-8, see fold-out section)

40x80 L 2NVS	3 842 993 767 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x80L 3NVS

A = 10,6 cm²
I_x = 67,8 cm⁴
I_y = 19,0 cm⁴
W_x = 17,0 cm³
W_y = 9,5 cm³
m = 2,9 kg/m



19212

Cover cap: see 40x80

40x80L 3NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 654 / L**
1 pc		6070	**3 842 538 329**
12 pcs		6070	**3 842 538 330**


Quick & Easy (p. 2-8, see fold-out section)

40x80L 3NVS	3 842 993 753 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x80x80L

A = 15,4 cm²
I_x = 96,6 cm⁴
I_y = 96,6 cm⁴
W_x = 24,2 cm³
W_y = 24,2 cm³
m = 4,2 kg/m



19213

Cover cap	Color	ESD		No.
40x80x80 (1x)	Signal gray		20	**3 842 548 790**
40x80x80 (1x)	Black		20	**3 842 548 791**
Material:	PP			

40x80x80L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 193 / L**
1 pc		6070	**3 842 529 370**
8 pcs		6070	**3 842 537 827**


Quick & Easy (p. 2-8, see fold-out section)

40x80x80L	3 842 993 730 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x120L

A = 15,5 cm²
I_x = 203,2 cm⁴
I_y = 27,8 cm⁴
W_x = 33,9 cm³
W_y = 13,9 cm³
m = 4,2 kg/m

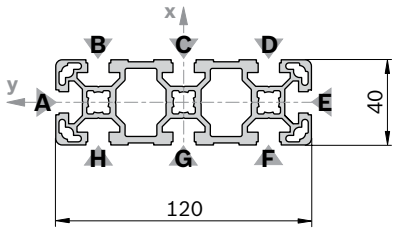

19214

40x120L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 139 / L**
1 pc	M12	60 ... 6000	**3 842 993 140 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 141 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 142 / L**
1 pc	D17V D17V	90 ... 6000	**3 842 993 225 / L**
1 pc		6070	**3 842 529 344**
8 pcs		6070	**3 842 537 824**

Profile finishing: M12: in all core holes
D17: in slots B/H, C/G, D/F
D17V: in slots A/E

Cover cap	Color	ESD		No.
40x40 (1x)	Signal gray		100	**3 842 548 746**
40x80 (1x)	Signal gray		20	**3 842 548 748**
40x40 (1x)	Black	ESD	20	**3 842 548 747**
40x80 (1x)	Black	ESD	20	**3 842 548 749**
Material:	PP			

Notice:
For the 40x120L profile you require the following combination of cover caps: 1x 40x40 und 1x 40x80


Quick & Easy (p. 2-8, see fold-out section)

40x120L	3 842 993 716 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,D,F, G,H)[1] / D17 (B,C,D,F, G,H)[1] / DB17 /
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x120L 5N

A = 15,8 cm²
I_x = 212,4 cm⁴
I_y = 30,1 cm⁴
W_x = 35,3 cm³
W_y = 15,5 cm³
m = 4,3 kg/m

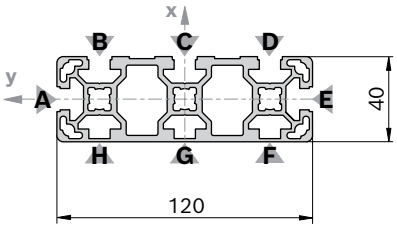

37612

Cover cap: See 40x120L

40x120L 5N		L (mm)	No.
1 pc		50 ... 6070	**3 842 996 363 / L**
8 pcs		6070	**3 842 558 480**


Quick & Easy (p. 2-8, see fold-out section)

40x120L 5N	3 842 993 771 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B, C, D, F, G, H)[1] / D17 (B, C, D, F, G, H)[1] / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x160L

A = 20,5 cm²
I_x = 466,7 cm⁴
I_y = 37,2 cm⁴
W_x = 58,3 cm³
W_y = 18,6 cm³
m = 5,5 kg/m

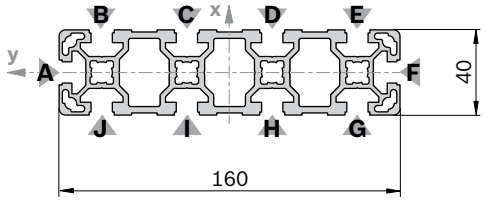



19215

Cover cap	Color	ESD		No.
40x80 (2x)	Signal gray		20	**3 842 548 748**
40x80 (2x)	Black	⚠	20	**3 842 548 749**
Material:	PP			

40x160L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 143 / L**
1 pc	M12	60 ... 6000	**3 842 993 144 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 145 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 146 / L**
1 pc		6070	**3 842 529 346**
6 pcs		6070	**3 842 529 345**

Profile finishing: M12: in all core holes
D17: in slots B/J, C/I, D/H, E/G


Quick & Easy (p. 2-8, see fold-out section)

40x160L	3 842 993 717 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,D,E,G,H, I,J)[1] / D17 (B,C,D,E,G,H, I,J)[1] / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

80x80L

A = 18,2 cm²
I_x = 132,1 cm⁴
I_y = 132,1 cm⁴
W_x = 33,0 cm³
W_y = 33,0 cm³
m = 4,9 kg/m



19216

80x80L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 133 / L**
1 pc	M12	60 ... 6000	**3 842 993 134 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 147 / L**
1 pc	M12 D17	90 ... 6000	**3 842 993 148 / L**
1 pc	D17	60 ... 6000	**3 842 993 149 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 150 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 993 151 / L**
1 pc		6070	**3 842 529 348**
6 pcs		6070	**3 842 529 347**

Profile finishing: M12: in all core holes
D17: in slots A/F, B/E
D17V: in slots C/H, D/G

Cover cap	Color	ESD		No.
80x80 (1x)	Signal gray		20	**3 842 548 750**
80x80 (1x)	Black		20	**3 842 548 751**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

80x80L	3 842 993 674 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

80x80L 4N

A = 19,1 cm²
I_x = 142,5 cm⁴
I_y = 142,5 cm⁴
W_x = 35,6 cm³
W_y = 35,6 cm³
m = 5,2 kg/m



36363

80x80L 4N		L (mm)	No.
1 pc		50 ...6070	**3 842 994 173 / L**
6 pcs		6070	**3 842 555 651**

Quick & Easy (p. 2-8, see fold-out section)


80x80L 4N	3 842 993 769 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

Cover cap	Color	ESD		No.
80x80 (1x)	Signal gray		20	**3 842 548 750**
80x80 (1x)	Black		20	**3 842 548 751**
Material:	PP			

80x80L 4NVS

A = 19,3 cm²
I_x = 142,5 cm⁴
I_y = 142,5 cm⁴
W_x = 35,6 cm³
W_y = 35,6 cm³
m = 5,2 kg/m

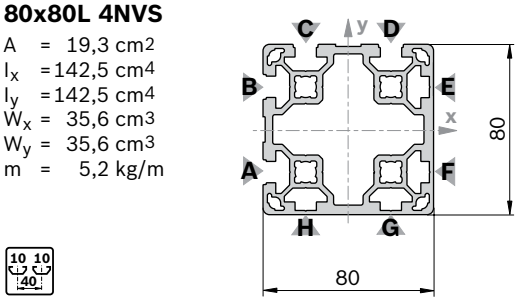

19416

Cover cap: see 80x80

80x80L 4NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 658 / L**
1 pc		6070	**3 842 538 333**
6 pcs		6070	**3 842 538 334**


Quick & Easy (p. 2-8, see fold-out section)

80x80L 4NVS	3 842 993 758 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

80x80L 6N

A = 18,8 cm²
I_x = 134,1 cm⁴
I_y = 140,9 cm⁴
W_x = 33,5 cm³
W_y = 36,2 cm³
m = 5,1 kg/m

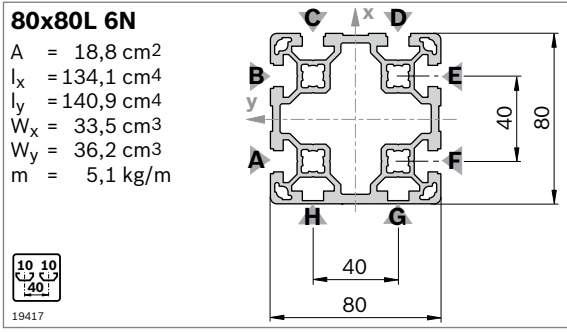

19417

Cover cap: see 80x80

80x80L 6N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 423 / L**
1 pc		6070	**3 842 536 482**
6 pcs		6070	**3 842 536 481**


Quick & Easy (p. 2-8, see fold-out section)

80x80L 6N	3 842 993 675 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

40x120x120L

A = 24,6 cm²
I_x = 318,0 cm⁴
I_y = 318,0 cm⁴
W_x = 42,2 cm³
W_y = 42,2 cm³
m = 6,7 kg/m

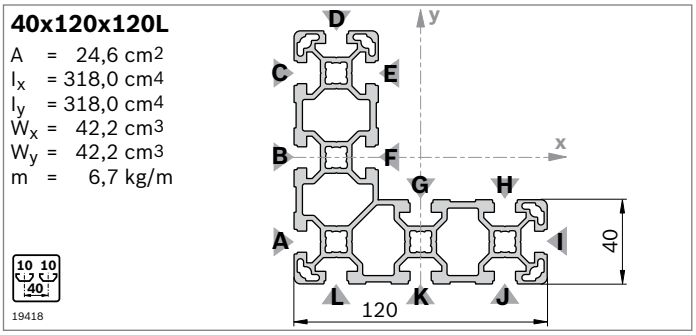

19418

Cover cap	Color	ESD		No.
40x40 (5x)	Signal gray		100	**3 842 548 746**
40x80 (2x)	Signal gray		20	**3 842 548 748**
40x40 (1x)	Signal gray		100	**3 842 548 746**
40x40 (5x)	Black	⚠	20	**3 842 548 747**
40x80 (2x)	Black	⚠	20	**3 842 548 749**
40x40 (1x)	Black	⚠	20	**3 842 548 747**
Material:	PP			

Notice:
For the 40x120x120L profile you require the following combination of cover caps: 5x 40x40 or 2x 40x80 and 1x 40x40

40x120x120L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 653 / L**
1 pc		6070	**3 842 538 252**
4 pcs		6070	**3 842 538 287**


Quick & Easy (p. 2-8, see fold-out section)

40x120x120L	3 842 993 757 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,J,K)[1] / D17 / DB17 (A,B,C,D,I, J,K,L)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]


[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 420 / 540 mm

80x120L

A = 25,6 cm²
I_x = 389,2 cm⁴
I_y = 192,8 cm⁴
W_x = 64,9 cm³
W_y = 48,2 cm³
m = 6,9 kg/m



19419

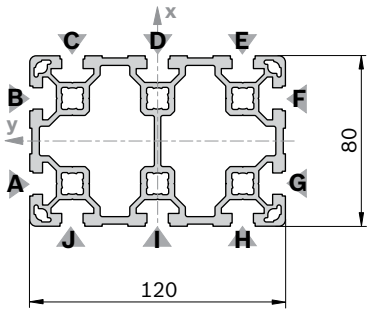

Cover cap	Color	ESD		No.
80x120 (1x)	Signal gray		20	**3 842 548 792**
80x120 (1x)	Black	⚠	20	**3 842 548 793**
Material:	PP			

80x120L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 201 / L**
1 pc	M12	60 ... 6000	**3 842 993 202 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 203 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 204 / L**
1 pc	D17V D17V	90 ... 6000	**3 842 993 229 / L**
1 pc		6070	**3 842 529 380**
4 pcs		6070	**3 842 537 828**

Profile finishing: M12: in all core holes
D17: in slots C/J, D/I, E/H
D17V: in slots A/G, B/F

Quick & Easy (p. 2-8, see fold-out section)

80x120L	3 842 993 672 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (C,D,E,H,I, J)[1] / D17 (C,D,E,H,I,J)[1] / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]


[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 439 / 578 mm

80x160L

A = 32,9 cm²
I_x = 850,7 cm⁴
I_y = 253,4 cm⁴
W_x = 106,3 cm³
W_y = 63,4 cm³
m = 8,9 kg/m



19420

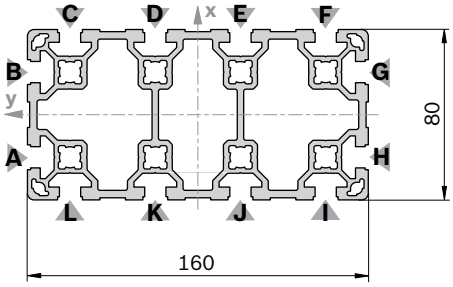

Cover cap	Color	ESD		No.
80x80 (2x)	Signal gray		20	**3 842 548 750**
80x80 (2x)	Black	⚠	20	**3 842 548 751**
Material:	PP			

80x160L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 127 / L**
1 pc	M12	60 ... 6000	**3 842 993 128 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 152 / L**
1 pc	M12 D17	90 ... 6000	**3 842 993 153 / L**
1 pc	D17	60 ... 6000	**3 842 993 154 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 155 / L**
1 pc	D17V D17V	90 ... 6000	**3 842 993 226 / L**
1 pc		6070	**3 842 529 350**
3 pcs		6070	**3 842 529 349**

Profile finishing: M12: in all core holes
D17: in slots C/L, D/K, E/J, F/I
D17V: in slots A/H, B/G


Quick & Easy (p. 2-8, see fold-out section)

80x160L	3 842 993 673 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (C,D,E,F,I, J,K,L)[1] / D17 (C,D,E,F,I,J, K,L)[1] / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 460 / 620 mm

45x45L

A = 6,0 cm²
I_x = 11,7 cm⁴
I_y = 11,7 cm⁴
W_x = 5,2 cm³
W_y = 5,2 cm³
m = 1,6 kg/m





19421

Cover cap	Color	ESD		No.
45x45 (1x)	Signal gray		100	**3 842 548 752**
45x45 (1x)	Black	⚠	20	**3 842 548 753**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x45 (1x)	Signal gray		20	**3 842 548 796**
45x45 (1x)	Black	⚠	20	**3 842 548 797**
Material:	PP			

Cover cap ZN	ESD	No.	FS
45x45-ZN	⚠	**3 842 518 205**	FS2
Material:	Cover cap: Diecast zinc Fastening material: Steel; zinc-plated		

45x45L		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 425 / L**
1 pc	M12	60 ... 6000	**3 842 992 426 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 427 / L**
1 pc	M12 D17	90 ... 6000	**3 842 992 960 / L**
1 pc	D9,8 D9,8	80 ... 6000	**3 842 992 967 / L**
1 pc	D17	60 ... 6000	**3 842 992 953 / L**
1 pc	D17 D17	80 ... 6000	**3 842 992 954 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 992 956 / L**
1 pc		6070	**3 842 553 618**
20 pcs		6070	**3 842 553 611**

Quick & Easy (p. 2-8, see fold-out section)

45x45L	3 842 993 737 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17 / F1 (A)[1]
Customized profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm


FS2



DIN 7991
M6x16

45x45L 0N

A = 6,7 cm²
I_x = 13,5 cm⁴
I_y = 13,5 cm⁴
W_x = 6,0 cm³
W_y = 6,0 cm³
m = 1,8 kg/m





19422

Cover cap: see 45x45

45x45L 0N		L (mm)	No.
1 pc		50 ... 6070	**3 842 994 174 / L**
20 pcs		6070	**3 842 540 955**


Quick & Easy (p. 2-8, see fold-out section)

45x45L 0N	3 842 993 761 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x45L 1N

A = 6,5 cm²
I_x = 12,6 cm⁴
I_y = 13,5 cm⁴
W_x = 5,5 cm³
W_y = 6,0 cm³
m = 1,8 kg/m



19423

Cover cap: see 45x45

45x45L 1N		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 401 / L**
1 pc		6070	**3 842 557 232**
20 pcs		6070	**3 842 557 222**


Quick & Easy (p. 2-8, see fold-out section)

45x45L 1N	3 842 993 738 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x45L 2N

A = 6,4 cm²
I_x = 11,6 cm⁴
I_y = 13,5 cm⁴
W_x = 5,2 cm³
W_y = 6,0 cm³
m = 1,7 kg/m



19424

Cover cap: see 45x45

45x45L 2N		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 403 / L**
1 pc		6070	**3 842 557 234**
20 pcs		6070	**3 842 557 224**


Quick & Easy (p. 2-8, see fold-out section)

45x45L 2N	3 842 993 739 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x45L 2NVS

A = 6,4 cm²
I_x = 12,6 cm⁴
I_y = 12,6 cm⁴
W_x = 5,6 cm³
W_y = 5,6 cm³
m = 1,7 kg/m



19425

Cover cap: see 45x45

45x45L 2NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 402 / L**
1 pc		6070	**3 842 557 233**
20 pcs		6070	**3 842 557 223**


Quick & Easy (p. 2-8, see fold-out section)

45x45L 2NVS	3 842 993 740 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x45L 3N

A = 6,2 cm²
I_x = 12,6 cm⁴
I_y = 11,7 cm⁴
W_x = 5,4 cm³
W_y = 5,2 cm³
m = 1,7 kg/m



19426

Cover cap: see 45x45

45x45L 3N		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 404 / L**
1 pc		6070	**3 842 557 235**
20 pcs		6070	**3 842 557 225**


Quick & Easy (p. 2-8, see fold-out section)

45x45L 3N	3 842 993 741 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x30°

A = 6,9 cm²
I_x = 12,7 cm⁴
I_y = 15,2 cm⁴
W_x = 5,0 cm³
W_y = 5,3 cm³
m = 1,9 kg/m



19427

45x30°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 013 / L**
1 pc		6070	**3 842 558 316**
20 pcs		6070	**3 842 557 954**


Quick & Easy (p. 2-8, see fold-out section)

45x30°	3 842 993 733 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
45x30° (1x)	Signal gray		20	**3 842 551 020**
45x30° (1x)	Black	⚠	20	**3 842 551 021**
Material:	PP			

45x45°

A = 7,6 cm²
I_x = 13,4 cm⁴
I_y = 21,4 cm⁴
W_x = 5,2 cm³
W_y = 6,4 cm³
m = 2,0 kg/m



19428

45x45°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 014 / L**
1 pc		6070	**3 842 558 317**
20 pcs		6070	**3 842 557 955**


Quick & Easy (p. 2-8, see fold-out section)

45x45°	3 842 993 735 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
45x45° (1x)	Signal gray		20	**3 842 551 022**
45x45° (1x)	Black	⚠	20	**3 842 551 023**
Material:	PP			

45x60°

A = 6,8 cm²
I_x = 11,4 cm⁴
I_y = 16,9 cm⁴
W_x = 4,4 cm³
W_y = 5,2 cm³
m = 1,8 kg/m



19429

45x60°		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 015 / L**
1 pc		6070	**3 842 558 318**
20 pcs		6070	**3 842 557 956**


Quick & Easy (p. 2-8, see fold-out section)

45x60°	3 842 993 744 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12
Customized profile finishing	–

Cover cap	Color	ESD		No.
45x60° (1x)	Signal gray		20	**3 842 551 024**
45x60° (1x)	Black	⚠	20	**3 842 551 025**
Material:	PP			

45x45L R

A = 4,9 cm²
I_x = 8,6 cm⁴
I_y = 8,6 cm⁴
W_x = 5,0 cm³
W_y = 5,0 cm³
m = 1,3 kg/m



19430

45x45L R		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 897 / L**
1 pc		6070	**3 842 558 310**
20 pcs		6070	**3 842 557 948**


Quick & Easy (p. 2-8, see fold-out section)

45x45L R	3 842 993 742 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / DB17
Customized profile finishing	–

Cover cap	Color	ESD		No.
45x45 R (1x)	Signal gray		20	**3 842 548 800**
45x45 R (1x)	Black	⚠	20	**3 842 548 801**
Material:	PP			

45x45 HR

A = 6,6 cm²
I_x = 11,0 cm⁴
I_y = 10,7 cm⁴
W_x = 4,8 cm³
W_y = 4,4 cm³
m = 1,8 kg/m



19431

45x45 HR		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 945 / L**
1 pc	M12	60 ... 6000	**3 842 993 001 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 999 / L**
1 pc		6070	**3 842 558 319**
20 pcs		6070	**3 842 557 957**

Quick & Easy (p. 2-8, see fold-out section)


45x45 HR	3 842 993 736 / ...
Length L (mm)	50 ...6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

Cover cap	Color	ESD		No.
45x45 HR (1x)	Signal gray		20	**3 842 548 798**
45x45 HR (1x)	Black	⚠	20	**3 842 548 799**
Material:	PP			

45x45

A = 7,5 cm2
I_x = 13,8 cm4
I_y = 13,8 cm4
W_x = 6,1 cm3
W_y = 6,1 cm3
m = 2,0 kg/m





19432

Cover cap	Color	ESD		No.
45x45 (1x)	Signal gray		100	**3 842 548 752**
45x45 (1x)	Black	⚠	20	**3 842 548 753**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x45 (1x)	Signal gray		20	**3 842 548 796**
45x45 (1x)	Black	⚠	20	**3 842 548 797**
Material:	PP			

45x45		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 520 / L**
1 pc	M12	60 ... 6000	**3 842 990 517 / L**
1 pc	M12 M12	110 ... 6000	**3 842 990 518 / L**
1 pc	M12 M16	180 ... 6000	**3 842 990 519 / L**
1 pc	M12 D17	90 ... 6000	**3 842 990 640 / L**
1 pc	M16	120 ... 6000	**3 842 990 521 / L**
1 pc	M16 D17	170 ... 6000	**3 842 990 642 / L**
1 pc	D9,8 D9,8	70 ... 6000	**3 842 992 969 / L**
1 pc	D17	60 ... 6000	**3 842 990 648 / L**
1 pc	D17 D17	80 ... 6000	**3 842 990 644 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 990 646 / L**
1 pc		6070	**3 842 553 621**
20 pcs		6070	**3 842 553 614**


Quick & Easy (p. 2-8, see fold-out section)

45x45	3 842 993 734 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

45x60

A = 11,0 cm²
I_x = 37,2 cm⁴
I_y = 22,7 cm⁴
W_x = 12,4 cm³
W_y = 10,1 cm³
m = 3,0 kg/m



19433

Cover cap	Color	ESD		No.
45x60 (1x)	Signal gray		20	**3 842 548 754**
45x60 (1x)	Black	ESD	20	**3 842 548 755**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x60 (1x)	Signal gray		20	**3 842 548 802**
45x60 (1x)	Black	ESD	20	**3 842 548 803**
Material:	PP			

45x60		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 570 / L**
1 pc	M12	60 ... 6000	**3 842 990 571 / L**
1 pc	M12 M12	110 ... 6000	**3 842 990 572 / L**
1 pc	M12 M16	180 ... 6000	**3 842 990 575 / L**
1 pc	M16	120 ... 6000	**3 842 990 573 / L**
1 pc	D9,8	50 ... 6000	**3 842 992 376 / L**
1 pc	D17	60 ... 6000	**3 842 990 688 / L**
1 pc	D17 D17	80 ... 6000	**3 842 990 672 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 990 674 / L**
1 pc	D9,8V	50 ... 6000	**3 842 992 375 / L**
1 pc	D17V	60 ... 6000	**3 842 990 690 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 990 670 / L**
1 pc	LF LF	80 ... 6000	**3 842 993 085 / L**
1 pc	F1 F1	80 ... 6000	**3 842 990 584 / L**
1 pc		6070	**3 842 557 210**
20 pcs		6070	**3 842 557 200**

Profile finishing
D9.8, D17: in slots B/D
D9.8V, D17V: in slots A/C
LF: in slots A/C
F1: in slot A


Quick & Easy (p. 2-8, see fold-out section)

45x60	3 842 993 743 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17 / F1 (A,C)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm

45x90SL

A = 9,0 cm²
I_x = 73,4 cm⁴
I_y = 18,1 cm⁴
W_x = 16,3 cm³
W_y = 8,0 cm³
m = 2,4 kg/m



19434

Cover cap	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 756**
45x90 (1x)	Black	ESD	20	**3 842 548 757**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 804**
45x90 (1x)	Black	ESD	20	**3 842 548 805**
Material:	PP			

45x90SL		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 450 / L**
1 pc		6070	**3 842 537 103**
12 pcs		6070	**3 842 537 102**


Quick & Easy (p. 2-8, see fold-out section)

45x90SL	3 842 993 759 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x90L

A = 11,3 cm²
I_x = 82,0 cm⁴
I_y = 23,6 cm⁴
W_x = 18,2 cm³
W_y = 10,5 cm³
m = 3,0 kg/m





19435

45x90L		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 432 / L**
1 pc	M12	60 ... 6000	**3 842 992 453 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 433 / L**
1 pc	D17 D17	80 ... 6000	**3 842 992 437 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 992 436 / L**
1 pc	D17V	60 ... 6000	**3 842 992 452 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 992 435 / L**
1 pc	LF LF	80 ... 6000	**3 842 993 084 / L**
1 pc		6070	**3 842 553 619**
12 pcs		6070	**3 842 553 612**

Profile finishing:
M12: in all core holes
D17: in slots B/F, C/E
D17V: in slots A/D
LF: in slots A/D

Cover cap	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 756**
45x90 (1x)	Black	⚠	20	**3 842 548 757**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 804**
45x90 (1x)	Black	⚠	20	**3 842 548 805**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

45x90L	3 842 993 662 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x90L 2N

A = 12,0 cm²
I_x = 85,6 cm⁴
I_y = 26,9 cm⁴
W_x = 38,1 cm³
W_y = 6,0 cm³
m = 3,2 kg/m





36364

Cover cap: see 45x90

45x90L 2N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 644 / L**
1 pc		6070	**3 842 538 303**
12 pcs		6070	**3 842 538 299**


Quick & Easy (p. 2-8, see fold-out section)

45x90L 2N	3 842 993 751 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\,i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x90L 2NVS

A = 12,0 cm²
I_x = 90,6 cm⁴
I_y = 25,9 cm⁴
W_x = 40,3 cm³
W_y = 5,7 cm³
m = 3,3 kg/m





33096

Cover cap: see 45x90

45x90L 2NVS		L (mm)	No.
1 pc		50 … 6070	**3 842 994 175 / L**
12 pcs		6070	**3 842 555 652**


Quick & Easy (p. 2-8, see fold-out section)

45x90L 2NVS	3 842 993 770 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 456/ 612 mm

45x90L 3NVS

A = 11,8 cm²
I_x = 87,2 cm⁴
I_y = 25,2 cm⁴
W_x = 38,8 cm³
W_y = 5,6 cm³
m = 3,2 kg/m





19437

Cover cap: see 45x90

45x90L 3NVS		L (mm)	No.
1 pc		50 … 6070	**3 842 993 635 / L**
1 pc		6070	**3 842 538 302**
12 pcs		6070	**3 842 538 298**


Quick & Easy (p. 2-8, see fold-out section)

45x90L 3NVS	3 842 993 752 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x90L 4N

A = 11,6 cm²
I_x = 83,6 cm⁴
I_y = 25,2 cm⁴
W_x = 18,6 cm³
W_y = 10,9 cm³
m = 3,2 kg/m





43375

Cover cap: see 45x90

45x90L 4N		L (mm)	No.
1 pc		50 ... 6070	**3 842 994 180 / L**
1 pc		6070	**3 842 567 973**
12 pcs		6070	**3 842 567 974**


Quick & Easy (p. 2-8, see fold-out section)

45x90L 4N	3 842 993 777 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x135L

A = 16,8 cm²
I_x = 267,4 cm⁴
I_y = 36,2 cm⁴
W_x = 39,6 cm³
W_y = 16,1 cm³
m = 4,6 kg/m

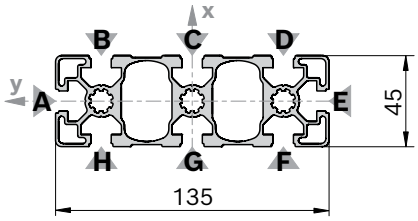



39851

Cover cap	Color	ESD		No.
45x45 (1x)	Signal gray		100	**3 842 548 752**
45x90 (1x)	Signal gray		20	**3 842 548 756**
45x45 (1x)	Black		20	**3 842 548 753**
45x90 (1x)	Black		20	**3 842 548 757**
Material:	PP			

Notice:
For the 45x135L and 45x135L 5N profiles, you require the following combination of cover caps: 1x 45x45 and 1x 45x90

45x135L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 528 / L**
1 pc		6070	**3 842 564 124**
8 pcs		6070	**3 842 564 122**


Quick & Easy (p. 2-8, see fold-out section)

45x135	3 842 993 773 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,D,F,G,H)[1] / D17 (B,C,D,F,G,H)[1] / DB17 / F1 (A, E)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 534 / 768 mm

45x135L 5N

A = 17,3 cm²
I_x = 274,4 cm⁴
I_y = 38,6 cm⁴
W_x = 40,7 cm³
W_y = 17,6 cm³
m = 4,7 kg/m

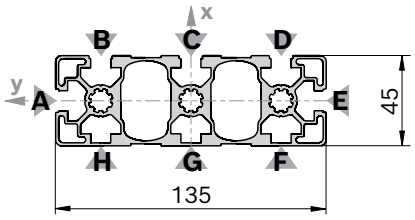



39852

Cover cap: See 45x135L

45x135L 5N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 530 / L**
1 pc		6070	**3 842 564 125**
4 pcs		6070	**3 842 564 123**


Quick & Easy (p. 2-8, see fold-out section)

45x135L 5N	3 842 993 774 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,D,F,G,H)[1] / D17 (B,C,D,F,G,H)[1] / DB17 / F1 (A,E)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 534 / 768 mm

45x90

A = 15,4 cm²
I_x = 124,6 cm⁴
I_y = 32,8 cm⁴
W_x = 27,7 cm³
W_y = 14,6 cm³
m = 4,2 kg/m



10 10 45

19438

Cover cap	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 756**
45x90 (1x)	Black	⚠	20	**3 842 548 757**
Material:	PP			

Cover cap with hole	Color	ESD		No.
45x90 (1x)	Signal gray		20	**3 842 548 804**
45x90 (1x)	Black	⚠	20	**3 842 548 805**
Material:	PP			

45x90		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 300 / L**
1 pc	M12	60 ... 6000	**3 842 990 301 / L**
1 pc	M12 M12	110 ... 6000	**3 842 990 302 / L**
1 pc	M12 D17	90 ... 6000	**3 842 990 323 / L**
1 pc	M12 D17V	90 ... 6000	**3 842 990 305 / L**
1 pc	M16	120 ... 6000	**3 842 990 303 / L**
1 pc	M16 M16	240 ... 6000	**3 842 990 304 / L**
1 pc	M16 D17	170 ... 6000	**3 842 990 325 / L**
1 pc	M16 D17V	170 ... 6000	**3 842 990 307 / L**
1 pc	D17	60 ... 6000	**3 842 990 329 / L**
1 pc	D17 D17	80 ... 6000	**3 842 990 313 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 990 311 / L**
1 pc	D17V	60 ... 6000	**3 842 990 331 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 990 309 / L**
1 pc		6070	**3 842 553 622**
12 pcs		6070	**3 842 553 615**

Profile finishing: M12, M16: in all core holes
D17: in slots B/F, C/E
D17V: in slots A/D


Quick & Easy (p. 2-8, see fold-out section)

45x90	3 842 993 661 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17 / F1 (A,D)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

45x180

A = 25,5 cm²
I_x = 766,7 cm⁴
I_y = 57,3 cm⁴
W_x = 85,2 cm³
W_y = 25,5 cm³
m = 6,9 kg/m

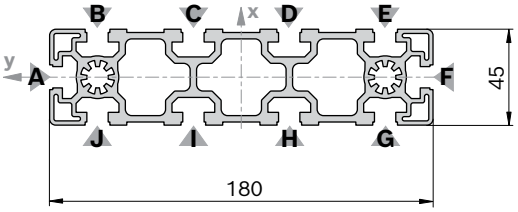

10 10 45

19439

Cover cap	Color	ESD		No.
45x180 (1x)	Signal gray		20	**3 842 548 794**
45x180 (1x)	Black	⚠	20	**3 842 548 795**
Material:	PP			

45x180		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 335 / L**
1 pc	M12	60 ... 6000	**3 842 990 336 / L**
1 pc	M12 M12	110 ... 6000	**3 842 990 339 / L**
1 pc	D17 D17	80 ... 6000	**3 842 990 342 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 990 344 / L**
1 pc		6070	**3 842 553 623**
6 pcs		6070	**3 842 553 616**

Profile finishing: M12: in all core holes
D17: in slots B/J, E/G
D17V: in slots A/F


Quick & Easy (p. 2-8, see fold-out section)

45x180	3 842 993 731 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 (B,C,D,E,G,H,I,J)[1] / D17 (B,C,D,E,G,H,I,J)[1] / DB17 / F1 (A,F)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 30°; L_{min1} / L_{min2} = 404 / 508 mm

45x270

A = 61,9 cm²
I_x = 3962,0 cm⁴
I_y = 118,0 cm⁴
W_x = 300,2 cm³
W_y = 61,6 cm³
m = 16,7 kg/m

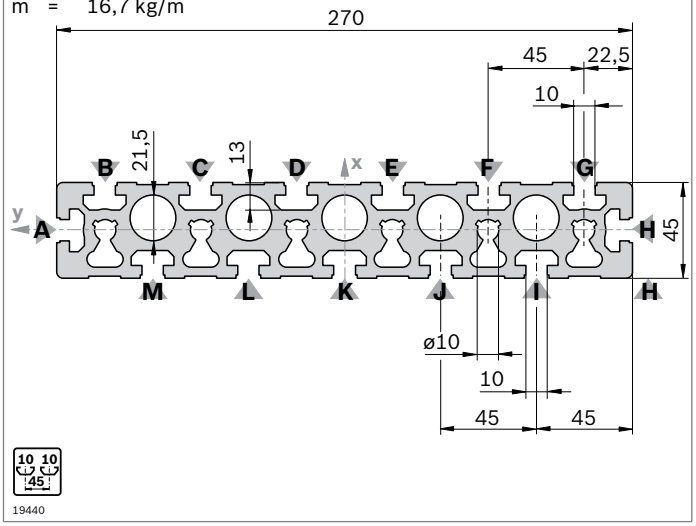

19440

45x270		L (mm)	No.
1 pc		50 ... 6000	**3 842 992 927 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 928 / L**
2 pcs		6070	**3 842 557 949**

Profile finishing: M12: in core holes with C, F slots

Quick & Easy (p. 2-8, see fold-out section)


45x270	3 842 993 732 / ...
Length L (mm)	80 ... 6000
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (B,C,D,E,F,G, I,J,K,L,M)[1] / D17 (B,C,D,E,F,G,I,J,K,L,M)[1] / DB17 / F1 (A,H)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS

[1] For the specified slots

Cover cap	Color	ESD		No.
45x90 (3x)	Signal gray		20	**3 842 548 756**
45x90 (3x)	Black	⚠	20	**3 842 548 757**
Material:	PP			

45x90x90L

A = 21,2 cm²
I_x = 152,1 cm⁴
I_y = 152,1 cm⁴
W_x = 19,1 cm³
W_y = 19,1 cm³
m = 5,7 kg/m





36805

45x90x90L		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 387 / L**
1 pc	M12	60 ... 6000	**3 842 992 388 / L**
1 pc		6070	**3 842 537 846**
8 pcs		6070	**3 842 537 823**

Profile finishing: M12: in central hole at intersection of slots A and H

Quick & Easy (p. 2-8, see fold-out section)

45x90x90L	3 842 993 682 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17 (A,B,C,F,G,H)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm


Cover cap	Color	ESD		No.
45x90x90 (1x)	Signal gray		20	**3 842 548 806**
45x90x90 (1x)	Black	⚠	20	**3 842 548 807**
Material:	PP			

Cover cap with hole[1]	Color	ESD		No.
45x90x90 (1x)	Signal gray		20	**3 842 548 806**
45x90x90 (1x)	Black	⚠	20	**3 842 548 807**
Material:	PP			

[1] The cover cap is also suitable for use with a hole; hole can be broken out

45x90x90L 4N

A = 22,1 cm²
I_x = 160,8 cm⁴
I_y = 160,8 cm⁴
W_x = 30,6 cm³
W_y = 30,6 cm³
m = 6,0 kg/m



29432

Cover cap: see 45x90x90L

45x90x90L 4N		L (mm)	No.
1 pc		50 ... 6070	**3 842 994 176 / L**
8 pcs		6070	**3 842 547 827**


Quick & Easy (p. 2-8, see fold-out section)

45x90x90L 4N	3 842 993 764
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17 (A,B,C,F,G,H)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

90x90SL

A = 14,1 cm2
I_x = 130,2 cm4
I_y = 130,2 cm4
W_x = 28,9 cm3
W_y = 28,9 cm3
m = 3,8 kg/m



19442

Cover cap: see 90x90L

90x90SL		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 449 / L**
1 pc		6070	**3 842 537 101**
6 pcs		6070	**3 842 537 100**


Quick & Easy (p. 2-8, see fold-out section)

90x90SL	3 842 993 681 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

90x90L

A = 24,1 cm2
I_x = 211,1 cm4
I_y = 211,1 cm4
W_x = 46,9 cm3
W_y = 46,9 cm3
m = 6,5 kg/m



19443

Cover cap	Color	ESD		No.
90x90L (1x)	Signal gray		20	**3 842 548 758**
90x90L (1x)	Black		20	**3 842 548 759**
Material:	PP			

90x90L			L (mm)	No.
1 pc			50 ... 6070	**3 842 992 415 / L**
1 pc	M12		60 ... 6000	**3 842 992 416 / L**
1 pc	M12	M12	110 ... 6000	**3 842 992 422 / L**
1 pc	M12	D17	90 ... 6000	**3 842 992 423 / L**
1 pc	D17		60 ... 6000	**3 842 992 417 / L**
1 pc	D17	D17	80 ... 6000	**3 842 992 420 / L**
1 pc	D17	D17V	80 ... 6000	**3 842 992 421 / L**
1 pc	LF	LF	80 ... 6000	**3 842 992 418 / L**
1 pc	LF	M12	90 ... 6000	**3 842 992 419 / L**
1 pc			6070	**3 842 553 620**
6 pcs			6070	**3 842 553 613**

Profile finishing:
M12: in all core holes
D17: in slots C/H, D/G
D17V: in slots A/F, B/E
LF: in slots C/H, D/G


Quick & Easy (p. 2-8, see fold-out section)

90x90L	3 842 993 680 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

90x90L 4N

A = 24,2 cm²
I_x = 227,4 cm⁴
I_y = 214,7 cm⁴
W_x = 50,5 cm³
W_y = 47,7 cm³
m = 6,5 kg/m

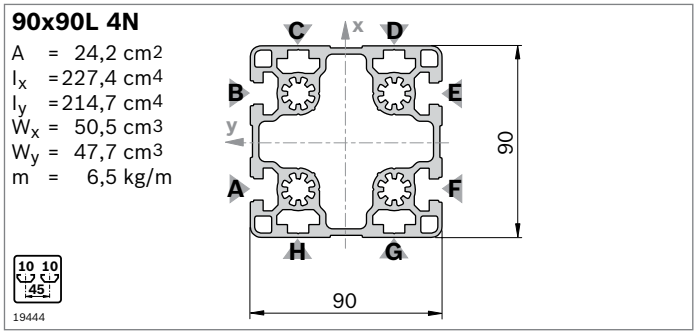

Cover cap: see 90x90L

90x90L 4N		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 628 / L**
1 pc		6070	**3 842 538 301**
6 pcs		6070	**3 842 538 297**


Quick & Easy (p. 2-8, see fold-out section)

90x90L 4N	3 842 993 755 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

90x90L 4NVS

A = 24,2 cm²
I_x = 220,9 cm⁴
I_y = 220,9 cm⁴
W_x = 49,2 cm³
W_y = 49,2 cm³
m = 6,5 kg/m

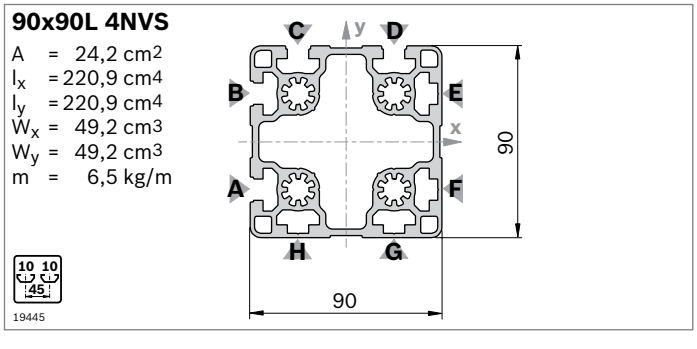

Cover cap: see 90x90L

90x90L 4NVS		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 621 / L**
1 pc		6070	**3 842 538 300**
6 pcs		6070	**3 842 538 296**


Quick & Easy (p. 2-8, see fold-out section)

90x90L 4NVS	3 842 993 756 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm

90x90

A = 38,4 cm²
I_x = 299,8 cm⁴
I_y = 299,8 cm⁴
W_x = 66,7 cm³
W_y = 66,7 cm³
m = 10,4 kg/m

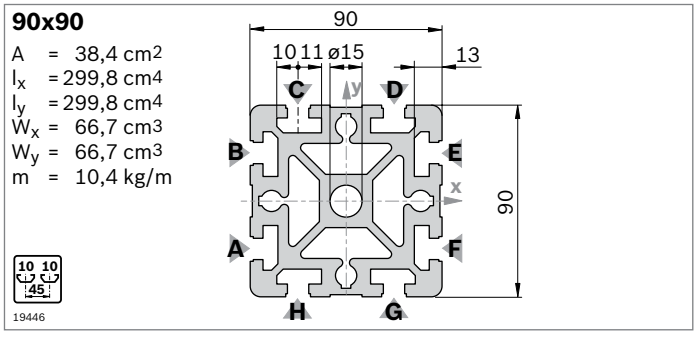

90x90			L (mm)	No.
1 pc			50 ... 6070	**3 842 990 500 / L**
1 pc	M16		120 ... 6000	**3 842 990 501 / L**
1 pc	M16	M16	240 ... 6000	**3 842 990 502 / L**
1 pc	M16	D17	170 ... 6000	**3 842 992 961 / L**
1 pc	D17		60 ... 6000	**3 842 990 092 / L**
1 pc	D17	D17	80 ... 6000	**3 842 990 093 / L**
1 pc	D17	D17V	80 ... 6000	**3 842 990 094 / L**
1 pc	LF	LF	80 ... 6000	**3 842 993 082 / L**
1 pc	F2		60 ... 6000	**3 842 990 505 / L**
1 pc	F2	F2	110 ... 6000	**3 842 990 507 / L**
1 pc			6070	**3 842 557 211**
6 pcs			6070	**3 842 557 201**

Quick & Easy (p. 2-8, see fold-out section)

90x90	3 842 993 679 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M16 / D9.8 / D17 / DB17 / F1
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1)]

[1)] DG_{max} = 45°; L_{min1} / L_{min2} = 456 / 612 mm


Cover cap	Color	ESD		No.
90x90 (1x)	Signal gray		20	**3 842 548 760**
90x90 (1x)	Black	⚠	20	**3 842 548 761**
Material:	PP			

Cover cap with hole	Color	ESD		No.
90x90 (1x)	Signal gray		20	**3 842 548 814**
90x90 (1x)	Black	⚠	20	**3 842 548 815**
Material:	PP			

Notice:A quick connector cannot be used

90x135L

A = 32,94 cm²
I_x = 629,40 cm⁴
I_y = 305,23 cm⁴
W_x = 93,26 cm³
W_y = 67,84 cm³
m = 8,89 kg/m



40846

Cover cap	Color	ESD		No.
90x90L (1x)	Signal gray		20	**3 842 548 758**
45x90 (1x)	Signal gray		20	**3 842 548 756**
90x90L (1x)	Black		20	**3 842 548 759**
45x90 (1x)	Black		20	**3 842 548 757**
Material:	PP			

Notice:
For the 90x135L profile you require the following combination of cover caps: 1x 90x90 and 1x 45x90

90x135L		L (mm)	No.
1 pc		50 ... 6070	**3 842 996 242 / L**
1 pc		6070	**3 842 564 806**
4 pcs		6070	**3 842 564 805**


Quick & Easy (p. 2-8, see fold-out section)

90x135L	3 842 993 776 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (C,D,E, H,I,J)[1] / D17 (C,D,E,H, I,J)[1] / DB17 / F1 (A,F)
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 534 / 768 mm

90x180L

A = 42,8 cm²
I_x = 1380,0 cm⁴
I_y = 401,0 cm⁴
W_x = 153,3 cm³
W_y = 89,1 cm³
m = 11,6 kg/m

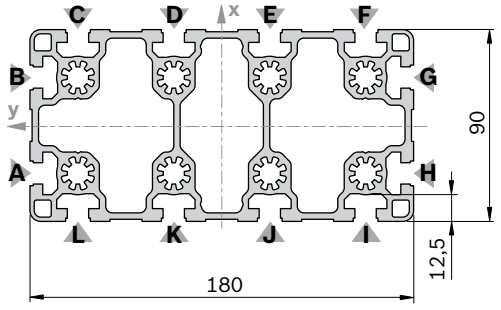

19447

Cover cap	Color	ESD		No.
90x90L (2x)	Signal gray		20	**3 842 548 758**
90x90L (2x)	Black		20	**3 842 548 759**
Material:	PP			

90x180L		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 857 / L**
1 pc	M12	60 ... 6000	**3 842 992 858 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 859 / L**
1 pc	M12 LF	90 ... 6000	**3 842 992 860 / L**
1 pc	D17V D17V	90 ... 6000	**3 842 992 864 / L**
1 pc	LF LF	80 ... 6000	**3 842 992 861 / L**
3 pcs		6070	**3 842 557 226**

Profile finishing:
M12: in all core holes
D17V: in slots A/H, B/G
LF: in slots A/H, B/G


Quick & Easy (p. 2-8, see fold-out section)

90x180L	3 842 993 677 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (C,D,E,F,I,J,K,L)[1] / D17 (C,D,E,F,I,J,K,L)[1] / DB17 / F1 (A,G)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 30°; L_{min1} / L_{min2} = 404 / 508 mm

90x180

A = 63,6 cm²
I_x = 2138,3 cm⁴
I_y = 544,3 cm⁴
W_x = 237,6 cm³
W_y = 121,0 cm³
m = 17,2 kg/m

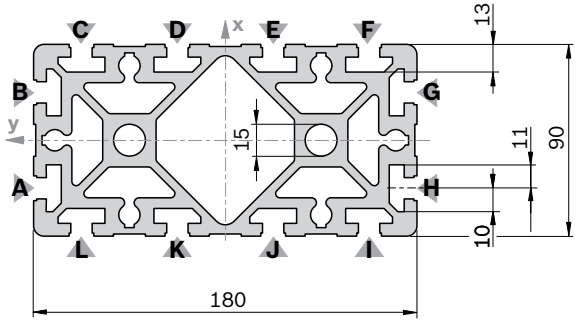

19448

Cover cap	Color	ESD		No.
90x90 (2x)	Signal gray		20	**3 842 548 760**
90x90 (2x)	Black		20	**3 842 548 761**
Material:	PP			
Cover cap with hole	**Color**	**ESD**		**No.**
90x90 (2x)	Signal gray		20	**3 842 548 814**
90x90 (2x)	Black		20	**3 842 548 815**
Material:	PP			

90x180		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 416 / L**
1 pc	M16	120 ... 6000	**3 842 990 417 / L**
1 pc	M16 M16	240 ... 6000	**3 842 990 418 / L**
1 pc	M16 F2	170 ... 6000	**3 842 990 419 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 992 378 / L**
1 pc	LF LF	80 ... 6000	**3 842 992 898 / L**
1 pc	LF-S LF-S	80 ... 6000	**3 842 993 081 / L**
1 pc	F2 F2	110 ... 6000	**3 842 990 421 / L**
3 pcs		6070	**3 842 553 617**

Profile finishing:
M16: in all core holes
D17V: in slots A/H, B/G
LF: in slots A/H, B/G
LF-S: in slots D/K, E/J

Quick & Easy (p. 2-8, see fold-out section)


90x180	3 842 993 676 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M16 / D9.8 (C,D,E,F,I,J,K,L)[1] / D17 (C,D,E,F,I,J,K,L)[1] / DB17 / F1 (A,G)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 30°; L_{min1} / L_{min2} = 404 / 508 mm


Notice: A quick connector cannot be used with profile 90x180

90x360

A = 90,2 cm²
I_x = 14065,0 cm⁴
I_y = 710,0 cm⁴
W_x = 781,4 cm³
W_y = 157,7 cm³
m = 24,4 kg/m



19449

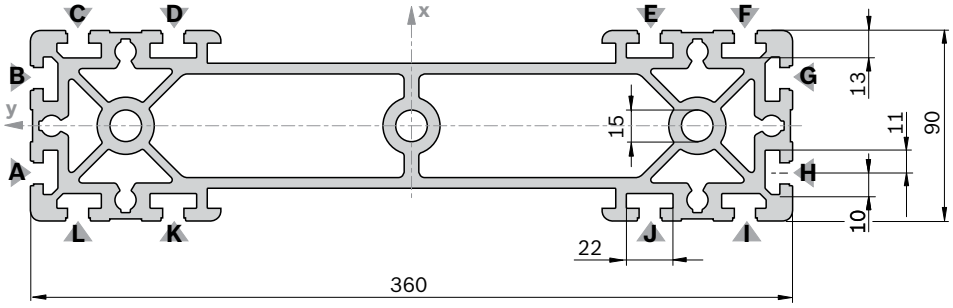

Cover cap	Color	ESD		No.
90x90 (2x)	Signal gray		20	**3 842 548 760**
90x90 (2x)	Black	⚠	20	**3 842 548 761**
Material:	PP			

Cover cap with hole	Color	ESD		No.
90x90 (2x)	Signal gray		20	**3 842 548 814**
90x90 (2x)	Black	⚠	20	**3 842 548 815**
Material:	PP			

Notice: A quick connector cannot be used

90x360		L (mm)	No.
	▭	50 ... 6000	**3 842 993 434 / L**
	M16 ▬ ▬ M16	240 ... 6000	**3 842 993 435 / L**
	F2 ▭ F2	110 ... 6000	**3 842 993 436 / L**
Profile finishing:		M16: in all core holes	

Quick & Easy (p. 2-8, see fold-out section)

90x360	3 842 993 678 / ...
Length L (mm)	80 ... 6000
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M16 / D9.8 (C,D,E,F,I,J, K,L)[1] / D17 (C,D,E,F,I,J, K,L)[1] / DB17 / F1 (A,G)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS


[1] For the specified slots

15x22,5

A = 1,3 cm²
I_x = 0,8 cm⁴
I_y = 0,3 cm⁴
W_x = 0,9 cm³
W_y = 0,6 cm³
m = 0,3 kg/m



19450



Cover cap	Color	ESD		No.
15x22.5 (1x)	Signal gray		20	**3 842 548 816**
15x22.5 (1x)	Black	⚠	20	**3 842 548 817**
Material:	PP			


15x22.5		L (mm)	No.
1 pc	▭	50 ... 3000	**3 842 992 473 / L**
1 pc	D17 ▭	60 ... 3000	**3 842 992 474 / L**
1 pc	D17 ▭ D17	80 ... 3000	**3 842 992 475 / L**
1 pc	▭	3000	**3 842 563 232**
10 pcs	▭	3000	**3 842 563 231**

Quick & Easy (p. 2-8, see fold-out section)

15x22.5	3 842 993 689 / ...
Length L (mm)	50 ... 2000
Standard profile finishing (note minimum length, p. 2-25)	D9.8 / D17
Customized profile finishing	–

15x180

A = 11,6 cm²
I_x = 321,7 cm⁴
I_y = 3,2 cm⁴
W_x = 35,7 cm³
W_y = 4,2 cm³
m = 3,1 kg/m

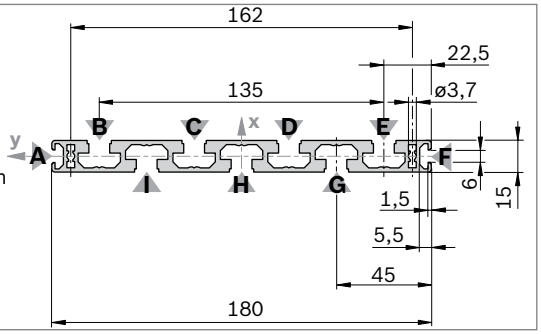

19451

Cover cap	Color	ESD		No.
15x180 (1x)	Signal gray		20	**3 842 548 772**
15x180 (1x)	Black	⚠	20	**3 842 548 773**
Material:	PP			

15x180		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 079 / L**
1 pc		6070	**3 842 557 249**
6 pcs		6070	**3 842 557 242**


Quick & Easy (p. 2-8, see fold-out section)

15x180	3 842 993 686 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	D9.8 (B,C,D,E,G,H,I)[1] / D17 (B,C,D,E,G,H,I)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS

[1] For the specified slots

22,5x45

A = 4,7 cm²
I_x = 7,1 cm⁴
I_y = 2,9 cm⁴
W_x = 3,2 cm³
W_y = 2,6 cm³
m = 1,3 kg/m



19452

Cover cap	Color	ESD		No.
22.5x45 (1x)	Signal gray		20	**3 842 548 830**
22.5x45 (1x)	Black	⚠	20	**3 842 548 831**
Material:	PP			

22.5x45		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 292 / L**
1 pc	M12	60 ... 6000	**3 842 990 087 / L**
1 pc	M12 M12	110 ... 6000	**3 842 990 090 / L**
1 pc	D17V D17V	80 ... 6000	**3 842 990 091 / L**
24 pcs		6070	**3 842 537 812**


Quick & Easy (p. 2-8, see fold-out section)

22.5x45	3 842 993 700 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 (A,C)[1] / D17 / DB17 (A,C)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm

22,5x180

A = 21,6 cm²
I_x = 581,0 cm⁴
I_y = 11,8 cm⁴
W_x = 66,8 cm³
W_y = 14,7 cm³
m = 5,8 kg/m

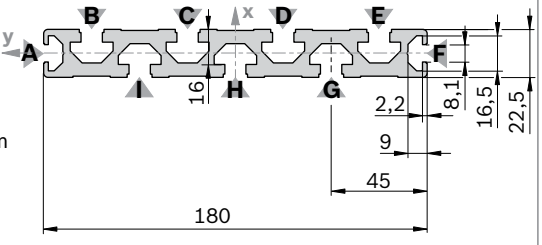

19453

Cover cap	Color	ESD		No.
22.5x180 (1x)	Signal gray		20	**3 842 548 770**
22.5x180 (1x)	Black	⚠	20	**3 842 548 771**
Material:	PP			

22.5x180		L (mm)	No.
1 pc		50 ... 6070	**3 842 990 345 / L**
1 pc		6070	**3 842 558 306**
6 pcs		6070	**3 842 557 944**
Profile finishing:	D28: in slots G, I		


Quick & Easy (p. 2-8, see fold-out section)

22.5x180	3 842 993 699 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	D9.8 (B,C,D,E,G,H,I)[1] / D17 (B,C,D,E,G,H,I)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS

[1] For the specified slots

50x50L

A = 9,3 cm²
I_x = 21,2 cm⁴
I_y = 21,2 cm⁴
W_x = 8,5 cm³
W_y = 8,5 cm³
m = 2,5 kg/m



19454

Cover cap	Color	ESD		No.
50x50 (1x)	Signal gray		20	**3 842 548 820**
50x50 (1x)	Black	⚠	20	**3 842 548 821**
Material:	PP			

Cover cap with hole	Color	ESD		No.
50x50 (1x)	Signal gray		20	**3 842 548 822**
50x50 (1x)	Black	⚠	20	**3 842 548 823**
Material:	PP			

50x50L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 156 / L**
1 pc	M12	60 ... 6000	**3 842 993 157 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 158 / L**
1 pc	M12 D17	90 ... 6000	**3 842 993 159 / L**
1 pc	D9,8 D9,8	80 ... 6000	**3 842 993 164 / L**
1 pc	D17	60 ... 6000	**3 842 993 160 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 161 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 993 162 / L**
1 pc		6070	**3 842 529 352**
20 pcs		6070	**3 842 529 351**


Quick & Easy (p. 2-8, see fold-out section)

50x50L	3 842 993 665 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 387 / 474 mm

50x100L

A = 17,2 cm²
I_x = 162,8 cm⁴
I_y = 42,6 cm⁴
W_x = 32,6 cm³
W_y = 17,0 cm³
m = 4,6 kg/m

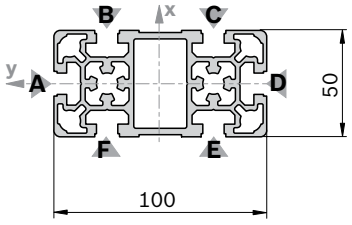

19455

Cover cap	Color	ESD		No.
50x50 (2x)	Signal gray		20	**3 842 548 820**
50x50 (2x)	Black	⚠	20	**3 842 548 821**
Material:	PP			

Cover cap with hole	Color	ESD		No.
50x50 (2x)	Signal gray		20	**3 842 548 822**
50x50 (2x)	Black	⚠	20	**3 842 548 823**
Material:	PP			

50x100L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 163 / L**
1 pc	M12	60 ... 6000	**3 842 993 165 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 166 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 167 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 993 168 / L**
1 pc	D17V	60 ... 6000	**3 842 993 169 / L**
1 pc	D17V D17V	90 ... 6000	**3 842 993 170 / L**
1 pc		6070	**3 842 529 354**
10 pcs		6070	**3 842 537 825**

Profile finishing: M12: in all core holes
D17: in slots B/F, C/E
D17V: in slot A/D

Quick & Easy (p. 2-8, see fold-out section)


50x100L	3 842 993 663 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17 / F1 (A, D)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots

[2] DG_{max} = 45°; L_{min1} / L_{min2} = 474 / 648 mm

50x150L

A = 25,8 cm²
I_x = 540,0 cm⁴
I_y = 64,2 cm⁴
W_x = 72,0 cm³
W_y = 25,7 cm³
m = 6,9 kg/m

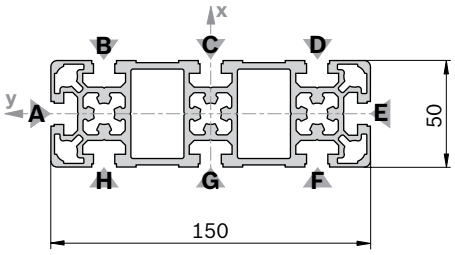



19456

50x150L			L (mm)	No.
	1 pc		50 ... 6070	**3 842 993 196 / L**
	1 pc	M12	60 ... 6000	**3 842 993 194 / L**
	1 pc	M12 M12	110 ... 6000	**3 842 993 199 / L**
	1 pc	D17 D17	80 ... 6000	**3 842 993 200 / L**
	1 pc		6070	**3 842 529 378**
	4 pcs		6070	**3 842 537 826**

Profile finishing: M12: in all core holes
D17: in slots B/H, C/G, D/F
D17V: in slots A/E

Cover cap	Color	ESD		No.
50x150 (1x)	Signal gray		20	**3 842 548 818**
50x150 (1x)	Black	⚠	20	**3 842 548 819**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

50x150L	3 842 993 664 / ...
Length L (mm)	80 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 (B,C,D,F,G,H)[1] / D17 (B,C,D,F,G,H)[1] / DB17 / F1 (A,E)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 45°; L_{min1} / L_{min2} = 450 / 600 mm

100x100L

A = 29,9 cm²
I_x = 318,3 cm⁴
I_y = 318,3 cm⁴
W_x = 63,7 cm³
W_y = 63,7 cm³
m = 8,1 kg/m





19457

100x100L			L (mm)	No.
	1 pc		50 ... 6070	**3 842 993 171 / L**
	1 pc	M12	60 ... 6000	**3 842 993 172 / L**
	1 pc	M12 M12	110 ... 6000	**3 842 993 173 / L**
	1 pc	M12 D17	90 ... 6000	**3 842 993 174 / L**
	1 pc	D17	60 ... 6000	**3 842 993 175 / L**
	1 pc	D17 D17	80 ... 6000	**3 842 993 176 / L**
	1 pc	D17 D17V	80 ... 6000	**3 842 993 177 / L**
	1 pc		6070	**3 842 529 356**
	6 pcs		6070	**3 842 529 355**

Profile finishing: M12: in all core holes
D17: in slots C/H, D/G
D17V: in slots A/F, B/E

Cover cap	Color	ESD		No.
100x100 (1x)	Signal gray		20	**3 842 548 824**
100x100 (1x)	Black	⚠	20	**3 842 548 825**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

100x100L	3 842 993 685 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17 / F1
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min1} / L_{min2} = 474 / 648 mm

100x200L

A = 54,0 cm²
I_x = 2133,1 cm⁴
I_y = 602,1 cm⁴
W_x = 213,3 cm³
W_y = 120,4 cm³
m = 14,6 kg/m

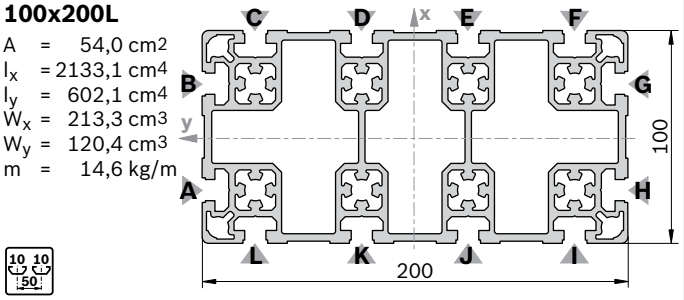

19458

100x200L		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 178 / L**
1 pc	M12	60 ... 6000	**3 842 993 179 / L**
1 pc	M12 M12	110 ... 6000	**3 842 993 180 / L**
1 pc	M12 D17	90 ... 6000	**3 842 993 181 / L**
1 pc	D17	60 ... 6000	**3 842 993 182 / L**
1 pc	D17 D17	80 ... 6000	**3 842 993 183 / L**
3 pcs		6070	**3 842 529 357**

Profile finishing: M12: in all core holes
D17: in slots C/L, D/K, E/J, F/I
D17V: in slots A/H, B/G

Cover cap	Color	ESD		No.
100x100 (2x)	Signal gray		20	**3 842 548 824**
100x100 (2x)	Black		20	**3 842 548 825**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

100x200L	3 842 993 687 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 (C,D,E,F,I,J,K,L)[1] / D17 (C,D,E,F,I,J,K,L)[1] / DB17 / F1 (A,G)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[2]

[1] For the specified slots
[2] DG_{max} = 30°; L_{min} = 416 / 532 mm

60x60L

A = 9,6 cm²
I_x = 32,4 cm⁴
I_y = 32,4 cm⁴
W_x = 10,8 cm³
W_y = 10,8 cm³
m = 2,6 kg/m



19459

60x60L		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 443 / L**
1 pc	M12	60 ... 6000	**3 842 992 444 / L**
1 pc	M12 M12	110 ... 6000	**3 842 992 445 / L**
1 pc	M12 D17	90 ... 6000	**3 842 992 446 / L**
1 pc	D17	60 ... 6000	**3 842 992 449 / L**
1 pc	D17 D17	80 ... 6000	**3 842 992 447 / L**
1 pc	D17 D17V	80 ... 6000	**3 842 992 448 / L**
1 pc		6070	**3 842 557 214**
20 pcs		6070	**3 842 557 204**

Cover cap	Color	ESD		No.
60x60 (1x)	Signal gray		100	**3 842 548 808**
60x60 (1x)	Black		20	**3 842 548 809**
Material:	PP			

Cover cap with hole	Color	ESD		No.
60x60 (1x)	Signal gray		20	**3 842 548 810**
60x60 (1x)	Black		20	**3 842 548 811**
Material:	PP			


Quick & Easy (p. 2-8, see fold-out section)

60x60L	3 842 993 670 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min} = 404 / 508 mm

60x60

A = 14,4 cm²
I_x = 52,2 cm⁴
I_y = 52,2 cm⁴
W_x = 17,4 cm³
W_y = 17,4 cm³
m = 3,9 kg/m

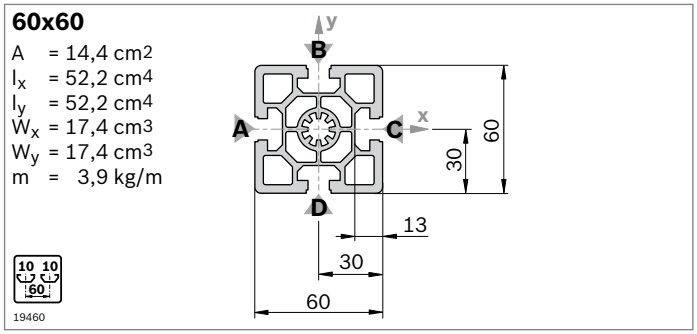

Cover cap	Color	ESD		No.
60x60 (1x)	Signal gray		100	**3 842 548 808**
60x60 (1x)	Black	⚠	20	**3 842 548 809**
Material:	PP			

Cover cap with hole	Color	ESD		No.
60x60 (1x)	Signal gray		20	**3 842 548 810**
60x60 (1x)	Black	⚠	20	**3 842 548 811**
Material:	PP			

60x60			L (mm)	No.
1 pc			50 ... 6070	**3 842 990 350 / L**
1 pc	M12		60 ... 6000	**3 842 990 351 / L**
1 pc	M12	M12	110 ... 6000	**3 842 990 353 / L**
1 pc	M12	M16	180 ... 6000	**3 842 990 354 / L**
1 pc	M12	D17	90 ... 6000	**3 842 990 355 / L**
1 pc	M16		120 ... 6000	**3 842 990 352 / L**
1 pc	M16	D17	170 ... 6000	**3 842 990 373 / L**
1 pc	D17		50 ... 6000	**3 842 990 370 / L**
1 pc	D17	D17	80 ... 6000	**3 842 990 357 / L**
1 pc	D17	D17V	80 ... 6000	**3 842 990 359 / L**
1 pc			6070	**3 842 557 212**
20 pcs			6070	**3 842 557 202**


Quick & Easy (p. 2-8, see fold-out section)

60x60	3 842 993 668 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M12 / M16 / D9.8 / D17 / DB17
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] DG_{max} = 45°; L_{min} = 404 / 508 mm

60x90

A = 25,8 cm²
I_x = 214,2 cm⁴
I_y = 90,5 cm⁴
W_x = 47,6 cm³
W_y = 30,2 cm³
m = 7,0 kg/m

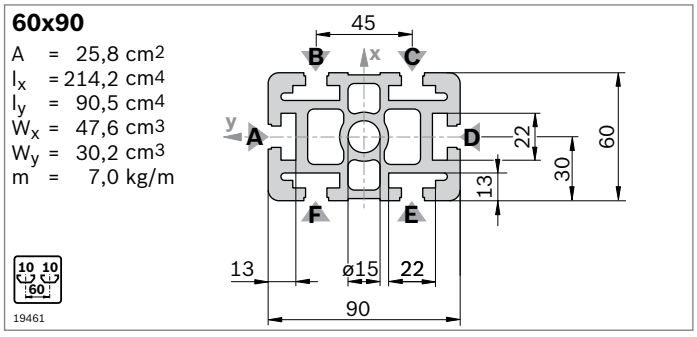

Cover cap	Color	ESD		No.
60x90 (1x)	Signal gray		20	**3 842 548 812**
60x90 (1x)	Black	⚠	20	**3 842 548 813**
Material:	PP			

Cover cap with hole	Color	ESD		No.
60x90 (1x)	Signal gray		20	**3 842 551 050**
60x90 (1x)	Black	⚠	20	**3 842 551 051**
Material:	PP			

Notice: A quick connector cannot be used


60x90			L (mm)	No.
1 pc			50 ... 6070	**3 842 990 450 / ...**
1 pc	M16		120 ... 6000	**3 842 990 453 / ...**
1 pc	M16	M16	240 ... 6000	**3 842 990 454 / ...**
1 pc	M16	D17	170 ... 6000	**3 842 992 962 / ...**
1 pc	M16	D17V	170 ... 6000	**3 842 992 963 / ...**
1 pc	M16	F2	170 ... 6000	**3 842 990 472 / ...**
1 pc	D17	D17	80 ... 6000	**3 842 990 097 / ...**
1 pc	D17	D17V	80 ... 6000	**3 842 990 099 / ...**
1 pc	D17V	D17V	90 ... 6000	**3 842 990 098 / ...**
1 pc	F1	F1	110 ... 6000	**3 842 990 464 / ...**
1 pc	F1	F1V	110 ... 6000	**3 842 990 481 / ...**
1 pc	F2	F2	110 ... 6000	**3 842 990 478 / ...**
1 pc			6070	**3 842 557 217**
10 pcs			6070	**3 842 557 207**

Profile finishing: D17: in slots B/F, C/E
D17V: in slots A/D

Quick & Easy (p. 2-8, see fold-out section)

60x90	3 842 993 671 / ...
Length L (mm)	50 ... 6070
Standard profile finishing L_{max} = 6000 mm (note minimum length, p. 2-25)	M16 / D9.8 / D17 / DB17 / F1 (A, D)[1]
Customized profile finishing ($L_{max\ i}$ = 5400 mm)	DI / DIS / MT / MTS / MI / MIS / DG[1]

[1] For the specified slots
[1] DG_{max} = 45°; L_{min} = 456 / 612 mm

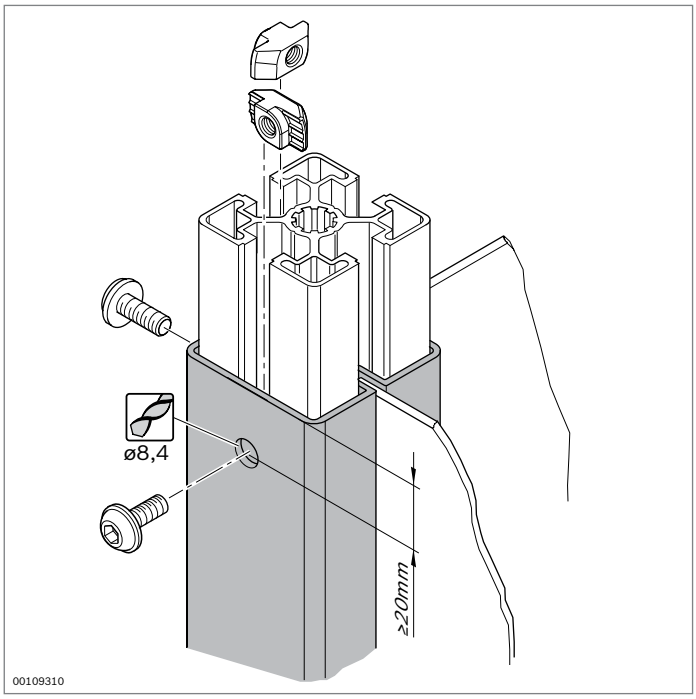


Rectangular tube




- For constructing manually height-adjustable frames
- Cut-outs for mounting of panel elements
- Profile finishing: Hole for screw

Required accessories:
Fastening material

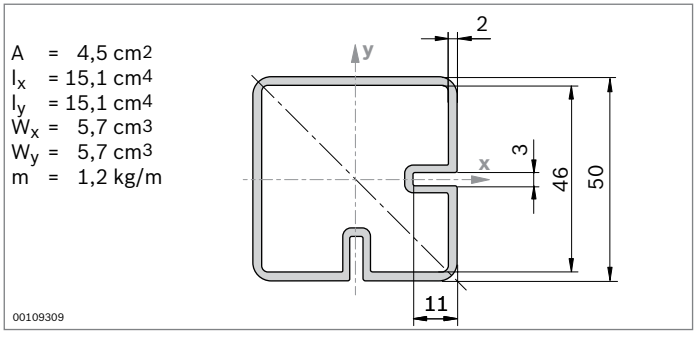

Rectangular tube		L (mm) No.
1 pc		50 ... 6070 **3 842 992 913 / L**
1 pc		6070 **3 842 558 321**
6 pcs		6070 **3 842 557 960**

Material: Aluminum; anodized

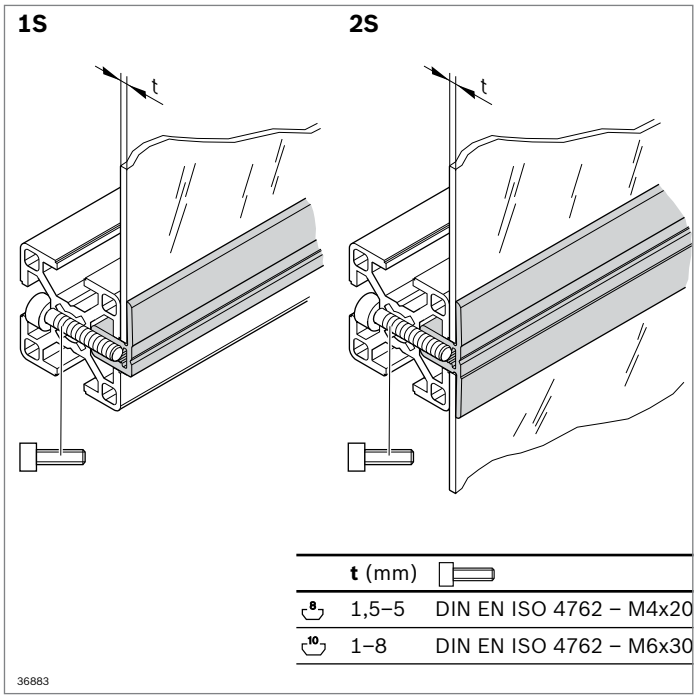


	t (mm)	
8	1,5–5	DIN EN ISO 4762 – M4x20
10	1–8	DIN EN ISO 4762 – M6x30


Clamping profile

- For simple fastening of panes, panel elements, or grilles on strut profiles
- For subsequent installation in closed frame constructions
- For panel elements with varying thicknesses
- Profile finishing: Through-hole for fastening screw


Required accessories:


- Cylinder head bolt DIN EN ISO 4762 – M4x20 (8 mm slot)
- Cylinder head bolt DIN EN ISO 4762 – M6x30 (10 mm slot)






Clamping profile 1S		Slot	L (mm)	No.
1 pc		8	50 ... 3000	**3 842 993 017 / L**
10 pcs		8	3000	**3 842 524 058**
1 pc		10	50 ... 3000	**3 842 993 019 / L**
10 pcs		10	3000	**3 842 524 064**
Material:	Aluminum; anodized			





Clamping profile 2S		Slot	L (mm)	No.
1 pc		8	50 ... 3000	**3 842 993 018 / L**
10 pcs		8	3000	**3 842 524 061**
1 pc		10	50 ... 3000	**3 842 993 020 / L**
10 pcs		10	3000	**3 842 524 067**
Material:	Aluminum; anodized			

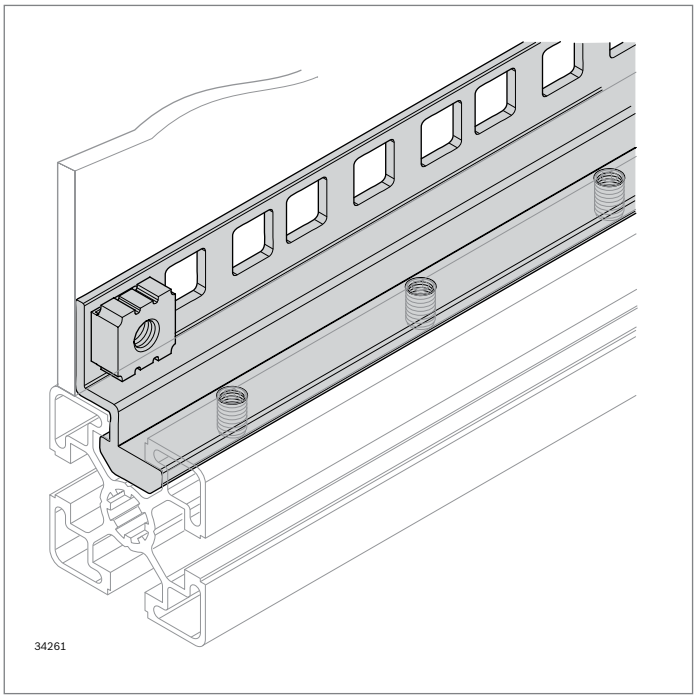


Al angle profile 19″


10

- Rail for mounting 19″ devices in electronic and electrical production
- Suitable for fastening panel elements
- Fully finished angle profile
  - with square cutouts for fastening the 19″ devices with a cage nut (hole according to DIN 60297-3-100)
  - with threads for fastening the Al angle profile with headless setscrews in the slot
- Angle profile, can be swiveled into slot

Required accessories: Headless setscrews M6x12

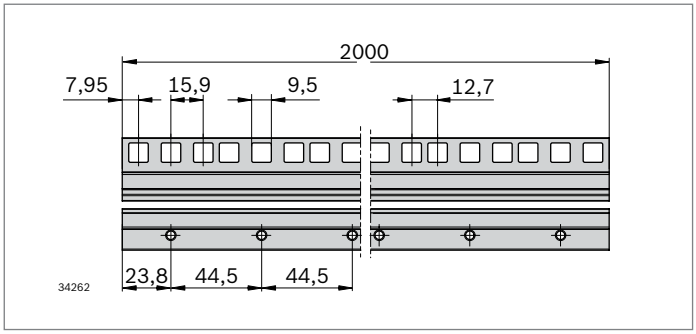


Al angle profile 19″		L (mm)	No.
	10 pcs	2000	**3 842 557 254**
Material:	Aluminum; anodized		

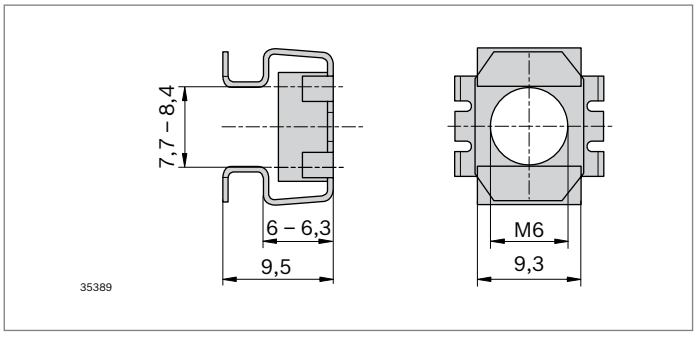

Cage nut

- For fastening panel elements or 19″ devices on profile
- Easy assembly as tension springs snap into the recess

Cage nut M6		No.
	20	**3 842 557 255**
Material:	Steel; zinc-plated	

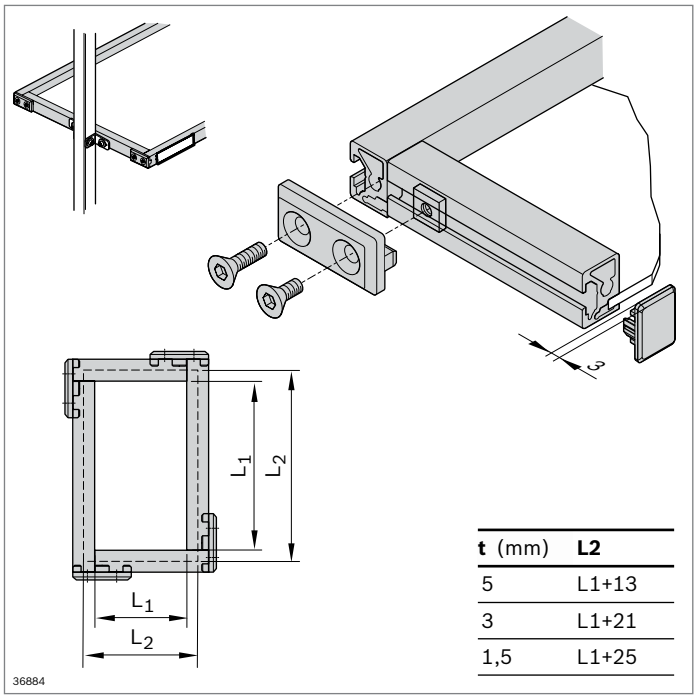


t (mm)	L2
5	L1+13
3	L1+21
1,5	L1+25

Frame profile 22.5x30

- For inexpensive construction of trays and material shelves
- Panel elements are mounted under tension so that they do not rattle

Accessories, optional:
- Bracket set M6 (p. 2-117)
- Swivel mounting (p. 4-14)
- Labeling clip for 8 mm slot (p. 2-95)
- Plate (p. 2-66)

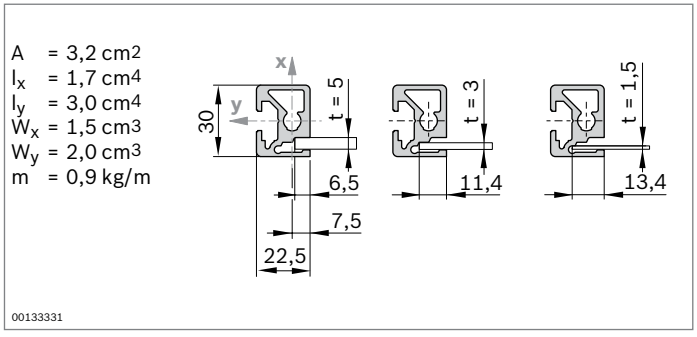


Frame profile 22.5x30		Slot	L (mm)	No.
1 pc		8	50 ... 6070	**3 842 992 493 / L**
1 pc		8	6070	**3 842 558 308**
20 pcs		8	6070	**3 842 557 946**


Material: Aluminum; anodized

Cover cap	Color	ESD		No.
22.5x30	Signal gray		20	**3 842 551 564**
22.5x30	Black		20	**3 842 551 565**


Material: PP



FS1



FS2




Corner piece for frame profile 22.5x30

- For the right-angled connection of two 22.5x30 frame profiles
- Profile finishing not required

Corner piece	Color	ESD		No.	FS
22.5x30	Signal gray		20	**3 842 554 708**	FS1, FS2
22.5x30	Black		20	**3 842 554 709**	FS1, FS2

Material: PA
Scope of delivery: Incl. fastening material (FS)

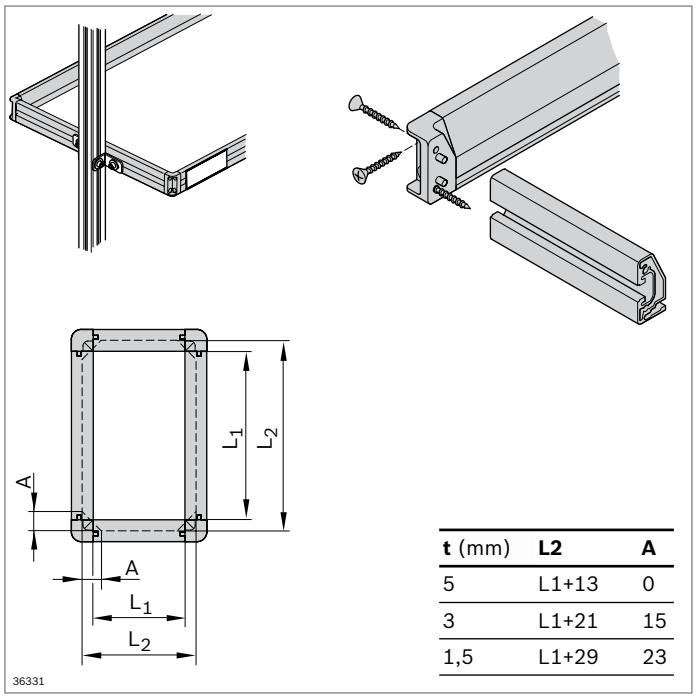


t (mm)	L2	A
5	L1+13	0
3	L1+21	15
1,5	L1+29	23

Frame profile 22.5x45


- For inexpensive construction of trays and material shelves
- Panel elements are mounted under tension so that they do not rattle


Accessories, optional:
- Bracket set (p. 3-33)
- Swivel mounting (p. 4-14)
- Labeling clip for 10 mm slot (p. 2-95)
- Plate (p. 2-66)

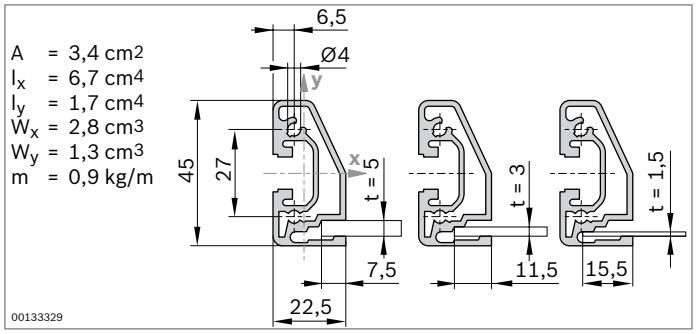

Frame profile 22.5x45	Slot	L (mm)	No.
1 pc	10	50 ... 6070	**3 842 992 411 / L**
1 pc	10	6070	**3 842 558 303**
20 pcs	10	6070	**3 842 557 941**

Material: Aluminum; anodized






Corner bracket for frame profile 22.5x45

- For the right-angled connection of two 22.5x45 frame profiles
- Profile finishing not required

Corner bracket	ESD		No.	FS
22.5x45		20	**3 842 535 637**	4xFS1


Material: Diecast zinc
Scope of delivery: Incl. fastening material (FS)

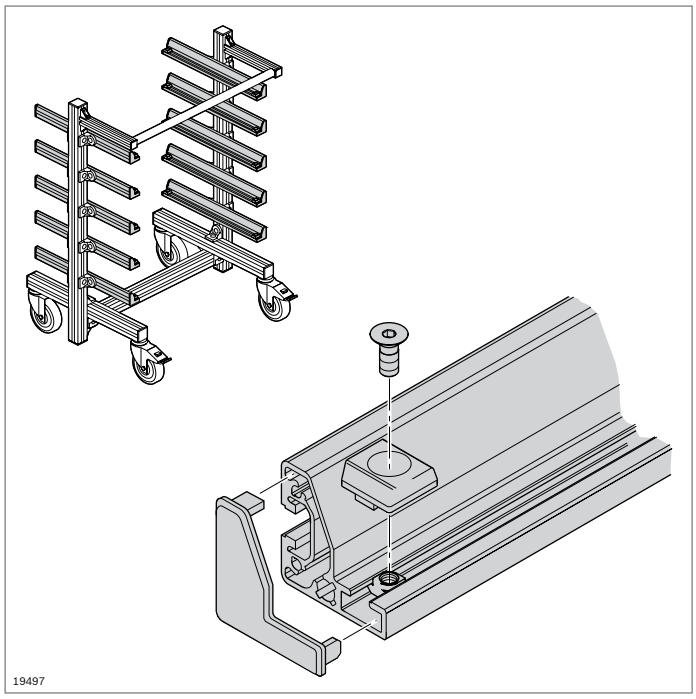

Angle profile


- For supporting containers, plates, or workpiece pallets in flow racks, material shuttles, or hopper stackers


Accessories:
Bracket R40x43 (p. 2-114)

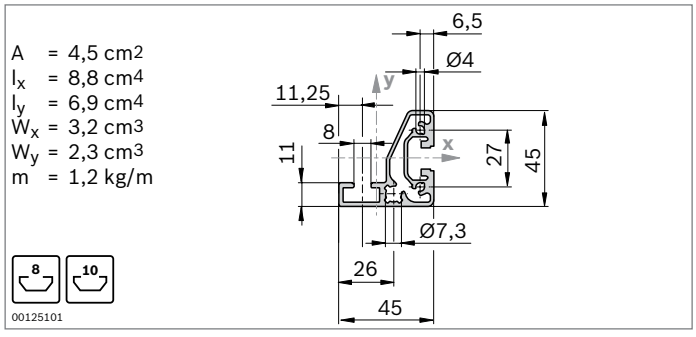

Angle profile		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 412 / L**
1 pc		6070	**3 842 558 304**
20 pcs		6070	**3 842 557 942**

Material: Aluminum; anodized






Stopper and cover cap

- The stopper prevents containers from shifting on the angle profile
- Cover cap to prevent injuries at open profile ends
- Attractive design

Stopper, cover cap	Color	ESD		No.	FS
Set	Signal gray		20	**3 842 554 490**	2xFS1
Set	Black		20	**3 842 554 491**	2xFS1

Material: PA
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

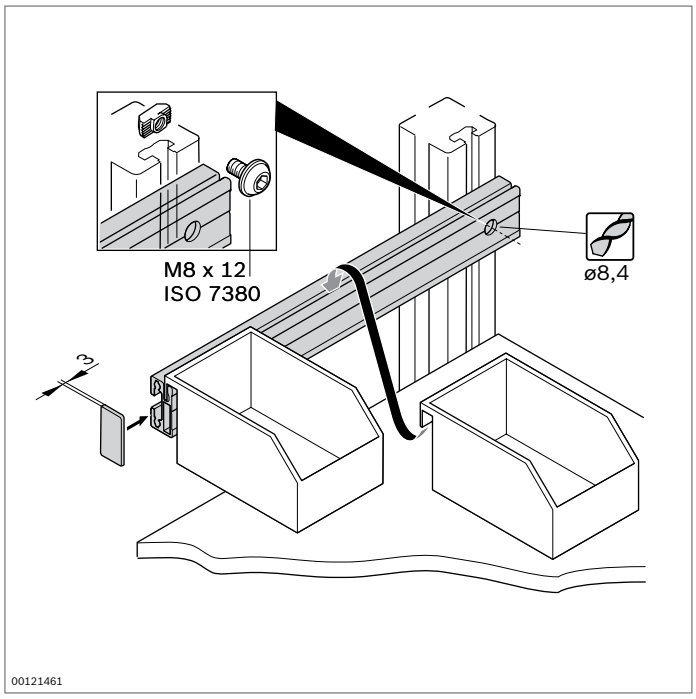


Suspension profile

- For the fast, secure suspension of grab containers, grab ledges, grab trays, and tool holders
- Profile finishing:
  Through-hole for screwdriver
- Matching grab containers in the Manual Production Systems catalog (**3 842 538 280**)

Required accessories:
- Screw
- T-nut (p. 3-4)

A = 2,0 cm²
I_x = 2,0 cm⁴
I_y = 0,5 cm⁴
W_x = 2,7 cm³
W_y = 0,3 cm³
m = 0,6 kg/m




Suspension profile		L (mm)	ESD	No.
1 pc		50 ... 3000		**3 842 993 411 / L**
1 pc		3000		**3 842 537 680**
10 pcs		3000		**3 842 537 679**
1 pc		50 ... 3000	ESD	**3 842 993 063 / L**
1 pc		3000	ESD	**3 842 554 156**
10 pcs		3000	ESD	**3 842 554 157**

Material: Suspension profile: Aluminum; anodized
Suspension profile ESD: Aluminum; natural


Cover cap	Color	ESD		No.
15x30	Signal gray		20	**3 842 551 582**
15x30	Black	ESD	20	**3 842 551 583**


Material: PP

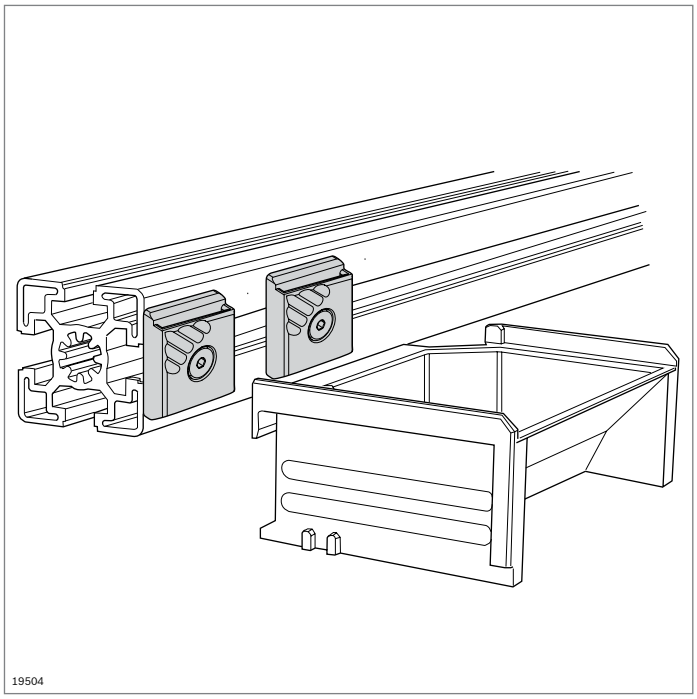


Container mount

- Container mount for mounting tool holders, grab containers, grab trays and grab ledges
- Suitable for 8 mm and 10 mm slots










Container mount	ESD		No.	FS
	⚠	10	**3 842 544 797**	FS1, FS2

Material: PA 66; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)






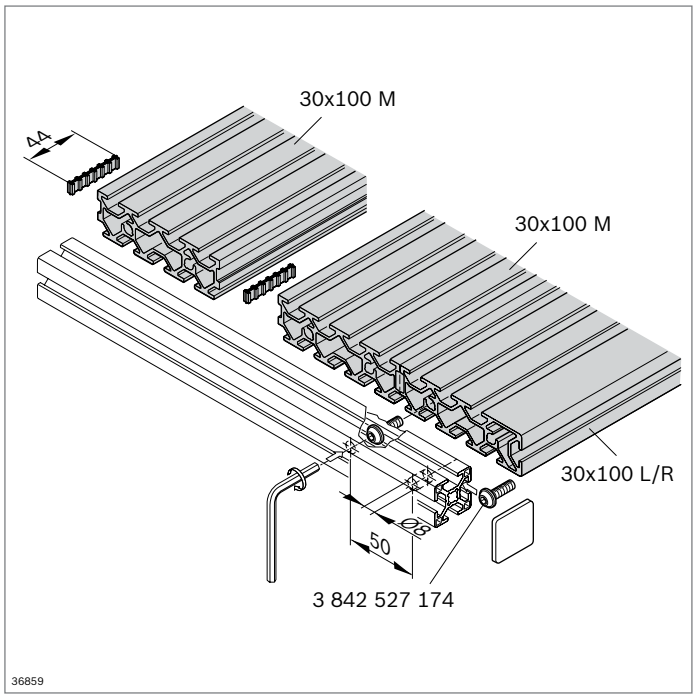

Slotted plate 30x100

- Modular plate profiles with multiple slots for experimental constructions of any size
- Slot spacing 25 mm
- Slot size 8.9 mm
- 8 mm slot connectors may be used


Accessories, optional:
- Profile 30x30 (p. 2-17)
- Sliding block

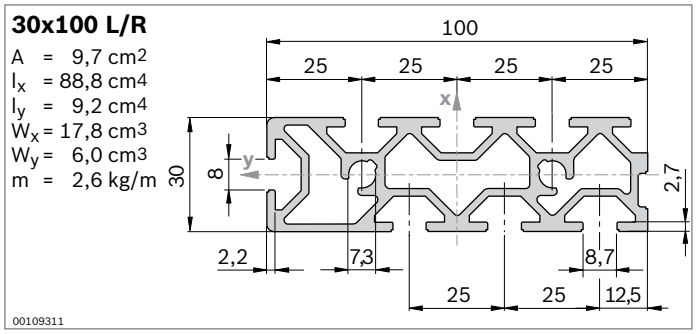

- Slotted plate **30x100 L/R** with lateral 8 mm slot as outer stop

Slotted plate 30x100 L/R		Slot	L (mm)	No.
1 pc		8	100 ... 5600	**3 842 993 337 / L**
1 pc		8	5600	**3 842 542 695**
18 pcs		8	5600	**3 842 542 696**


Material: Aluminum; anodized

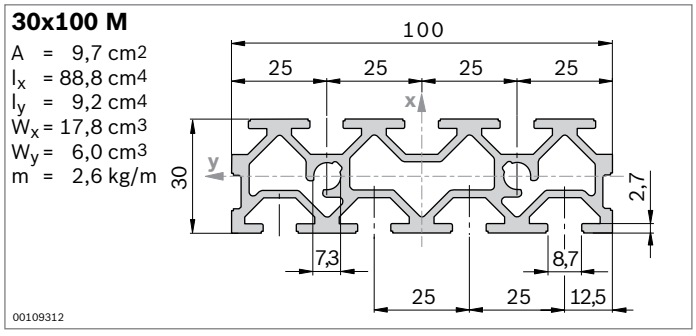

- Slotted plate **30x100 M** for constructing slotted plates of any width

Slotted plate 30x100 M		Slot	L (mm)	No.
1 pc		8	100 ... 5600	**3 842 993 336 / L**
1 pc		8	5600	**3 842 542 697**
18 pcs		8	5600	**3 842 542 698**

Material: Aluminum; anodized




Sliding block

- For connecting the slotted plates 30x100
- Recommendation: Use 3 sliding blocks per meter of profile length

Sliding block		No.
	100	**3 842 520 922**

Material: PA

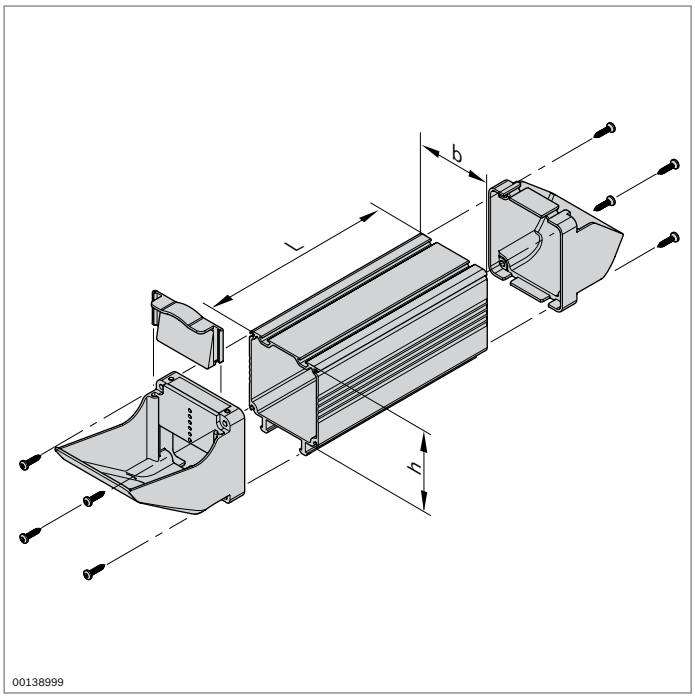


00138999

Material chute
Grab ledge and refill end-piece
Hopper
Grab container base

- Small parts within easy reach on the workstation
- Components for the individual construction of stable Vario grab containers
- Customizable holding capacity

90x45

A = 7,0 cm²
I_x = 20,7 cm⁴
I_y = 54,3 cm⁴
m = 1,8 kg/m

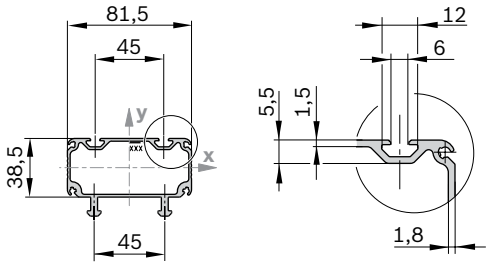


19908

Material chute 90x45		L (mm)	ESD	No.
	1 pc	50 ... 3000		**3 842 993 071 / L**
	3 pcs	3000		**3 842 526 671**
	1 pc	50 ... 1500	ESD	**3 842 993 446 / L**
	6 pcs	1500	ESD	**3 842 558 332**

Material: Material chute: Aluminum; anodized
Material chute ESD: Aluminum; coated with Alutin

90x90

A = 9,6 cm²
I_x = 118,8 cm⁴
I_y = 88,1 cm⁴
m = 2,5 kg/m

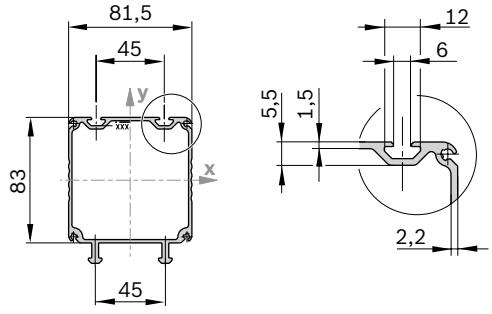


19599

Material chute 90x90		L (mm)	ESD	No.
	1 pc	50 ... 3000		**3 842 993 072 / L**
	3 pcs	3000		**3 842 526 672**
	1 pc	50 ... 1500	ESD	**3 842 993 517 / L**
	6 pcs	1500	ESD	**3 842 558 333**

Material: Material chute: Aluminum; anodized
Material chute ESD: Aluminum; coated with Alutin

180x90

A = 15,5 cm²
I_x = 208,2 cm⁴
I_y = 597,5 cm⁴
m = 4,2 kg/m

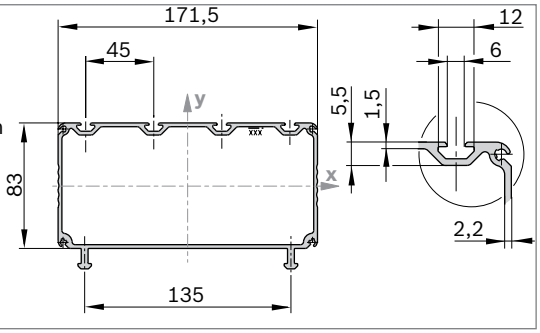


19909

Material chute 180x90		L (mm)	ESD	No.
	1 pc	50 ... 3000		**3 842 993 073 / L**
	3 pcs	3000		**3 842 526 673**
	1 pc	50 ... 1500	ESD	**3 842 993 527 / L**
	6 pcs	1500	ESD	**3 842 558 334**


Material: Material chute: Aluminum; anodized
Material chute ESD: Aluminum; coated with Alutin

90x45

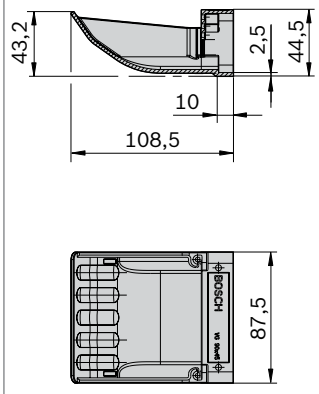

19925

90x45

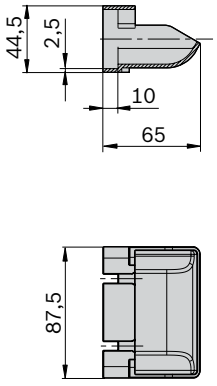

19926

- Refill end-piece with large opening for easy filling
- Ergonomically designed grab ledge for easy, safe grabbing
- Grab container pusher for closing


Grab ledge and refill end-piece	ESD	No.	FS
90 x 45		**3 842 526 626**	8xFS1, FS2
	⚠	**3 842 558 328**	8xFS1, FS2

Material:	Grab ledge and refill end-piece Plastic ABS; light gray RAL 7035 Grab ledge and refill end-piece ESD: ABS plastic; black, similar to RAL 9005 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)


FS1



FS2




90x90
180x90

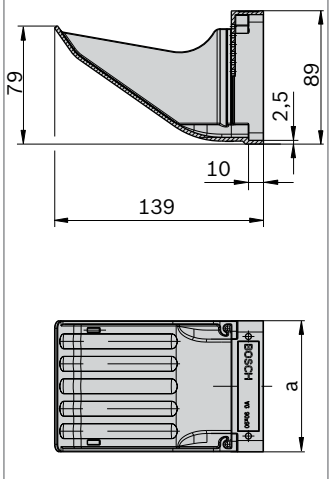

	90x90	180x90
a	87,5	172,5

36885

90x90
180x90

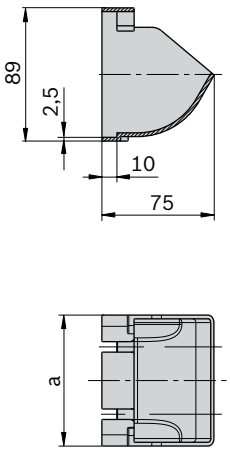

	90x90	180x90
a	87,5	172,5

36886


Grab ledge and refill end-piece	ESD	No.	FS
90 x 90		**3 842 526 627**	8xFS1, FS2
	⚠	**3 842 558 329**	8xFS1, FS2
180 x 90		**3 842 526 628**	8xFS1, FS2
	⚠	**3 842 558 330**	8xFS1, FS2


Material:	Grab ledge and refill end-piece Plastic ABS; light gray RAL 7035 Grab ledge and refill end-piece ESD: ABS plastic; black, similar to RAL 9005 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

FS1



FS2




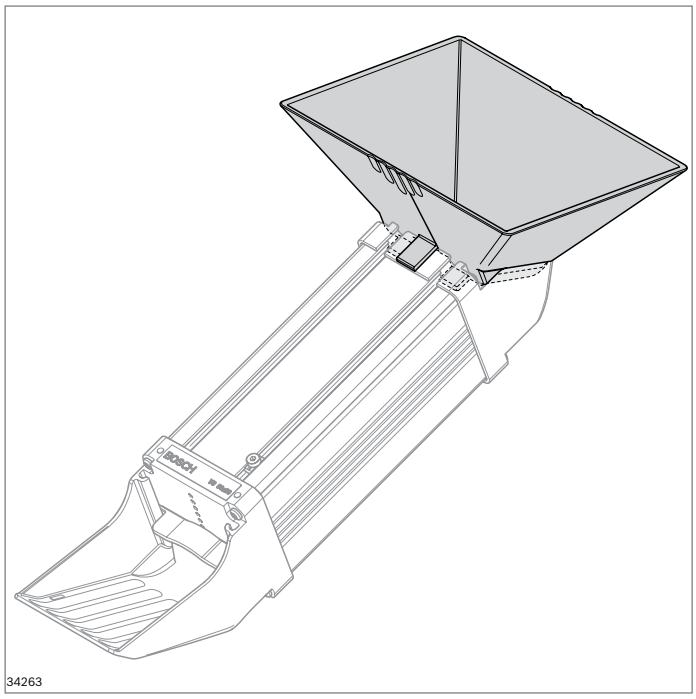

- Hopper for installing on Vario grab container
- Docking aids on the hopper facilitate ergonomic filling
- Easy assembly and dismantling


Material:
ABS plastic; light gray (similar to RAL 7035)

90x45

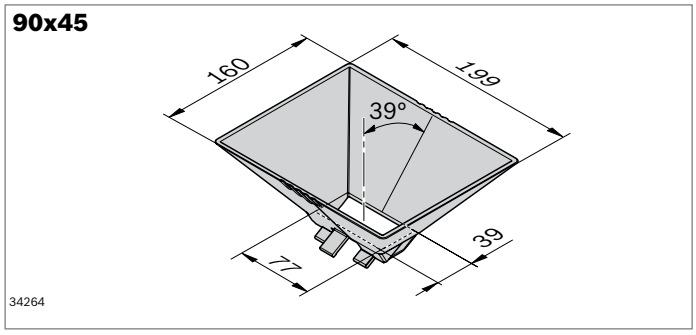


	Color	ESD	No.
Hopper 90x45	Gray (RAL 7035)		**3 842 557 433**
	Black	⚠	**3 842 564 686**

90x90

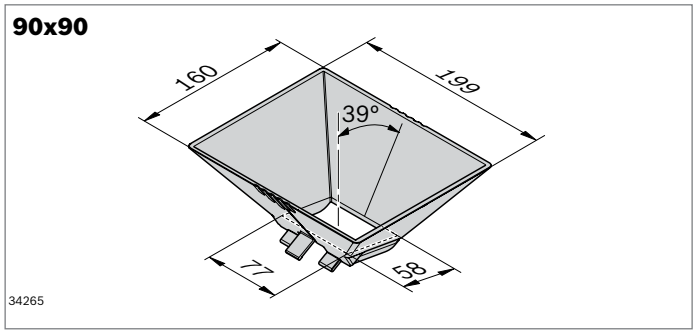


	Color	ESD	No.
Hopper 90x90	Gray (RAL 7035)		**3 842 557 434**
	Black	⚠	**3 842 564 687**

180x90

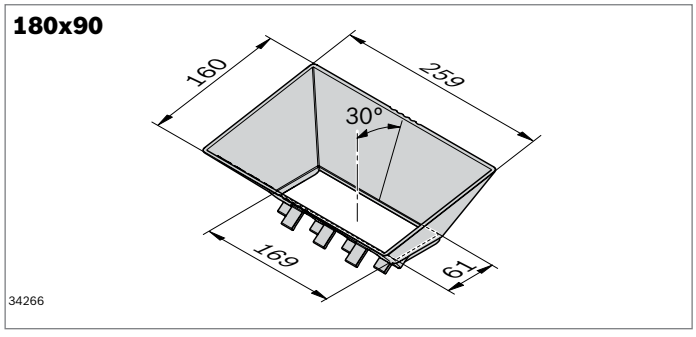


	Color	ESD	No.
Hopper 180x90	Gray (RAL 7035)		**3 842 557 435**
	Black	⚠	**3 842 564 688**



▶ Grab container base for an ergonomically optimized arrangement of grab containers

Grab container base	b x h x l (mm)	ESD	No.
SG 90	90 x 149 x 315		**3 842 526 660**
		⏚	**3 842 558 331**
SG 180	180 x 149 x 315		**3 842 526 665**
		⏚	**3 842 559 310**

Material: Grab container base: Sheet steel; light gray powder coating (RAL 7035)
Grab container base ESD: Sheet steel; dusty gray (RAL 7037)

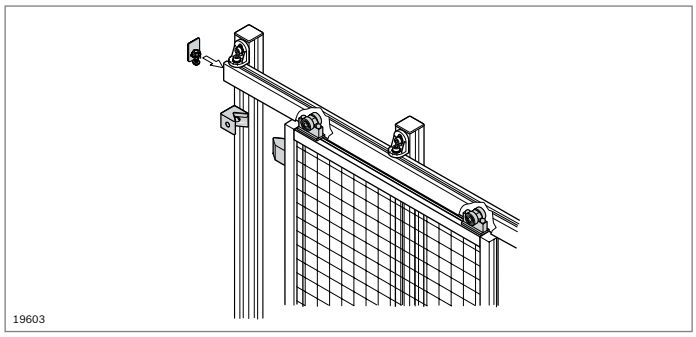


Profile rail, trolley

- Profile rail and trolley for movable mounting of parts, e.g. for use as a screwdriver hanger at work tables or for EcoSafe sliding doors (p. 10-34)


Accessories:


See page 12-4

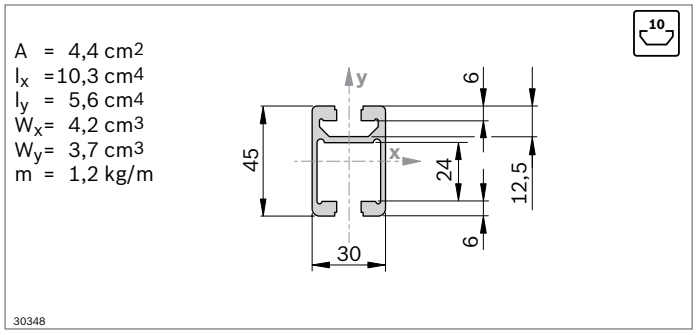

Profile rail 30x45C		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 946 / L**
1 pc		6070	**3 842 558 312**
20 pcs		6070	**3 842 557 950**

Material: Aluminum; anodized






- Profile rail end piece for use for trolley as a cover cap with stop
- With screw protection

End piece 30x45C	Color	ESD		No.	FS
	Signal gray		20	**3 842 554 710**	FS1
	Black		20	**3 842 554 711**	FS1

Material: End piece: PA
Fastening material: Steel; zinc-plated


Scope of delivery: Incl. fastening material (FS)

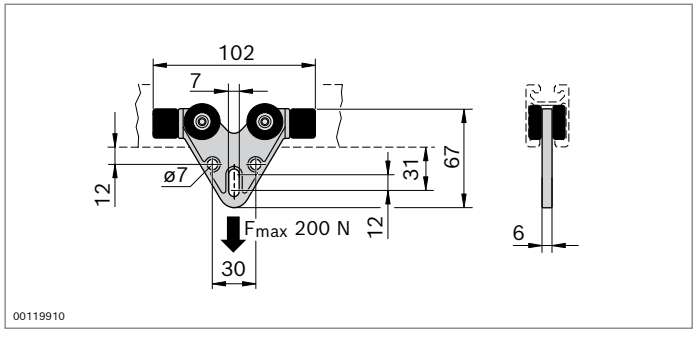


- Trolley with eye, e.g. for suspending a snap hook

Trolley for profile rail 30x45C		No.
	1	**3 842 521 510**

Material: Trolley: PA 6; black
Cam roller: POM; natural
Rubber buffer: NK/SBR; black






- Trolley with dust-proof ball bearings for smooth sliding motion
- For fastening profiles with a 8 mm slot

Trolley		No.	FS
	1	**3 842 524 153**	2xFS2

Material: PA; black / steel, zinc-plated
Fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS)

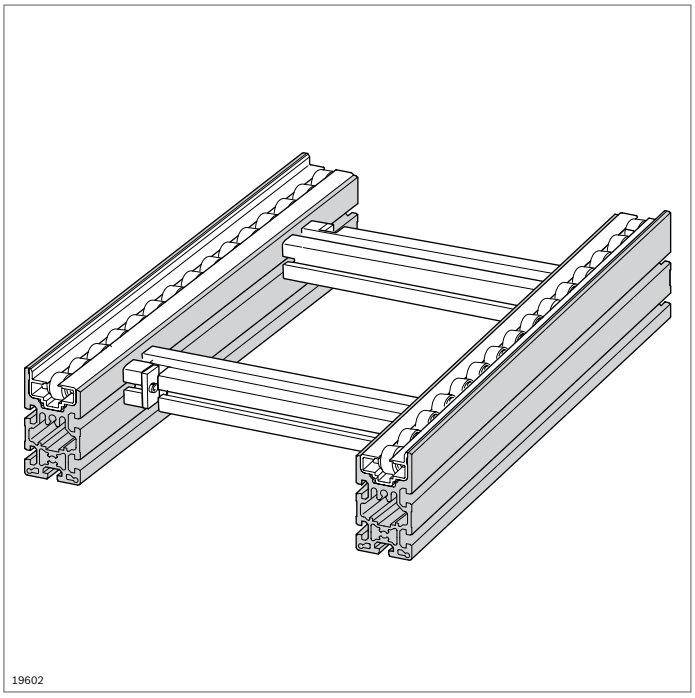


Profiles for installing conveyor media




- Profiles that are normally used to construct the transfer systems TS 2*plus* and TS 4, as well as Lean conveyor sections, are also suitable for the construction of manual conveyor sections. Detailed information is available in chapter 12 “Elements for manual movement” and in the respective special catalogs

U-profile

A = 4,4 cm²
I_x = 10,4 cm⁴
I_y = 8,3 cm⁴
W_x = 4,6 cm³
W_y = 4,1 cm³
m = 1,2 kg/m






U-profile		Slot	L (mm)	ESD	No.
1 pc		10	50 ... 6070		**3 842 993 316 / L**
1 pc		10	6070		**3 842 564 223**
20 pcs		10	6070		**3 842 535 115**
1 pc		10	50 ... 6070	ESD	**3 842 995 027 / L**
20 pcs		10	6070	ESD	**3 842 541 814**

Material: U-profile: Aluminum, anodized
U-profile ESD: Aluminum; untreated

SP 2/R

A = 5,2 cm²
I_x = 4,3 cm⁴
I_y = 11,7 cm⁴
W_x = 2,4 cm³
W_y = 5,2 cm³
m = 1,4 kg/m



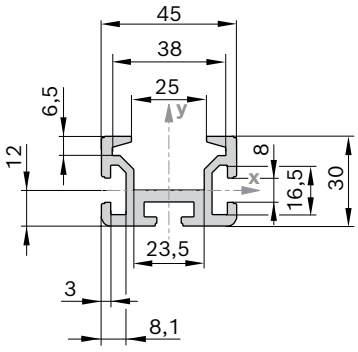


Section profile SP 2/R		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 676**
1 pc		6070	**3 842 508 553**

Material: Aluminum; anodized

SP 2/B

A = 10,4 cm²
I_x = 49,6 cm⁴
I_y = 25,8 cm⁴
W_x = 12,1 cm³
W_y = 11,5 cm³
m = 2,8 kg/m

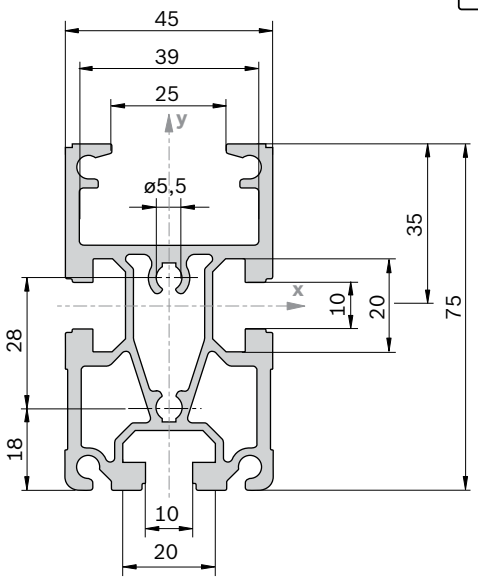


19903

Section profile SP 2/B		Slot	L (mm)	No.
1 pc		10	200 ... 6070	**3 842 992 884 / L**
1 pc		10	6070	**3 842 532 698**
16 pcs		10	6070	**3 842 532 695**

Material: Aluminum; anodized

SP 2/B-50

A = 6,9 cm²
I_x = 16,1 cm⁴
I_y = 16,9 cm⁴
W_x = 5,3 cm³
W_y = 7,5 cm³
m = 1,9 kg/m




19904

Section profile SP 2/B-50		Slot	L (mm)	No.
1 pc		8 / 10	200 ... 6070	**3 842 992 903 / L**
1 pc		8 / 10	6070	**3 842 532 670**
20 pcs		8 / 10	6070	**3 842 532 697**

Material: Aluminum; anodized

SP 2/B-100

A = 11,9 cm²
I_x = 95,1 cm⁴
I_y = 30,4 cm⁴
W_x = 20,0 cm³
W_y = 13,5 cm³
m = 3,2 kg/m

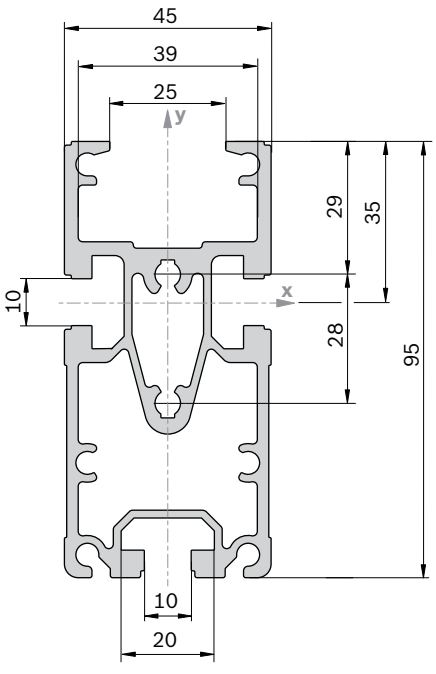


19905

Section profile SP 2/B-100		Slot	L (mm)	No.
1 pc		10	200 ... 6070	**3 842 993 259 / L**
1 pc		10	6070	**3 842 532 592**
16 pcs		10	6070	**3 842 532 608**

Material: Aluminum; anodized


SP 2/BH

A = 12,4 cm²
I_x = 53,7 cm⁴
I_y = 28,6 cm⁴
W_x = 14,0 cm³
W_y = 13,8 cm³
m = 3,3 kg/m

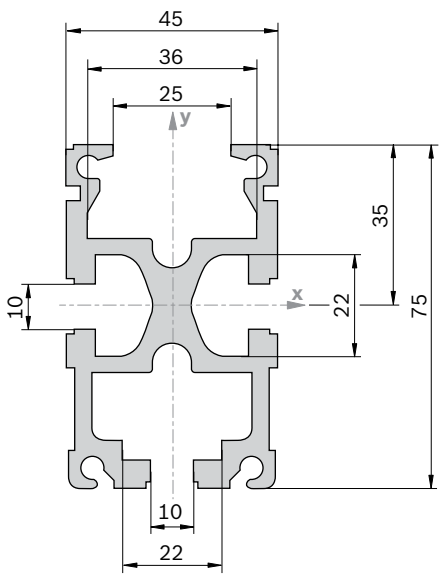


Section profile SP 2/BH		Slot	L (mm)	No.
1 pc		10	200 ... 6070	**3 842 990 409 / L**
1 pc		10	6070	**3 842 532 699**
16 pcs		10	6070	**3 842 532 696**


Material: Aluminum; anodized

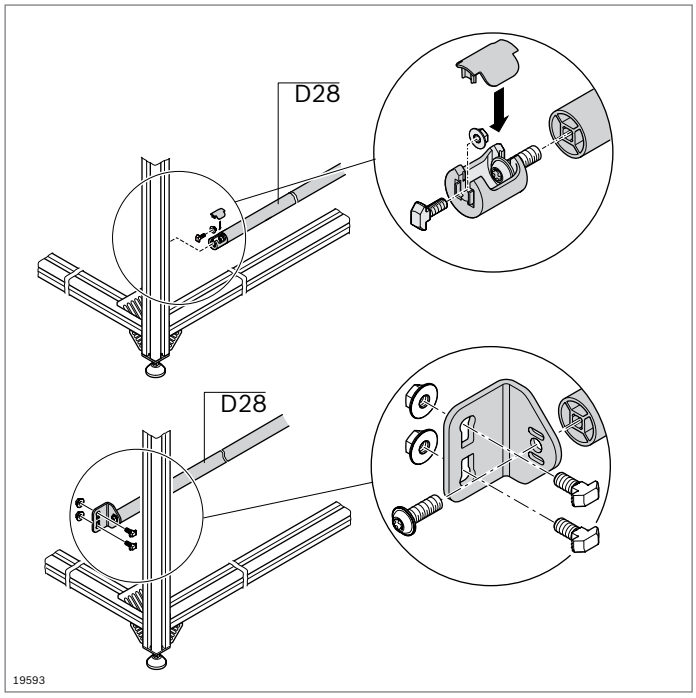


Round tube D28, strut profile D28x55 bracket, T-connector Bracket, T-connector

- For constructing cross ties in flow racks or workstations
- Suitable for heavy loads
- Use of brackets makes for easy assembly
- Elongated hole in the mounting bracket for longitudinal compensation
- Central holes can be used for self-tapping screws S8x25 (p. 3-43)
- For matching components to construct conveyor tracks, see chapter 12 “Elements for manual movement”

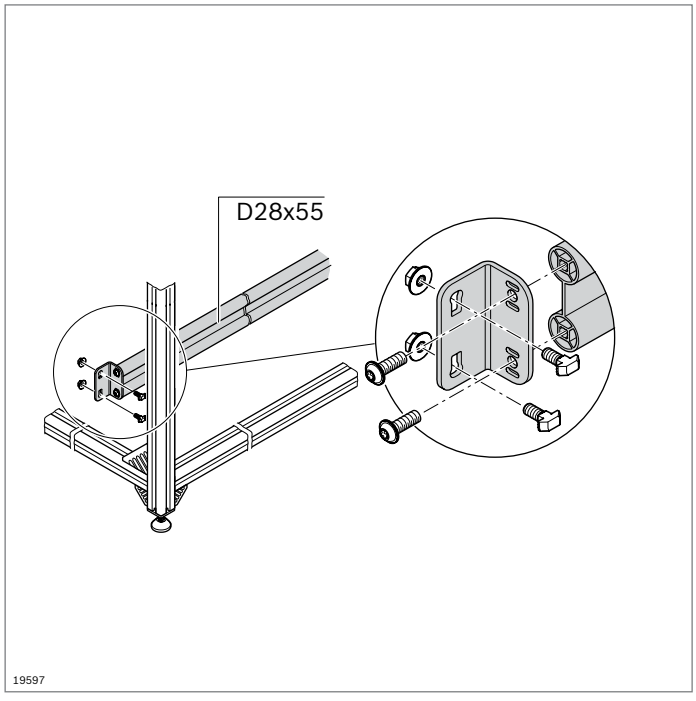






D28

A = 2,4 cm²
I_x = 1,5 cm⁴
I_y = 1,5 cm⁴
W_x = 1,1 cm³
W_y = 1,1 cm³
m = 0,7 kg/m




19505

Round tube D28		L (mm)	No.
1 pc		50 ... 6070	**3 842 993 317 / L**
1 pc		6070	**3 842 564 212**
20 pcs		6070	**3 842 535 118**


Material: Aluminum; anodized
Accessories, optional: Labeling clip (p. 2-95)

Cover cap D28	Color	ESD		No.
	Gray		20	**3 842 537 718**
	Black		20	**3 842 535 835**




19596

FS1



FS2




Holding bracket for round tube D28

- For mounting a round tube D28 to a strut profile with a 10 mm slot
- Extremely simple mounting thanks to easy adjustment of the installation height


Bracket 60x47x4		No.	FS
	20	**3 842 536 002**	2xFS1, FS2

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




19594

FS2



FS3



T-connector for round tube D28


- For mounting a round tube D28 to a strut profile with a 10 mm slot
- Without interfering contours

T-connector D28		No.	FS
	20	**3 842 532 879**	FS2, FS3

Material: T-connector: Diecast aluminum
Cover cap: ABS; black
Scope of delivery: Incl. cover cap, fastening material (FS)

Cover cap D28		No.
	20	**3 842 532 878**


Material: ABS; black



19595

D28x55

A = 5,9 cm²
I_x = 3,2 cm⁴
I_y = 88,3 cm⁴
W_x = 2,3 cm³
W_y = 23,1 cm³
m = 1,6 kg/m




19468

Strut profile D28x55		L (mm)	No.
1 pc		100 ... 6070	**3 842 993 489 / L**
1 pc		6070	**3 842 564 214**
20 pcs		6070	**3 842 537 477**


Material: Aluminum; anodized
Accessories, optional: Labeling clip (p. 2-95)

Cover cap D28	Color	ESD		No.
(2x)	Gray		20	**3 842 537 718**
(2x)	Black		20	**3 842 535 835**



19598

FS1



FS2



Bracket 85x47x4

- For mounting a strut profile D28x55 to a strut profile with a 10 mm slot
- Extremely simple mounting thanks to easy adjustment of the installation height


Bracket 85x47x4		No.	FS
	20	**3 842 536 730**	2xFS1, 2xFS2

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




EcoShape tubular framing system

- Secure connection based on poka-yoke principle
- Accidental mistakes during assembly are prevented by the design
  - Anti-torsion element for secure joints
  - Form-fit connection
  - High dynamic load capacity
- All connectors are suitable for setting up ESD-conductive systems

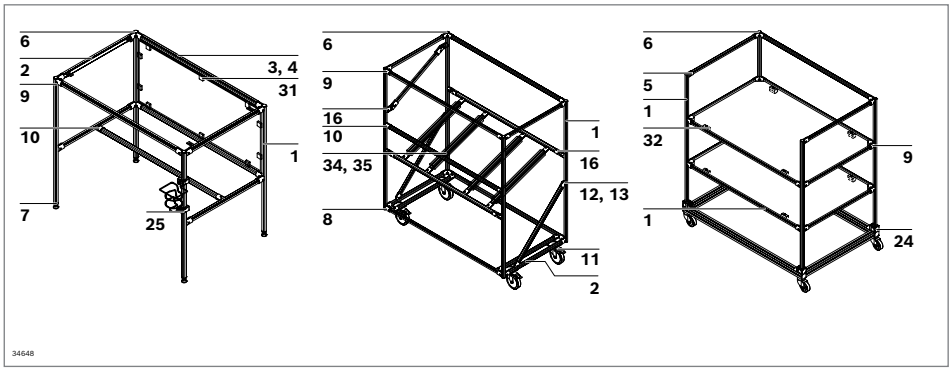


Few components – countless options

The EcoShape system is characterized by its simplicity and efficiency: Using just a few components, you can build complete assembly lines as well as simple transport shuttles.

1 **Round tube** **D28L** 	**2** **Round tube** **D28L, N10** 	**3** **Slide rail** **D28L** 	**4** **Slide rail** **D28L, SF** 
5 **Cover cap** **D28L** 	**6** **Cover cap** **D28L, N10** 	**7** **Threaded sleeve** **D28L, PA** 	**8** **Threaded sleeve** **D28L, M12** 
9 **90°** **Connector** **D28L** 	**10** **90°** **Connector D28L,** **inside** 	**11** **Parallel** **connector D28L** 	**12** **45°** **Connector D28L** 
13 **45°** **Connector D28L,** **inside** 	**14** **Strut** **D28L, 45°** 	**15** **Cross connector** **D28L** 	**16** **0°-90°** **Connector D28L** 
17 **0°-90°** **Connector** **D28L** 	**18** **Corner bracket** **D28L** 	**19** **90°** **connector R25,** **inside** 	**20** **Swivel bearing** **D28L** 
21 **Bushing** 	**22** **Retaining ring** **D28L** 	**23** **Adapter** **N8, N10** 	**24** **Adapter** **N10/45** 
25 **Adapter** **N10/30** 	**26/1** **Adapter mount D28L**  **26/2** **Container mount** 	**27** **Adapter** **XLean** 	**28** **Tube clamp** **D28L, N10** 
29 **Hinge** **D28L/D28L** 	**30** **Hinge** **D28L/–** 	**31** **Variofix** **block PA** 	**32** **Variofix** **block Zn** 
33 **Mounting** **bracket** **D28L** 	**34** **Impact** **protection** 	**35** **Impact** **protection** **D28L** 	**36** **Ring** **D50** 
37 **Rubber foot** **D28** 	**38** **Stopper** **D28L, N10** 	**39/40** **EcoShape** **base plate** 	**41** **Tension wire**

1

A = 1,8 cm²
I_x = 1,3 cm⁴
I_y = 1,3 cm⁴
W_x = 1,0 cm³
W_y = 1,0 cm³
m = 0,5 kg/m



36996


- Round tube D28L with 4 interfaces for attaching EcoShape connectors

Round tube D28L		L (mm)	No.
1 pc		50 ... 6070	**3 842 994 291/L**
50 pcs		6070	**3 842 567 384**
1 pc		6070	**3 842 567 386**
Material:	Aluminum; anodized		

2

A = 2,6 cm²
I_x = 1,0 cm⁴
I_y = 2,0 cm⁴
W_x = 1,4 cm³
W_y = 0,8 cm³
m = 0,7 kg/m

10




36997

- Round tube D28L, N10 with 10 mm slot for mounting accessories from the aluminum profile construction kit
- 3 interfaces for EcoShape connectors

Round tube D28L, N10		L (mm)	No.
1 pc		50 ... 6070	**3 842 994 292/L**
20 pcs		6070	**3 842 567 385**
1 pc			**3 842 567 387**
Material:	Aluminum; anodized		

3




00134987

- Slide rail for creating a simple conveyor track or manual slide section by clipping the slide rail onto the round tube D28L or D28L, N10

Slide rail D28L		L (mm)	ESD		No.
Signal gray		2000		10	**3 842 554 750**
Black		2000		10	**3 842 548 117**
Material:	PVC				

4






- Slide rail with lateral guide for creating a simple conveyor track or manual slide section by clipping the slide rail onto the round tube D28L or D28L, N10


Slide rail D28L SF		L (mm)	ESD		No.
Signal gray		2000		10	**3 842 567 346**
Black		2000		10	**3 842 567 347**
Material:	PVC				

5



24132

6





24133

- Cover cap for round tube D28L and D28L, N10

Cover cap			ESD		No.
5	D28L	Signal gray		20	**3 842 554 752**
		Black		20	**3 842 548 129**
6	D28L, N10	Signal gray		20	**3 842 554 754**
		Black		20	**3 842 548 130**
Material:	PA6, PA666 (conductive)				

7







▶ Threaded sleeve for incorporating a leveling foot or castor wheel

Threaded sleeve D28L, PA	ESD		No.
Black		20	**3 842 541 185**

Material: PA66
Hexagon nut: Aluminum

8







▶ Threaded sleeve for incorporating a leveling foot or castor wheel for dynamic loads

Threaded sleeve D28L, M12	ESD		No.
		20	**3 842 567 349**

Material: Die-cast aluminum / galvanized steel

9







90° connector D28L	ESD		No.	FS
		20	**3 842 567 339**	FS1

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS1
ISO14579 M6x25
DIN EN ISO7042 M6

10







90° connector D28L, inside	ESD		No.	FS
		20	**3 842 567 341**	FS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x20
DIN EN ISO7042 M6

11







Parallel connector D28L	ESD		No.	FS
		20	**3 842 567 350**	FS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x25
DIN EN ISO7042 M6

12







45° connector D28L	ESD		No.	FS
		20	**3 842 567 340**	FS1

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS1
ISO14579 M6x25
DIN EN ISO7042 M6

13







45° connector D28L, inside	ESD		No.	FS
		20	**3 842 567 342**	FS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x20
DIN EN ISO7042 M6

14







Strut D28L, 45°	ESD		No.	FS
		20	**3 842 567 351**	2xFS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x20
DIN EN ISO7042 M6

15







Cross connector D28L	ESD		No.	FS
		20	**3 842 567 352**	FS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x20
DIN EN ISO7042 M6

16







0°-90° connector D28L	ESD		No.	FS
		20	**3 842 567 353**	2xFS1

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS1
ISO14579 M6x25
DIN EN ISO7042 M6

17







0°-90° connector D28L	ESD		No.	FS
		20	**3 842 567 390**	2xFS1

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS1
ISO14579 M6x25
DIN EN ISO7042 M6

18






- Corner bracket D28L for easy adjustment within a 15° range
- Swivel range: 90°–270°

90°-270° corner bracket D28L	ESD		No.	FS
		20	**3 842 567 355**	3xFS1

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS1
ISO14579 M6x25
DIN EN ISO7042 M6

19





90° connector R25, inside		No.	FS
	20	**3 842 567 381**	FS2

Material: Diecast aluminum
Scope of delivery: Incl. fastening material (FS)

FS2
ISO14579 M6x20
DIN EN ISO7042 M6

20/1






- For axial shifting along the round tube D28L or D28L, N10. End position defined via retaining ring
- Construction of swiveling applications
- Additional thread for flexible bracket adjustment


Required accessories:
- Retaining ring D28L

Swivel bearing D28L	**L** (mm)		**No.**
	34	20	**3 842 548 121**

Material:	Swivel bearing: Aluminum
Scope of delivery:	Swivel bearing D28L, L = 34 mm; bushing D28 (17), headless setscrew ISO 4026 M4x10

20/2

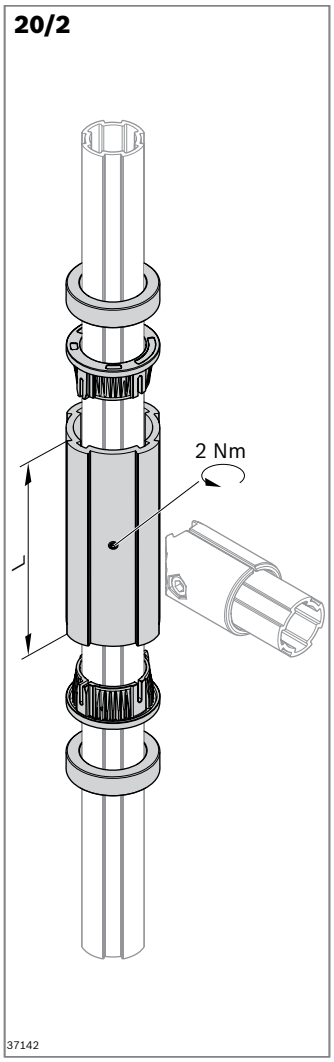




For self-assembly:
- Swivel bearing D28L with L = 1000 mm, can be cut to length

Swivel bearing D28L	**L** (mm)		**No.**
	1000	2	**3 842 557 298**

Material:	Aluminum


21



Bushing D28		**No.**
	4	**3 842 557 299**


Material:	POM; black


22



Retaining ring D28L	**ESD**		**No.**
		4	**3 842 548 122**

Material:	Aluminum
Scope of delivery:	Retaining ring incl. headless setscrew DIN 913 M6x6






- Adapter N8, N10 for connection to a Rexroth strut profile (8 mm slot, 10 mm slot)


Adapter N8, N10	ESD		No.	FS
		20	**3 842 567 354**	FS4, FS5

Material: Diecast zinc
Scope of delivery: Incl. fastening material (FS)

FS4
ISO14579 M6x10
M6 8

FS5
ISO14579 M6x12
2x M6 10







- Adapter N10/45 for connecting round tube D28L or D28L, N10 to a profile with 10 mm slot

Adapter N10/45	ESD		No.	FS
		20	**3 842 541 187**	2xFS3

Material: Adapter: Diecast zinc
Cover cap: PE
Scope of delivery: Incl. cover cap, fastening material (FS)

FS3
ISO 4762 M5x40
DIN 934 M5







- Adapter N10/30 for fastening light accessories, such as a bottle holder to a round tube D28L

Adapter N10/30	ESD		No.	FS
		20	**3 842 541 190**	**FS6**

Material: Diecast zinc
Scope of delivery: Incl. fastening material (FS)

FS6
ISO 4762 M5x30
DIN 934 M5







- For attaching cable ties

Adapter mount D28L		No.	FS
A + B	20	**3 842 548 120**	FS7

Material: PA66; black
Scope of delivery: Incl. fastening material (FS)

FS7
ISO 10642
M5x10






- For attaching containers using the container mount


Container mount	ESD		No.	FS
C		10	**3 842 544 797**	FS8, FS12


Material: PA66; black
Scope of delivery: Incl. fastening material (FS)

FS8
ISO 10642
M5x10
M5 8

FS9
ISO 10642
M5x16
M5 10

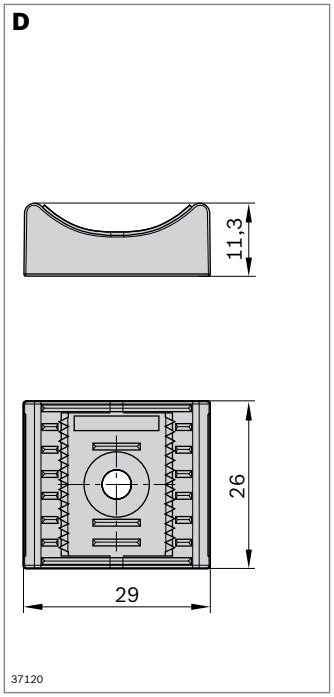






- Loop flat cable bracket (**D**) for direct assembly on panel element or table top
- Can be mounted on adapter D28L (**A**) for attachment to EcoShape profiles
- Can be used with M4 and M5 screws
- Adapter for attaching loop flat cable holder to EcoShape profiles
- Adapter D28L (**A**) for fastening of container mount


Cable bracket + adapter	ESD		No.	FS
D Cable bracket loop flat		10	**3 842 559 380**	
A Adapter D28L		10	**3 842 562 115**	FS7

Material: Cable bracket: PP; black; UL certified
Velcro strap: PP, PPA (velour); UL certified
Adapter: PA; black
Mounting kit: Steel; zinc-plated
Scope of delivery: Adapter incl. fastening material (FS)

FS7
ISO 10642
M5x10

27







- Adapter XLean for combination with XLean. The adapter XLean connects the round tube D28L to the rail holder XLean

Adapter XLean	ESD		No.
		20	**3 842 541 296**

Material: PA66; black

28






- Tube clamp D28L, N10 for fastening material shelves with 10 mm slot to the round tube D28L. Oblique positioning up to 30° possible


Tube clamp D28L, N10	ESD		No.	FS
		20	**3 842 541 193**	2xFS10

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

FS10
M8
M8x20
10

29





- Opening angle: 180°
- For mounting round tube D28L


Hinge D28L/D28L	ESD		No.	FS
		2	**3 842 548 126**	4xFS11, FS12


Material: Aluminum
Scope of delivery: Incl. fastening material (FS)

FS11
ISO4762
M6x10
M6
8

FS12
ISO8741
6x60
DIN125
A6,4

30






- Opening angle: 180°
- For mounting panel elements


Hinge D28L/–	ESD		No.	FS
		2	**3 842 548 127**	2xFS11, FS12

Material: Aluminum
Scope of delivery: Incl. Fastening material

FS11
ISO4762
M6x10
M6
8

FS12
ISO8741
6x60
DIN125
A6,4





- Plastic Variofix block for fastening panel elements with snap-in clips or a screw
- Variofix remover for releasing the snap-in clip

Variofix block PA		No.	FS
A + B	20	**3 842 543 311**	FS13, FS14


Material: PA66; black
Scope of delivery: Incl. fastening material (FS)


FS13
ISO 4762 M6x16
DIN 557 M6

FS14

Snap-in clip		No.
C	10	**3 842 184 738**

Material: PA6; transparent






- Diecast zinc Variofix block for fastening panel elements
- Three arrangements possible (“A”, “B”, “C”)

Variofix block Zn	ESD		No.	FS
		20	**3 842 543 494**	FS15

Material: Diecast zinc
Scope of delivery: Incl. fastening material (FS)

FS15
ISO 4762 M6x22
ISO 4762 M6x30
2x DIN 557 M6





- Diecast zinc mounting bracket D28L for fastening panel elements
- Recommended for ESD applications: Countersunk self-tapping screw ISO 15482-ST4, 2x13

Mounting bracket D28L	ESD		No.
		10	**3 842 567 368**

Material: PA66,


34






Impact protection	L (mm)		No.
	2000	10	**3 842 544 637**
Material:	PE-LD; gray		


35





Impact protection D28L	L (mm)		ESD	No.
Signal gray	2000	10		**3 842 567 344**
Black	2000	10	⚠	**3 842 567 345**
Material:	TPV, TPE (conductive)			


36



▶ For designing simple tool holders

Ring + spring hook		No.
Ring D50	20	**3 842 548 131**
Spring hook	1	**0 842 901 309**
Material:	Ring: Steel; nickel-plated Spring hook: Steel; zinc-plated	

37





▶ Non-slip design of flow racks and stands

Rubber foot D28	ESD		No.	FS
	⚠	20	**3 842 548 128**	FS16
Material:	NR/SBR; black			

FS16

ISO 7089-14-200HV-CM





- To stop material shuttles ergonomically at just one point
- Universal attachment to different round tubes and profile cross-sections
- Stopper tension path: 34 mm


Stopper D28L, N10	No.	FS
	3 842 548 132	4xFS16, 2xFS18


Material:	Stopper: Stainless steel, EPDM Attachment plate: Aluminum
Scope of delivery:	Incl. fastening material (FS)


FS17



FS18







- Base plate for fastening frames directly onto walls, floors, table tops and strut profiles with 10 mm slot via EcoShape round tubes
- No additional connector required
- Centering lugs as anti-torsion elements (can be broken off)
- Reference load for profile installation: 15 Nm admissible in lengthwise and crosswise direction Load values for installation on other surfaces dependent on material


Recommended accessories for profile installation:
- Countersunk screw ISO 10642 M5x16-8.8
- T-nut (**3 842 530 283**)

Accessories, optional:
Self-tapping screw (**3 842 552 267**)


Base plate D28L	ESD		No.	FS
		10	**3 842 559 346**	2xFS19

Material:	Diecast zinc
Scope of delivery:	Incl. fastening material (FS)


FS19



40



37145



35420


- Base plate for fastening frames directly onto walls, floors, table tops and strut profiles with 10 mm slot via EcoShape round tubes
- No additional connector required
- Centering lugs as anti-torsion elements (can be broken off)
- Reference load for profile installation: 15 Nm admissible in lengthwise and crosswise direction Load values for installation on other surfaces dependent on material

Recommended accessories for profile installation:


- Countersunk screw ISO 10642 M5x16-8.8
- T-nut (**3 842 530 283**)

EcoShape base plate	ESD		No.	FS
	⚠	10	**3 842 559 345**	2xFS19
Material:	Diecast zinc			
Scope of delivery:	Incl. fastening material (FS)			

FS19




41

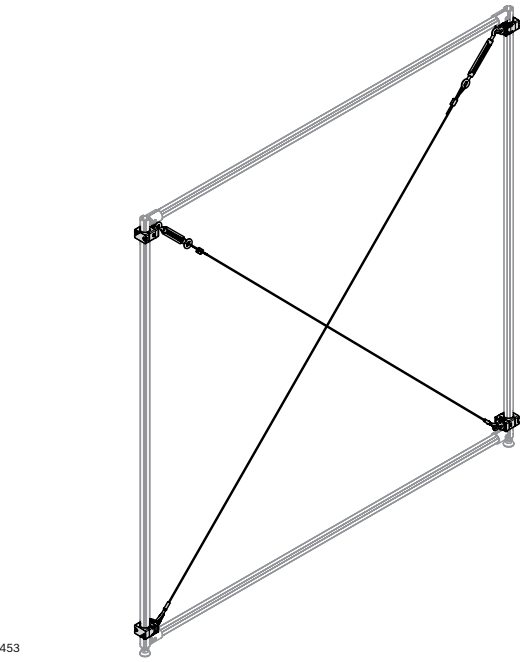


38453

- Reinforcement option for EcoShape applications
- Max. tensioning force 500 N

Tension wire	L (mm)	ESD		No.
	3000	⚠	2	**3 842 562 083**
Material:	Eye, tension lock: Stainless steel Wire rope: Steel; zinc-plated			
Scope of delivery:	Incl. fastening material for fastening to the D28L round tube			

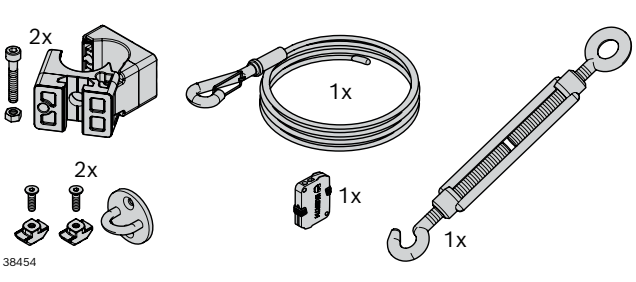

38454

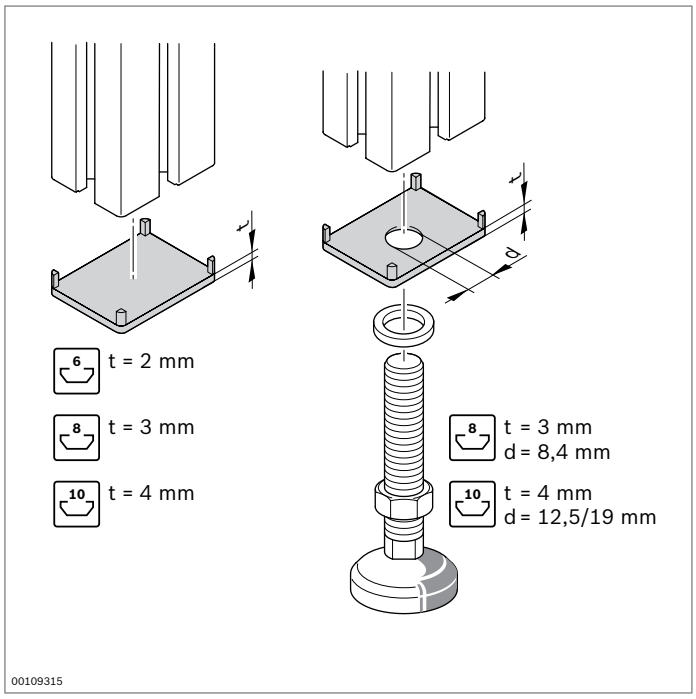


Cover cap
Cover cap with hole

ESD 6 8 10

- To prevent injuries at open profile ends
- Attractive design
- Cover cap with hole for use with leveling feet and rollers
- Cover cap material: PA or PP


Order information for the cover caps can be found in the profile section



Bearing ring

- For cover caps with hole in the sizes 40x40, 45x45, 50x50 and 60x60
- For M12 threads
- To protect the cover caps when tightening accessories

Bearing ring		No.
	100	**3 842 555 653**
Material:	Diecast zinc	

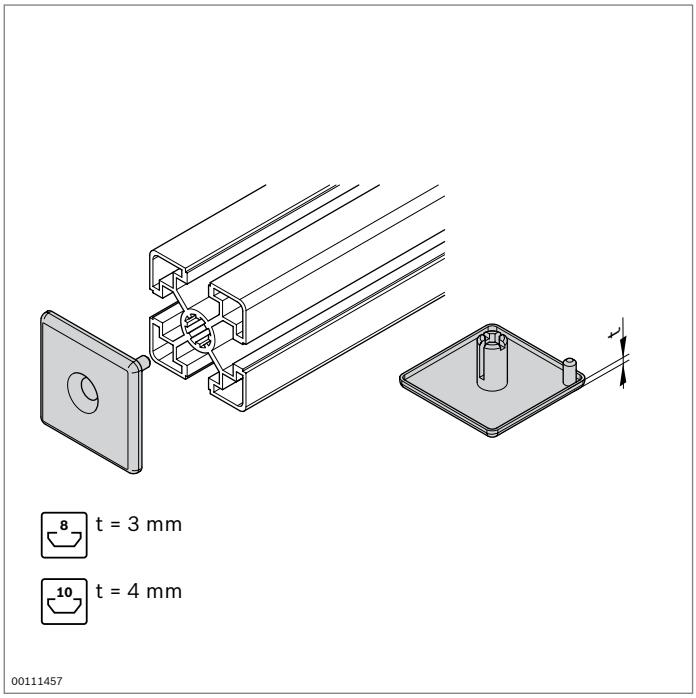


Diecast zinc cover cap

- Shock-proof
- Resistant to aggressive media
- Fastening with countersunk screw; profile finishing not required


Cover cap ZN		ESD	No.	FS
30x30-ZN			**3 842 518 204**	FS1
40x40-ZN			**3 842 541 807**	FS2
45x45-ZN			**3 842 518 205**	FS2
Material:	Cover cap: Diecast zinc Fastening material: Steel; zinc-plated			

FS1
DIN 7991 M4x16

FS2
DIN 7991 M6x16

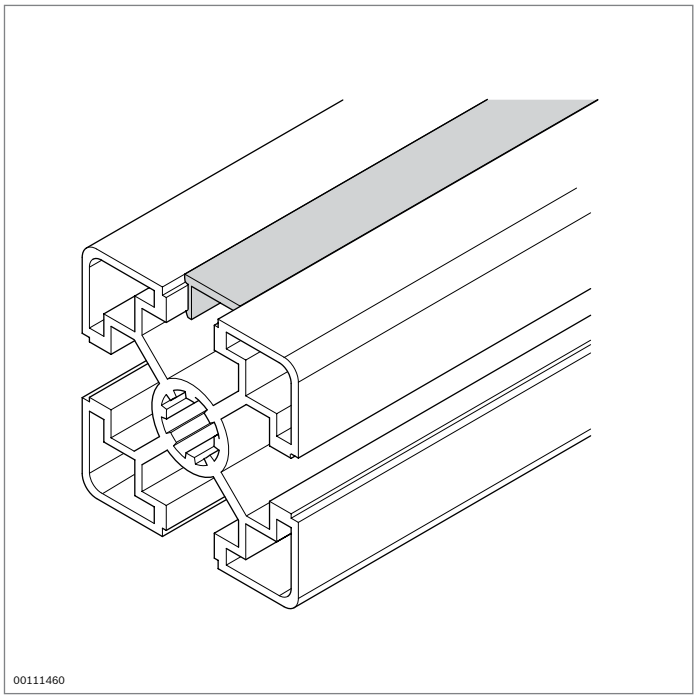


Cover profiles



- For fixing cables in position
- To prevent dirt from entering the profile slot
- Attractive design
- Soft PVC cover profile for 6 mm slot is provided as a roller
- Flush with profile
- An ESD-conductive connection between the cover profile and the strut profile must be ensured by a suitable design solution, e.g. screw


Cover profile, 6 mm slot	Color	Material	ESD	L (mm)		No.
 00109365	Colorless, natural	Aluminum; anodized	⏚	2000	10	**3 842 523 254**
 00117777	Signal gray (RAL 7004)	Soft PVC		10000	1	**3 842 555 268**
Cover profile, 8 mm slot	**Color**	**Material**	**ESD**	**L** (mm)		**No.**
 00109366	Colorless, natural	Aluminum; anodized	⏚	2000	10	**3 842 523 256**
 00109367	Signal gray (RAL 7004)	PP		2000	10	**3 842 548 878**
	Black (RAL 9005)	PP	⏚	2000	10	**3 842 548 879**
	Light gray (RAL 7035)	PP		2000	10	**3 842 548 898**
	Red (RAL 3020)	PP		2000	10	**3 842 549 878**
	Yellow (RAL 1023)	PP		2000	10	**3 842 549 879**
	Green (RAL 6032)	PP		2000	10	**3 842 554 771**
	Blue (RAL 5010)	PP		2000	10	**3 842 549 880**
	Orange (RAL 2004)	PP		2000	10	**3 842 549 881**
	Colorless, transparent	PET		2000	10	**3 842 549 877**
Cover profile, 10 mm slot	**Color**	**Material**	**ESD**	**L** (mm)		**No.**
 00109368	Colorless, natural	Aluminum; anodized	⏚	2000	10	**3 842 523 258**
 19502	Signal gray (RAL 7004)	Hard PVC		2000	10	**3 842 548 876**
	Black (RAL 9005)	Hard PVC	⏚	2000	10	**3 842 548 877**
	Light gray (RAL 7035)	Hard PVC		2000	10	**3 842 518 367**
	Red (RAL 3020)	Hard PVC		2000	10	**3 842 518 368**
	Yellow (RAL 1023)	Hard PVC		2000	10	**3 842 518 369**
	Green (RAL 6032)	Hard PVC		2000	10	**3 842 549 888**
	Blue (RAL 5010)	Hard PVC		2000	10	**3 842 538 955**
	Orange (RAL 2004)	Hard PVC		2000	10	**3 842 538 957**
	Colorless, transparent	Hard PVC		2000	10	**3 842 191 182**

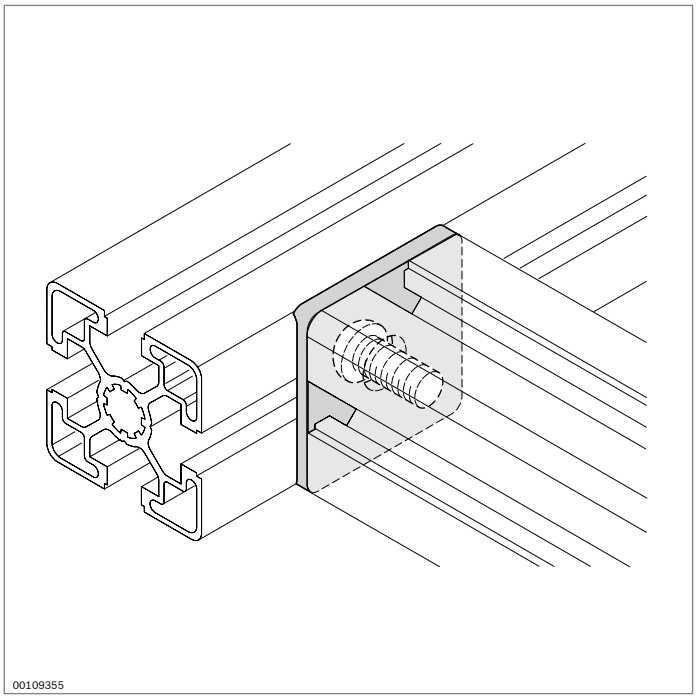


Radial compensation




- For avoiding gaps and sharp edges on T-connections between two profiles using a central bolt or quick connector (note spacing of hole from the end of the profile)
- Slot segments can be broken out to support panel elements in the slot
- Important note: The load capacity of the profile connection is reduced when using radial compensation (see “Technical data”, page 18-1)!
- Tested for particulate emissions. Report No. BO2112-1289




Radial compensation		Slot		No.
30x30		8	10	**3 842 551 026**
Material:	PA; signal gray RAL 7004			



Radial compensation		Slot		No.
40x40		10	10	**3 842 551 028**
Material:	PA; signal gray RAL 7004			





Radial compensation		Slot		No.
45x45		10	10	**3 842 551 030**
Material:	PA; signal gray RAL 7004			

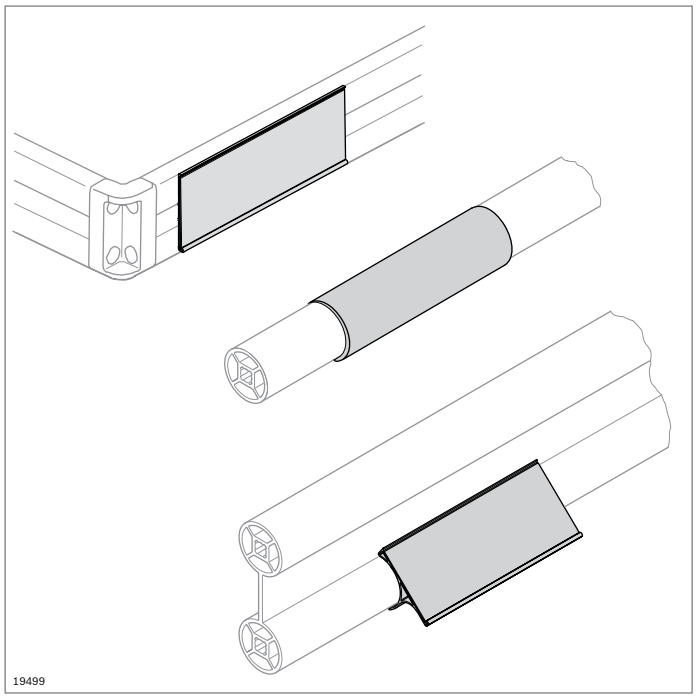

Labeling clips

- For labeling profiles and tubular cross ties






- Labeling clip for strut profiles with 8 mm and 10 mm slot

Labeling clip	Slot	L (mm)		No.
	8	2000	20	**3 842 537 113**
	8	102	20	**3 842 537 650**
	10	2000	20	**3 842 537 116**
	10	102	20	**3 842 537 651**


Material: Hard PVC; light gray (RAL 7035), transparent



- Self-adhesive
- Labeling clip with rounded text surface for strut profiles D28; D28L; D28L; N10 and D28x55
- Label height 38 mm

Labeling clip	L (mm)		No.
For tubular cross ties	2000	20	**3 842 535 136**
	102	20	**3 842 538 093**


Material: Hard PVC; colorless, transparent





- Self-adhesive
- Labeling clip with flat text surface for strut profiles D28; D28L; D28L, N10, and D28x55


Labeling clip	L (mm)		No.
For tubular cross ties	2000	20	**3 842 537 119**
	102	20	**3 842 537 652**


Material: Hard PVC; light gray (RAL 7035), transparent

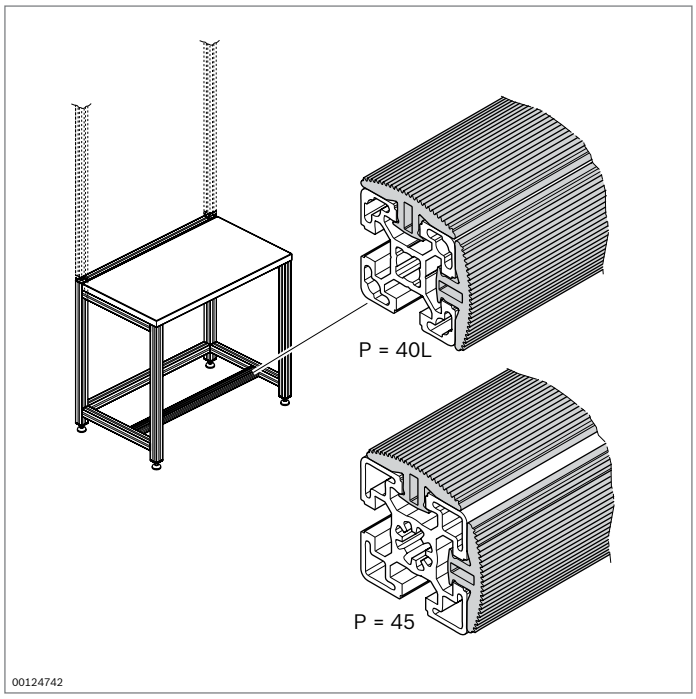









Rubber profile
Cloth holder



Rubber profile

- To avoid impact on hard edges, such as when setting down impact-sensitive products
- For use as footrest to clip in from top and front on the cross strut of the workstation
- Really simple and inexpensive
- Suitable for the construction of ESD workstations

Rubber profile	L (mm)	ESD		No.
	30 ... 30000		1	**3 842 994 979 / L**
	30000		1	**3 842 562 090**

Material: EPDM; conduction resistance R = 10^4 ... 10^9 Ω

Screwed-on cloth holder

- For hanging cleaning cloths

Required accessories:

- T-nut, 10 mm slot, M5 (**3 842 530 283**) (p. 2-103)
- Screw DIN 7984 M5x12

Screwed-on cloth holder	No.
	1 845 719 000

Material: PE; black

Cloth holder with clamp base

- With injection molded clamp base for direct assembly on strut profile with 10 mm slot
- Can also be used as a cable guide

Cloth holder with clamp base	No.
	3 842 530 306

Material: PA6; black



Function-integrated profiles



- Completely integrated wiring in the frame construction
- Unique profile joints with internal cable guide
- High flexibility with low component diversity (only 4 profile cross-sections)
- Appealing design: closed outer surfaces, accentuated plastic parts
- Minimal assembly
- Saves time and money: easy design, installation and maintenance

The function-integrated profiles (FIP) from Rexroth offer plenty of usable interior space, giving you more freedom for your design ideas: The completely internal cable guide allows for the safe and space-saving laying of cables, data lines and hoses – and thanks to the profile joints, they can even be laid through profile connectors.

Few parts, high variability – build a safe frame more quickly

The result is a solid machine frame that is based on only four profile cross-sections and offers a high degree of flexibility: Thanks to a 10 mm slot, all elements from the Rexroth modular profile system can be easily mounted, cavities simply separated with dividing strips and cables laid separately. The aluminum covers on the profile have a hinge function, ensuring ease of installation and maintenance. Screw holes for mounting covers and attachments parts provide safety and stability.

The unique profile joint not only withstands high transmission forces, but also allows for completely internal wiring. This way, the installation remains invisible until it is led out of the profile at the place of use. The function-integrated profiles are compatible with the standard profiles, meaning you can combine profiles and of course use various accessories.

Technical data

- Modular dimension 40
- Profile slot 10 mm
- Profile cross-sections 40x120x120, 120x120, 60x120, 120x120 6N
- Usable interior space from 600 mm^2 to 4000 mm^2
- Compatible with aluminum profile modules from Rexroth
- VDE certified
- Suitable for EPA




Stability and load capacity


The range of function-integrated profiles is designed for high loads. The profiles in the 40 mm profile dimension include the sturdy 10 mm Rexroth slot and allow strong M12/S12 screws to be screwed into the central hole.

The central connection element in the system is the profile joints 1/2 and 3/4. The connection elements are made of solid diecast aluminum. The screw connection in the central hole of the profiles creates a high-strength connection as the basis for a resilient machine frame.

The base plates are designed for the use of M16 spindles, which can take up to 30000 N.

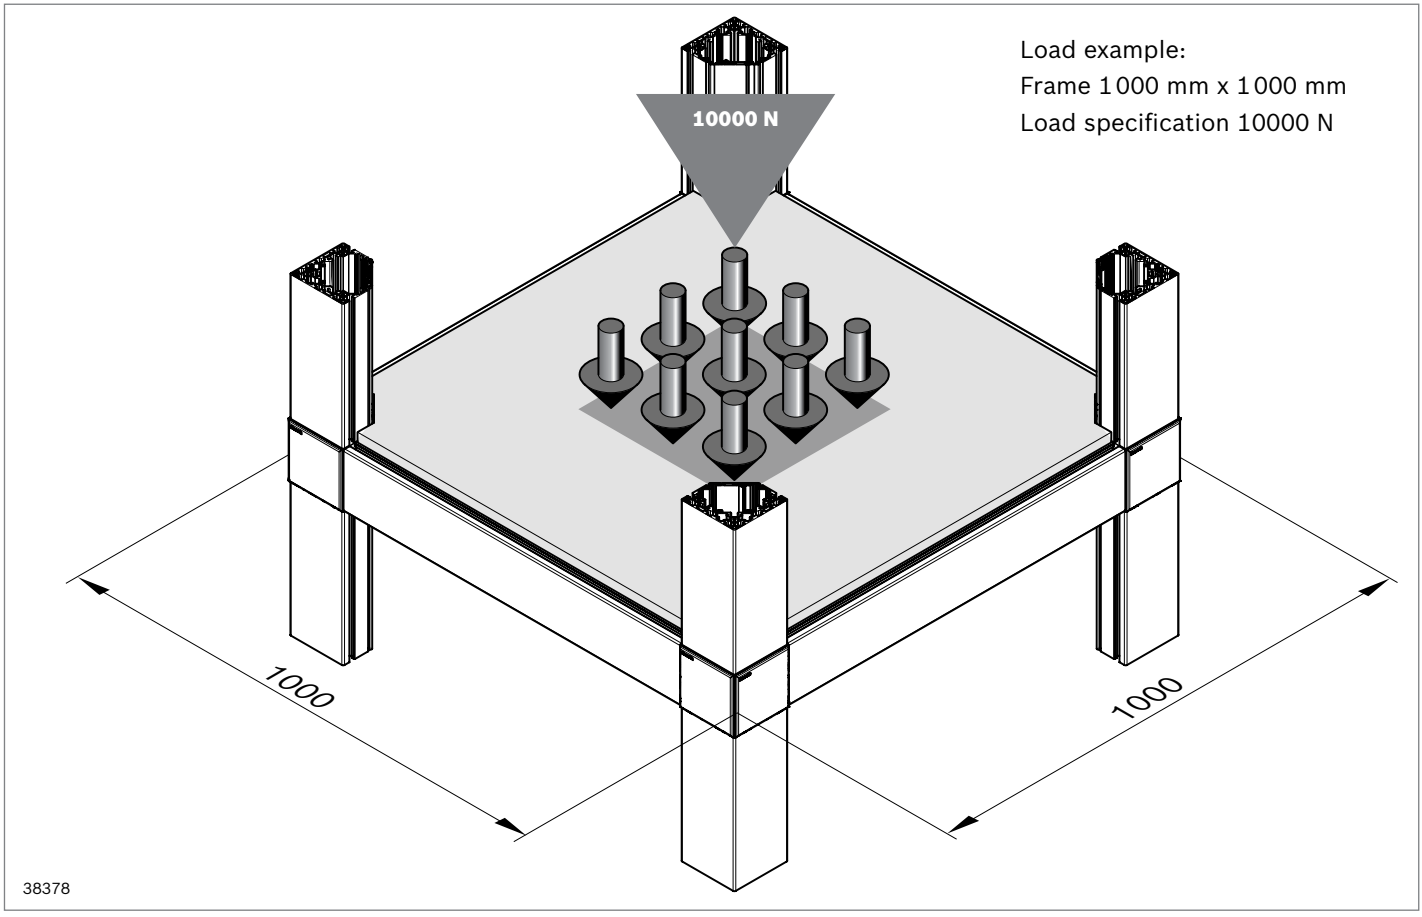

Load example:
Frame 1000 mm x 1000 mm
Load specification 10000 N

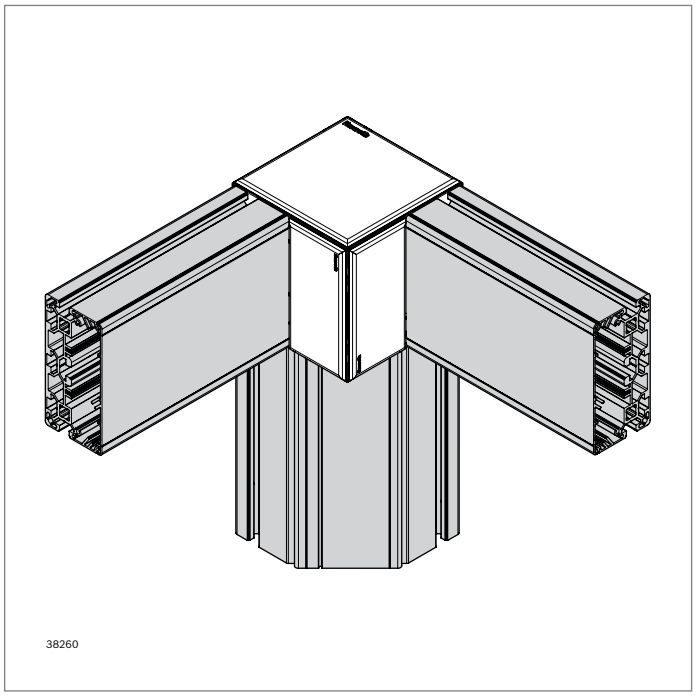


Cable guide profiles



- Construction profiles with usable interior space for guiding cables and hoses
- 2 parts (profile and cover)
- Cover with hinge function on both sides
- Concealed 10 mm slot for mounting socket strips or installation elements
- Screw holes for mounting cover plates
- Closed exterior
- Mount for dividing strips and grounding cables
- Mount for potential equalizer

Accessories, optional:


- Self-tapping screw (**3 842 552 267**) to secure the cover
- Potential equalizer line (**3 842 552 234**, p. 2-117)

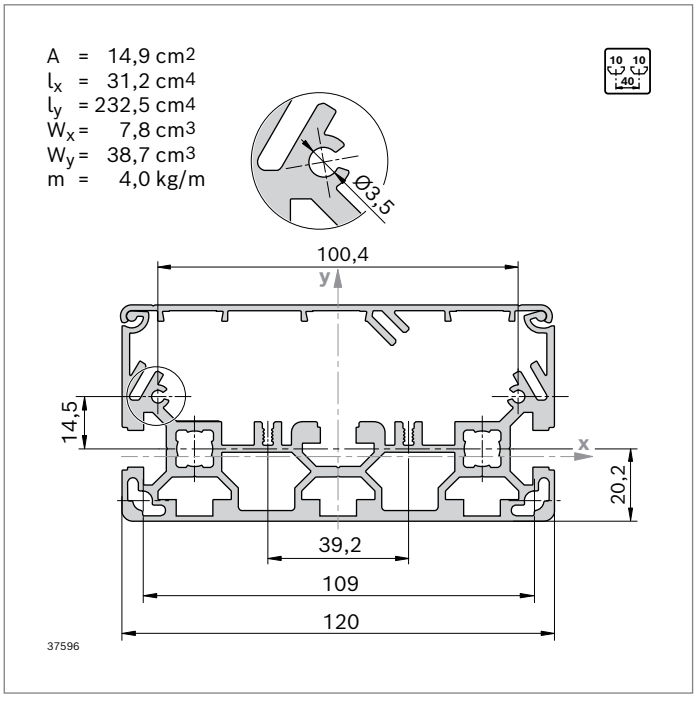

Usable interior space: 600 mm²

60x120			L (mm)	No.
1 pc			100 ... 6070	**3 842 996 361**
1 pc	M12		100 ... 6000	**3 842 996 364**
1 pc	M12	M12	110 ... 6000	**3 842 996 365**
10 pcs			6070	**3 842 558 242**


Profile finishing: M12: in all core holes

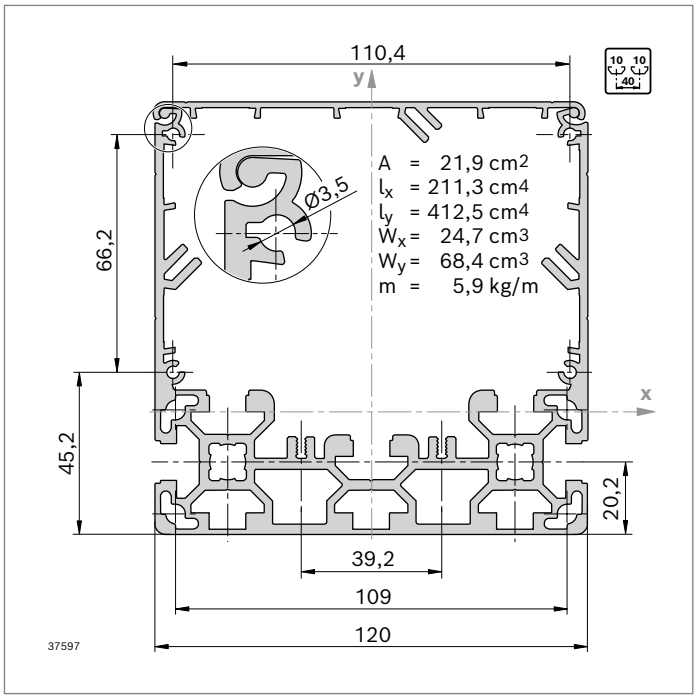

Usable interior space: 4000 mm²

120x120		L (mm)	No.
1 pc		100 ... 6070	**3 842 996 360**
1 pc	M12	100 ... 6000	**3 842 996 366**
1 pc	M12 M12	110 ... 6000	**3 842 996 367**
4 pcs		6070	**3 842 558 241**


Profile finishing: M12: in all core holes

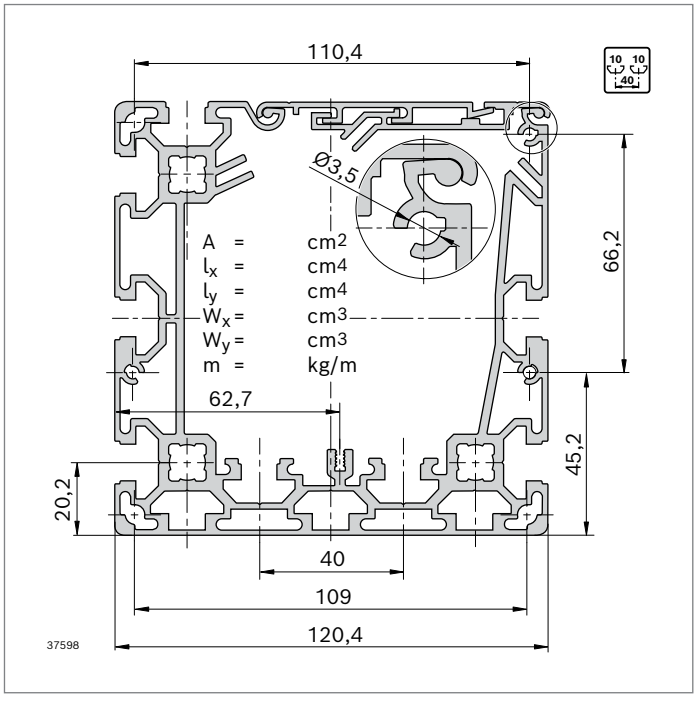

Usable interior space: 4600 mm²

120x120 6N		L (mm)	No.
1 pc		100 ... 6070	**3 842 994 039**
1 pc	M12	100 ... 6000	**3 842 994 054**
1 pc	M12 M12	110 ... 6000	**3 842 994 059**
4 pcs		6070	**3 842 558 190**


Profile finishing: M12: in all core holes

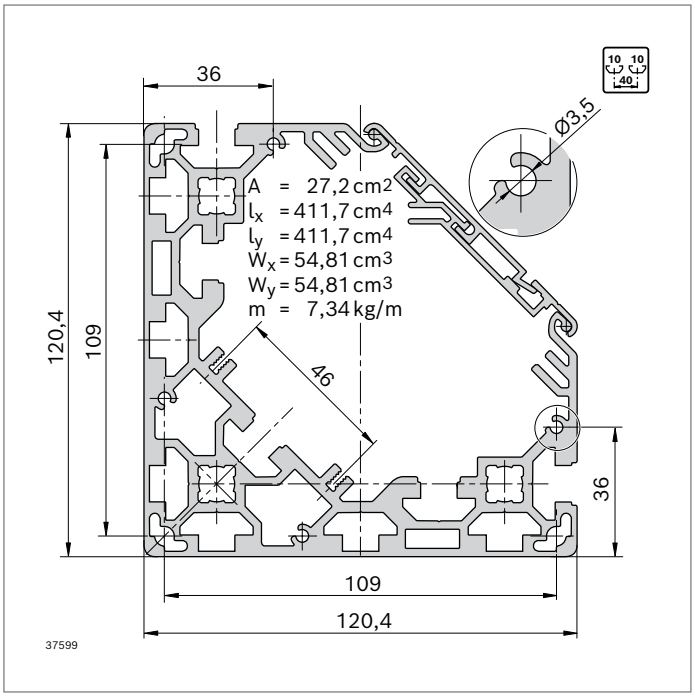

Usable interior space: 3200 mm²

40x120x120		L (mm)	No.
1 pc		100 ... 6070	**3 842 996 362**
1 pc	M12	100 ... 6000	**3 842 996 368**
1 pc	M12 M12	110 ... 6000	**3 842 996 369**
4 pcs		6070	**3 842 558 243**

Profile finishing: M12: in all core holes

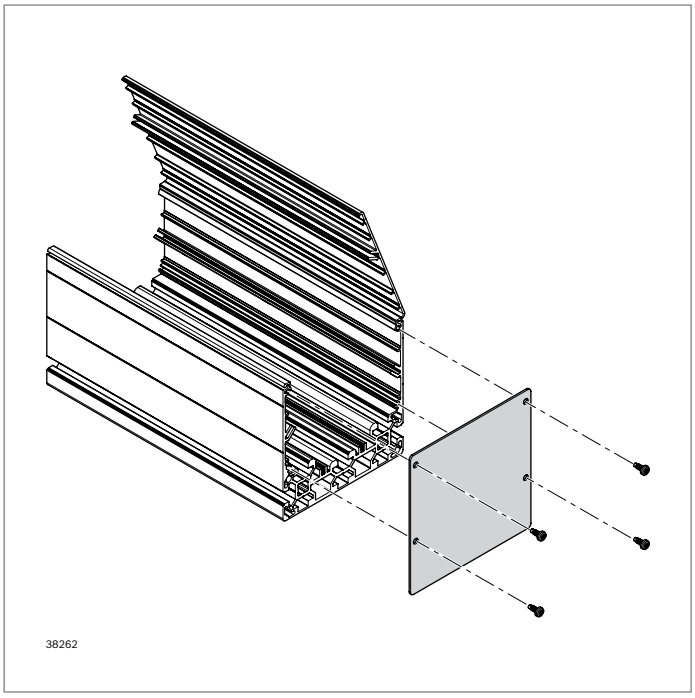


Cover plate

- Closes cable guide profiles at the front
- Surface anodized
- Fastened securely with screws


FS1

DIN7500-PE
M4x8

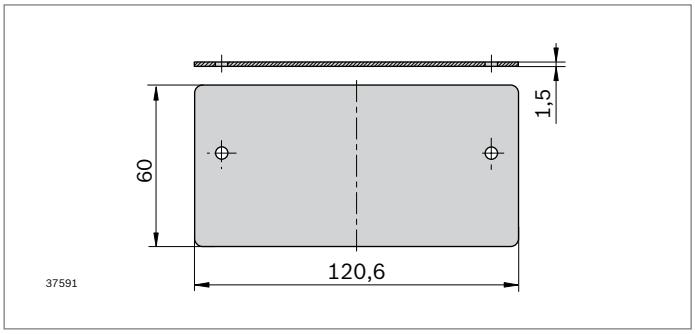


- For cable guide profile 60x120

Cover plate	ESD		No.	FS
60x120		10	**3 842 558 233**	2x FS1
Material:	Cover plate: Aluminum sheet, anodized Fastening material: Steel; zinc-plated			
Scope of delivery:	Incl. fastening material (FS)			

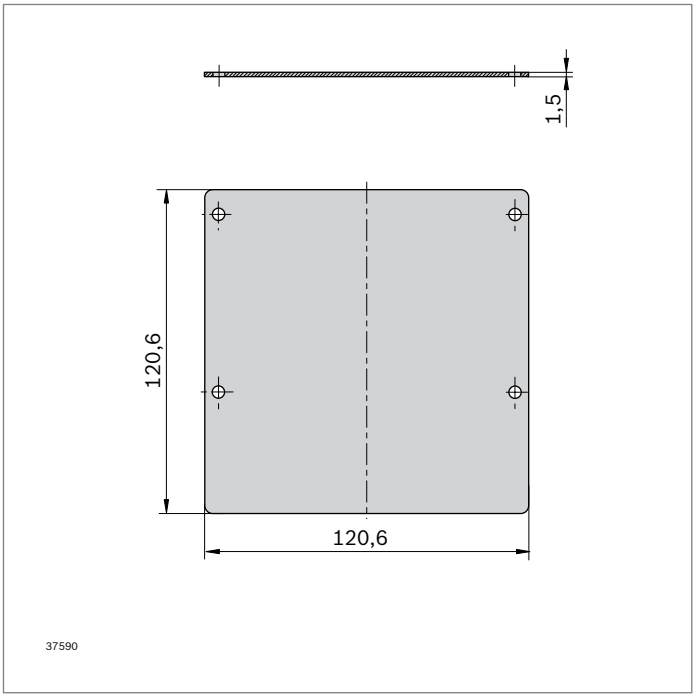

- For cable guide profile 120x120 6N (3 screw holes can be used for mounting) and 120x120


Cover plate	ESD		No.	FS
120x120		10	**3 842 558 229**	4x FS1
Material:	Cover plate: Aluminum sheet, anodized Fastening material: Steel; zinc-plated			
Scope of delivery:	Incl. fastening material (FS)			

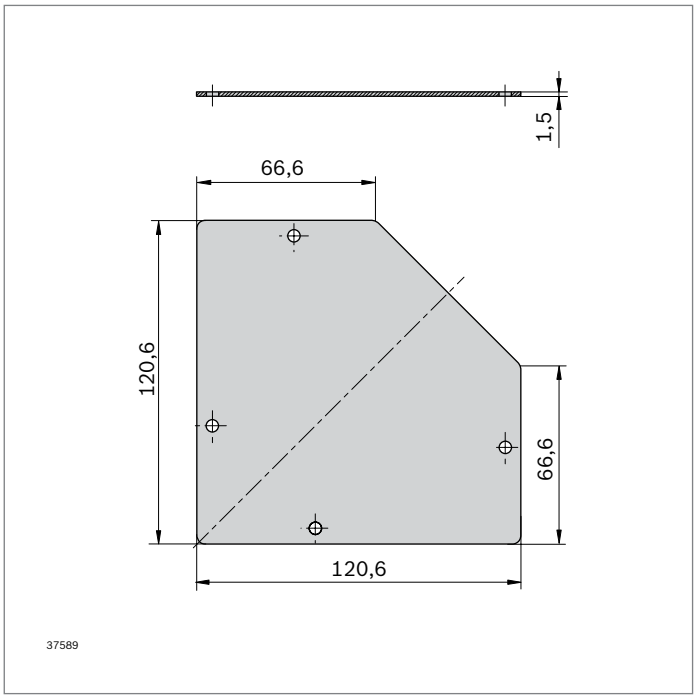

▶ For cable guide profile 40x120x120

Cover plate	ESD		No.	FS
40x120x120		10	**3 842 558 228**	4x FS1

Material:	Cover plate: Aluminum sheet, anodized Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

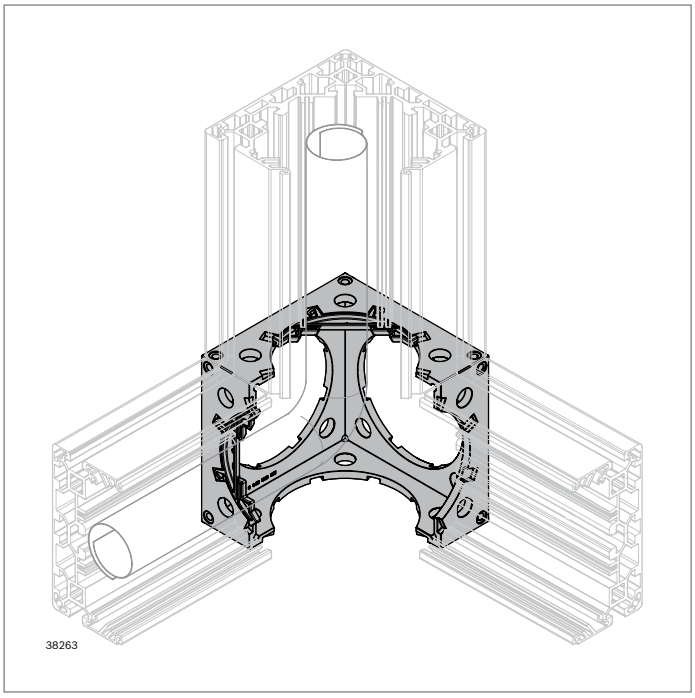


Profile joints 3/4 and 1/2
Positioning pin
Edge protector

- For connecting cable guide profiles or standard profiles 40x120 or 40x120 5N
- High strength and stability
- Implementation of protected cable branches
- Screw connection with central bolt M12 (recommended) or S12

Required accessories:
- Positioning pin to facilitate assembly
- Central bolt M12x30-T50 (**3 842 530 235**)/ S12x30-T50 (**3 842 530 236**) for fastening the profile joints (see MGE catalog, page 3-41)


Accessories, optional:
- Edge protector to cover sharp edges
- Cover cap for closing openings

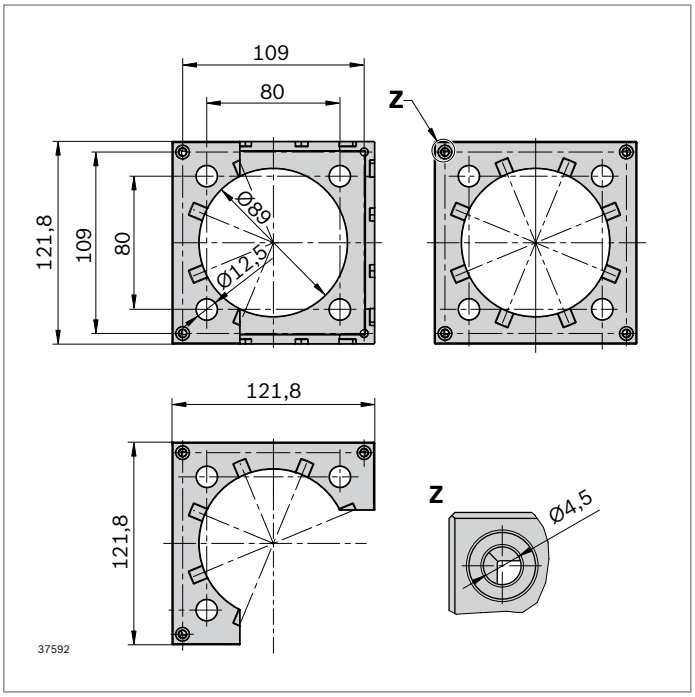

Profile joint 3/4		ESD*)	No.
120x120-3/4	1		**3 842 558 501**

Material:	Diecast aluminum; coated, signal gray RAL 7004
*) ESD:	A conductive connection between the profiles is established via the fastening screws. However, the surface of the profile joints is not ESD-conductive.


Accessories, optional:
- Connection bracket for covering sharp edges and for fastening cover caps
- Cover caps

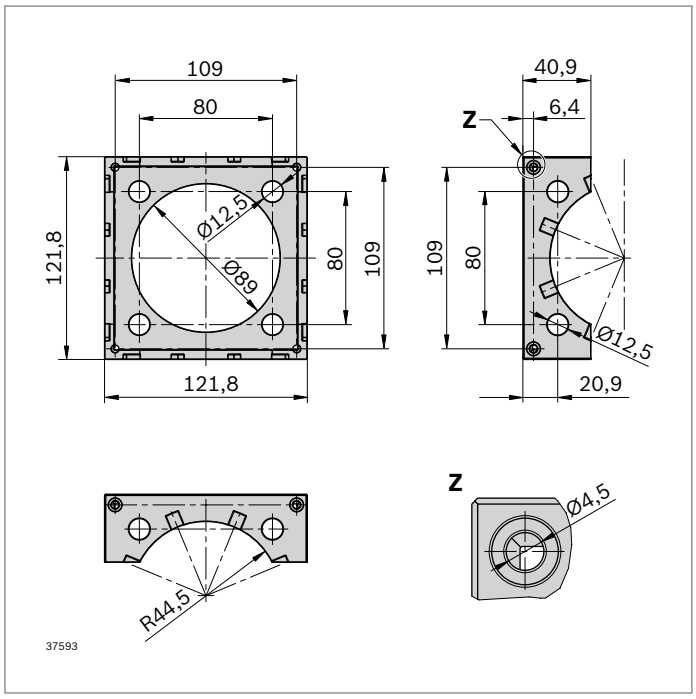

Profile joint 1/2			No.
120x120-1/2		1	**3 842 558 246**
Material:	Diecast aluminum; coated, signal gray RAL 7004		


Accessories, optional:

- Spacer for fixing cover caps
- Cover caps




- Positioning aid to facilitate assembly
- Use for the combinations of profile joint/profile, profile joint/base plate, base plate/profile

Positioning pin			No.
D=5.7		20	**3 842 558 487**
Material:	PP; signal gray RAL 7004		

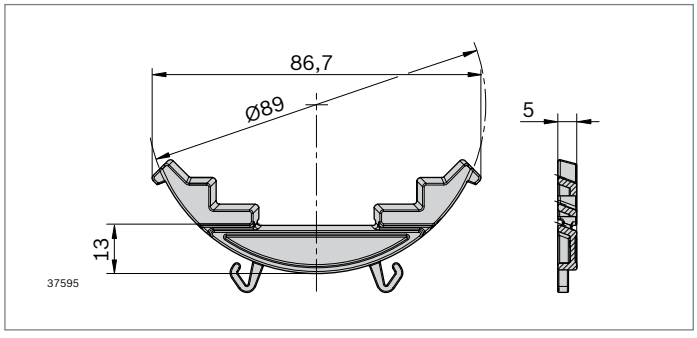


- Optimum protection for cables with sharp-edged transition between profile joint and cable guide profile
- Can be retrofitted
- Fastening via snap lock

Edge protector	Color	ESD		No.
120x120	Signal gray		10	**3 842 558 485**
120x120	Black		10	**3 842 558 249**
Material:	PP			

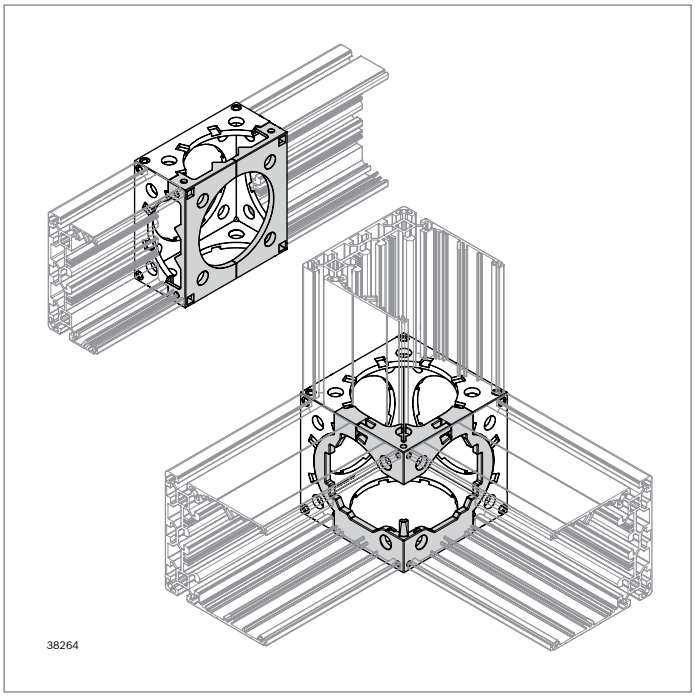

Connection bracket
Spacers


- Enables the mounting of cover caps on profile joints
- Edge protector for safe cable routing

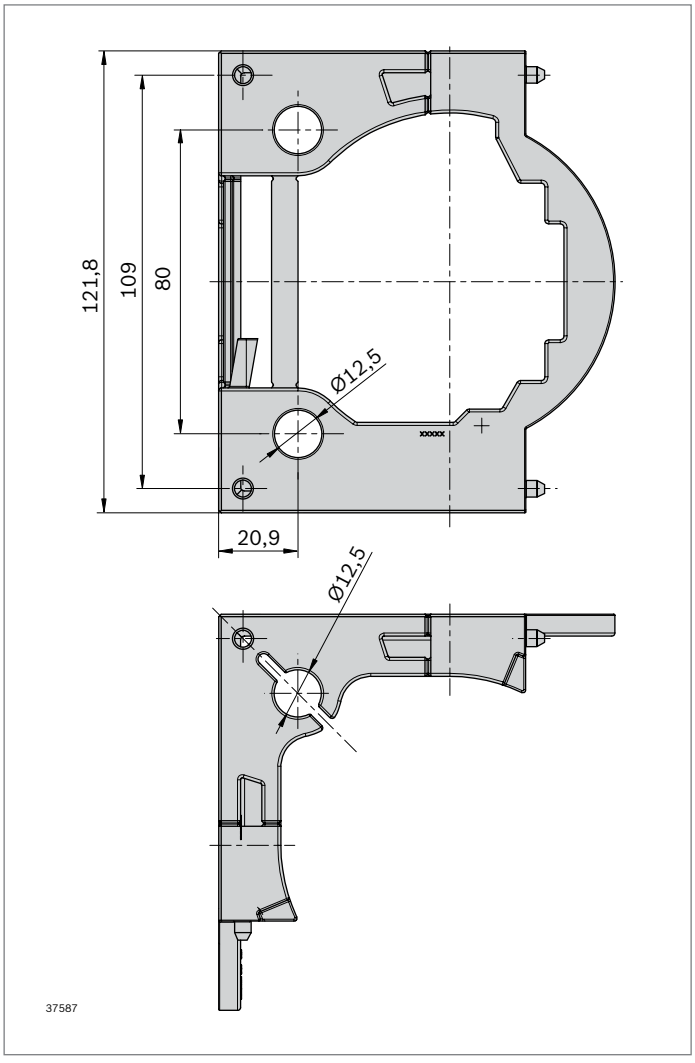

Connection bracket

- Closes profile joint 3/4 via residual function for safe cable laying
- Edge protector included


Connection bracket		No.
CGP 120x120	2	**3 842 558 473**
Material:	PP; signal gray RAL 7004	

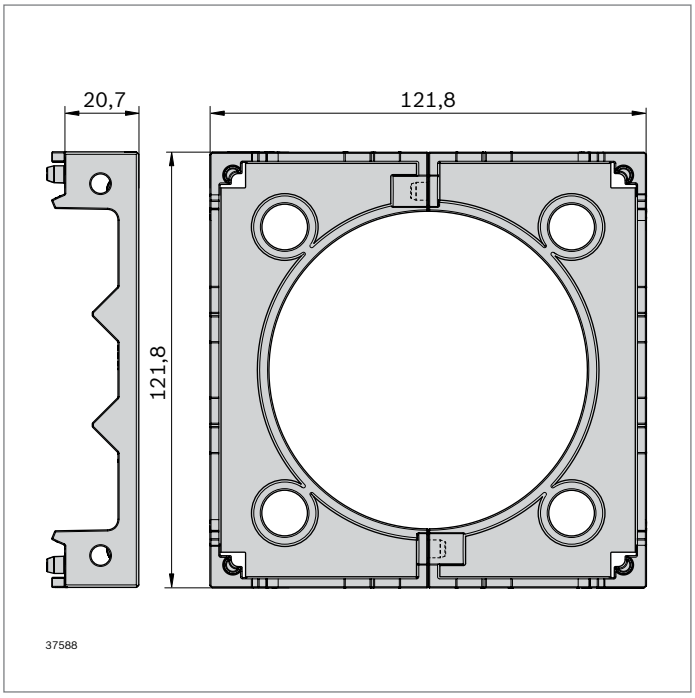

Spacers


- Running cables at a profile joint 1/2
- 2 parts for easy assembly

Spacers		No.
20x120	5	**3 842 558 502**
Material:	PP; signal gray RAL 7004	

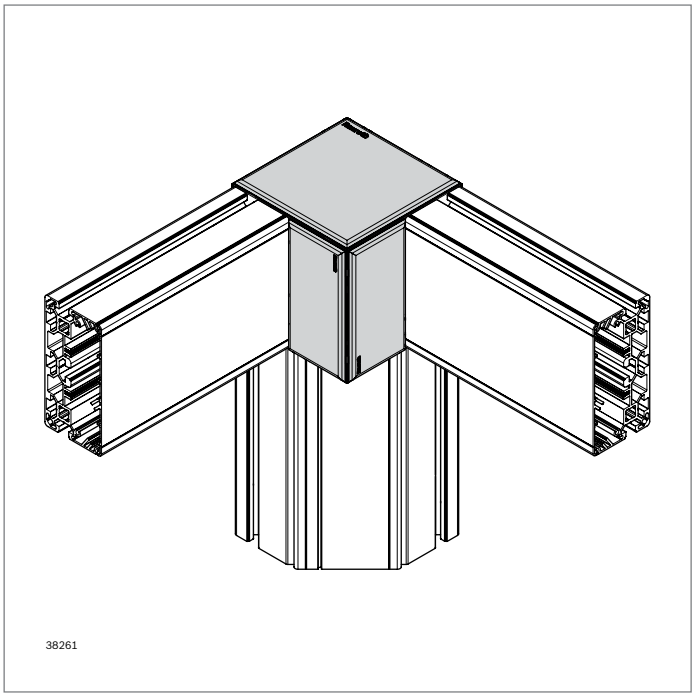


Cover caps

- For closing the profile joints and profile butt joints in various application combinations

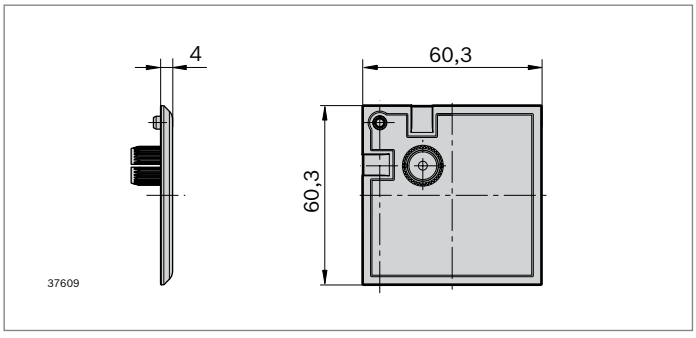


- For profile joint 3/4 and cable guide profile 60x120 without connection bracket

Cover cap	Color	ESD		No.
60x60	Signal gray		10	**3 842 558 474**
60x60	Black		10	**3 842 558 494**
Material:	PP			

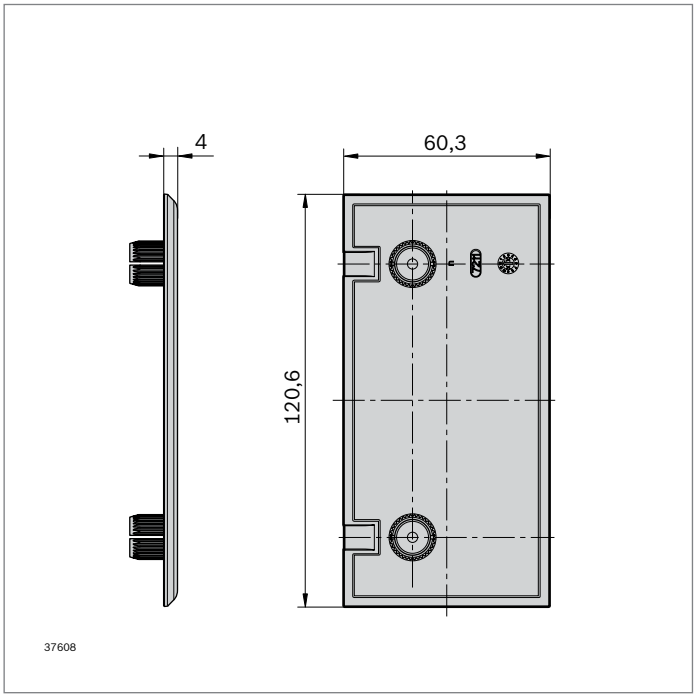


- For profile joint 3/4 or 1/2 in conjunction with cable guide profile 60x120 or base plate 60x120

Cover cap	Color	ESD		No.
60x120	Signal gray		10	**3 842 558 475**
60x120	Black		10	**3 842 558 495**
Material:	PP			

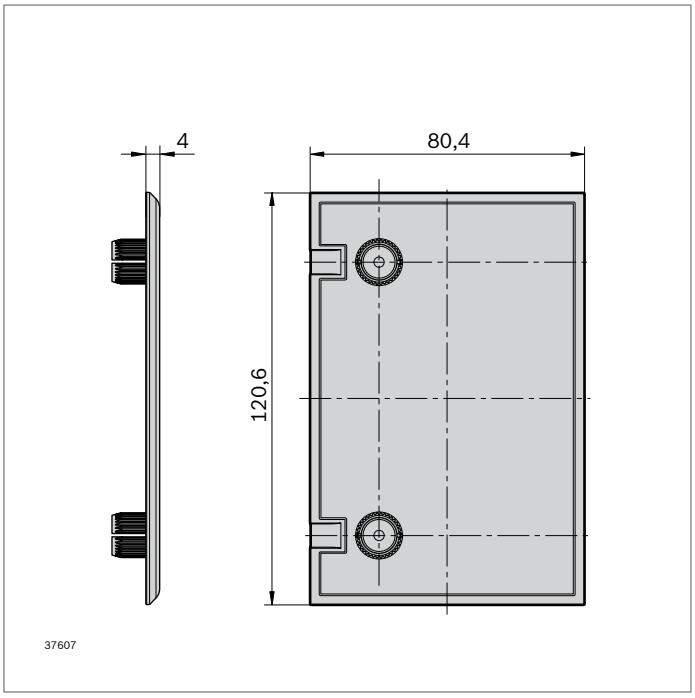


- For profile joint 3/4 or 1/2 in conjunction with strut profile 40x120

Cover cap	Color	ESD		No.
80x120	Signal gray		10	**3 842 558 476**
80x120	Black		10	**3 842 558 496**
Material:	PP			

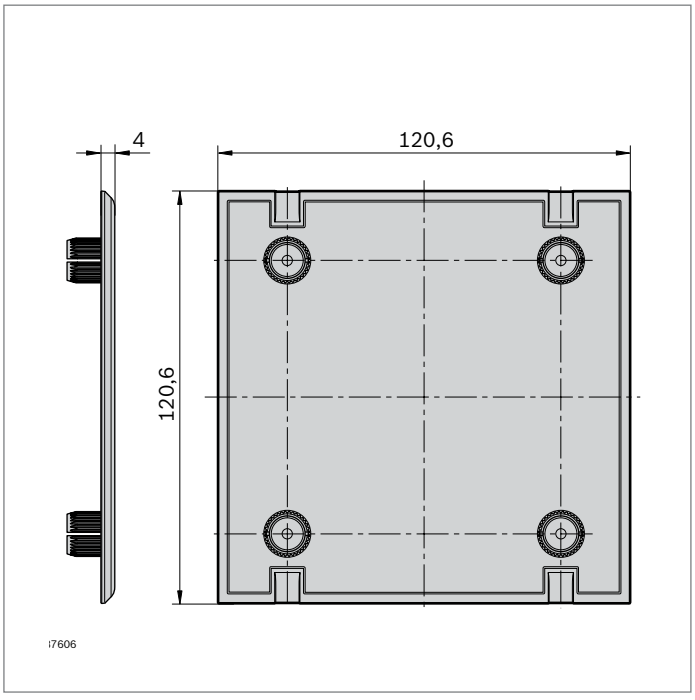


- For profile joints 3/4 and 1/2

Cover cap	Color	ESD		No.
120x120	Signal gray		10	**3 842 558 477**
120x120	Black		10	**3 842 558 497**
Material:	PP			

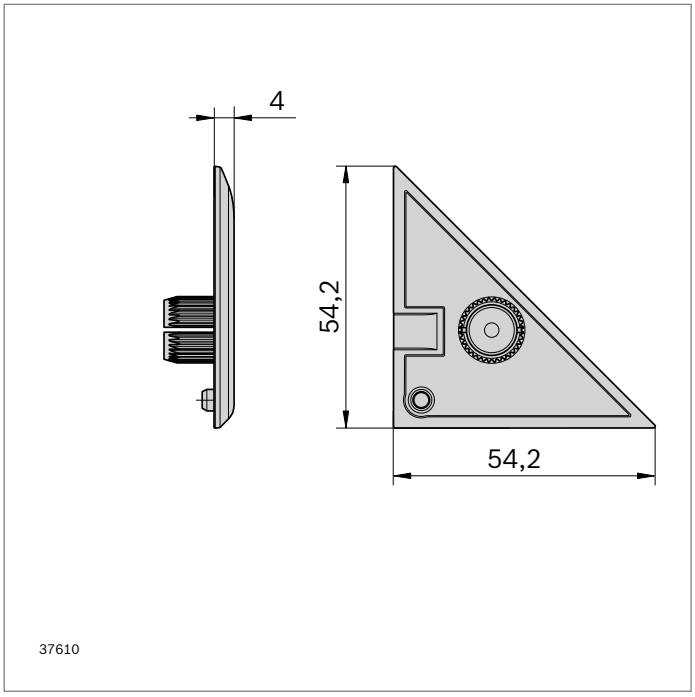


- For connecting corner profile 40x120x120 and profile joint or base plate 40x120x120

Cover cap	Color	ESD		No.
80 Triangle	Signal gray		10	**3 842 558 479**
80 Triangle	Black		10	**3 842 558 499**
Material:	PP			

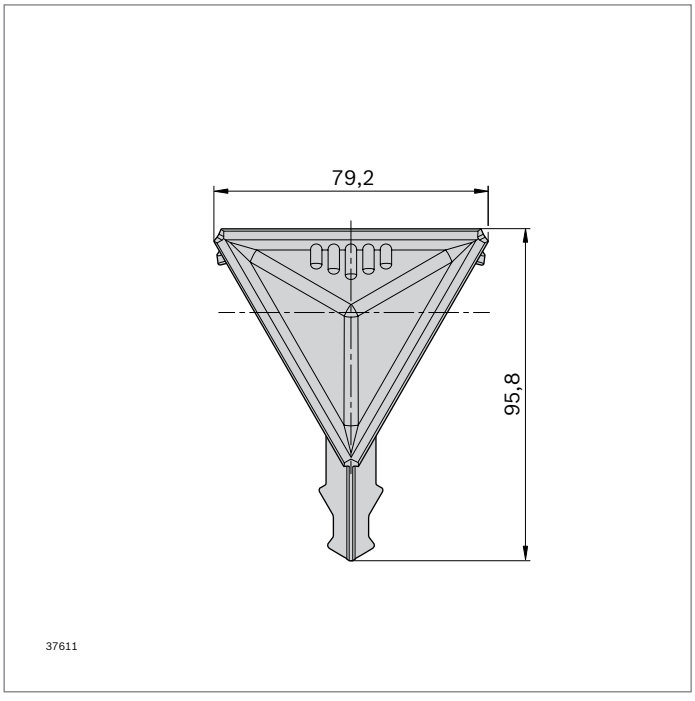


- For butt joints of 3x corner profile 40x120x120

Cover cap	Color	ESD		No.
80x80x80	Signal gray		10	**3 842 558 478**
80x80x80	Black		10	**3 842 558 498**
Material:	PP			

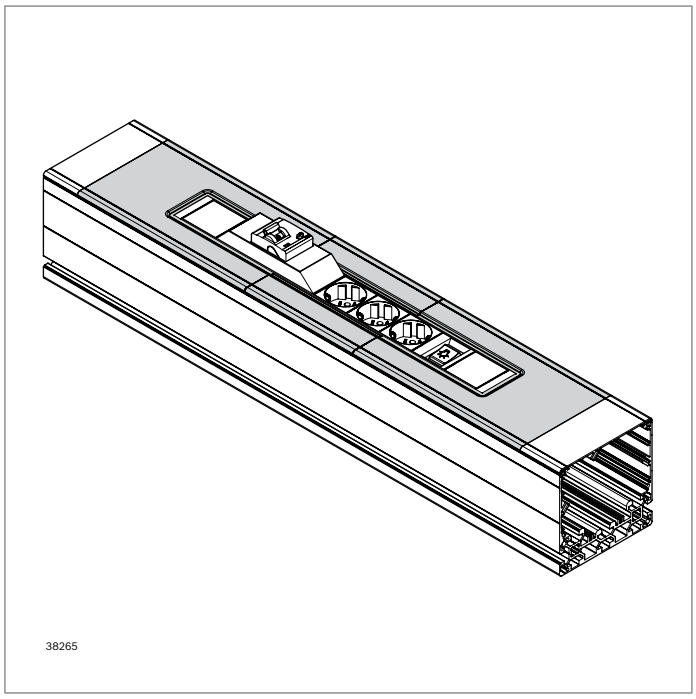


Cover
Cover rail

- Closes the opening gap of installed socket strips in cable guide profiles
- For socket strips with 263 mm or 404 mm length (with extension)
- Compatible with socket strips from the MPS range (see the Manual Production Systems catalog)
- Socket covers can be extended with the cover rails

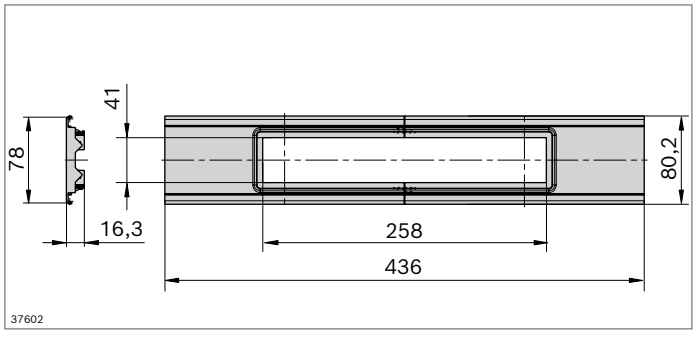


- For installation in cable guide profiles 40x120x120 and 120x120 6N

Cover	Color	ESD		No.
80	Signal gray		10	**3 842 558 507**
80	Black		10	**3 842 558 506**
Material:	PP			

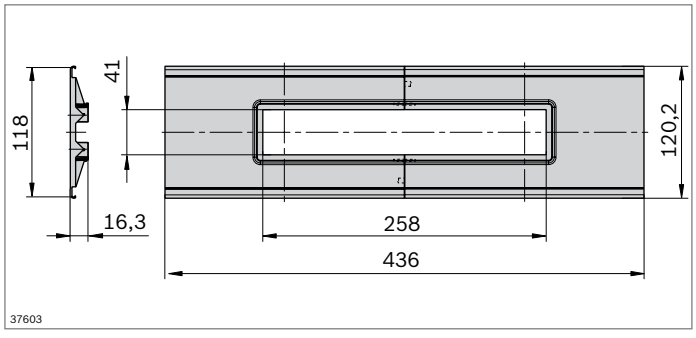


- For installation in cable routing profiles 60x120 and 120x120

Cover	Color	ESD		No.
120	Signal gray		10	**3 842 558 509**
120	Black		10	**3 842 558 508**
Material:	PP			

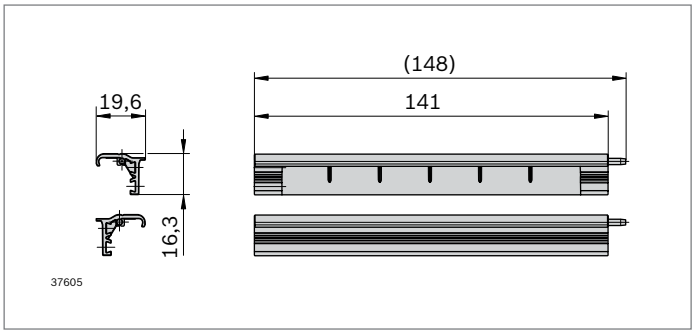


- For installation in cable guide profiles 40x120x120 and 120x120 6N
- Cover rail consists of 2 half shells

Cover rail	Color	ESD		No.
80	Signal gray		10	**3 842 558 511**
80	Black		10	**3 842 558 510**
Material:	PP			

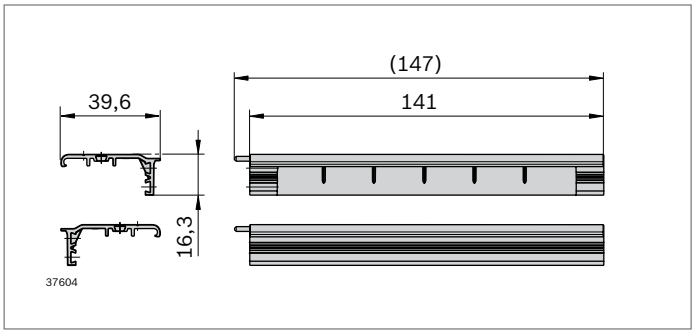


- For installation in cable routing profiles 60x120 and 120x120
- Cover rail consists of 2 half shells

Cover rail	Color	ESD		No.
120	Signal gray		10	**3 842 558 513**
120	Black		10	**3 842 558 512**
Material:	PP			

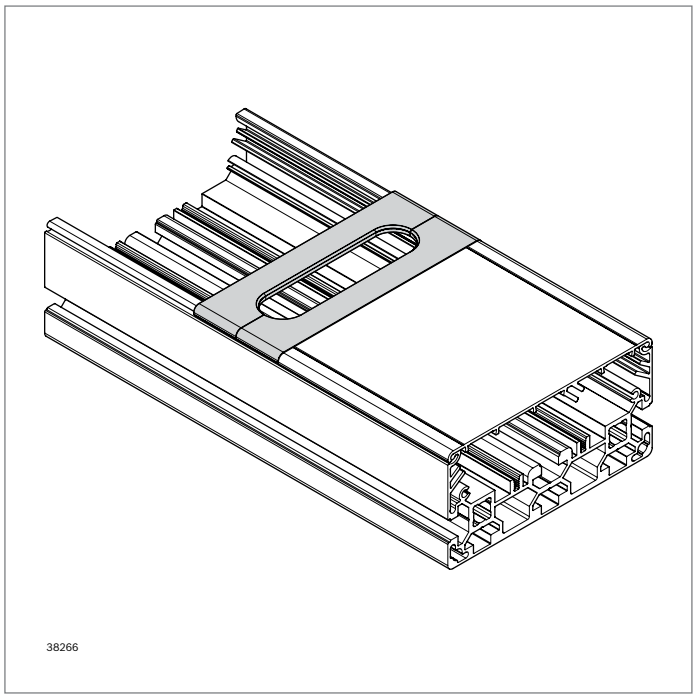

Cable hole


- For passing cables through the cover of a cable guide profile

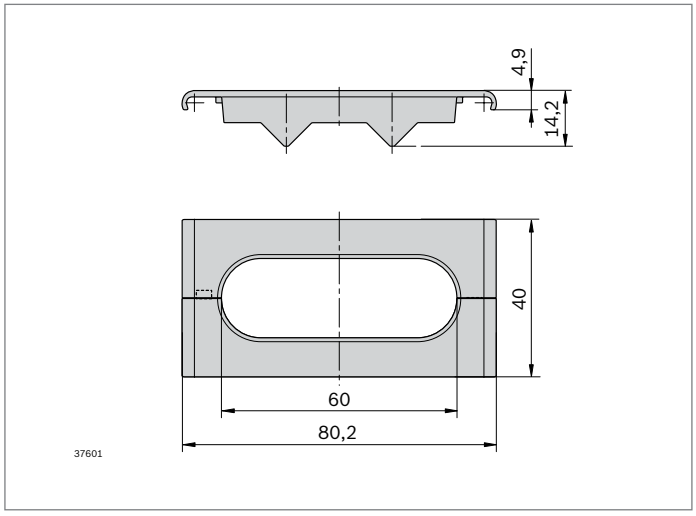

- For installation in cable guide profiles 40x120x120 and 120x120 6N

Cable hole	Color	ESD		No.
80	Signal gray		10	**3 842 558 212**
80	Black		10	**3 842 558 503**


Material: PP

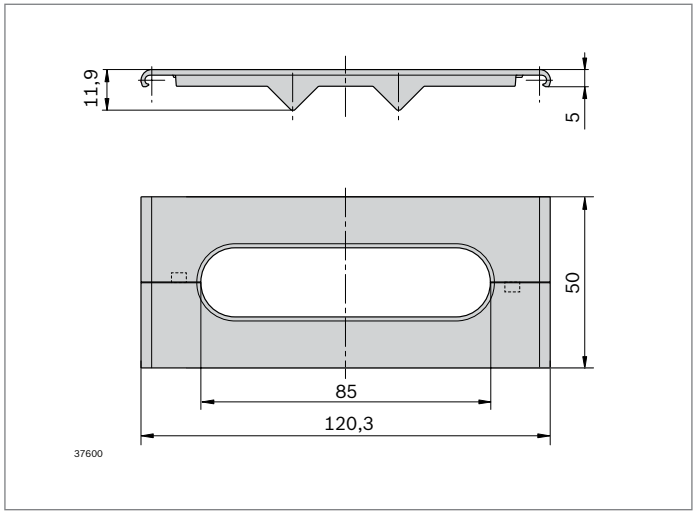

- For installation in cable routing profiles 60x120 and 120x120

Cable hole	Color	ESD		No.
120	Signal gray		10	**3 842 558 505**
120	Black		10	**3 842 558 250**

Material: PP

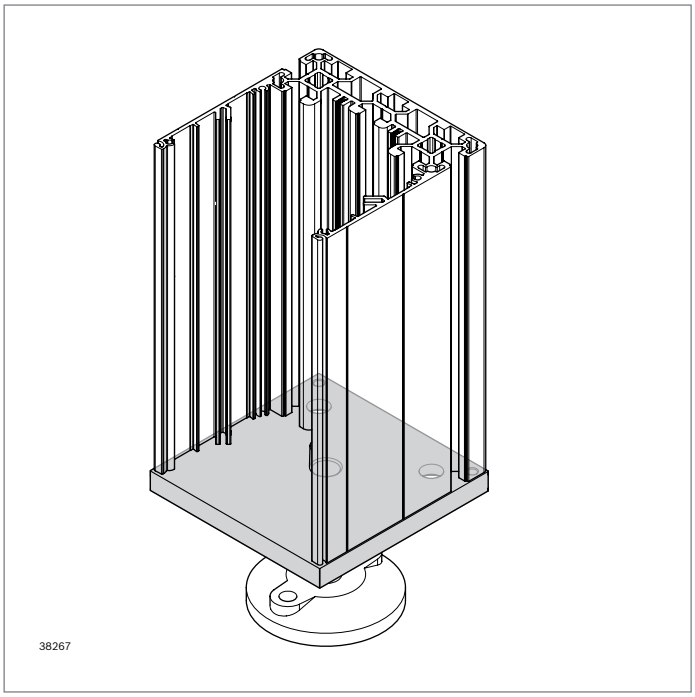


Base plate


- Screw-on plate for supports or castor wheels
- Suitable for mounting on profile joints or cable guide profile

Required accessories:


- Central bolt M12x30 or S12x30 (for fastening in the central hole)
- Central bolt M12x30, hexagon nut ISO 4035 M12 (for fastening at profile joint)
- Positioning pin (**3 842 558 487**, p. 2-106) to facilitate installation

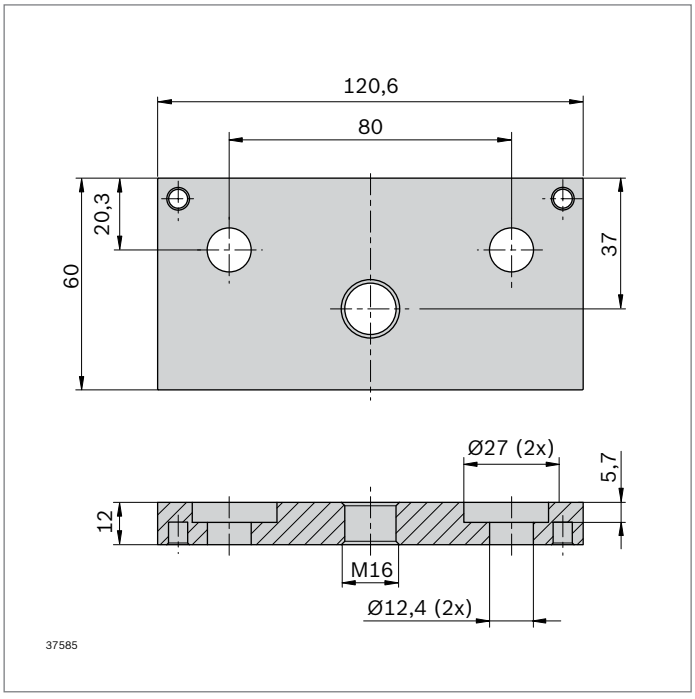


Base plate		ESD	No.
60x120			**3 842 558 218**
Material:	Steel; zinc-plated		

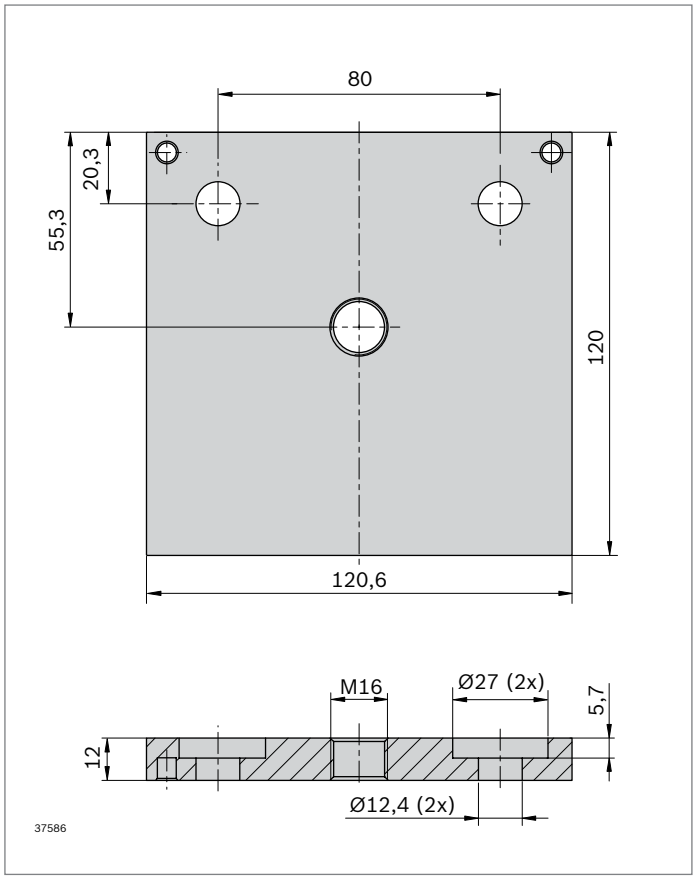

Base plate	ESD	No.
120x120		**3 842 558 220**
Material:	Steel; zinc-plated	

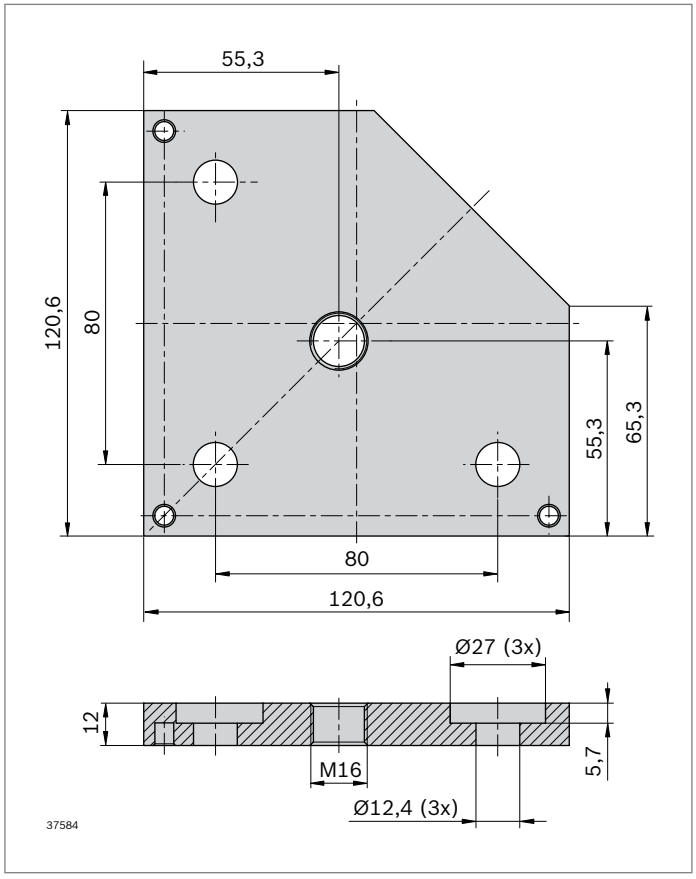

Base plate	ESD	No.
40x120x120		**3 842 558 226**
Material:	Steel; zinc-plated	

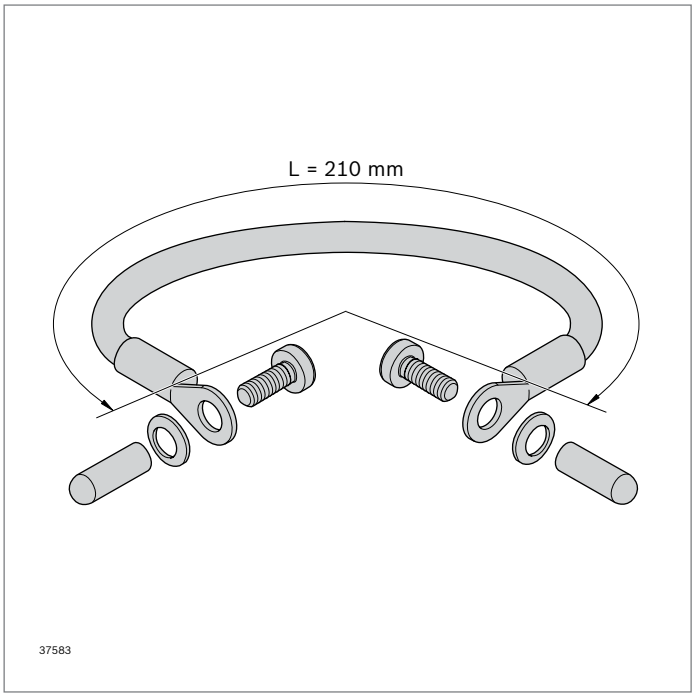

Potential equalizer line

- For proper grounding of the cable guide profiles


Potential equalizer line		No.
		3 842 552 234
Material:	Cable: plastic-coated Fastening material: Steel; zinc-plated	



Protective hose

- Cable protection conduit with Velcro fastener
- Bundle diameter up to max. 38 mm

Protective hose	**L** (mm)	No.
	3000	**3 842 558 248**
Material:	PET; black	

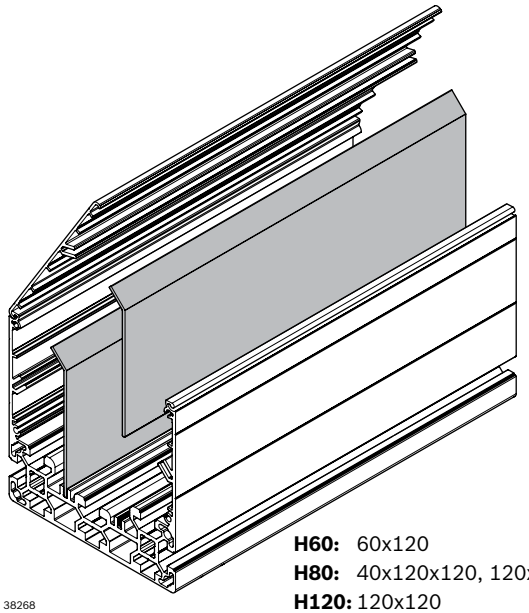


38268

H60: 60x120
H80: 40x120x120, 120x120 6N
H120: 120x120


Dividing strip

- Divides the cable guide profile into 2 or 3 chambers for routing different cable types (power/data cables etc.)
- Push-in installation
- The angled ends of the dividing strips keep the cables in the intended chamber even in a horizontal installation position

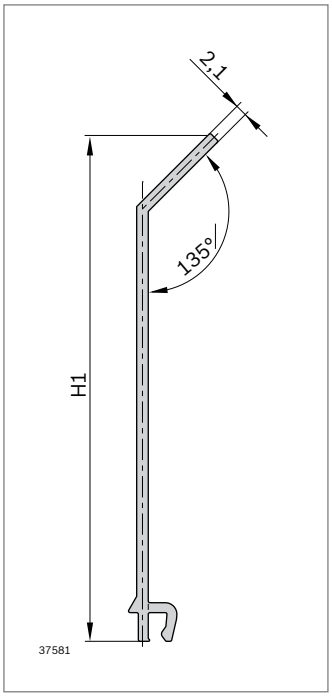

Dividing strip	H1 (mm)	L (mm)		No.
H60	30	3000	10	**3 842 558 245**
H80	68	3000	10	**3 842 558 222**
H120	90	3000	10	**3 842 558 244**
Material:	PVC; signal gray			


Connection elements




T-nut (p. 3-4)
Collar screw (p. 3-5)



Flange nut,
T-bolt (p. 3-6)



Sliding block (p. 3-7)



Expanding nut (p. 3-10)




Parallel connector (p. 3-11)




Tensioning connector
(p. 3-13)



Slot connector (p. 3-14)



Inner bracket (p. 3-15)
Inner bracket R (p. 3-16)



Miter bracket (p. 3-18)



Bracket (p. 3-19)




Bracket R (p. 3-31)



Steel bracket (p. 3-33)



Metal bracket, supporting
bracket (p. 3-34)




Foundation bracket
(p. 3-36)



Holder (p. 3-37)




Supporting bracket
(p. 3-39)




Profile connector (p. 3-41)




Central bolt (p. 3-43)




Anti-torsion element (p. 3-44)




Cubic connector (p. 3-45)




Corner bracket (p. 3-49)



End connector (p. 3-51)



T-connector (p. 3-53)




Connector 45° (p. 3-55)




Quick connector
(p. 3-56)




Quick connector, bendable
(p. 3-61)




Longitudinal end connector
(p. 3-63)



Bolt connector (p. 3-64)













QV mounting kit
(p. 3-66)




Lifting eye bolt
(see page 3-67)


Connection elements, selection criteria

● recommended ◑ suitable ○ unsuitable

	Coupling	Slot connector	Inner bracket	Bracket	Central bolt	T-connector	Quick connector	Bolt connector
 High feed force	●	●	○	●	●	●	●	●
 High moment	◑	◑	○	●	◑	◑	○	●
 High torsional moment	●	●	○	◑	○	●	○	●
 Minimal finishing	●	●	●	●	◑ M12 9,8	●	◑ D17	◑ D17
 Minimal assembly	●	●	●	●	●	○	●	○
 Low parts costs	◑	◑	◑	◑	●	○	◑	○
 Subsequent mounting in closed frame possible	◑	◑	○	●	○	◑	○	●
 Adjustment possible	●	●	◑	●	○	●	●	●
 Mounting of panel elements	◑	◑	◑	◑	●	○	●	○
 Internal connection (concealable)	●	●	●	○	●	◑	◑	●

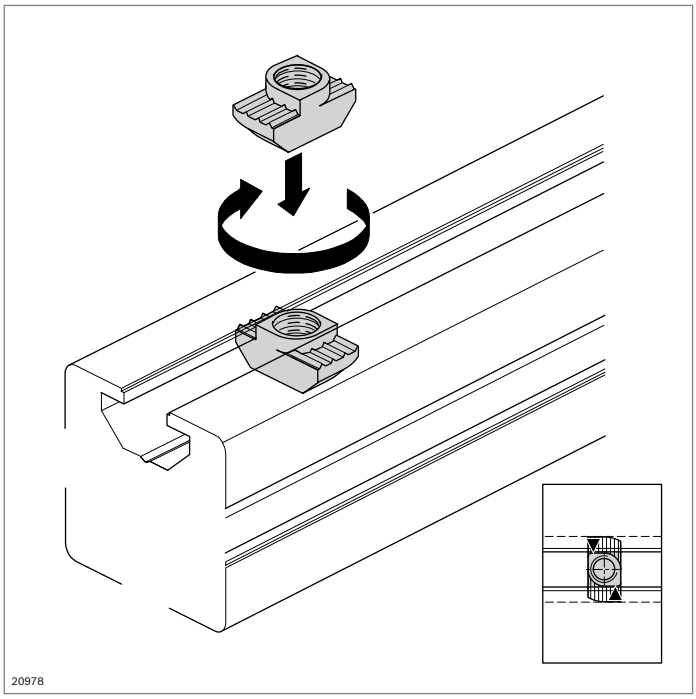


T-nut



- Standard element for a secure and conductive connection
- End stop for correct positioning in the profile slot
- Stainless steel T-nut, e.g. for outdoor or cleanroom applications
- Profile finishing: Not required


Technical data (p. 18-15)

Accessories:
Insulating cap (p. 3-5)



Slot	F_{max}
6	1700 N


T-nut, 6 mm slot	Slot	M	ESD		No.
Steel; zinc-plated	6	M4		100	**3 842 523 135**
Stainless steel	6	M4		100	**3 842 536 599**



Slot	F_{max}
8 (M6)	4000 N

T-nut, 8 mm slot	Slot	M	ESD		No.
Steel; zinc-plated	8	M4		100	**3 842 501 751**
		M5*		100	**3 842 501 752**
		M6*		100	**3 842 501 753**
Stainless steel	8	M4		100	**3 842 536 600**
		M5		100	**3 842 536 601**
		M6		100	**3 842 536 602**

* Suitable for standard screws. **Attention:** T-nuts have driving torque for safe turning in the base of the slot.




Slot	F_{max}
10 (M8)	6000 ... 18000 N[1)]


[1)] Depending on profile (p. 19-5)

T-nut, 10 mm slot	Slot	M	ESD		No.
Steel; zinc-plated	10	M4		100	**3 842 530 281**
		M5*		100	**3 842 530 283**
		M6*		100	**3 842 530 285**
		M8*		100	**3 842 530 287**
Stainless steel	10	M4		100	**3 842 536 606**
		M5		100	**3 842 536 605**
		M6		100	**3 842 536 604**
		M8		100	**3 842 536 603**

* Suitable for standard screws. **Attention:** T-nuts have driving torque for safe turning in the base of the slot.

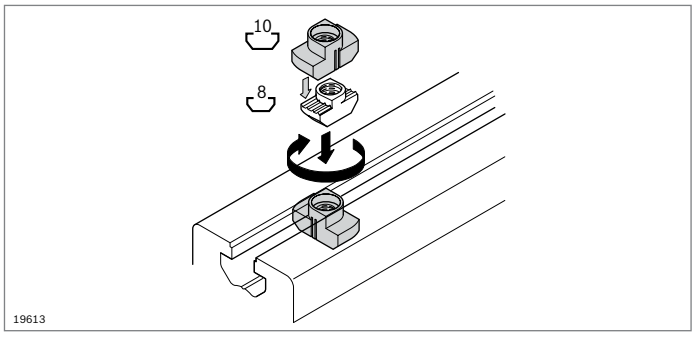


- Insulating cap for decoupling directly grounded components; for use with T-nuts for 8 mm slots in a 10 mm slot



Insulating cap for T-nut 8 mm slot	Slot		No.
	10	10	**3 842 524 012**

Material: PA; high-strength, black

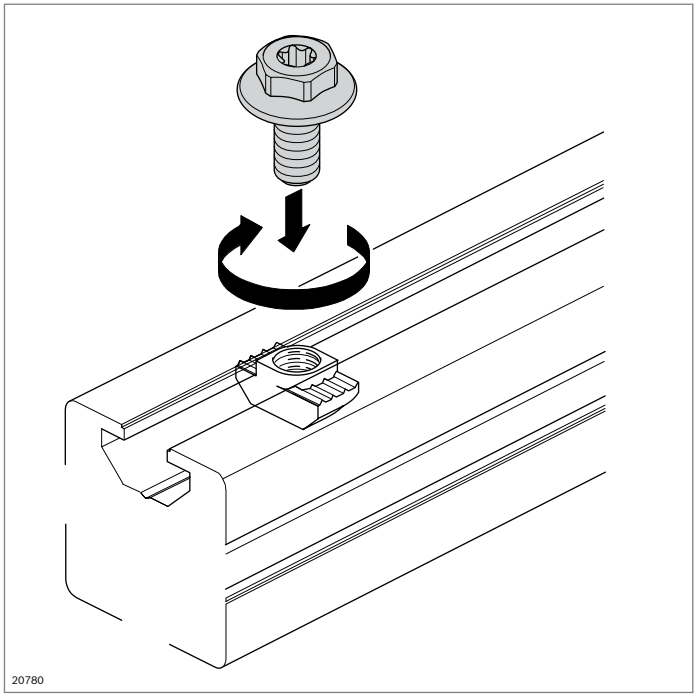


Collar screw

- Collar screw with multi-function head for tightening with ring/open-end wrench (WS 13) or Torx screwdriver (T40)
- Machine tightening possible
- Preferably to be used for fastening brackets
- Quick and simple assembly
- Excellent force transmission via the wide flange
- ESD-capable
- With Polyfleck to secure the T-nut

Tools:
Offset screwdriver (p. 14-6)

Accessories:
T-nut (p. 3-4)




Collar screw	M	L (mm)	ESD		No.
M8x18-SW13-T40[1]	M8	18	ESD	100	**3 842 541 246**
M8x20-SW13-T40[2]	M8	20	ESD	100	**3 842 541 409**

[1] For 40/40 and 60/60 brackets

[2] For all other brackets for 10 mm slot


Material: Steel; zinc-plated

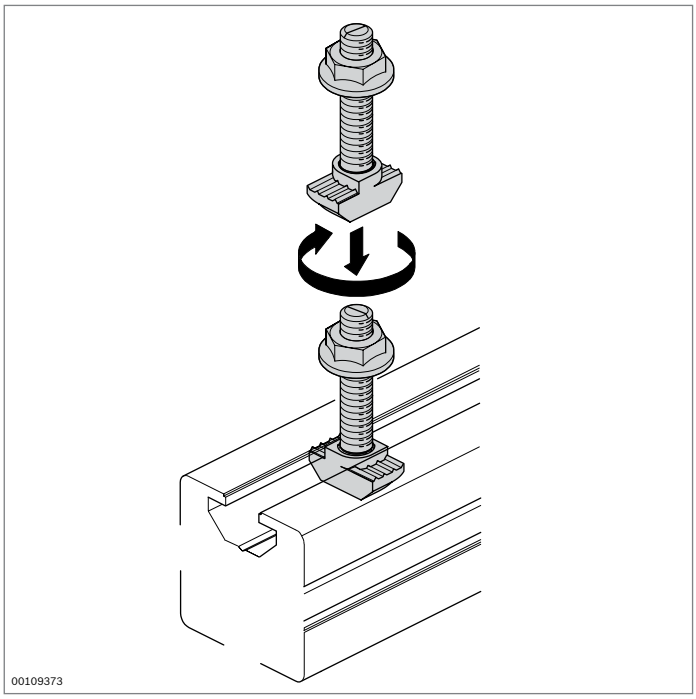


Flange nut
T-bolt

- Secure and conductive connection
- Notch at bolt end as marker for correct position recognition
- Profile finishing: Not required


Technical data (p. 18-15)





Flange nut	Slot	M	ESD		No.
	8	M6		100	**3 842 523 925**
	10	M8		100	**3 842 345 081**

Material: Steel; zinc-plated




Slot	F_{max}
8	4000 N
10	6000 ... 18000 N[1)]


[1)] Depending on profile (p. 18-15)

T-bolt	Slot	MxL	b (mm)	l (mm)	ESD		No.
	8	M6x16	10	14		100	**3 842 523 920**
		M6x20	14	18		100	**3 842 523 921**
		M6x25	18	23		100	**3 842 523 922**
	10	M8x20	14	14		100	**3 842 528 715**
		M8x25	19	19		100	**3 842 528 718**
		M8x30	24	24		100	**3 842 528 721**
		M8x40	22	34		100	**3 842 528 724**
		M8x45	22	29		100	**3 842 563 312**
		M8x50	22	44		100	**3 842 528 727**
		M8x60	22	54		100	**3 842 528 730**

Material: Steel; zinc-plated

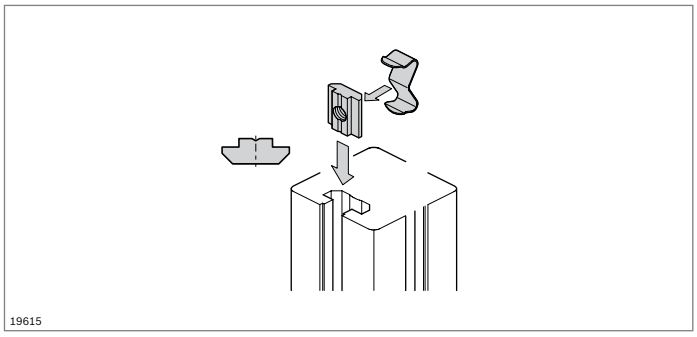


Sliding block, sliding block profile



- Sliding block for reliable absorption of high forces
- Sliding block profile for self-assembly of individual fastening elements
- Profile finishing: Not required
- The spring assists with the assembly and positioning of the sliding block and swivel-in sliding block (p. 3-8)

Technical data (p. 18-15)




Slot	Fmax
6 (M5)	3000 N
8 (M8)	6000 N
10 (M8)	8000 ... 24000 N[1)]

[1)] Depending on profile (p. 18-15)


Sliding block	Slot	M	h (mm)	h_1 (mm)	l (mm)	ESD		No.
Steel; zinc-plated	6	M4	4.0	1.0	12	✓	100	**3 842 542 692**
		M5	4.0	1.0	12	✓	100	**3 842 542 693**
	8	M4	6.0	2.0	16		100	**3 842 514 928**
		M5	6.0	2.0	16		100	**3 842 514 929**
		M6	6.0	2.0	16		100	**3 842 514 930**
		M8	6.0	2.0	16		100	**3 842 514 931**
	10	M5	10.5	5.0	20		100	**3 842 528 741**
		M6	10.5	5.0	20		100	**3 842 528 738**
		M8	10.5	5.0	20		100	**3 842 528 735**
Steel; stainless	6	M4	4.0	1.0	12	✓	100	**3 842 523 140**
		M5	4.0	1.0	12	✓	100	**3 842 523 142**
	8	M4	6.0	2.0	16	✓	100	**3 842 547 817**
		M5	6.0	2.0	16	✓	100	**3 842 547 816**
		M6	6.0	2.0	16	✓	100	**3 842 547 815**
		M8	6.0	2.0	16	✓	100	**3 842 547 814**
	10	M5	10.5	5.0	20	✓	100	**3 842 547 813**
		M6	10.5	5.0	20	✓	100	**3 842 547 812**
		M8	10.5	5.0	20	✓	100	**3 842 547 811**

Accessories: Spring (p. 3-9)



Sliding block profile	Slot	h (mm)	h_1 (mm)	l (mm)	No.
Steel; zinc-plated	6	4.0	1.0	1000	**3 842 542 694**
	8	6.0	2.0	1000	**3 842 510 078**
	10	10.5	5.0	1000	**3 842 528 744**
Steel; stainless	6	4.0	1.0	1000	**3 842 523 438**


Accessories: Spring (p. 3-9)

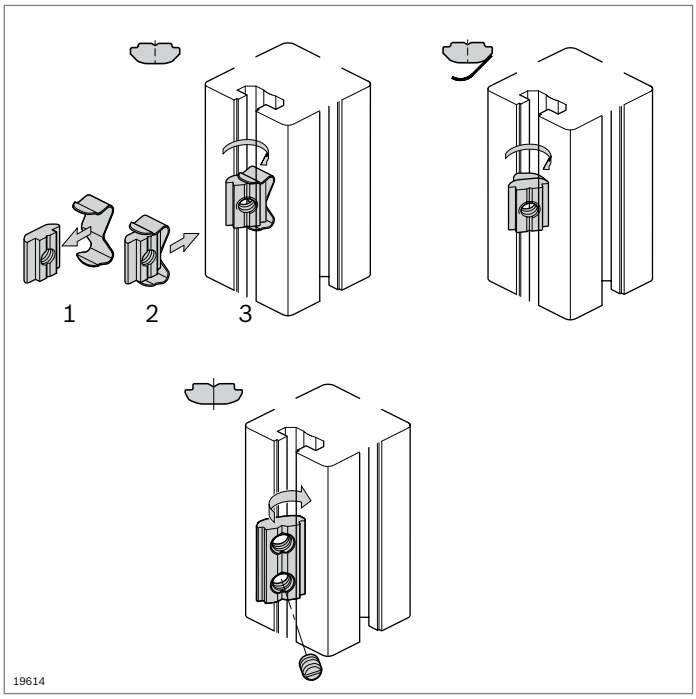


Swivel-in sliding block
Swivel-in sliding block profile
Spring

- Swivel-in sliding block profile for self-assembly of individual fastening elements
- The swivel-in sliding block can be inserted directly at the assembly point for easy assembly
- The swivel-in sliding block with spring can be inserted directly at the assembly point and fixed in position thanks to attached springs
- Swivel-in sliding block with headless setscrews for shake-proof fixing in all positions
- Profile finishing: Not required

Technical data (p. 18-15)



Swivel-in sliding block profile	Slot	h (mm)	h_1 (mm)	l (mm)	No.
Steel; zinc-plated	8	4.8	1.0	1000	**3 842 529 327**
	10	5.3	1.5	1000	**3 842 529 325**




Slot	F_{max}
8 (M8)	2200 N
10 (M8)	8000 ... 18000 N[1)]

[1)] Depending on profile (p. 18-15)


Swivel-in sliding block	Slot	M	h (mm)	h_1 (mm)	l (mm)	ESD		No.
Steel; zinc-plated	8	M5	4.8	1.0	16		100	**3 842 529 319**
		M6	4.8	1.0	16		100	**3 842 529 320**
		M8	4.8	1.0	16		100	**3 842 529 321**
	10	M6	5.3	1.5	20		100	**3 842 529 323**
		M8	5.3	1.5	20		100	**3 842 529 324**
Steel; stainless	6	M3	3.0	0.9	12	ESD	100	**3 842 547 826**
		M4	3.0	0.9	12	ESD	100	**3 842 536 669**
		M5	3.0	0.9	12	ESD	100	**3 842 547 825**
	8	M6	4.8	1.0	16	ESD	100	**3 842 530 321**
	10	M8	5.3	1.5	20	ESD	100	**3 842 530 316**

Accessories: Spring (p. 3-9)



- The spring assists with the assembly and positioning of the sliding block and swivel-in sliding block


Spring	Slot		No.
Spring steel; stainless	6	100	**3 842 523 145**
	8	100	**3 842 516 685**
	10	100	**3 842 516 669**




Slot	F_{max}
8 (M8)	2200 N
10 (M8)	8000 ... 18000 N[1)]

[1)] Depending on profile (p. 18-15)

Swivel-in sliding block with spring	Slot	M	h (mm)	h_1 (mm)	l (mm)	ESD		No.
Steel; zinc-plated	8	M4	4.8	1.0	16		100	**3 842 529 294**
		M5	4.8	1.0	16		100	**3 842 529 295**
		M6	4.8	1.0	16		100	**3 842 529 296**
		M8	4.8	1.0	16		100	**3 842 529 297**
	10	M4	5.3	1.5	20		100	**3 842 541 393**
		M5	5.3	1.5	20		100	**3 842 529 298**
		M6	5.3	1.5	20		100	**3 842 529 299**
		M8	5.3	1.5	20		100	**3 842 529 300**
Steel; stainless	8	M4	4.8	1.0	16		100	**3 842 547 824**
		M5	4.8	1.0	16		100	**3 842 547 823**
		M6	4.8	1.0	16		100	**3 842 547 822**
		M8	4.8	1.0	16		100	**3 842 547 821**
	10	M5	5.3	1.5	20		100	**3 842 547 808**
		M6	5.3	1.5	20		100	**3 842 547 807**
		M8	5.3	1.5	20		100	**3 842 547 806**
Material:	Spring: Spring steel; stainless							



Swivel-in sliding block with headless setscrew (M_A)	Slot	M_A; M_B	b (mm)	h (mm)	h_1 (mm)	l (mm)		No.
Steel; stainless	6	M4; M4	8	3.0	0.9	15	100	**3 842 536 673**
Steel; zinc-plated	8	M5; M4	12	4.8	1.0	24	100	**3 842 557 259**
		M5; M5	12	4.8	1.0	24	100	**3 842 536 675**
		M5; M6	12	4.8	1.0	24	100	**3 842 557 260**
	10	M5; M5	14	5.3	1.5	30	100	**3 842 536 676**
		M5; M6	14	5.3	1.5	30	100	**3 842 557 261**
		M5; M8	14	5.3	1.5	30	100	**3 842 557 262**

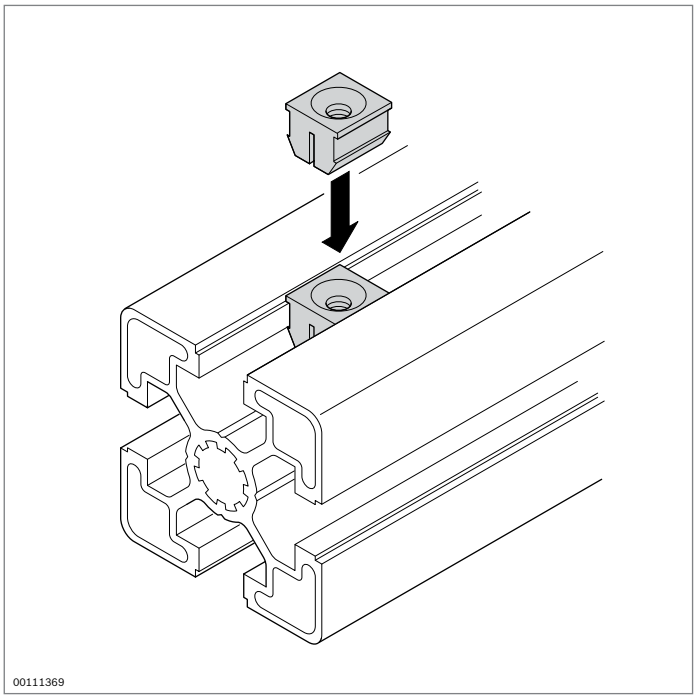


Expanding nut




- For attaching light accessories such as cable ties or rings
- Easy assembly by clipping into the profile slot
- Profile finishing: Not required

Required accessories:
Countersunk screw




Expanding nut	Slot	M		No.
	10	M4	100	**3 842 554 774**
		M5	100	**3 842 554 776**
		M6	100	**3 842 554 778**


Material: PA; signal gray similar to RAL 7004

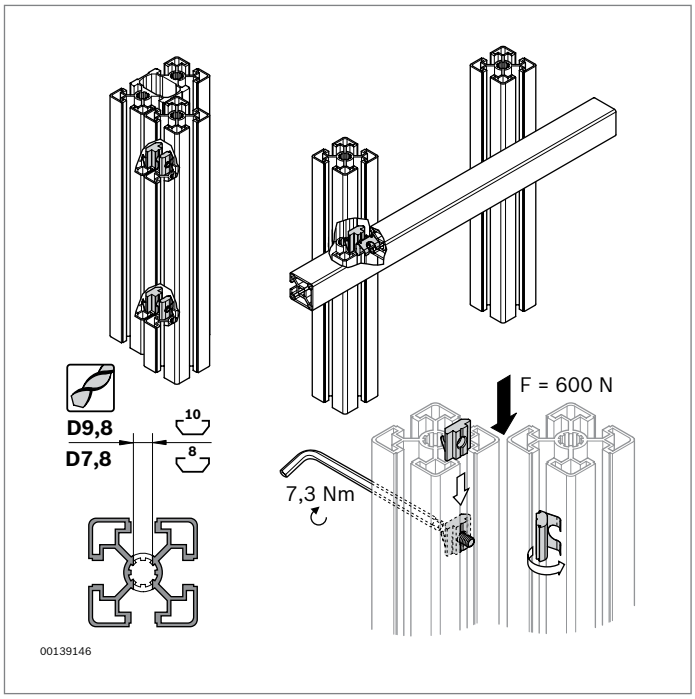

Parallel connector



- For a gap-free connection between two strut profiles, parallel to the axis or at any angle
- Parallel connector consisting of two sliding blocks with welded springs for simple assembly
- Attractive-looking interior connection, e.g. for material shelves
- Connection possible in any position
- Transferable displacement force per parallel connector: 600 N
- Profile finishing: Through-hole




Slot	F_{max}
8	600 N
10	600 N

Parallel connector	Slot	l (mm)		No.
	8	16	10	**3 842 542 737**
	10	20	10	**3 842 542 736**

Material: Sliding block: Steel; zinc-plated
Spring: Spring steel; stainless


Scope of delivery: Sliding block with spring; swivel-in sliding block with spring; M5 countersunk screw

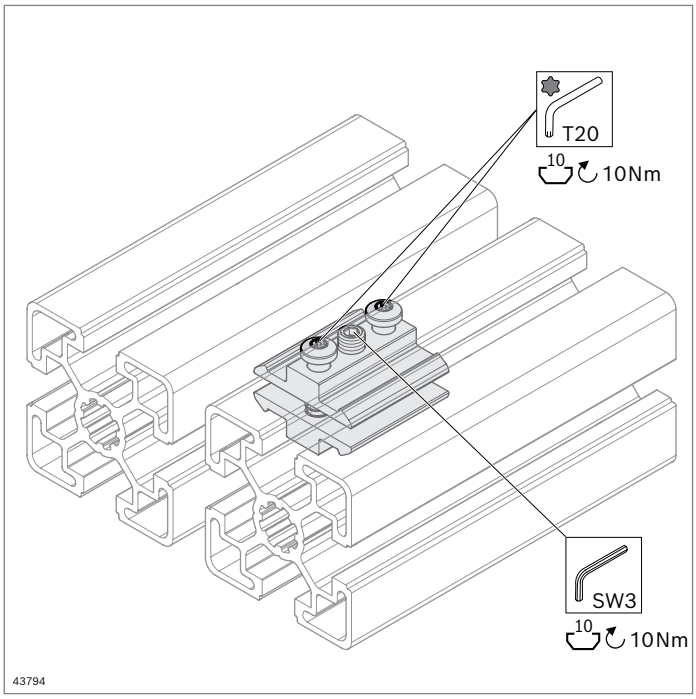

Quick parallel connector





- For connection of two strut profiles, axially parallel with 10 mm distance
- Parallel connector pre-assembled
- The center screw is used for tightening
- Connection possible at any point along the profile slot
- Transferable displacement force per parallel connector: 500 N
- No machining of the profile necessary



Slot	F_{max}
10	500 N

Quick parallel connector		Slot		No.
		10	10	**3 842 564 742**
Material:	Steel; zinc-plated			



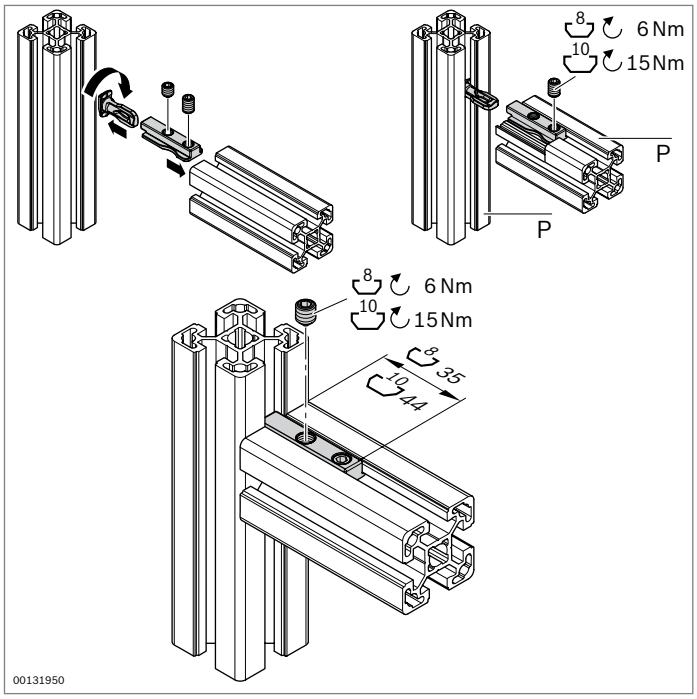

P	F_{max}	M_{max}	M_{max}
30x...	1000 N	35 Nm	15 Nm
45x...L	3500 N	110 Nm	30 Nm
40x..., 45x..., 50x..., 90x...	3500 N	110 Nm	30 Nm
60x...	3500 N	195 Nm	60 Nm


Coupling

- Tensioning connector for fast assembly
- The connector can be moved within the slot
- Easily accessible screws
- Three slots are left free for mounting of panel elements
- Profile finishing: Not required

Technical data (p. 18-18)

Coupling	Slot	P	ESD		No.
8	8	30x...		10	**3 842 538 489**
10L	10	45x...L 45x90SL 90x90SL		10	**3 842 538 491**
10	10	40x...L, 45x..., 50x...L, 60x..., 60x...L 80x...L 90x..., 90x...L, 45x90x90L		10	**3 842 538 490**


Material: Steel; zinc-plated

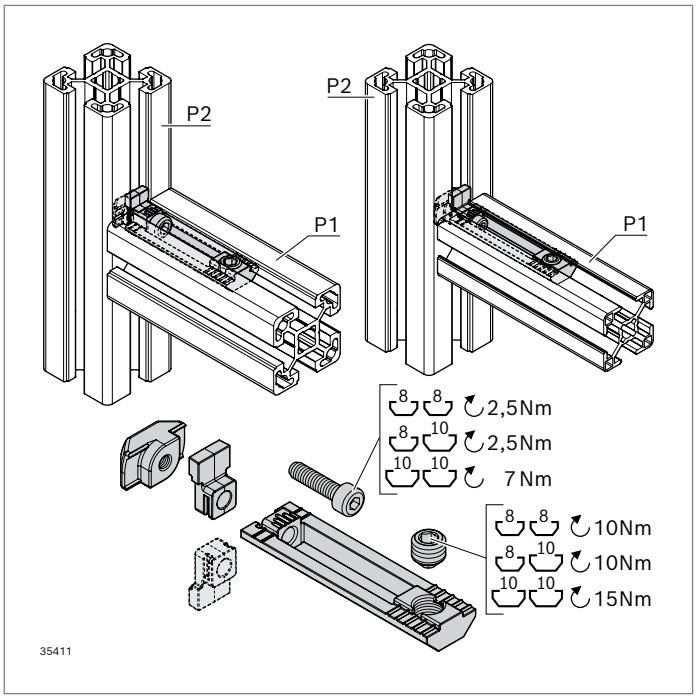

Slot connector




- Slot connector for fast assembly
- The connector can be moved within the slot
- Easily accessible screws
- Anti-torsion element can be removed if necessary, variable alignment (slot 10/10; 8/10)
- Headless setscrew, preassembled
- Profile finishing: Not required

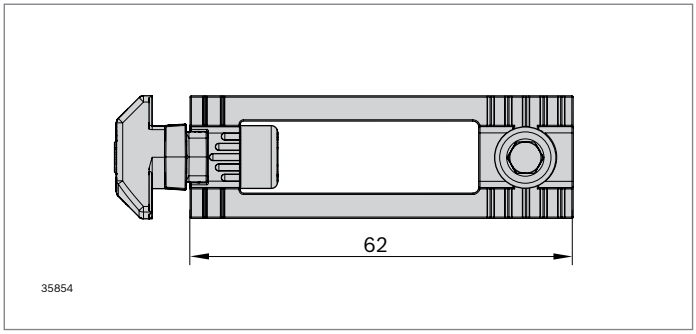


Slot connector	P1	P2	ESD		No.
8/8	8	8		10	**3 842 558 566**
8/10	8	10		10	**3 842 558 567**
10/10	10	10		10	**3 842 558 568**

Material: Slot connector: Steel; zinc-plated
Anti-torsion element: PA6

Slot	F_{max}	M_{max}	M_{max}
8 / 8	1000 N	35 Nm	15 Nm
8 / 10	1000 N	35 Nm	15 Nm
10 / 10	3000 N	110 Nm	30 Nm

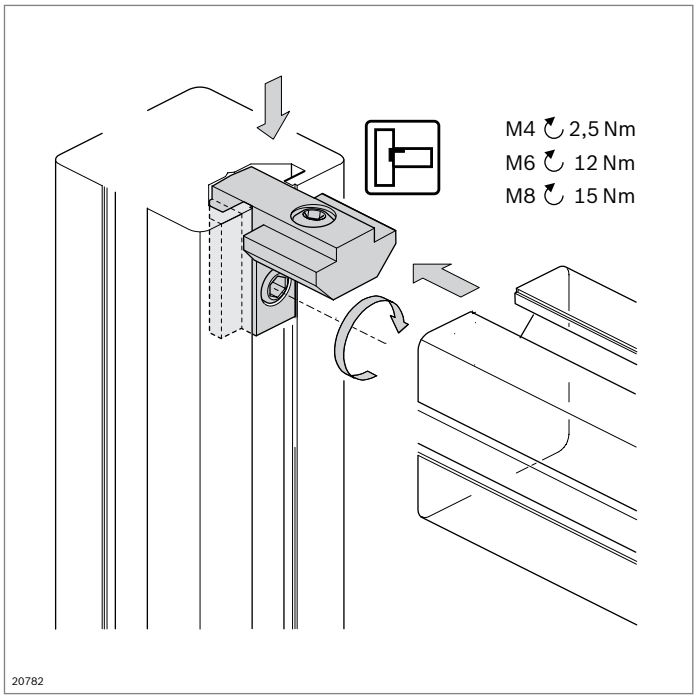


Inner bracket



- For elegant, easy-to-assemble profile connections
- Especially suitable for constructing door frames, protective grilles, or partition walls
- The inner bracket, 6 mm slot, can also be used as an inner bracket R, 6 mm slot
- Profile finishing: Not required

Technical data (p. 18-18)




FS1



ISO 4027
M4x6

Inner bracket	Slot	ESD		No.	FS
	6 / 6		10	**3 842 535 574**	2xFS1
Material:	Sheet steel; zinc-plated Fastening material: Steel; zinc-plated				
Scope of delivery:	Incl. fastening material (FS)				




Slot	F_{max}	M_{max}
8 / 8	2200 N	50 Nm

FS2



DIN 913
M6x8

Inner bracket	Slot	ESD		No.	FS
	8 / 8		10	**3 842 535 578**	2xFS2
Material:	Cast steel; zinc-plated Fastening material: Steel; zinc-plated				
Scope of delivery:	Incl. fastening material (FS)				




Slot	F_{max}	M_{max}
10 / 10	2800 N	100 Nm

FS3



ISO 4026
M8x12


Inner bracket	Slot	ESD		No.	FS
	10 / 10		10	**3 842 535 572**	2xFS3
Material:	Cast steel; zinc-plated Fastening material: Steel; zinc-plated				
Scope of delivery:	Incl. fastening material (FS)				

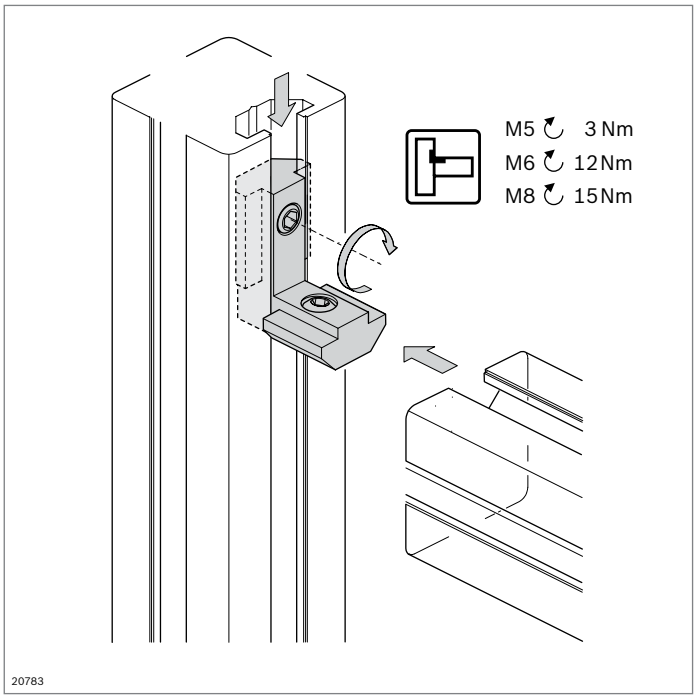

Inner bracket R

- For elegant, easy-to-assemble profile connections
- Especially suitable for constructing door frames, protective grilles, or partition walls
- Profile finishing: Not required


Technical data (p. 18-18)



Slot	F_{max}	M_{max}
6 / 6	600 N	10 Nm

FS1
DIN 913
M5x5


Inner bracket R	Slot	ESD		No.	FS
	6 / 6		10	**3 842 535 575**	2xFS1
Material:	Cast steel; zinc-plated Fastening material: Steel; zinc-plated				
Scope of delivery:	Incl. fastening material (FS)				



Slot	F_{max}	M_{max}
6 / 8	600 N	10 Nm

FS1
DIN 913
M5x5

Inner bracket R	Slot	ESD		No.	FS
	6 / 8		10	**3 842 535 573**	2xFS1
Material:	Cast steel; zinc-plated Fastening material: Steel; zinc-plated				
Scope of delivery:	Incl. fastening material (FS)				




Slot	F_{max}	M_{max}
8 / 8	2500 N	50 Nm

FS2
DIN 913
M6x8

Inner bracket R	Slot	ESD		No.	FS
	8 / 8		10	**3 842 535 577**	2xFS2

Material: Cast steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




Slot	F_{max}	M_{max}
8 / 10	2500 N	50 Nm

FS2
DIN 913
M6x8

FS3
DIN 913
M6x12

Inner bracket R	Slot	ESD		No.	FS
	8 / 10		10	**3 842 535 576**	FS2, FS3

Material: Cast steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




Slot	F_{max}	M_{max}
10 / 10	3000 N	100 Nm

FS4
ISO 4026
M8x12

Inner bracket R	Slot	ESD		No.	FS
	10 / 10		10	**3 842 535 571**	2xFS4


Material: Cast steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

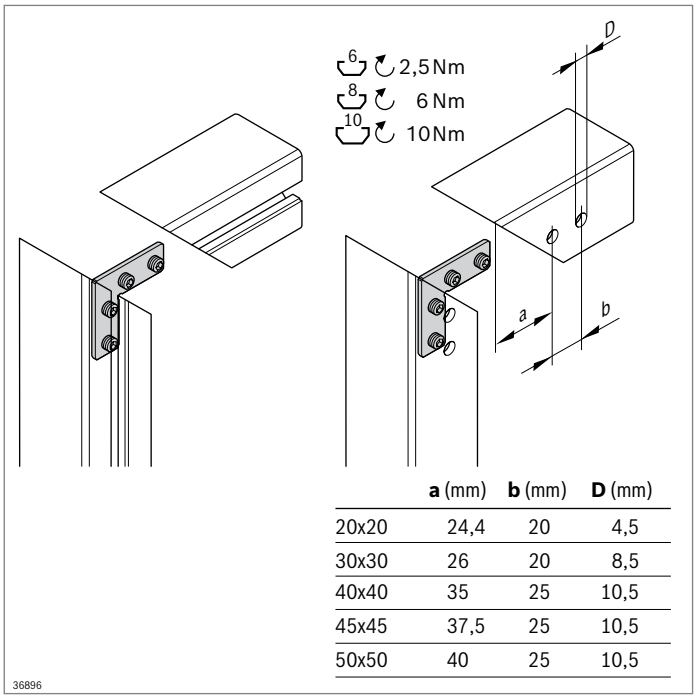

	a (mm)	**b** (mm)	**D** (mm)
20x20	24,4	20	4,5
30x30	26	20	8,5
40x40	35	25	10,5
45x45	37,5	25	10,5
50x50	40	25	10,5

Miter bracket


- For right-angled connections of miter-cut profiles
- Profile finishing with open profile slots: Not required
- Profile finishing with closed profile slots: Through-holes for screwdriver



FS1
DIN EN ISO 4027 M4x5

Miter bracket	Slot	ESD		No.	FS
	6		20	**3 842 535 626**	4xFS1


Material: Steel; stainless
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)



FS2
DIN EN ISO 4026 M8x8

Miter bracket	Slot	ESD		No.	FS
	8		20	**3 842 535 627**	4xFS2


Material: Steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




FS3
DIN EN ISO 4026 M10x10

Miter bracket	Slot	ESD		No.	FS
	10		20	**3 842 563 228**	4xFS3

Material: Steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

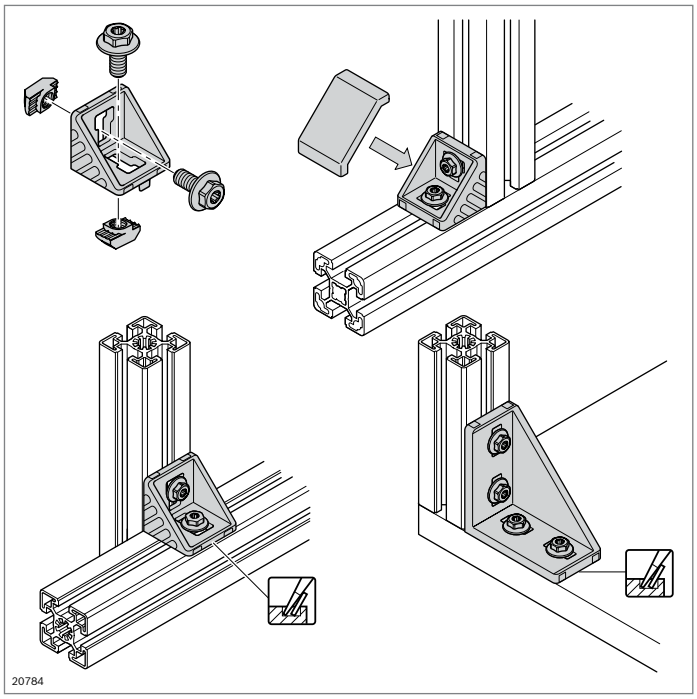

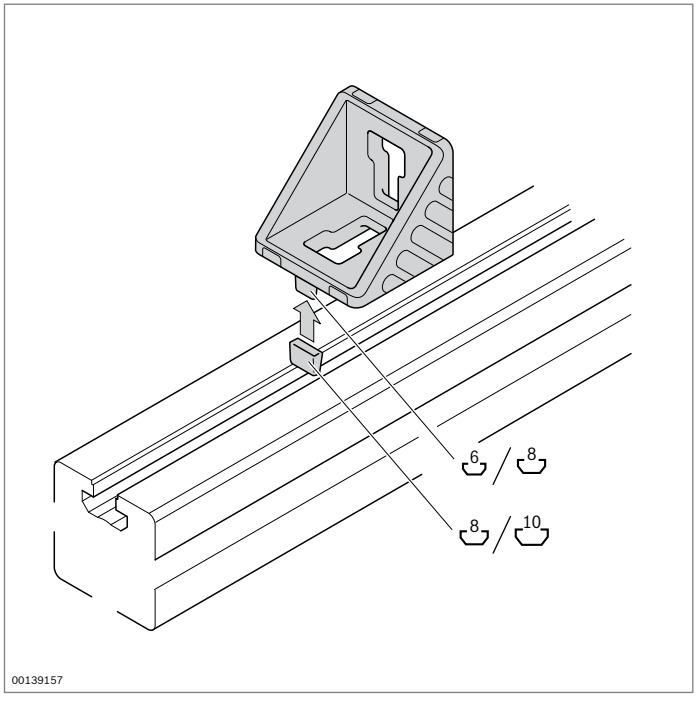

Bracket

designLINE


- Brackets with centering lugs for rapid, precise assembly with protection against turning
- Centering lugs can be easily broken off for assembly on plates or at right angles to the slot
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Intermediate element for positioning brackets in the next largest slot
- Sliding block offset for off-center positioning of the 45/45 bracket
- Cover cap for preventing dirt, available in signal gray (RAL 7004) and black ESD (RAL 9005)
- Profile finishing: Not required

Technical data (p. 18-19)

Notice: The collar screws enable the brackets to be assembled really quickly and easily (p. 3-5)

20x20



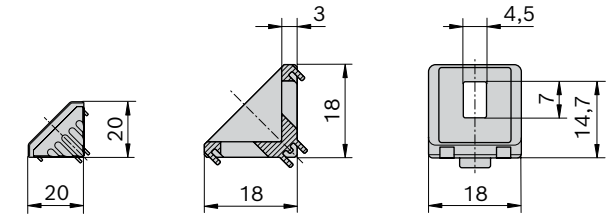


36866

20x20	Slot	ESD		No.	FS
Set (standard)	6 / 6		1	**3 842 523 511**	2xFS1
designLINE set	6 / 6		1	**3 842 551 596**	2xFS1
Bracket (standard)	6		100	**3 842 523 508**	
Cover cap, signal gray			100	**3 842 548 842**	
Cover cap, black			20	**3 842 548 843**	
Intermediate element for 8 mm slot	6 / 8		100	**3 842 523 516**	


Material:	Bracket Diecast aluminum *designLINE* bracket: painted (RAL 9006) Intermediate element: PA; black Cover cap: PP Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)


Type	Fmax	Mmax	Mmax	Mmax
20x20	700 N	6 Nm	25 Nm	–

FS1



20x40



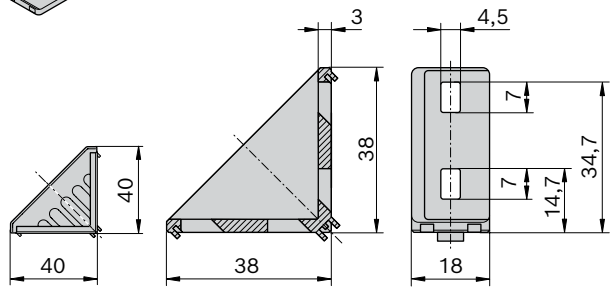


36867

20x40	Slot	ESD		No.	FS
Set (standard)	6 / 6		1	**3 842 523 520**	4xFS1
designLINE set	6 / 6		1	**3 842 551 597**	4xFS1
Bracket (standard)	6		20	**3 842 523 517**	
Cover cap, signal gray			20	**3 842 548 844**	
Cover cap, black			20	**3 842 548 845**	
Intermediate element for 8 mm slot	6 / 8		100	**3 842 523 516**	

Material:	Bracket Diecast aluminum *designLINE* bracket: painted (RAL 9006) Intermediate element: PA; black Cover cap: PP Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
20x40	1400 N	15 Nm	50 Nm	8 Nm


FS1



20x28





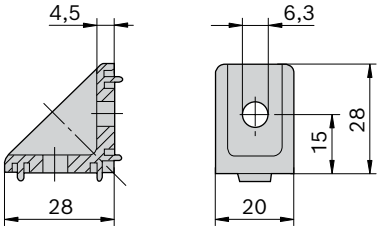

00125983


20x28	Slot	ESD		No.	FS
Set (standard)	8 / 8		1	**3 842 502 137**	2xFS1
Bracket (standard)	8		100	**3 842 501 587**	


Material: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)


FS1



30x30





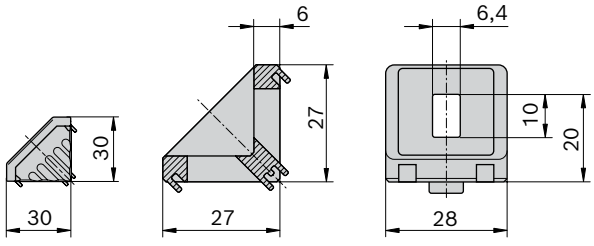


36868

30x30	Slot	ESD		No.	FS
Set (standard)	8 / 8		1	**3 842 523 528**	2xFS2
	8 / 10		1	**3 842 523 530**	1xFS2, 2xFS3, 1xFS4
	10 / 10		1	**3 842 523 532**	4xFS3, 2xFS4
designLINE set	8 / 8		1	**3 842 551 598**	2xFS2
	8 / 10		1	**3 842 551 600**	1xFS2, 2xFS3, 1xFS4
	10 / 10		1	**3 842 551 599**	4xFS3, 2xFS4
Bracket (standard)	8		100	**3 842 523 525**	
Cover cap, signal gray			100	**3 842 548 846**	
Cover cap, black			20	**3 842 548 847**	
Intermediate element for 10 mm slot	8 / 10		100	**3 842 523 537**	


Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Intermediate element: PA; black
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	F_{max}	M_{max}	M_{max}	M_{max}
30x30	1250 N	25 Nm	75 Nm	–


FS2




FS3



FS4



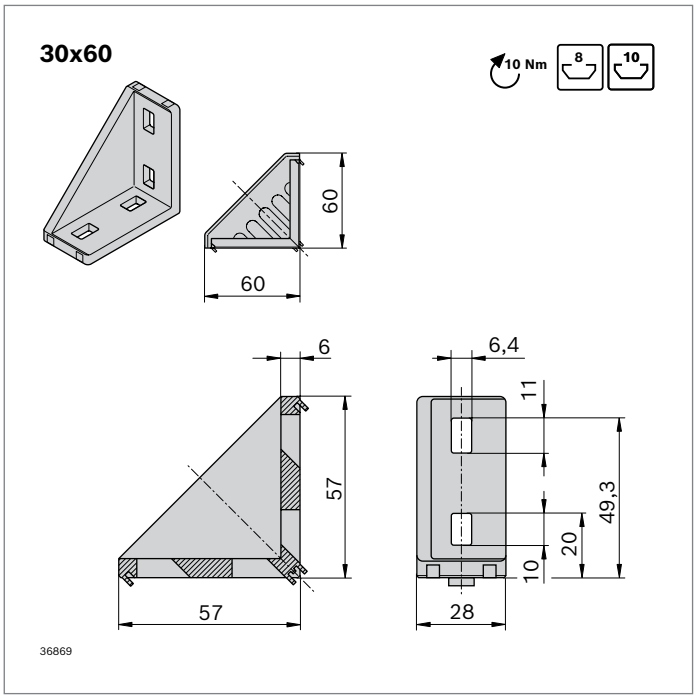



30x60	Slot	ESD		No.	FS
Set (standard)	8 / 8		1	**3 842 523 541**	4xFS2
designLINE set	8 / 8		1	**3 842 551 601**	4xFS2
Bracket (standard)	8		20	**3 842 523 538**	
Cover cap, signal gray			20	**3 842 548 848**	
Cover cap, black			20	**3 842 548 849**	
Intermediate element for 10 mm slot	8 / 10		100	**3 842 523 537**	

Material:	Bracket Diecast aluminum *designLINE* bracket: painted (RAL 9006) Intermediate element: PA; black Cover cap: PP Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)

Type	F_{max}	M_{max}	M_{max}	M_{max}
30x60	2500 N	100 Nm	170 Nm	25 Nm

FS2



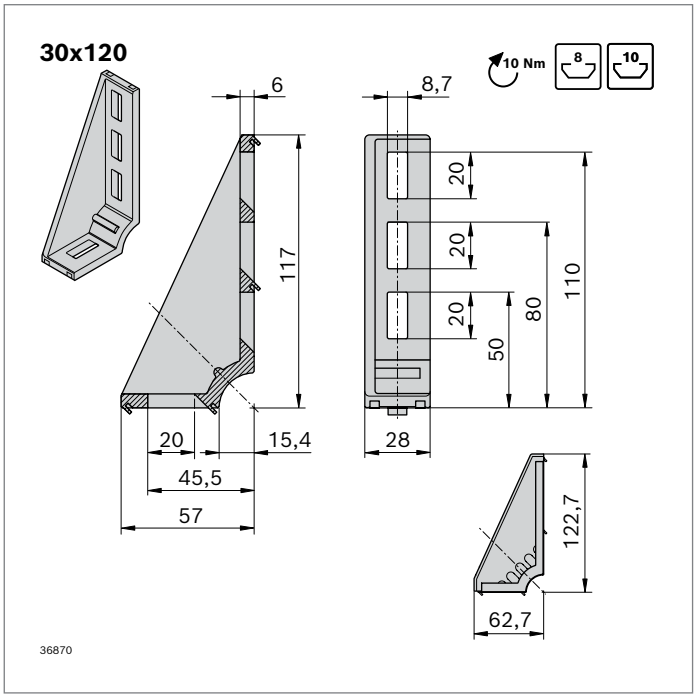


30x120	Slot	ESD		No.	FS
designLINE set	8 / 8		1	**3 842 551 602**	2xFS6
Bracket (standard)	8		20	**3 842 523 587**	
Cover cap, signal gray			20	**3 842 548 850**	
Cover cap, black			20	**3 842 548 851**	
Intermediate element for 10 mm slot	8 / 10		100	**3 842 523 537**	


Material:	Bracket Diecast aluminum *designLINE* bracket: painted (RAL 9006) Intermediate element: PA; black Cover cap: PP Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)

Type	F_{max}	M_{max}	M_{max}
30x120	3750 N	100 Nm	47 Nm

FS6



60x60

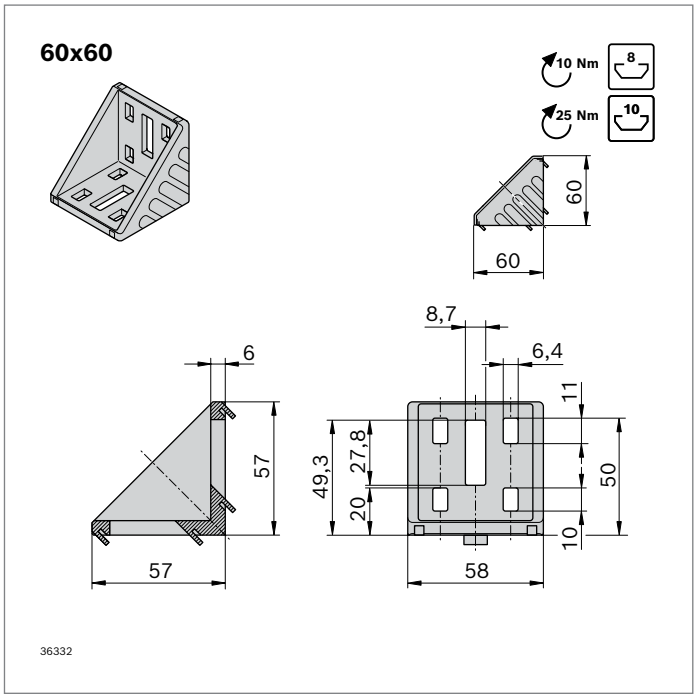


60x60	Slot	ESD		No.	FS
Set (standard)	8 / 8		1	**3 842 523 549**	8xFS2
	8 / 10		1	**3 842 523 551**	4xFS2, 1xFS5
	10 / 10		1	**3 842 523 553**	2xFS5
designLINE set	8 / 8		1	**3 842 551 609**	8xFS2
	8 / 10		1	**3 842 551 610**	4xFS2, 1xFS5
	10 / 10		1	**3 842 551 611**	2xFS5
Bracket (standard)	8		20	**3 842 523 546**	
Cover cap, signal gray			20	**3 842 548 852**	
Cover cap, black			20	**3 842 548 853**	
Intermediate element for 10 mm slot	10		100	**3 842 523 537**	


Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Intermediate element: PA; black
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Slot	Fmax	Mmax	Mmax	Mmax
60x60	8	5000 N	320 Nm	370 Nm	110 Nm
	10	3000 N	125 Nm	150 Nm	–


FS2



FS5



40x40

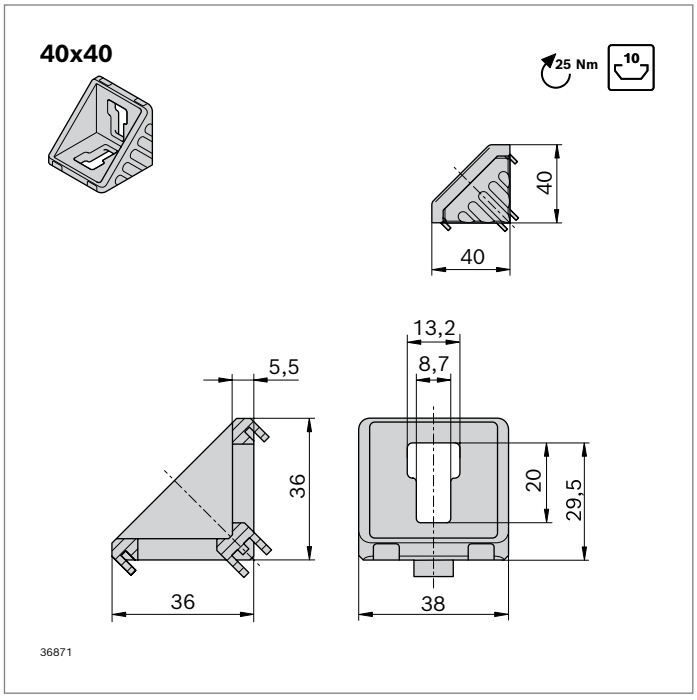



40x40	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 529 383**	2xFS5
designLINE set	10 / 10		1	**3 842 551 603**	2xFS5
Bracket (standard)	10		100	**3 842 528 967**	
Cover cap, signal gray			100	**3 842 548 854**	
Cover cap, black			20	**3 842 548 855**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
40x40	3000 N	55 Nm	145 Nm	35 Nm

FS5




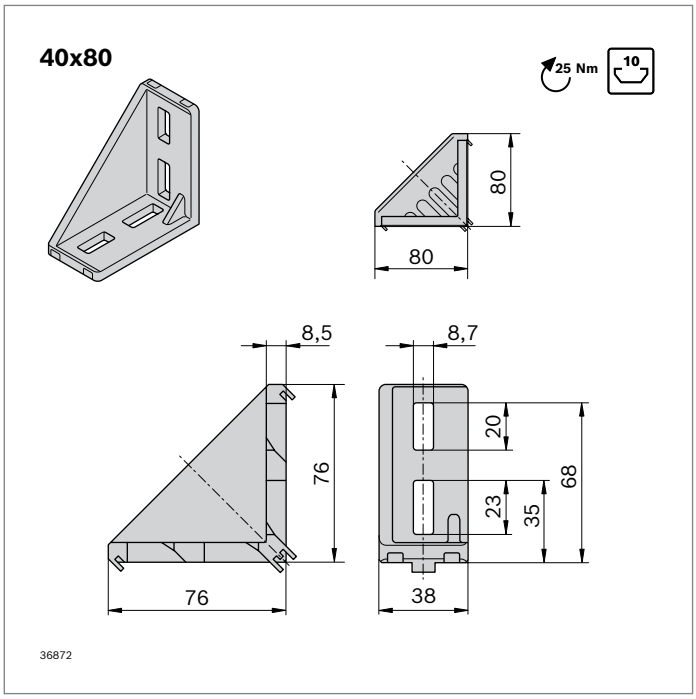


40x80	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 529 386**	4xFS7
designLINE set	10 / 10		1	**3 842 551 604**	4xFS7
Bracket (standard)	10		20	**3 842 529 005**	
Cover cap, signal gray			20	**3 842 548 856**	
Cover cap, black			20	**3 842 548 857**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
40x80	6000 N	180 Nm	400 Nm	60 Nm




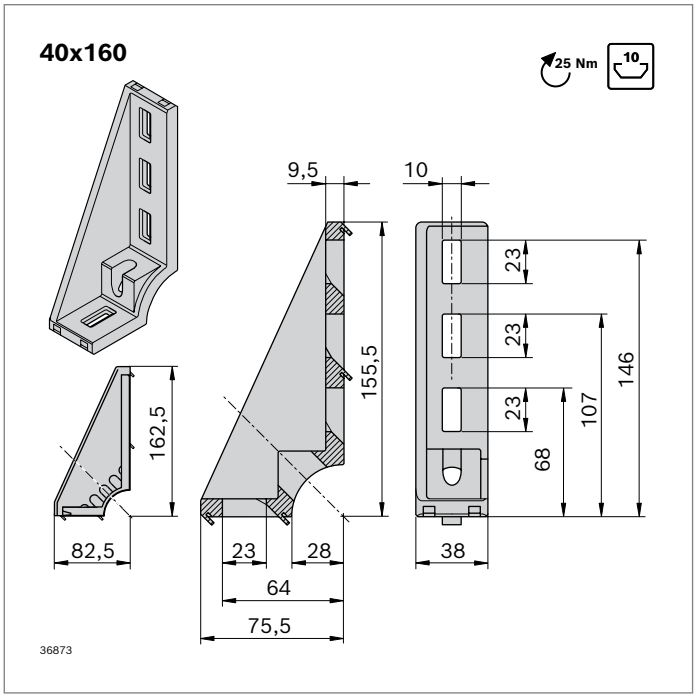


40x160	Slot	ESD		No.	FS
designLINE set	10 / 10		1	**3 842 551 605**	2x FS7
Bracket (standard)	10		20	**3 842 529 006**	
Cover cap, signal gray			20	**3 842 548 858**	
Cover cap, black			20	**3 842 548 859**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax
40x160	9000 N	250 Nm	60 Nm



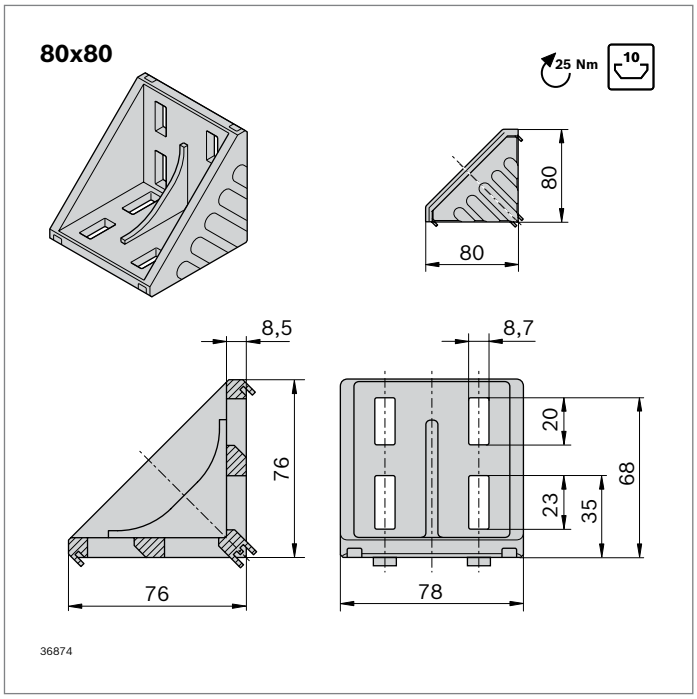



80x80	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 530 360**	8xFS7
designLINE set	10 / 10		1	**3 842 551 612**	8xFS7
Bracket (standard)	10		20	**3 842 530 231**	
Cover cap, signal gray			20	**3 842 548 860**	
Cover cap, black			20	**3 842 548 861**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS)

Type	F_{max}	M_{max}	M_{max}	M_{max}
80x80	14000 N	500 Nm	1000 Nm	400 Nm



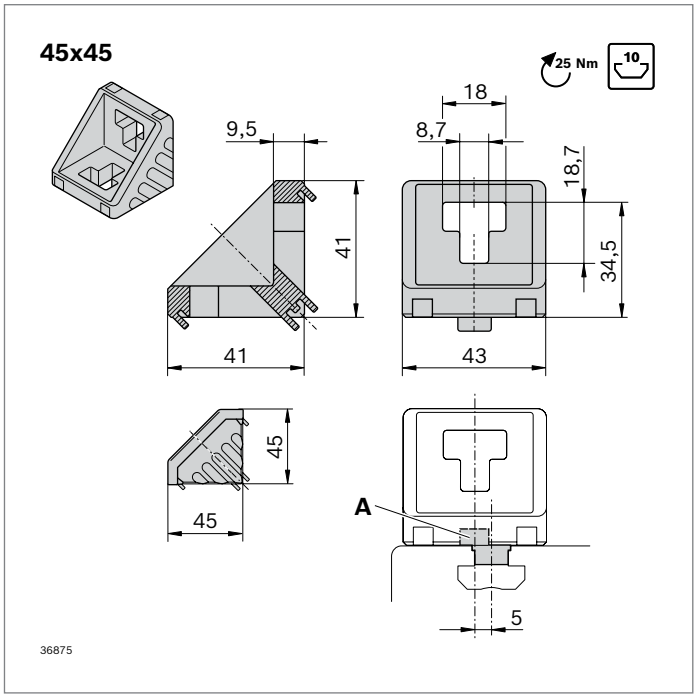



45x45	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 523 561**	2xFS7
designLINE set	10 / 10		1	**3 842 551 606**	2xFS7
Bracket (standard)	10		100	**3 842 523 558**	
Cover cap, signal gray			100	**3 842 548 862**	
Cover cap, black			20	**3 842 548 863**	
Sliding block, offset (**A**)	10		100	**3 842 523 593**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Sliding block, offset: PA; black
Cover cap: PP
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS)

Type	F_{max}	M_{max}	M_{max}	M_{max}
45x45	3000 N	60 Nm	160 Nm	–




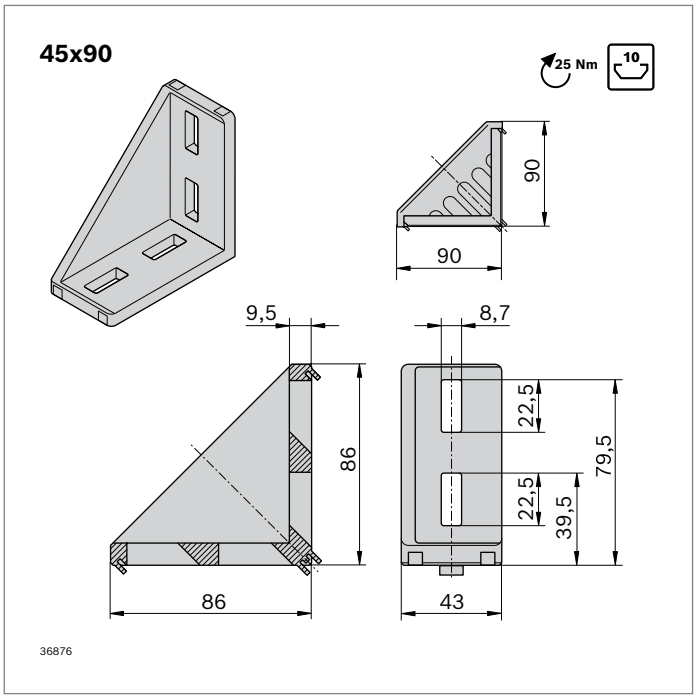


45x90	Slot	ESD		No.	FS
Set (standard)	10 / 10	ESD	1	**3 842 523 570**	4xFS7
designLINE set	10 / 10	ESD	1	**3 842 551 607**	4xFS7
Bracket (standard)	10	ESD	100	**3 842 523 567**	
Cover cap, signal gray			20	**3 842 548 864**	
Cover cap, black		ESD	20	**3 842 548 865**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
45x90	6000 N	180 Nm	400 Nm	60 Nm




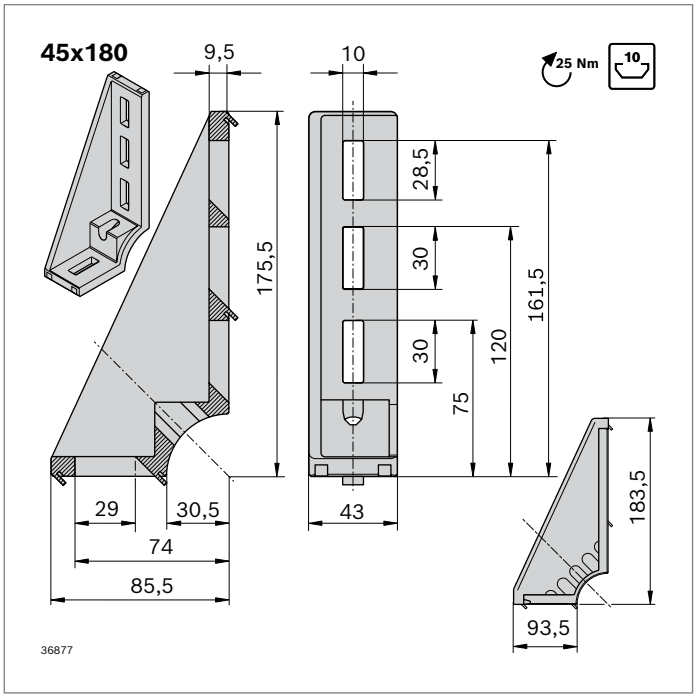


45x180	Slot	ESD		No.	FS
designLINE set	10 / 10	ESD	1	**3 842 551 608**	2xFS7
Bracket (standard)	10	ESD	20	**3 842 523 583**	
Cover cap, signal gray			20	**3 842 548 866**	
Cover cap, black		ESD	20	**3 842 548 867**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax
45x180	9000 N	250 Nm	65 Nm



90x90

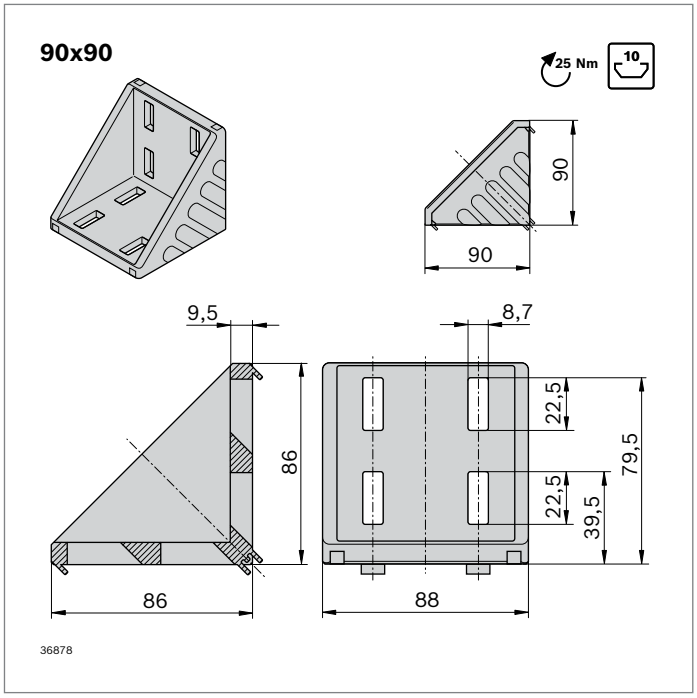


90x90	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 523 578**	8xFS7
designLINE set	10 / 10		1	**3 842 551 613**	8xFS7
Bracket (standard)	10		20	**3 842 523 575**	
Cover cap, signal gray			20	**3 842 548 868**	
Cover cap, black			20	**3 842 548 869**	


Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
90x90	12000 N	370 Nm	800 Nm	200 Nm

FS7



43x42

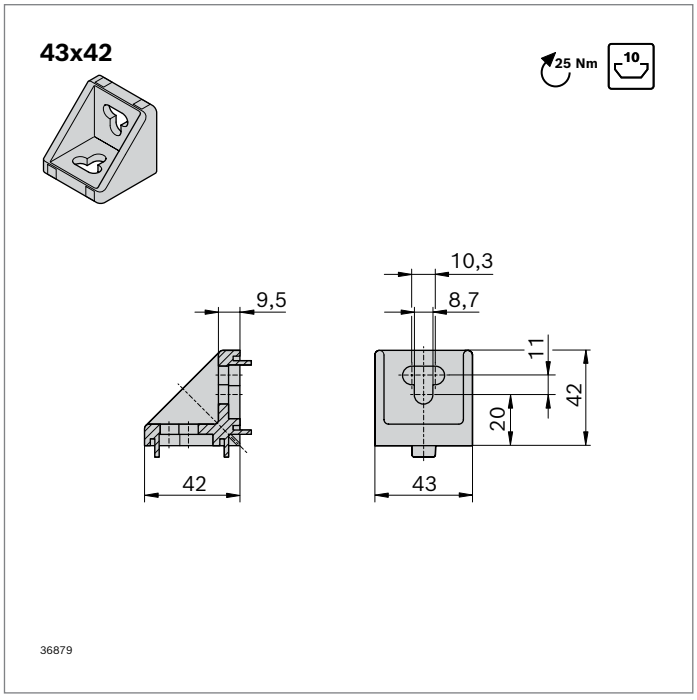



43x42	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 352 009**	2xFS7
Bracket (standard)	10		100	**3 842 348 526**	

Material: Bracket Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
43x42	2000 N	–	160 Nm	–

FS7




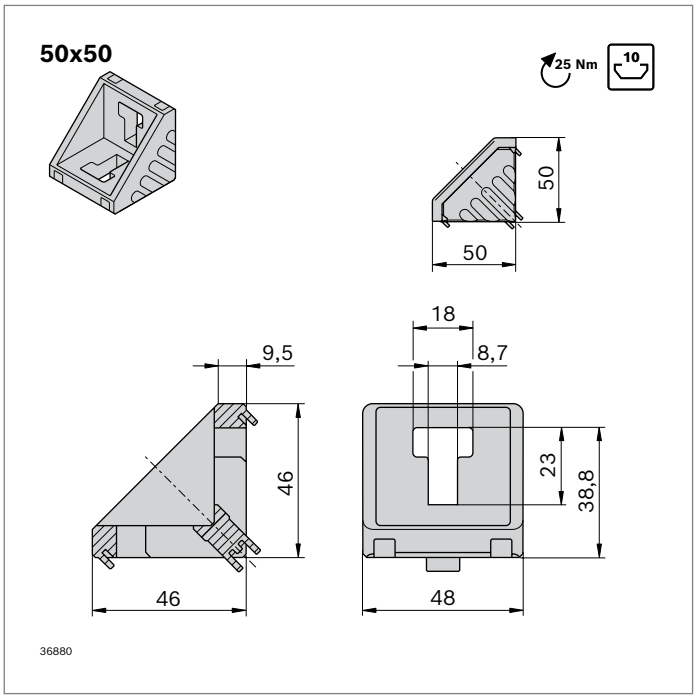


50x50	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 530 259**	2xFS7
Bracket (standard)	10		20	**3 842 530 381**	
Cover cap, signal gray			20	**3 842 548 870**	
Cover cap, black			20	**3 842 548 871**	

Material: Bracket Diecast aluminum
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
50x50	4000 N	125 Nm	250 Nm	38 Nm




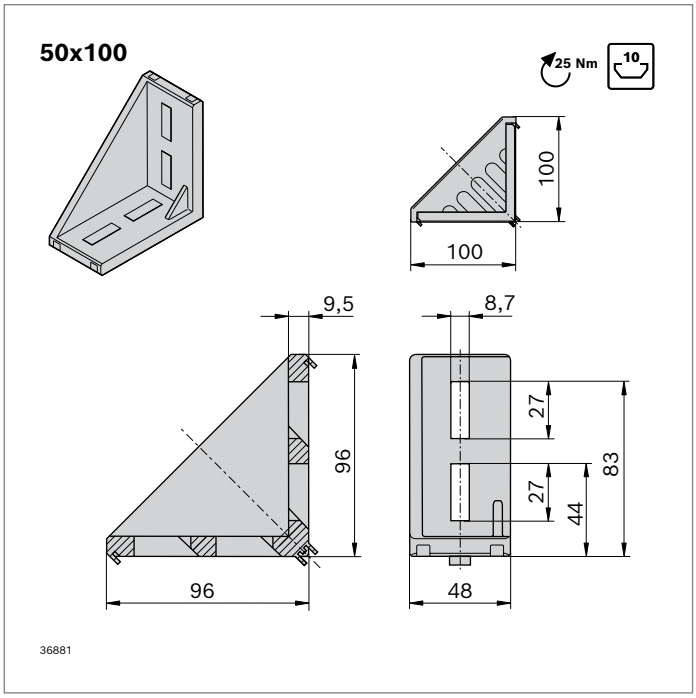


50x100	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 530 260**	4xFS7
Bracket (standard)	10		20	**3 842 530 382**	
Cover cap, signal gray			20	**3 842 548 872**	
Cover cap, black			20	**3 842 548 873**	

Material: Bracket Diecast aluminum
Cover cap: PP
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
50x100	7500 N	300 Nm	600 Nm	73 Nm



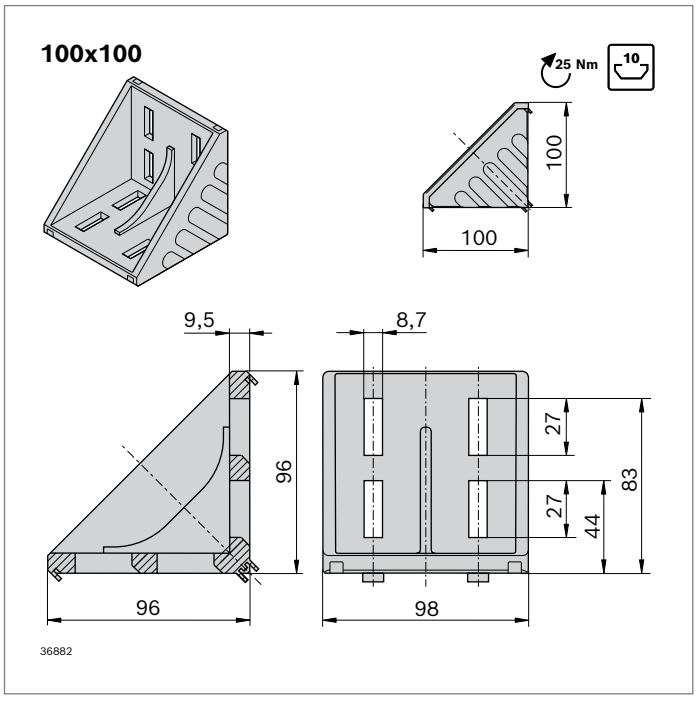



100x100	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 530 361**	8xFS7
Bracket (standard)	10		20	**3 842 530 460**	
Cover cap, signal gray			20	**3 842 548 874**	
Cover cap, black			20	**3 842 548 875**	

Material: Bracket Diecast aluminum
Cover cap: PP
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS)

Type	Fmax	Mmax	Mmax	Mmax
100x100	15000 N	550 Nm	1100 Nm	480 Nm




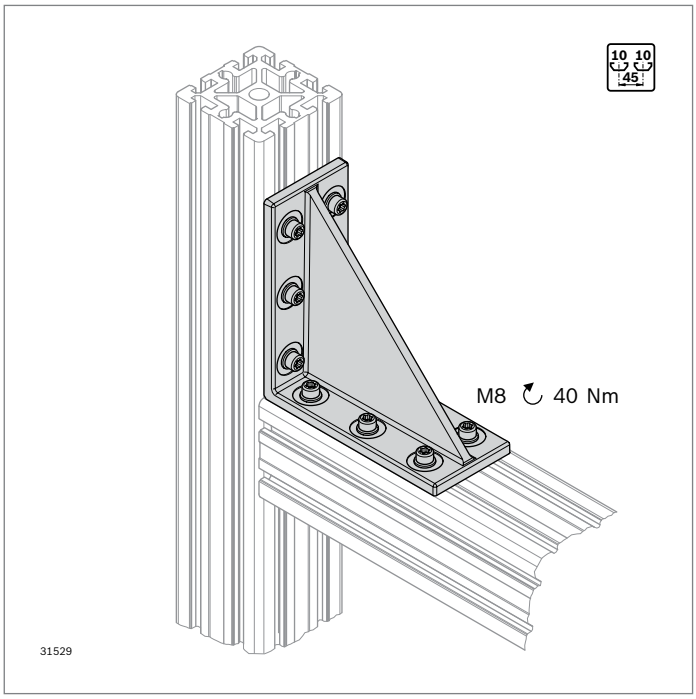

Heavy-duty connector 180x180 dynamic load


- Heavy-duty connector for reliable absorption of high forces
- Can be used for both static and dynamic forces
- Connection possible in any position
- Profile finishing: Not required
- Calculation program for static and dynamic forces included in MT*pro* planning software
- Focus profile: 90x90, 90x180, 90x360

Required accessories:
Mounting kit

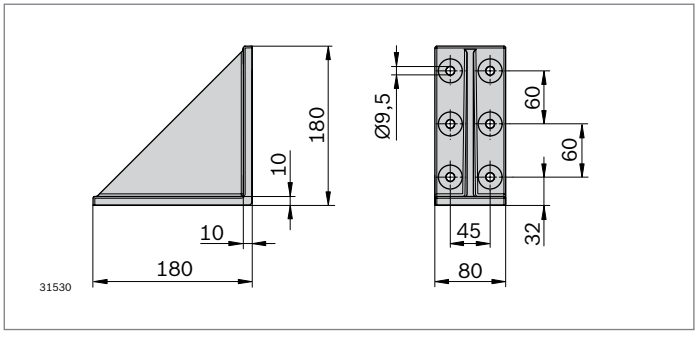

180x180		Slot	ESD	No.
		10		**3 842 555 616**
Material:	Cast iron; zinc-plated			
Scope of delivery:	Bracket			

Type	F_{max}	M_{max}	M_{max}	M_{max}
180x180	30000 N	5600 Nm	5600 Nm	1400 Nm




Slot	F_{max}
10 (M8)	6000 ... 18000 N

Mounting kit

- For connecting a heavy-duty angle to a profile
- Set consists of 4 sliding blocks and 12 screws with washers


Mounting kit		Slot	M	ESD		No.
		10	8		Set	**3 842 548 955**
Material:	Screws: Steel; zinc-plated Sliding block: Steel; zinc-plated					
Scope of delivery:	4 x sliding blocks, 12 x washers, 12 x screws M8 10.9 microencapsulated					

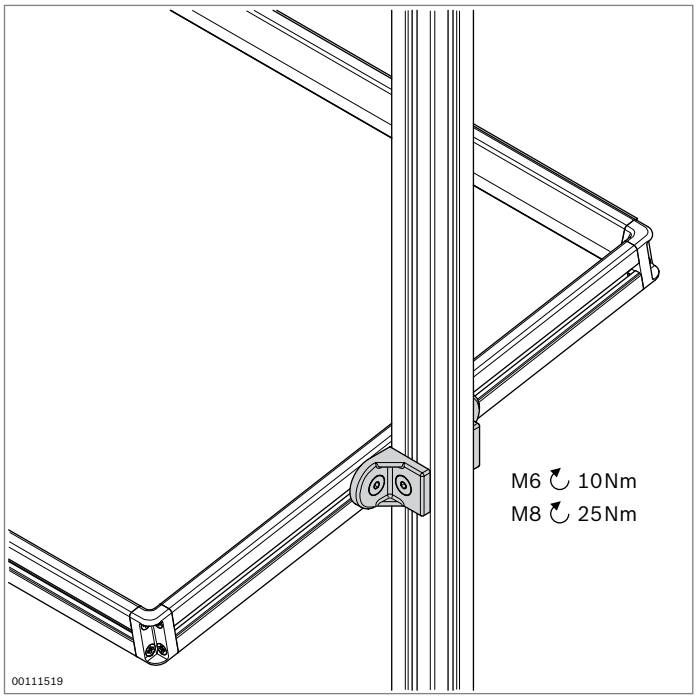


Bracket R


designLINE

- For connecting profiles at any angle
- No interfering edges thanks to rounded bracket
- Brackets with centering lugs for rapid, precise assembly with protection against turning
- Centering lugs can be easily broken off for assembly on plates or at right angles to the slot
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing: Not required











R28x38	Slot	ESD		No.	FS
Set (standard)	8 / 10		1	**3 842 515 547**	FS1, FS2, 2xFS3
	10 / 10		1	**3 842 521 580**	2xFS2, 4xFS3
designLINE set	8 / 10		1	**3 842 538 703**	FS1, FS2, 2xFS3
	10 / 10		1	**3 842 538 704**	2xFS2, 4xFS3
Bracket (standard)	8 / 10		100	**3 842 515 473**	


Material: Bracket Diecast zinc
designLINE bracket: painted (RAL 9006)
Intermediate element: PA; black
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)






R35x38	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 532 274**	2xFS4
designLINE set	10 / 10		1	**3 842 538 705**	2xFS4
Bracket (standard)	10		100	**3 842 529 020**	

Material: Bracket Diecast aluminum
designLINE bracket: painted (RAL 9006)
Centering bolts: PA6; black
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)






R40x43	Slot	ESD		No.	FS
Set (standard)	10 / 10		1	**3 842 518 424**	2xFS4
designLINE set	10 / 10		1	**3 842 538 706**	2xFS4
Bracket (standard)	10		100	**3 842 504 760**	

Material: Bracket Diecast zinc
designLINE bracket: painted (RAL 9006)
Centering bolts: PA6; black
Fastening material: Steel; zinc-plated


Scope of delivery: Set incl. fastening material (FS)

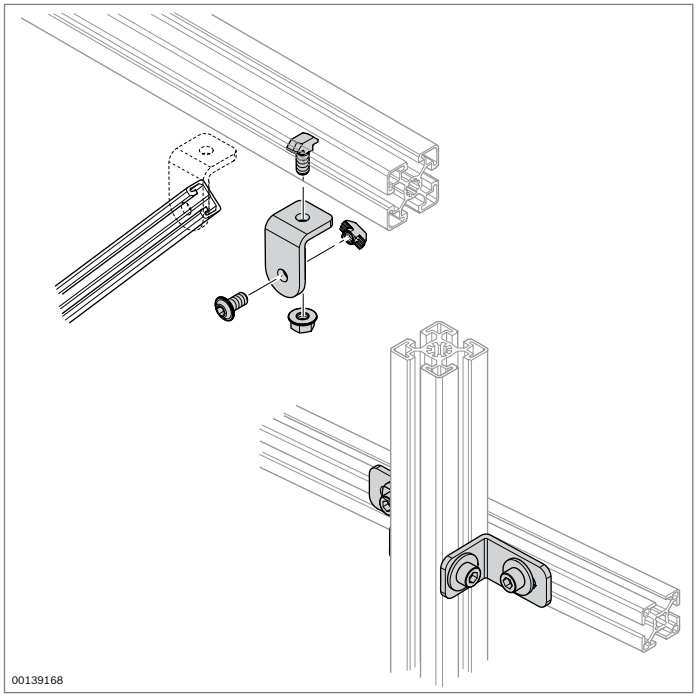



Steel bracket



- Steel bracket without centering lugs for fastening at any angle
- Profile finishing: Not required









Bracket set	Slot	ESD		No.	FS
	8 / 10		4	**3 842 537 862**	4xFS1, 4xFS2


Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)







Bracket set	Slot	ESD		No.	FS
	10 / 10		4	**3 842 537 861**	8xFS3

Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)








Bracket set	Slot	ESD		No.	FS
	10 / 10		20	**3 842 536 729**	FS4, FS5

Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated
Scope of delivery:	Set incl. fastening material (FS)

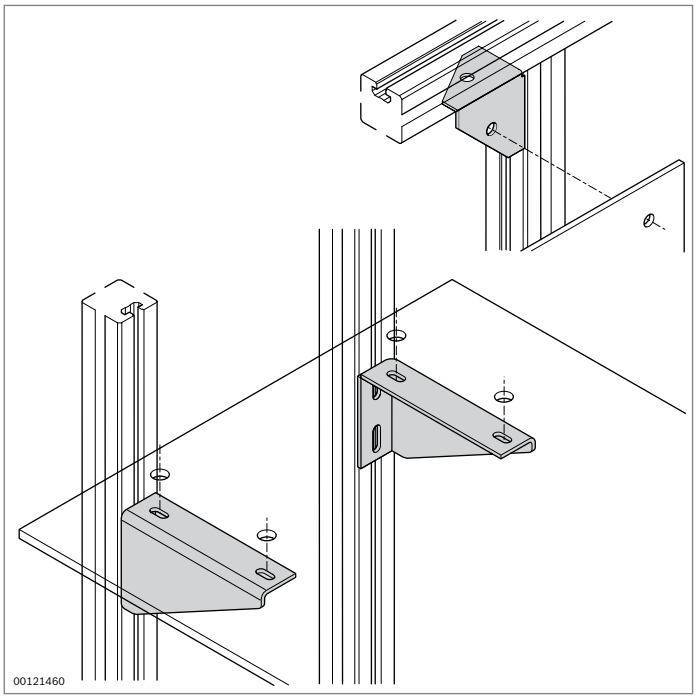


Metal bracket
Supporting bracket

Metal bracket

- Metal bracket for right-angled profile connections
- Screw fitting of panel elements in the stiffening fin bore
- Profile finishing: Not required

Supporting bracket

- Supporting bracket for fastening panel elements to profiles, e.g. for shelves
- Profile finishing: Not required




Metal bracket	ESD		No.
	ESD	20	**3 842 146 813**



Material: Sheet steel; zinc-plated

Required accessories:

- T-bolt M8x20, 10 mm slot, **3 842 528 715** (p. 3-6)
- Flange nut M8, **3 842 345 081** (p. 3-6)

Supporting bracket, left

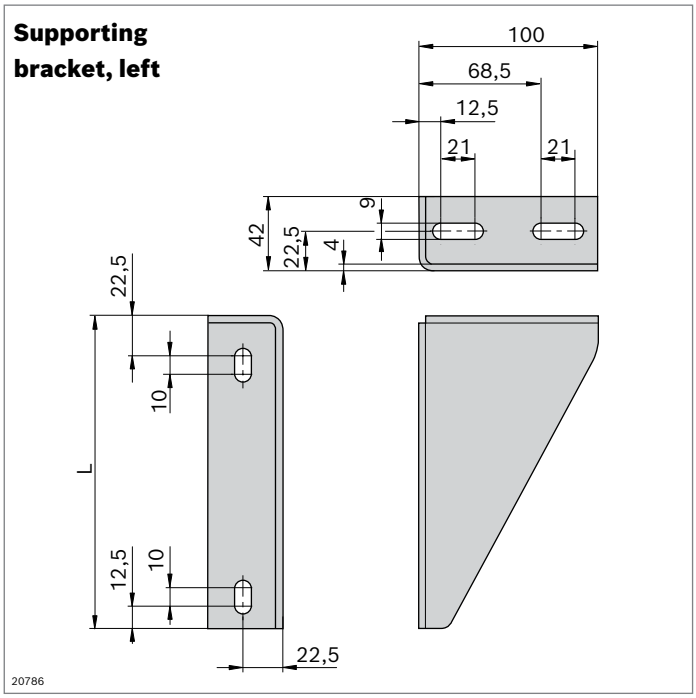



Supporting bracket	L (mm)	ESD	No.	FS
left 	255	ESD	**3 842 536 119**	2xFS1
	335	ESD	**3 842 536 121**	2xFS1
	415	ESD	**3 842 536 123**	2xFS1
	495	ESD	**3 842 536 125**	2xFS1
right 	255	ESD	**3 842 536 120**	2xFS1
	335	ESD	**3 842 536 122**	2xFS1
	415	ESD	**3 842 536 124**	2xFS1
	495	ESD	**3 842 536 126**	2xFS1

Material: Sheet steel; powder-coated, RAL 7037
Fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS)


FS1



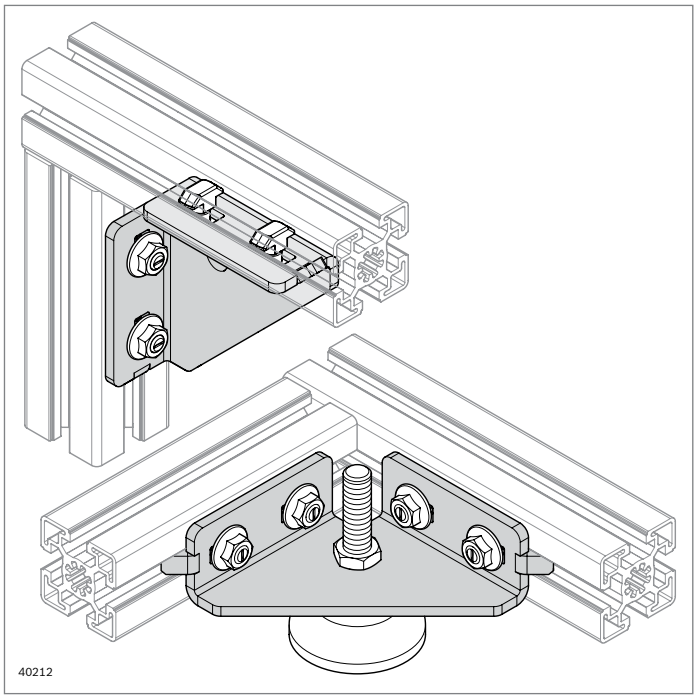

Metal bracket

- Fastening of leveling feet offset inwards and wheels with M12 thread
- Metal bracket for right-angled profile connections
- Screw fitting of panel elements in the stiffening fin bore
- Profile finishing: Not required

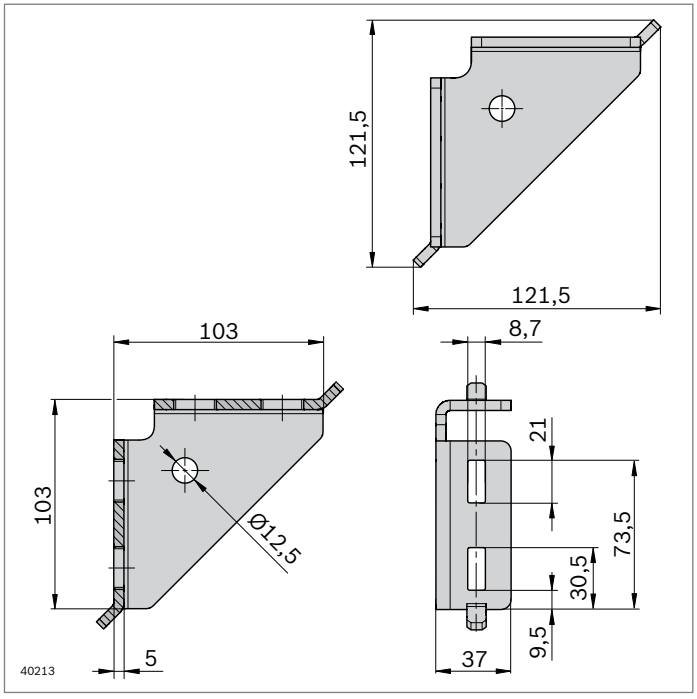


Metal bracket 103x103x37	ESD	No.	FS
	ESD	**3 842 564 154**	4xFS1, 1xFS2

Material: Sheet steel; zinc-plated
Scope of delivery: Incl. Fastening material

FS1
M8x20

FS2
ISO4032-M12

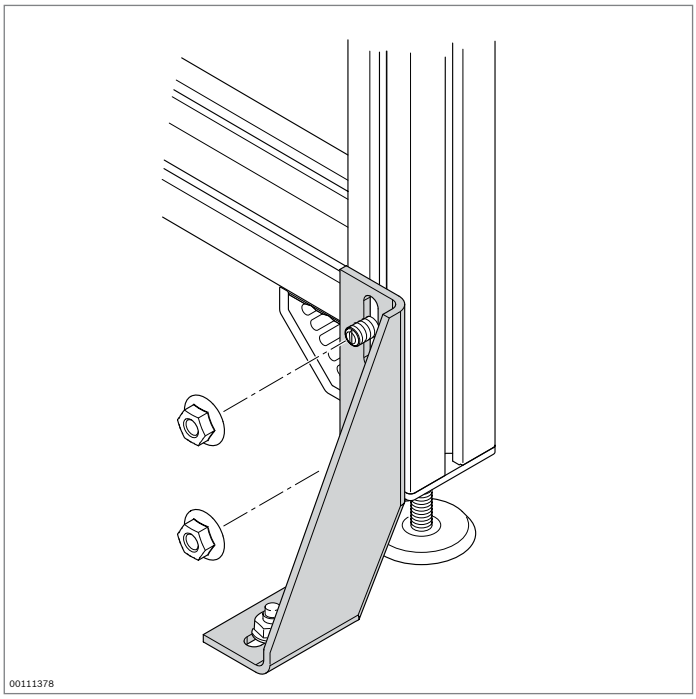


Foundation bracket



- Foundation bracket for securing frames to the floor
- The drilled hole for the floor dowel can be created without removing the foundation bracket
- Profile finishing: Not required


Required accessories:

- T-bolt M8x20, 10 mm slot, **3 842 528 715** (p. 3-6)
- Flange nut M8, **3 842 345 081** (p. 3-6)
- Floor dowel

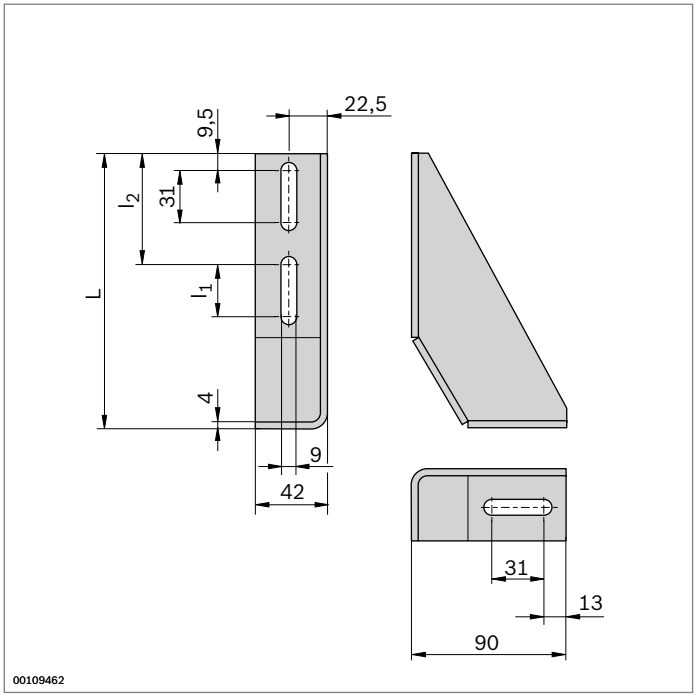


Foundation bracket	L (mm)	l_1 (mm)	l_2 (mm)		No.
	160	31	64.5	20	**3 842 146 815**
	210	91	54.5	20	**3 842 146 848**

Material: Sheet steel; zinc-plated



Floor dowel	ø	L (mm)	l_1 (mm)	$l_{2\,max}$ (mm)		No.
	8	80	65	15	100	**3 842 526 560**


Material: Steel; zinc-plated

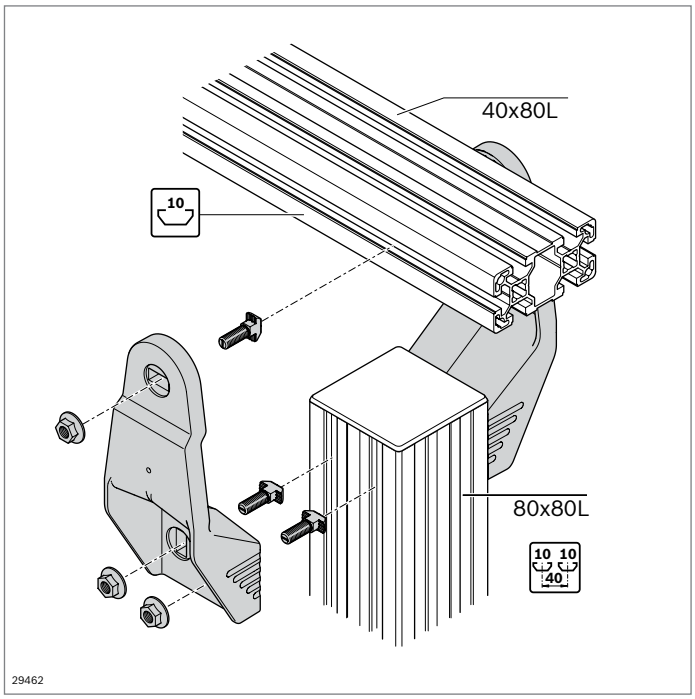


Holder AL


10


- For connecting profiles at right-angles to each other and with defined spacing, e.g. for floor supports made of 80x80L or 60x60 profiles
- Longitudinal connection possible in all profiles with 10 mm slot
- Transverse connection possible with 40 mm slot spacing
- Profile finishing: Not required







Holder		No.	FS
VF*plus* 65	Set	**3 842 546 625**	4xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		







Holder		No.	FS
VF*plus* 90	Set	**3 842 546 626**	4xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		







Holder		No.	FS
VF*plus* 120	Set	**3 842 546 627**	4xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		







Holder		No.	FS
VF*plus* 160	Set	**3 842 546 628**	6xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		






Holder		No.	FS
VF*plus* 240	Set	**3 842 546 629**	6xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		






Holder		No.	FS
VF*plus* 320	Set	**3 842 546 630**	6xFS1
Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	2 x holder, fastening material (FS)		

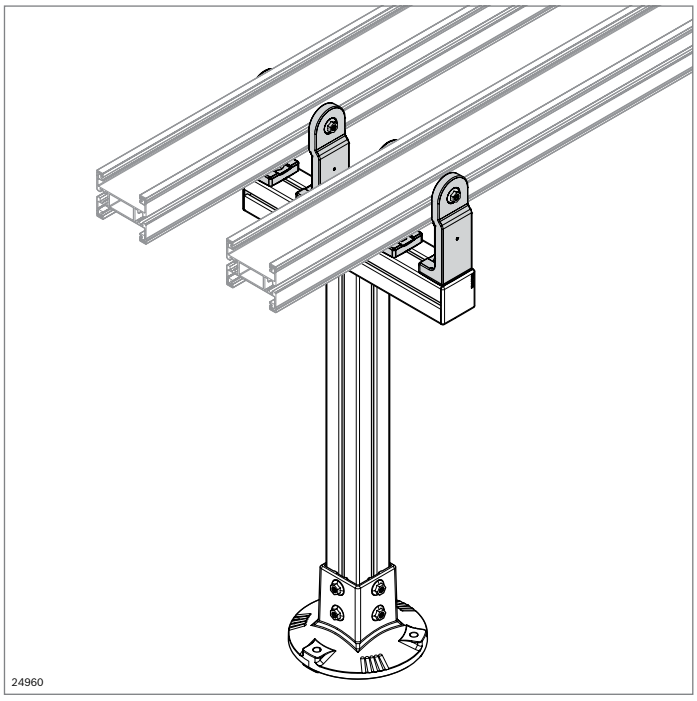


Supporting bracket AL




- Supporting bracket for connecting two profiles with defined spacing (approx. 2–3 m)
- Profile finishing: Not required
- Centering lugs make centering the supporting brackets in the slot easy
- If the centering lugs are removed, the supporting bracket can also be used for upward and downward sloping sections (up to approx. 45° depending on the return chain)
- Very simple assembly thanks to pluggable screwed connection
- Easy-to-clean design with draining surfaces

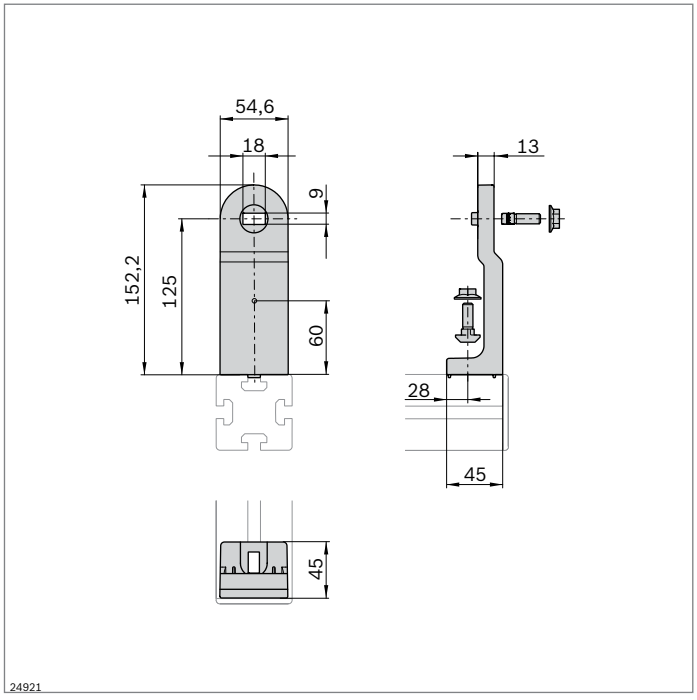

Supporting bracket VF*plus* AL		No.	FS
	Set	**3 842 546 632**	4xFS1
Material:	Holder: Diecast aluminum, silver Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. 2x holder; fastening material (FS)		




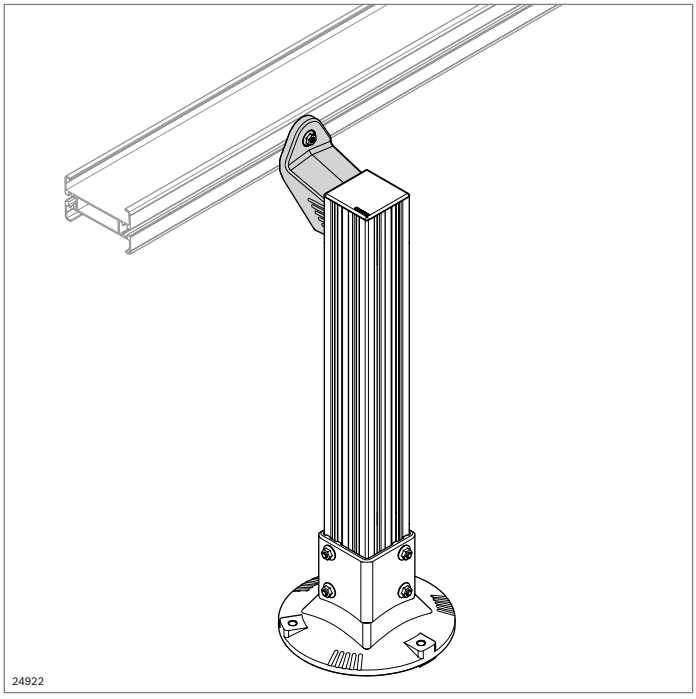

Supporting bracket AL, lateral

10


- Supporting bracket for connecting two profiles with defined spacing (approx. 2–3 m)
- Profile finishing: Not required
- Centering lugs make centering the supporting brackets in the slot easy
- If the centering lugs are removed, the supporting bracket can also be used for upward and downward sloping sections (up to approx. 45° depending on the return chain)
- Designed for attachment to a vertical 80x80 strut profile

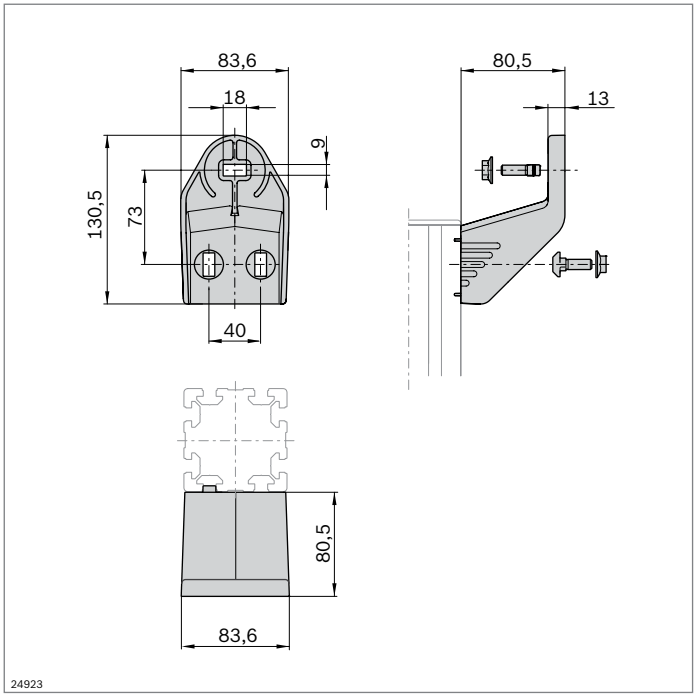


Supporting bracket VF*plus* lateral AL		No.	FS
	Set	**3 842 547 461**	3xFS1


Material:	Holder: Diecast aluminum; powder-coated (RAL 9006) Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

FS1




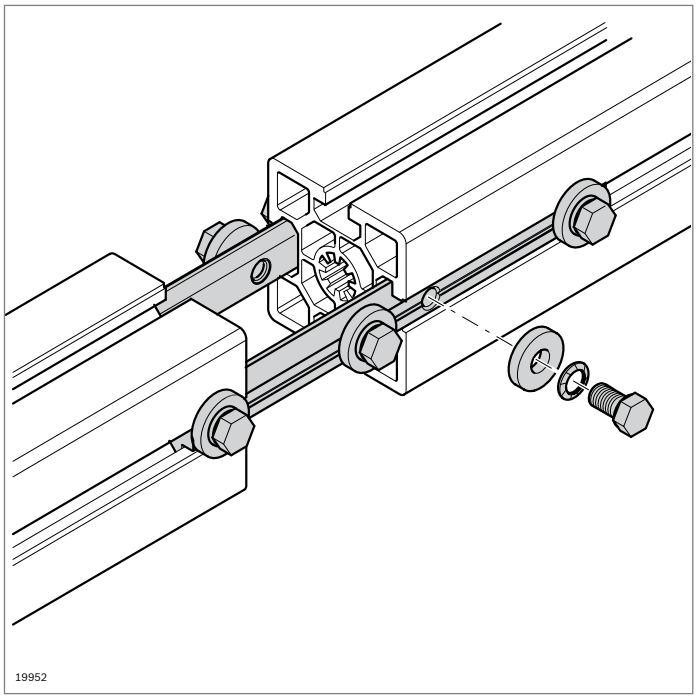

Profile connector



- Profile connector for the end-face connection of any profiles
- For an especially strong connection: One profile connector per slot
- Profile finishing: Not required




Profile connector	(Nm)	Slot		No.	FS
50 VF	10	8	10	**3 842 536 787**	2xFS2
50	8.5	8	1	**3 842 518 427**	2xFS1

Material: Steel; zinc-plated; fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS)

FS1
ISO 4026
M6x10

FS2
M6x8
ISO 4762
ISO 7089-6

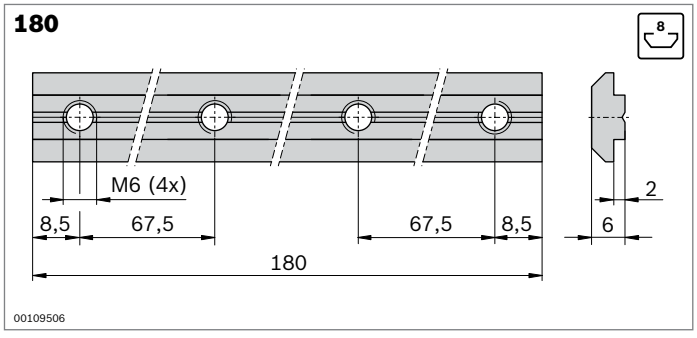



Profile connector	(Nm)	Slot	No.	FS
180	10	8	**3 842 521 216**	4xFS3

Material: Steel; zinc-plated; fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS)

FS3
ISO 4762
M6x10
DIN 7349
6,4

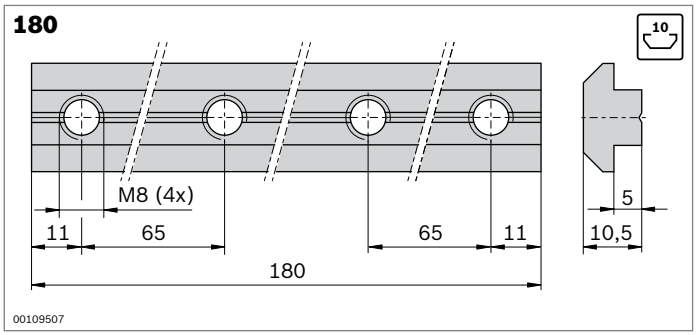



Profile connector	(Nm)	Slot	No.	FS
180	25	10	**3 842 528 746**	4xFS4

Material: Steel; zinc-plated; fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS)


FS4
ISO 4017 M8x14
8-Fst
DIN 7394 8,4

Connection kit	(Nm)	Slot		No.	FS
	18	10	Set	**3 842 529 881**	4xFS5

Material: Steel; zinc-plated; fastening material: Steel; zinc-plated

Scope of delivery: Set consisting of 2 pieces incl. fastening material

FS5
M8x12

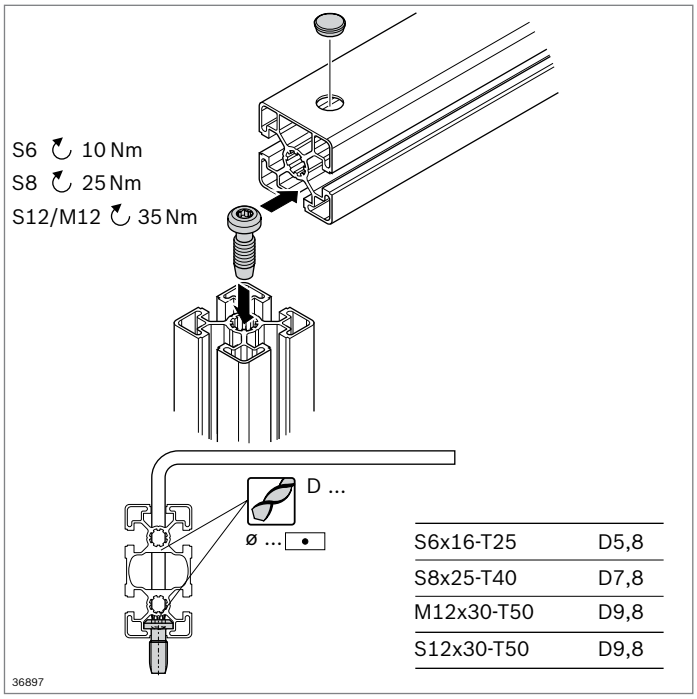

S6x16-T25	D5,8
S8x25-T40	D7,8
M12x30-T50	D9,8
S12x30-T50	D9,8


Central bolt, anti-torsion element, cover cap

Central bolt


- Best-value connection element
- Self-tapping screw, can be mounted without profile finishing
- Profile finishing:
  - Thread cutting for M12x30 screw
  - Through-hole for screwdriver/offset screwdriver

Tools:
Offset screwdriver (p. 14-6)

S6x16-T25




S8x25-T40




Central bolt	Slot	ESD		No.
S6x16-T25 (self-tapping)	6		100	**3 842 528 593**
S8x25-T40 (self-tapping)	8		100	**3 842 527 174**

Material: Steel; zinc-plated

M12x30-T50




S12x30-T50



Central bolt	Slot	ESD		No.
M12x30-T50	10		100	**3 842 530 235**
S12x30-T50 (self-tapping)	10		100	**3 842 530 236**


Material: Steel; zinc-plated

Size	F_{max}	M_{max}
S6	500 N	8 Nm
S8	800 N	43 Nm
S12	1300 N	80 Nm
M12	3000 N	80 Nm

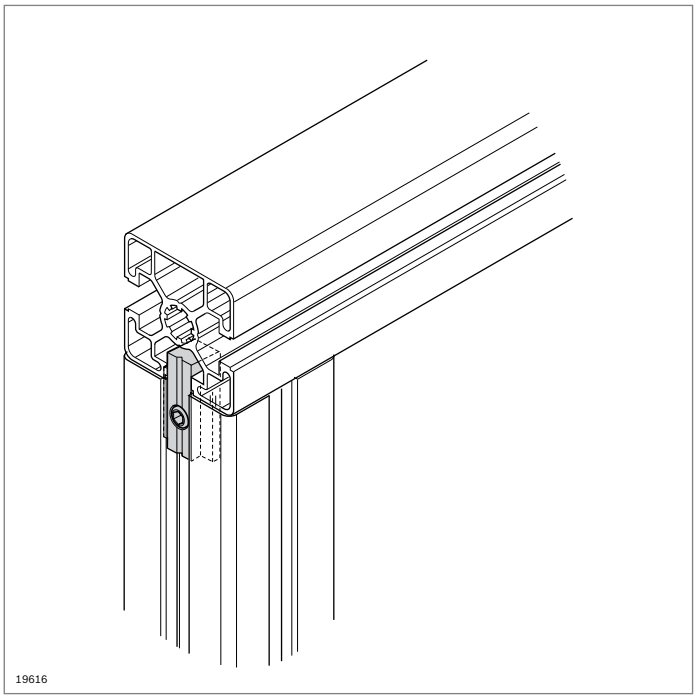

Anti-torsion element


- Provides torsion resistance for profile connections with central bolts or quick connectors
- Subsequent installation in the connection possible



FS1

DIN 916
M5x8


Anti-torsion element	Slot		No.	FS
	8	10	**3 842 530 325**	FS1
Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated			



FS2

ISO 4029
M6x12


Anti-torsion element	Slot		No.	FS
	10	10	**3 842 530 326**	FS2
Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated			




Cover cap

- For sealing through-holes in closed profiles

Cover cap	D (mm)		No.
	5.8	100	**3 842 551 032**
	7.8	100	**3 842 551 034**
	9.8	100	**3 842 551 036**
Material:	TPE; signal gray RAL 7004		

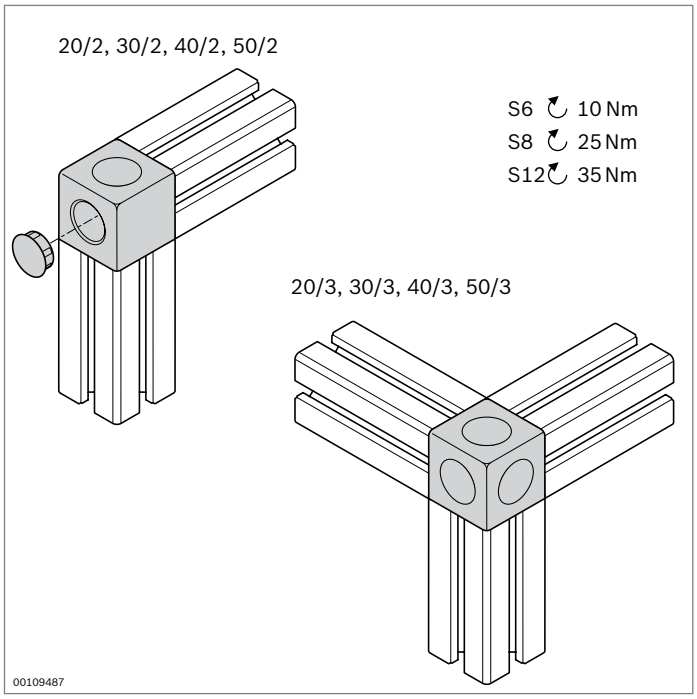


Cubic connector



designLINE

- For torsion-proof corner connections of profiles with equivalent cross-sections
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Cover caps to cover the openings
- Screw fitting on profile with self-tapping screws
- Profile finishing: Not required

Technical data (p. 18-18)



Type	M_{max}
20/2	18 Nm

FS1




Cubic connector 20/2		Slot	ESD		No.	FS
Set (standard), signal gray		6	*	1	**3 842 549 858**	2xFS1
designLINE set, signal gray		6	*	1	**3 842 549 859**	2xFS1
Cubic connector		6		20	**3 842 523 875**	
Cover cap D12	signal gray (PP)			100	**3 842 548 700**	
	black (PP)			100	**3 842 548 704**	
Countersunk screw S6x16		6		100	**3 842 517 132**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type	M_{max} 2 / M_{max} 2
20/3	23 Nm

FS1




Cubic connector 20/3		Slot	ESD		No.	FS
Set (standard), signal gray		6	ESD*	1	**3 842 549 860**	3xFS1
designLINE set, signal gray		6	ESD*	1	**3 842 549 861**	3xFS1
Cubic connector		6	ESD	20	**3 842 523 872**	
Cover cap D12	signal gray (PP)			100	**3 842 548 700**	
	black (PP)		ESD	100	**3 842 548 704**	
Countersunk screw S6x16		6	ESD	100	**3 842 517 132**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type	M_{max}
30/2	80 Nm

FS2




Cubic connector 30/2		Slot	ESD		No.	FS
Set (standard), signal gray		8	ESD*	1	**3 842 549 862**	2xFS2
designLINE set, signal gray		8	ESD*	1	**3 842 549 863**	2xFS2
Cubic connector		8	ESD	20	**3 842 523 876**	
Cover cap D18	signal gray (PP)			100	**3 842 548 701**	
	black (PP)		ESD	100	**3 842 548 705**	
Countersunk screw S8x25		8	ESD	100	**3 842 517 543**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type	M_{max} 2 / M_{max} 2
30/3	85 Nm

FS2




Cubic connector 30/3		Slot	ESD		No.	FS
Set (standard), signal gray		8	ESD*	1	**3 842 549 864**	3xFS2
designLINE set, signal gray		8	ESD*	1	**3 842 549 865**	3xFS2
Cubic connector		8	ESD	20	**3 842 523 873**	
Cover cap D18	signal gray (PP)			100	**3 842 548 701**	
	black (PP)		ESD	100	**3 842 548 705**	
Countersunk screw S8x25		8	ESD	100	**3 842 517 543**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.

40/2



Type	M_{max}
40/2	60 Nm

FS3




Cubic connector 40/2		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 866**	2xFS3
designLINE set, signal gray		10	ESD*	1	**3 842 549 867**	2xFS3
Cubic connector		10	ESD	20	**3 842 529 010**	
Cover cap D24	signal gray (PP)			100	**3 842 548 702**	
	black (PP)		ESD	100	**3 842 548 706**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.

40/3



Type	$\frac{M_{max}}{2}$ $\frac{M_{max}}{2}$
40/3	70 Nm

FS3




Cubic connector 40/3		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 868**	3xFS3
designLINE set, signal gray		10	ESD*	1	**3 842 549 869**	3xFS3
Cubic connector		10	ESD	20	**3 842 529 011**	
Cover cap D24	signal gray (PP)			100	**3 842 548 702**	
	black (PP)		ESD	100	**3 842 548 706**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps


* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.

45/2



Type		M_{max}
45/2	45x45L	150 Nm
	45x45	200 Nm

FS3




Cubic connector 45/2		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 870**	2xFS3
designLINE set, signal gray		10	ESD*	1	**3 842 549 871**	2xFS3
Cubic connector		10	ESD	20	**3 842 523 877**	
Cover cap D24	signal gray (PP)			100	**3 842 548 702**	
	black (PP)		ESD	100	**3 842 548 706**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type		M_{max} / 2 + M_{max} / 2
45/3	45x45L	170 Nm
	45x45	240 Nm

FS3




Cubic connector 45/3		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 872**	3xFS3
designLINE set, signal gray		10	ESD*	1	**3 842 549 873**	3xFS3
Cubic connector		10	ESD	20	**3 842 523 874**	
Cover cap D24	signal gray (PP)			100	**3 842 548 702**	
	black (PP)		ESD	100	**3 842 548 706**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
designLINE cubic connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type	M_{max}
50/2	120 Nm

FS3




Cubic connector 50/2		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 874**	2xFS3
Cubic connector		10	ESD	20	**3 842 529 012**	
Cover cap D30	signal gray (PP)			100	**3 842 548 703**	
	black (PP)		ESD	100	**3 842 548 707**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
Fastening material: Steel; zinc-plated


Scope of delivery: Set incl. fastening material (FS), cover caps

* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Type	$\frac{M_{max}}{2}$ + $\frac{M_{max}}{2}$
50/3	140 Nm

FS3




Cubic connector 50/3		Slot	ESD		No.	FS
Set (standard), signal gray		10	ESD*	1	**3 842 549 876**	3xFS3
Cubic connector		10	ESD	20	**3 842 529 013**	
Cover cap D30	signal gray (PP)			100	**3 842 548 703**	
	black (PP)		ESD	100	**3 842 548 707**	
Screw S12x30		10	ESD	100	**3 842 530 236**	

Material: Cubic connector: Diecast aluminum
Fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover caps


* Cubic connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.

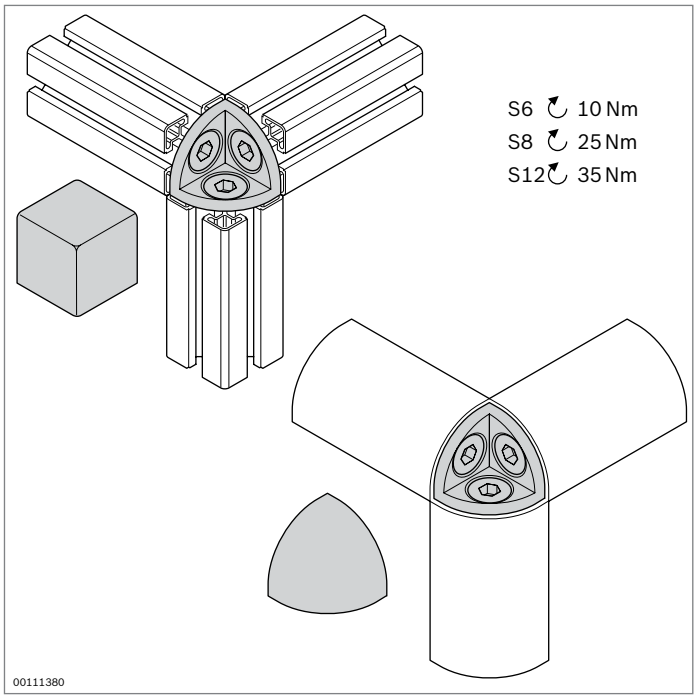

Corner bracket

- Corner bracket for corner connection of three square or half-round profiles with equivalent cross-sections
- Screw fitting on profiles with self-tapping screws
- Ball or cubic-shaped cover caps to prevent injuries and avoid dirt
- Profile finishing: Not required

R20x20




Type	$\frac{M_{max}}{2}$ $\frac{M_{max}}{2}$
20/3	23 Nm

FS1



R20x20		Slot	ESD		No.	FS
Corner bracket		6		1	**3 842 519 318**	3xFS1
Cover cap K (ball)	signal gray (PP)			10	**3 842 548 708**	
	black (PP)			10	**3 842 548 712**	
Cover cap W (cube)	signal gray (PP)			10	**3 842 548 716**	
	black (PP)			10	**3 842 548 720**	
Material:	Corner bracket: Diecast zinc Fastening material: Steel; zinc-plated					
Scope of delivery:	Incl. fastening material (FS)					

R30x30




Type	$\frac{M_{max}}{2}$ $\frac{M_{max}}{2}$
30/3	85 Nm

FS2



R30x30		Slot	ESD		No.	FS
Corner bracket		8		1	**3 842 519 319**	3xFS2
Cover cap K (ball)	signal gray (PP)			10	**3 842 548 709**	
	black (PP)			10	**3 842 548 713**	
Cover cap W (cube)	signal gray (PP)			10	**3 842 548 717**	
	black (PP)			10	**3 842 548 721**	
Material:	Corner bracket: Diecast zinc Fastening material: Steel; zinc-plated					
Scope of delivery:	Incl. fastening material (FS)					

R40x40




Type	$\frac{M_{max}}{2}$ $\frac{M_{max}}{2}$
40/3	70 Nm

FS3



R40x40		Slot	ESD		No.	FS
Corner bracket		10		1	**3 842 529 404**	3xFS3
Cover cap K (ball)	signal gray (PP)			10	**3 842 548 710**	
	black (PP)			10	**3 842 548 714**	
Cover cap W (cube)	signal gray (PP)			10	**3 842 548 718**	
	black (PP)			10	**3 842 548 722**	
Material:	Corner bracket: Diecast zinc Fastening material: Steel; zinc-plated					
Scope of delivery:	Incl. fastening material (FS)					

R45x45




Type		$\frac{M_{max}}{2}$ $\frac{M_{max}}{2}$
45/3	45x45L	170 Nm
	45x45	240 Nm

FS4



R45x45		Slot	ESD		No.	FS
Corner bracket		10		1	**3 842 519 321**	3xFS4
Cover cap K (ball)	signal gray (PP)			10	**3 842 548 711**	
	black (PP)			10	**3 842 548 715**	
Cover cap W (cube)	signal gray (PP)			10	**3 842 548 719**	
	black (PP)			10	**3 842 548 723**	
Material:	Corner bracket: Diecast zinc Fastening material: Steel; zinc-plated					
Scope of delivery:	Incl. fastening material (FS)					

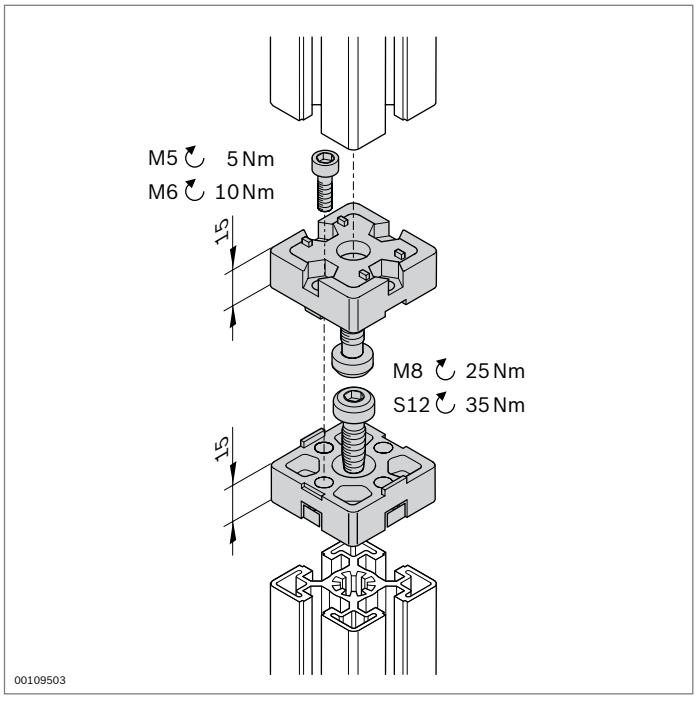


End connector



designLINE

- For end-to-end profile connections
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing:
  - 30x30: M8 thread cutting in central hole
  - 40x40, 45x45, 50x50: Not required




Type	M_{max}
30x30	81 Nm

FS1



DIN7984 M8x30

FS2




DIN 7984 M5x25

DIN 934 M5

End connector		Slot	ESD	No.	FS
30x30	Set (standard)	8		**3 842 526 003**	2xFS1, 4xFS2
	designLINE set	8		**3 842 538 656**	2xFS1, 4xFS2

Material: End connector: Diecast aluminum
designLINE end connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




Type	M_{max}
40x40	170 Nm

FS3



S12x30

FS4




DIN 7984 M6x25

ISO 4032 M6

End connector		Slot	ESD	No.	FS
40x40	Set (standard)	10		**3 842 532 196**	2xFS3, 4xFS4
	designLINE set	10		**3 842 538 657**	2xFS3, 4xFS4

Material: End connector: Diecast aluminum
designLINE end connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

45x45




Type	M_{max}
45x45	200 Nm

FS3




FS4



End connector		Slot	ESD	No.	FS
45x45	Set (standard)	10		**3 842 191 175**	2xFS3, 4xFS4
	designLINE set	10		**3 842 538 658**	2xFS3, 4xFS4

Material: End connector: Diecast zinc
designLINE end connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

50x50




Type	M_{max}
50x50	180 Nm

FS3




FS4



End connector		Slot	ESD	No.	FS
50x50	Set (standard)	10		**3 842 532 199**	2xFS3, 4xFS4


Material: End connector: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

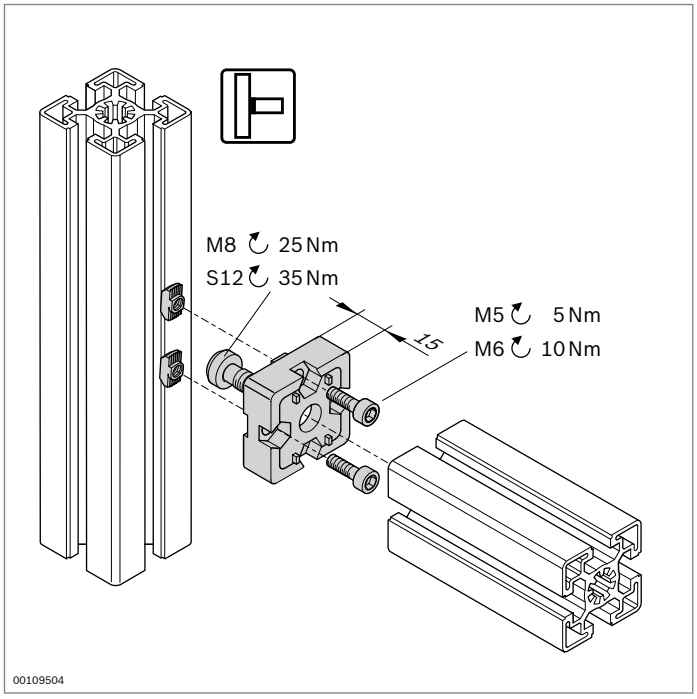

T-connector

designLINE

- For right-angled profile connections
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing:
  - 30x30: M8 thread cutting in central hole
  - 40x40, 45x45, 50x50: Not required



Type	Fmax	Mmax
30x30	4000 N	80 Nm

FS1



DIN7984 M8x30


FS2



DIN 7984 M5x16

T-connector		Slot	ESD	No.	FS
30x30	Set (standard)	8		**3 842 524 476**	1xFS1, 2xFS2
	designLINE set	8		**3 842 538 696**	1xFS1, 2xFS2

Material: T-connector: Diecast aluminum
designLINE T-connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




Type	Fmax	Mmax
40x40	9000 N	150 Nm

FS3



S12x30


FS4



DIN 7984 M6x20

T-connector		Slot	ESD	No.	FS
40x40	Set (standard)	10		**3 842 532 195**	1xFS3, 2xFS4
	designLINE set	10		**3 842 538 697**	1xFS3, 2xFS4

Material: T-connector: Diecast aluminum
designLINE T-connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




Type	F_{max}	M_{max}
45x45	9000 N	200 Nm

FS3




FS4



T-connector		Slot	ESD	No.	FS
45x45	Set (standard)	10		**3 842 520 802**	1xFS3, 2xFS4
	designLINE set	10		**3 842 538 698**	1xFS3, 2xFS4

Material: T-connector: Diecast zinc
designLINE T-connector: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




Type	F_{max}	M_{max}
50x50	10000 N	170 Nm

FS3




FS4



T-connector		Slot	ESD	No.	FS
50x50	Set (standard)	10		**3 842 532 198**	1xFS3, 2xFS4

Material: T-connector: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

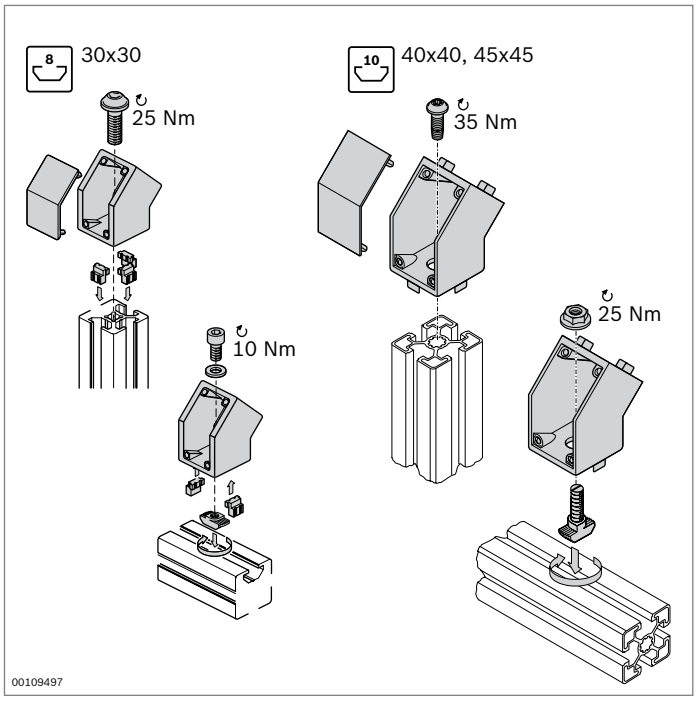



Connector 45°


designLINE


- For connecting profiles at an angle of less than 45°
- Suitable for reinforcing frames
- Suitable for connections at the end-face or in the profile slot
- 45° connectors 40x40 and 45x45 with centering lugs for easy positioning (centering lugs can simply be broken off for installation in the profile slot)
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing: Not required

* 45° connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.












Connector 45°		Color	Slot	ESD	No.	FS
30x30	Set (standard)	Signal gray	8	*	**3 842 554 446**	2xFS1, FS2, FS3
		Black	8		**3 842 554 447**	
	designLINE set	Signal gray	8	*	**3 842 554 452**	2xFS1, FS2, FS3
		Black	8		**3 842 554 453**	

Material: 45° connector: Diecast zinc; *designLINE* 45° connector: painted (RAL 9006); centering piece, cover cap: PP; fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), 6 x centering piece, cover cap










Connector 45°		Color	Slot	ESD	No.	FS
40x40	Set (standard)	Signal gray	10	*	**3 842 554 448**	2xFS4, FS5
		Black	10		**3 842 554 449**	
	designLINE set	Signal gray	10	*	**3 842 554 454**	2xFS4, FS5
		Black	10		**3 842 554 455**	

Material: 45° connector: Cast aluminum; *designLINE* 45° connector: painted (RAL 9006); centering piece, cover cap: PP; fastening material: Steel; zinc-plated

Scope of delivery: Set incl. fastening material (FS), cover cap








Connector 45°		Color	Slot	ESD	No.	FS
45x45	Set (standard)	Signal gray	10	*	**3 842 554 450**	2xFS4, FS5
		Black	10		**3 842 554 451**	
	designLINE set	Signal gray	10	*	**3 842 554 456**	2xFS4, FS5
		Black	10		**3 842 554 457**	

Material: 45° connector: Cast aluminum; *designLINE* 45° connector: painted (RAL 9006); centering piece, cover cap: PP; fastening material: Steel; zinc-plated


Scope of delivery: Set incl. fastening material (FS), cover cap

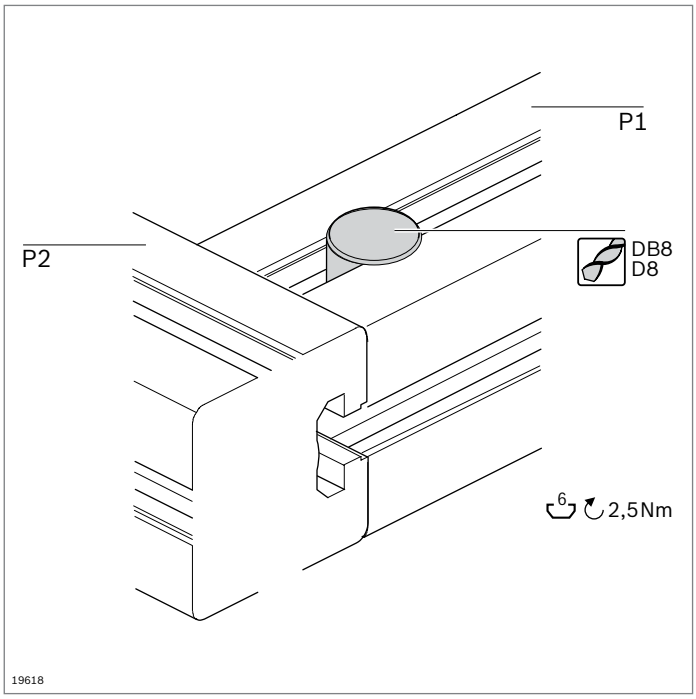



Quick connector, 6 mm slot, 0°, 90° cover cap

- For the right-angled connecting of two profiles
- Excellent accessibility for tools during mounting
- Quick connector for 6 mm slot with square head; can be used as a 0° or 90° connector
- Profile finishing:
  Blind hole DB8 or through-hole D8

Accessories, optional:
Drilling jig (p. 14-2)









Slot	F_{max}	M_{max}
6 / 6	450 N	18 Nm

Quick connector 0° / 90°	P1 / P2	D (mm)	ESD		No.
	6 / 6	8		10	**3 842 537 013**
Material:	Steel; stainless				



- Cover cap for connector sleeves

Cover cap	D (mm)		No.
	8	100	**3 842 551 038**
Material:	PE; signal gray RAL 7004		

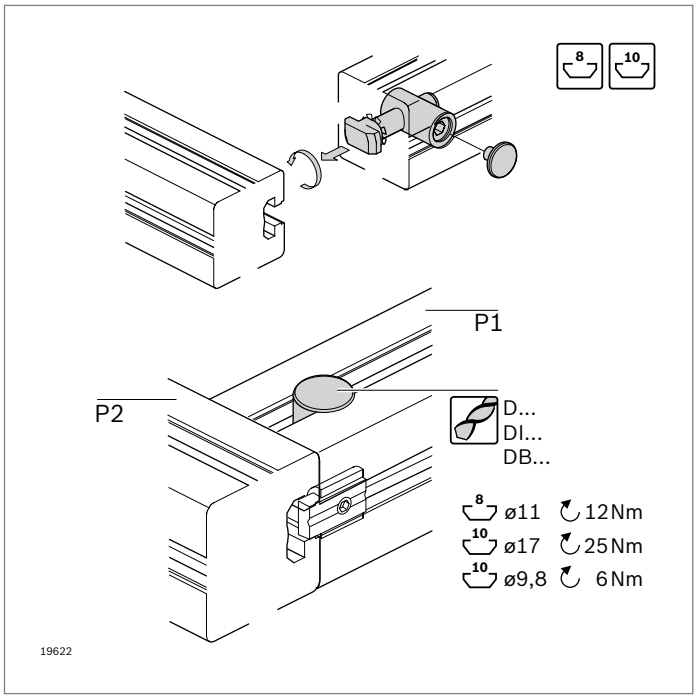


Quick connector, 8/10 mm slot, 0°

- For the right-angled connecting of two profiles
- Excellent accessibility for tools during mounting
- O-ring for fixing allows overhead assembly
- Quick connectors can be pivoted into the profile slot at the mounting location
- Profile finishing:
  Blind hole DI, DB11, DB17 or
  through-hole DI, D11, D17
- Note differing drilling intervals and load capacities when using with radial compensation
  (“Technical data” p. 18-16)

Accessories, optional:


- Anti-torsion element (p. 3-44)
- Radial compensation (p. 2-94)
- Drilling jig (p. 14-2)
- Cover cap (p. 3-56)



Slot	F_{max}	M_{max}
8 / 8	500 N	40 Nm
8 / 10	2000 N	70 Nm
10 / 10	4000 N	140 Nm

*) With the use of a radial compensation

Quick connector 0°	P1 / P2	D (mm)	ESD		No.
Steel; zinc-plated	8 / 8	11	ESD	10	**3 842 535 459**
	8 / 10	11	ESD	10	**3 842 535 464**
	10 / 10	17	ESD	10	**3 842 535 458**
Steel; stainless	8 / 8	11	ESD	10	**3 842 548 934**
	8 / 10	11	ESD	10	**3 842 548 935**
	10 / 10	17	ESD	10	**3 842 548 936**




Slot	F_{max}	M_{max}
10 / 10	800 N	50 Nm

*) With the use of a radial compensation

- Quick connector 9.8 with smaller connector sleeve
- The hole for the connector sleeve does not make contact with the slot flanks. This permits a visually attractive connection; the slot can be completely closed with the cover profile

Quick connector 0°, connector sleeve D = 9.8	P1 / P2	D (mm)	ESD		No.
Steel; zinc-plated	10 / 10	9.8[1)]	ESD	10	**3 842 541 412**


[1)] No standard hole in modular dimensions 40, 50 and 60
Target distance from profile end: 22.5 mm

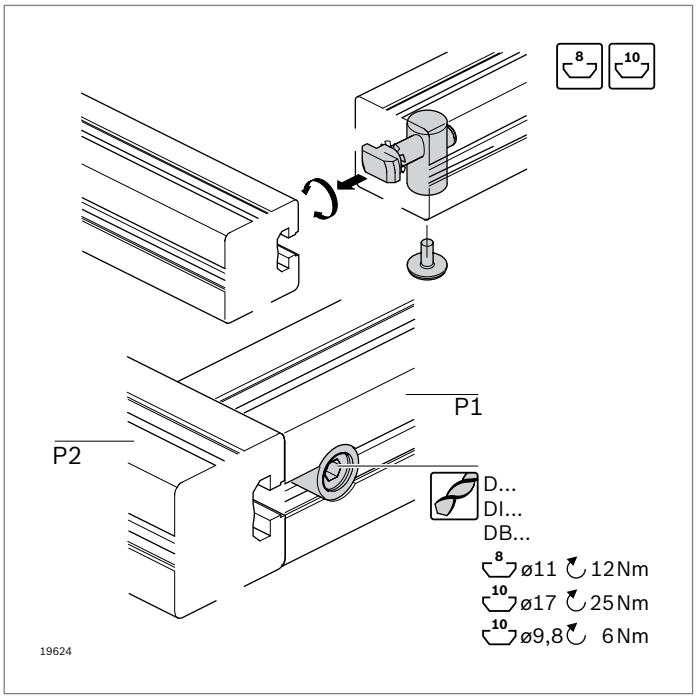

Quick connector, 8/10 mm slot, 90° cover cap

- Tie rod head rotated at a 90° angle to the connector sleeve
- Profile finishing: Blind hole DI, DB11, DB17 or through-hole DI, D11, D17


Accessories, optional:
- Anti-torsion element (p. 3-44)
- Radial compensation (p. 2-94)
- Drilling jig (p. 14-2)
- Cover cap



Slot	F_{max}	M_{max}
8 / 8	500 N	40 Nm
10 / 10	4000 N	140 Nm

*) With the use of a radial compensation

Quick connector 90°	P1 / P2	D (mm)	ESD		No.
Steel; zinc-plated	8 / 8	11		10	**3 842 535 465**
	10 / 10	17		10	**3 842 535 466**
Steel; stainless	8 / 8	11		10	**3 842 548 937**
	10 / 10	17		10	**3 842 548 938**




Slot	F_{max}	M_{max}
10 / 10	800 N	50 Nm

*) With the use of a radial compensation


Quick connector 90°, connector sleeve D = 9.8	P1 / P2	D (mm)	ESD		No.
Steel; zinc-plated	10 / 10	9.8[1)]		10	**3 842 541 410**

1) No standard hole in modular dimensions 40, 50 and 60
Target distance from profile end: 22.5 mm



Cover cap	D (mm)		No.
	11	100	**3 842 551 040**
	17	100	**3 842 551 042**


Material: PE; signal gray RAL 7004

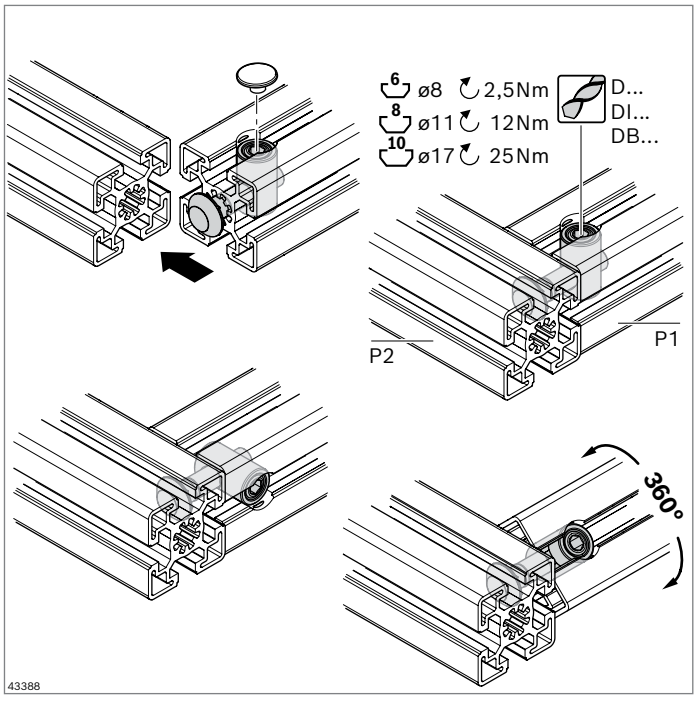

Quick connector with round head

- For the right-angled connecting of two profiles
- Excellent accessibility for tools during mounting
- O-ring for fixing allows overhead assembly (25.079ersions)
- Profiles can be rotated as desired
- Profile finishing:
  Blind hole DI, DB8, DB11, DB17 or
  through-hole DI, D8, D11, D17


Accessories, optional:
Anti-torsion element (p. 3-44)
Radial compensation (p. 2-94)
Drilling jig (p. 14-2)
Cover cap (p. 3-56 + 3-58)



Slot	F_{max}	M_{max}
6 / 6	250 N	6 Nm
8 / 8	500 N	40 Nm
8 / 10	500 N	40 Nm
10 / 10	2500 N	140 Nm

*) With the use of a radial compensation


Quick connector with round head	P1 / P2	D (mm)	ESD		No.
Steel; stainless	6 / 6	8		10	**3 842 564 112**
Steel; zinc-plated	8 / 8	11		10	**3 842 564 113**
	8 / 10	11		10	**3 842 564 142**
	10 / 10	17		10	**3 842 564 114**

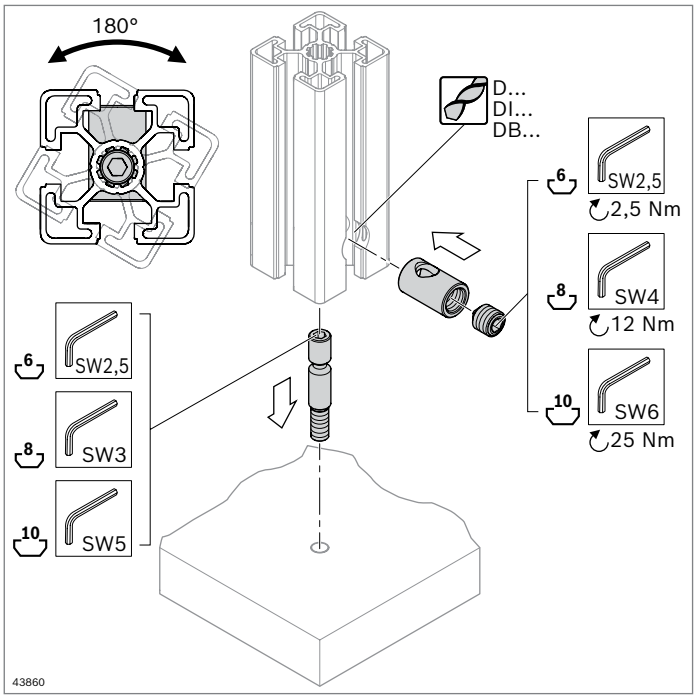

Quick connector with threaded tension rods


- For attaching profiles to plates
- Easy tensioning thanks to circumferential notch on the tie rod
- Profile finishing:
  Blind hole DB8, DB11, DB17 or
  through-hole D8, D11, D17


Accessories, optional:
- Anti-torsion element (p. 3-44)
- Drilling jig (p. 14-2)
- Cover cap (p. 3-56 + 3-58)



Slot	M_{max}
6	18 Nm
8	40 Nm
10	140 Nm

Quick connector with threaded tension rods	Slot	M	L (mm)	D (mm)	ESD		No.
Steel; stainless	6	M4	9	8	ESD	10	**3 842 557 258**
Steel; zinc-plated	8	M6	12	11	ESD	10	**3 842 557 257**
	10	M8	18	17	ESD	10	**3 842 557 256**

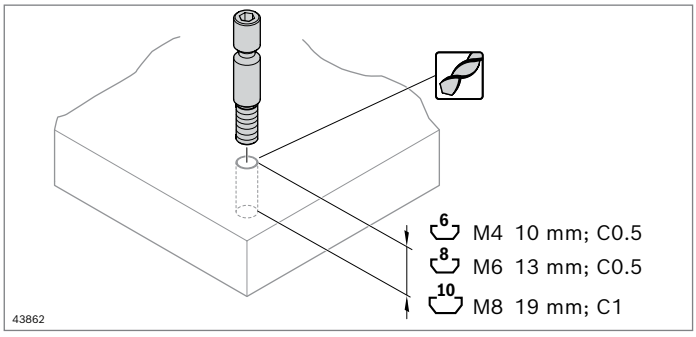

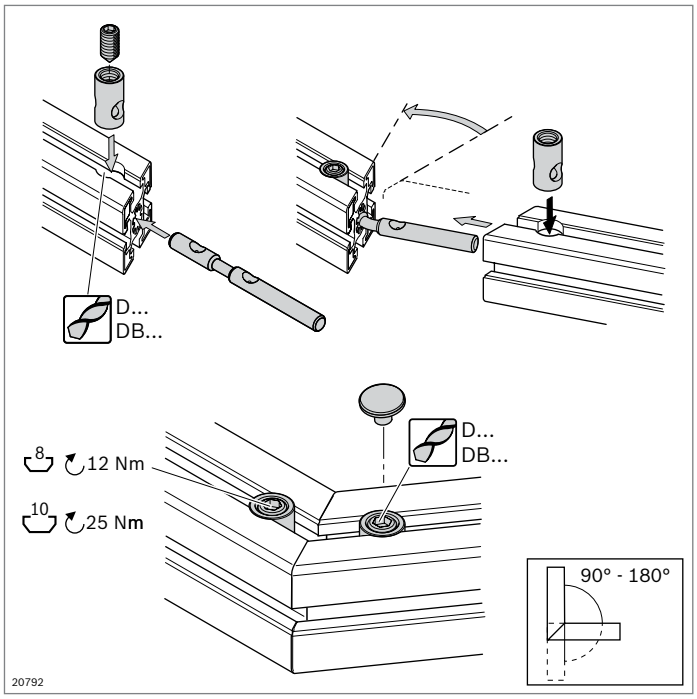


Quick connector, bendable – end-to-end

- For end-to-end connecting of two profiles with equal cross-sections and at any angle, e.g. for frames
- Profile finishing:
  Blind hole DB11, DB17 or through-hole D11, D17
  Miter cut

Technical data (p. 18-16)


Accessories:
- Drilling jig (p. 14-2)
- Cover cap (p. 3-56)




Profile	M_{max}
30x30	24 Nm
40x40L	100 Nm
45x45L	110 Nm
45x45	145 Nm
50x50L	160 Nm

Quick connector, bendable	P1 / P2	a (mm)	D (mm)	ESD		No.
End-to-end	8 / 8	18	11	ESD	10	**3 842 535 630**
	10 / 10	22.5	17	ESD	10	**3 842 535 634**

Material: Tie rod: Steel; stainless
Socket: Steel; zinc-plated

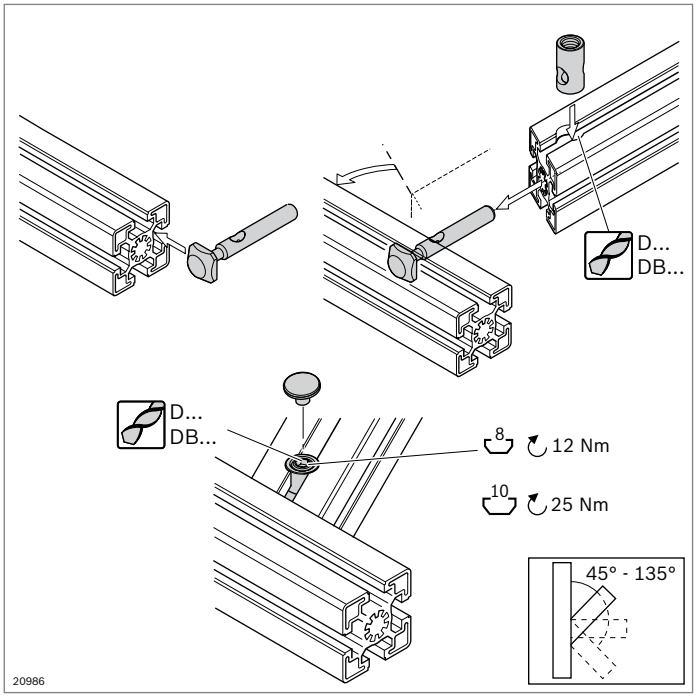



Profile	F_{max}	M_{max}	F_{max}	M_{max}
30x30	1100 N	35 Nm	650 N	40 Nm
40x40L	1500 N	110 Nm	1000 N	80 Nm
45x45L	1500 N	120 Nm	1000 N	95 Nm
45x45	1500 N	140 Nm	1100 N	180 Nm
50x50L	1500 N	150 Nm	1100 N	180 Nm

Quick connector, bendable – end-to-slot


- For end-to-slot connecting of two profiles at any angle, e.g. for framework constructions
- Profile finishing:
  Blind hole DB11, DB17 or through-hole D11, D17
  Miter cut

Technical data (p. 18-16)

Accessories:
- Drilling jig (p. 14-2)
- Cover cap (p. 3-56)

Quick connector, bendable	P1 / P2	a (mm)	D (mm)	ESD		No.
End-to-slot	8 / 8	18	11	ESD	10	**3 842 535 629**
	10 / 10	22.5	17	ESD	10	**3 842 535 635**


Material: Tie rod: Steel; stainless
Socket: Steel; zinc-plated

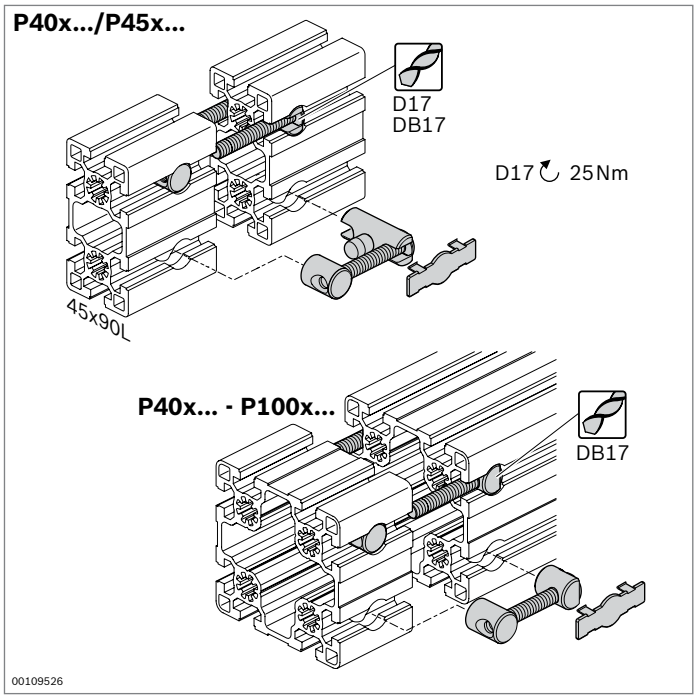

Longitudinal end connector


- For the end-to-end connecting of two profiles
- Standard profile finishing:
  Through-hole D17 (longitudinal end connectors on both sides)
  Blind hole DB17 or through-hole D17 (longitudinal end connector on one side)

Accessories, optional:
Cover cap D17 x 44.6; ESD (p. 3-65)




Longitudinal end connector, two-sided	L (mm)	ESD	No.
Profile 40x...	40	*	**3 842 554 442**
Profile 45x...	45	*	**3 842 554 440**

Material: Longitudinal end connector: screw steel; zinc-plated
Centering pin, cover caps: PP; signal gray
Scope of delivery: Incl. 4 x cover cap
* Longitudinal end connector establishes conductive connection.
Cover caps included in the set are not ESD-compatible.



Longitudinal end connector, one-sided	ESD	No.
Profile 40x... – 100x...	*	**3 842 554 444**

Material: Longitudinal end connector: screw steel; zinc-plated
Centering pin, cover caps: PP; signal gray
Scope of delivery: Incl. 2 x cover cap
* Longitudinal end connector establishes conductive connection.
Cover caps included in the set are not ESD-compatible.

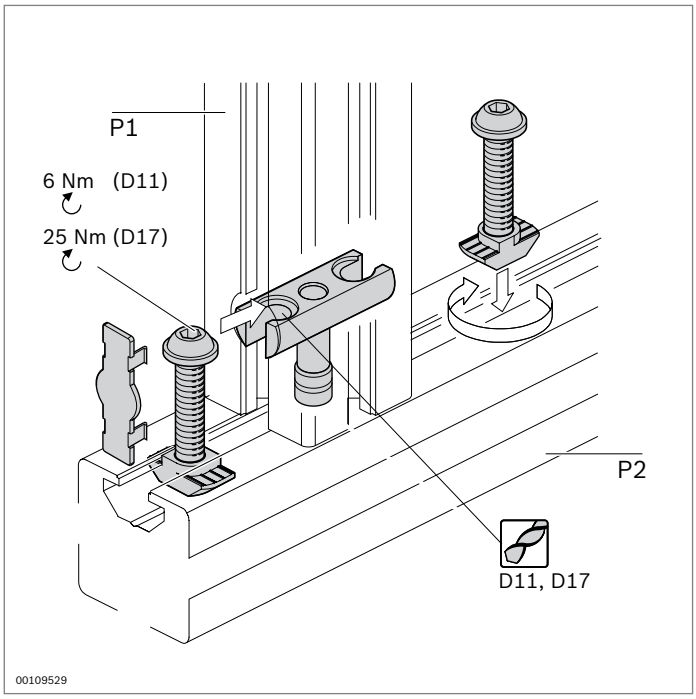


Bolt connector

- For the right-angled connecting of two profiles
- Suitable for heavy loads, including torsional loads
- Can be mounted in closed frames
- Profile finishing: Through-hole D11, D17

Technical data (p. 18-17)

Accessories:
Drilling jig (p. 14-2)

Accessories, optional:
Cover cap, ESD (p. 3-65)




Size	F_{max}	M_{max}	M_{max}
30	2500 N	60 Nm	20 Nm

Bolt connector	P1 / P2	L (mm)	l_2 (mm)	ESD		No.
D11x30	8 / 8	30	18	*	10	**3 842 554 402**
	8 / 10	30	18	*	10	**3 842 555 590**

Material: Bolt connector: Steel; zinc-plated
Centering pin, cover caps: PP; signal gray
* Bolt connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.

Scope of delivery: Incl. 2 x cover cap




Size	F_{max}	M_{max}	M_{max}
40	4000 N	180 Nm	40 Nm
45	4000 N	180 Nm	60 Nm
50	4000 N	200 Nm	65 Nm
60	4000 N	200 Nm	80 Nm
80	5000 N	800 Nm	170 Nm
90	5000 N	800 Nm	200 Nm
100	5000 N	1000 Nm	480 Nm


Bolt connector	P1 / P2	L (mm)	l_2 (mm)	ESD		No.
D17x40	10 / 10	40	23	*	10	**3 842 555 594**
D17x45	10 / 10	45	28	*	10	**3 842 555 584**
D17x50	10 / 10	50	33	*	10	**3 842 555 596**
D17x60	10 / 10	60	43	*	10	**3 842 555 586**
D17x80	10 / 10	80	63	*	10	**3 842 555 598**
D17x90	10 / 10	90	73	*	10	**3 842 555 588**
D17x100	10 / 10	100	83	*	10	**3 842 555 592**

Material: Bolt connector: Steel; zinc-plated
Centering pin, cover caps: PP; signal gray
* Bolt connector creates conductive connection, but the cover caps included in the set are not ESD-compatible.


Scope of delivery: Incl. 2 x cover cap




Cover cap	Color	ESD		No.
D11 x 23.5	Signal gray		100	**3 842 551 052**
D11 x 23.5	Black	⚠	100	**3 842 551 053**
Material:	PP			





Cover cap	Color	ESD		No.
D17 x 44.6	Signal gray		100	**3 842 551 054**
D17 x 44.6	Black	⚠	100	**3 842 551 055**
Material:	PP			






Bolt connector	P1 / P2	ESD		No.
D11x11	8 / 8	⚠	10	**3 842 535 617**
Material:	Steel; zinc-plated			






Bolt connector	P1 / P2	ESD		No.
D17x15	10 / 10	⚠	10	**3 842 535 619**
Material:	Steel; zinc-plated			

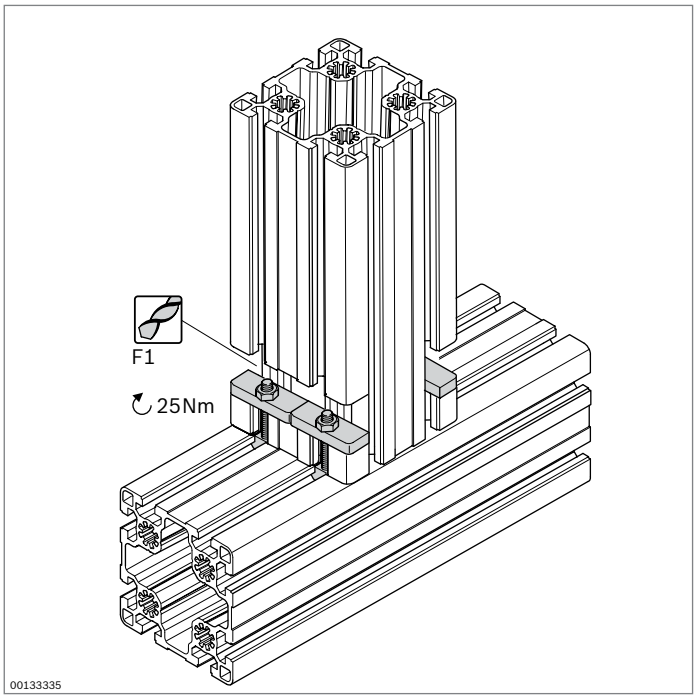

QV mounting kit




- For the right-angled connecting of two profiles
- Excellent accessibility for tools during mounting
- Profile finishing: Standard milling F1
- Bending moments must be avoided



Slot	F_{max}
10	1000 N

QV mounting kit			No.
		10	**3 842 146 972**
Material:	Steel; zinc-plated		

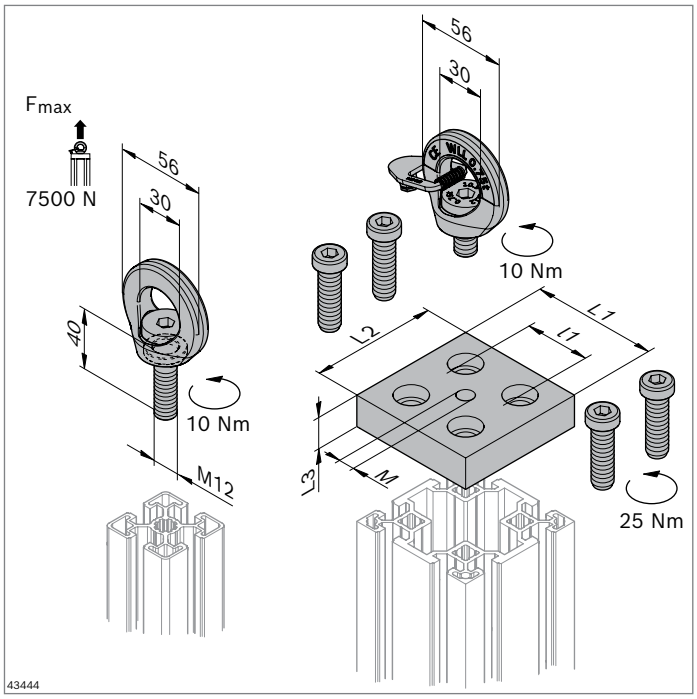


Lifting eye bolt




- Lifting eye bolt for lifting aluminum profile frames
- Profile finishing:
  M12 thread cutting in central hole

Technical data (p. 18-22)



Lifting eye bolt M12x40		No.
		3 842 564 729
Material:	Screw: Steel; bronzed Eye: Steel, painted (orange)	

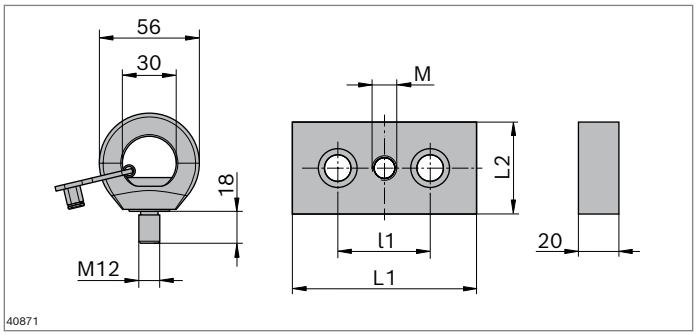


Lifting eye bolt with plate	L1 (mm)	l1 (mm)	L2 (mm)	No.	FS
45x90	90	45	45	**3 842 564 734**	2xFS1
40x80	80	40	40	**3 842 564 736**	2xFS1

Material: Plate: Steel; nickel-plated
Fastening material: Steel; zinc-plated
Screw: Steel; bronzed
Eye: Steel, painted (orange)

Scope of delivery: Incl. Fastening material

FS1



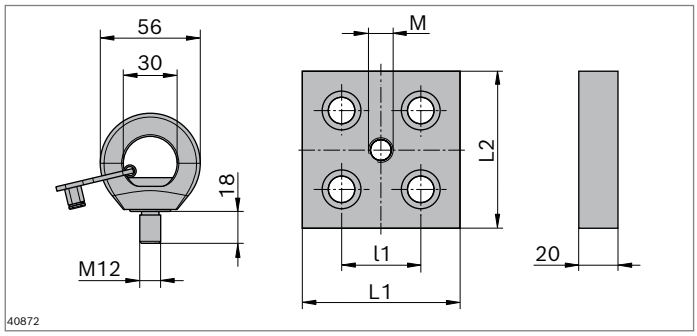

Lifting eye bolt with plate	L1 (mm)	l1 (mm)	L2 (mm)	No.	FS
90x90	90	45	90	**3 842 564 735**	4xFS2
80x80	80	40	80	**3 842 564 737**	4XFS2


Material: Plate: Steel; nickel-plated
Fastening material: Steel; zinc-plated
Screw: Steel; bronzed
Eye: Steel, painted (orange)

Scope of delivery: Incl. Fastening material

FS2



Joints




Joints (p. 4-2)




Swivel bearing (p. 4-11)



Supporting arm joint (p. 4-12)




Bearing pedestal (p. 4-13)



Swivel mounting (p. 4-14)




Clamping lever, star knob (p. 4-15)

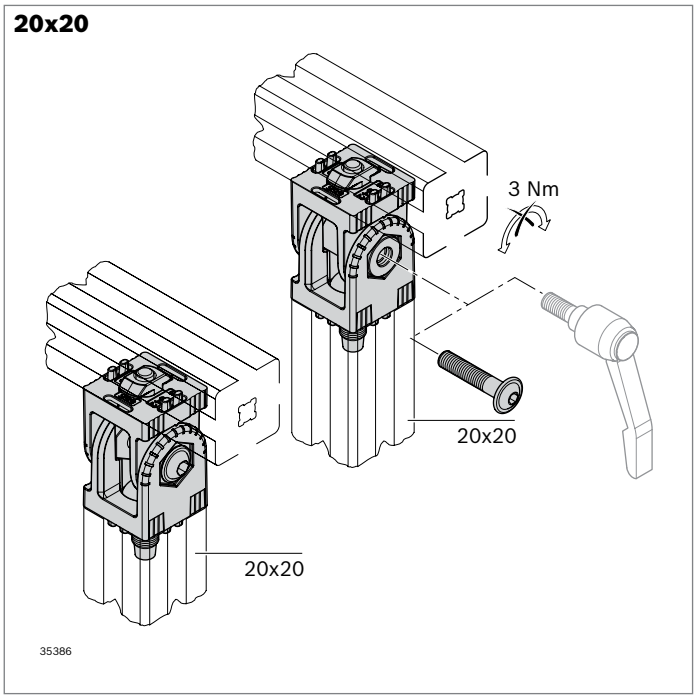


Joint 20x20

designLINE


- For movable or rigid profile connections at any angle
- Swivel range 180°
- With a 15° graduation
- Clamping (3 Nm) and convenient adjustment of joint using a clamping lever (M4x20)
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Two different assembly versions (normal and support) available under the same order number







Joint 20x20	Slot	ESD	No.	FS
Standard	6		**3 842 555 659**	2xFS3, 2xFS4
designLINE	6		**3 842 555 665**	2xFS3, 2xFS4


Material:	Standard: Diecast aluminum *designLINE*: painted, RAL 9006 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)









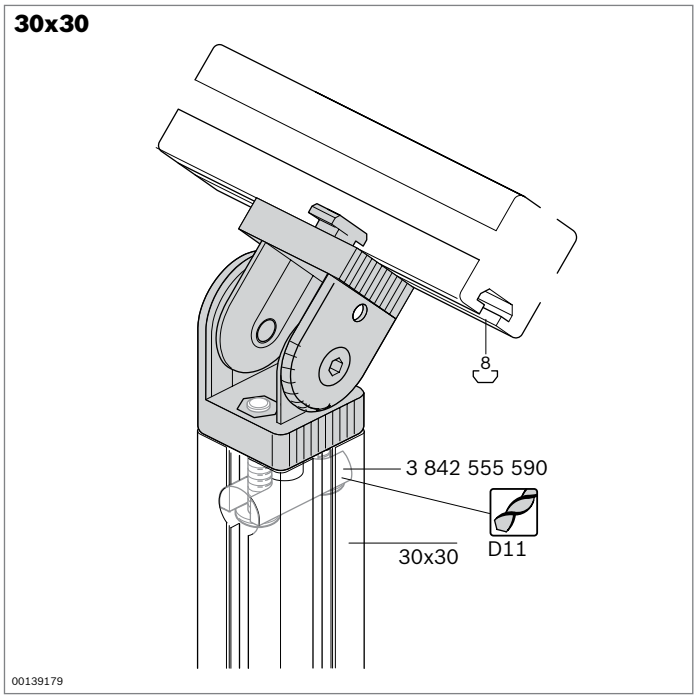



Joint 30x30

designLINE

- For movable or rigid profile connections at any angle
- Swivel range 182°
- With a 15° graduation
- Joint can be clamped (5 Nm) or swivel mounted
- Option of permanent fixing via pins (15 Nm)
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing:
  Through-hole D11 for end face profile connections


Required accessories:
Bolt connector D11 for end face connections












Joint 30x30	Slot	ESD	No.	FS
Standard	8		**3 842 502 683**	2xFS1, 4xFS2
designLINE	8		**3 842 538 683**	2xFS1, 4xFS2


Material:	Standard: Diecast zinc *designLINE*: painted, RAL 9006 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

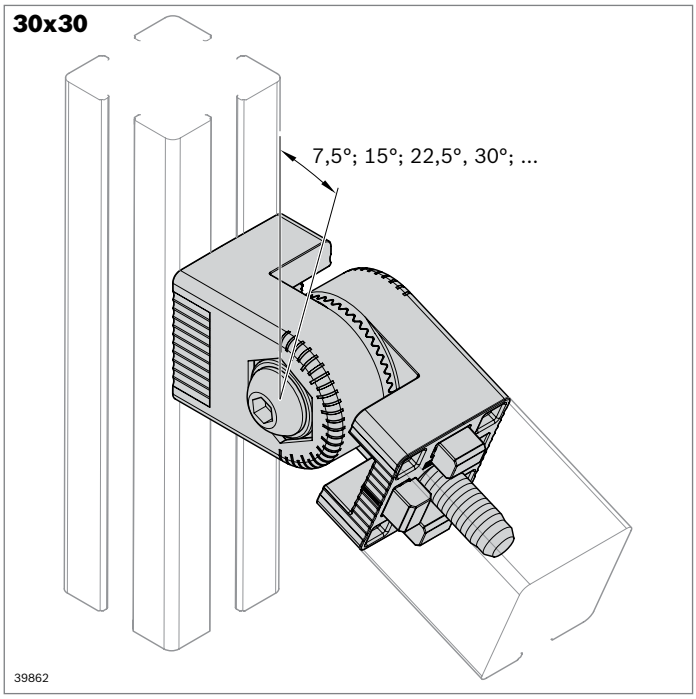

Joint 30x30 lockable



- For adjustable or rigid profile connections
- For high loads up to 45 Nm in the swivel direction
- Form fit thanks to Hirth teething
- Swivel range 180°
- Easy adjustment in the 7.5° modular dimensions
- Marking with a 7.5° graduation for easy detection of the adjustment angle
- Clamping and convenient adjustment of joint using a clamping lever or screw
- Profile finishing:
  Not required (self-cutting screw for end face to end face connections)
- Compatible with joint 30x30 (p. 4-3)





Joint 30x30 lockable	Slot	ESD	No.
	10	ESD	**3 842 562 086**


Material: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. Fastening material

Clamping lever M8x30	No.
For joint 30x30 lockable	**3 842 564 090**

Material: Diecast zinc; black polymer coating

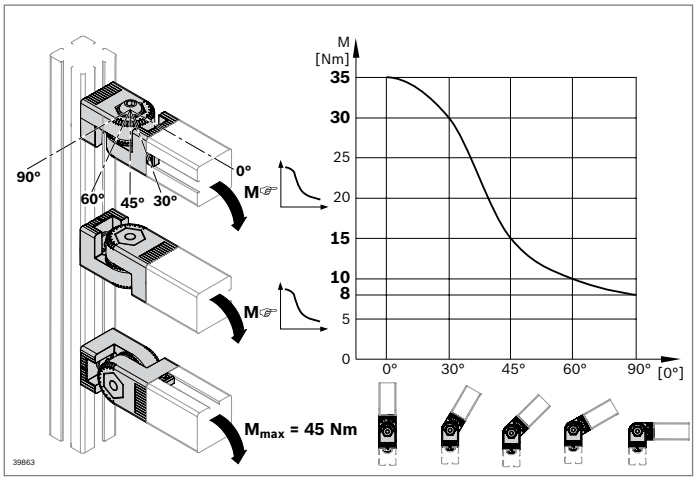

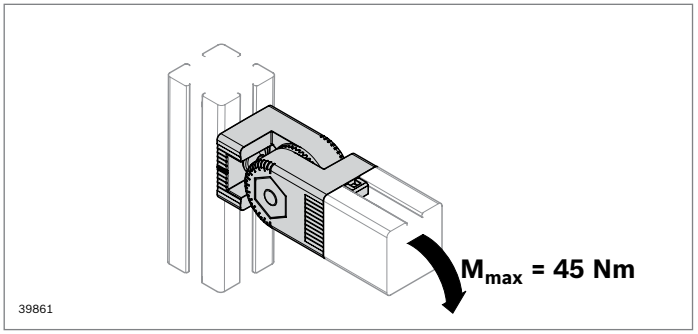


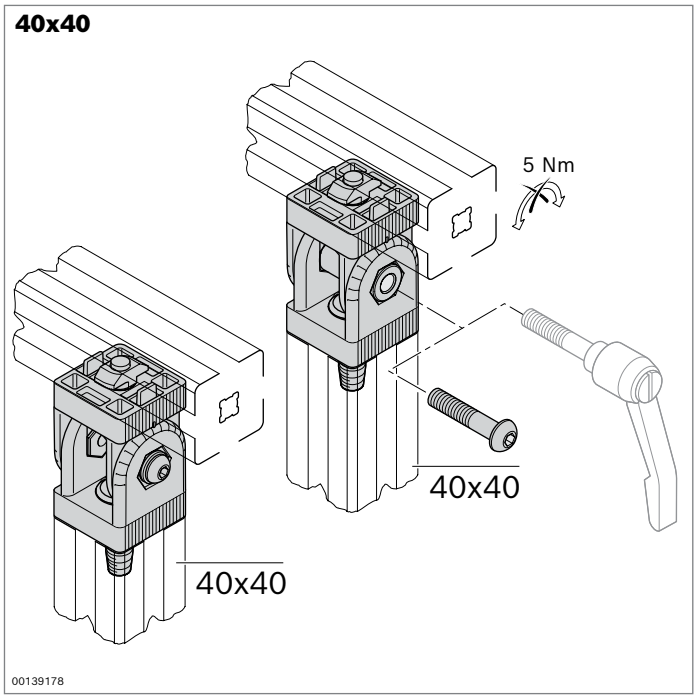



Joint40x40, 40x40 support


designLINE


- For movable or rigid profile connections at any angle
- Swivel range 180°
- With a 15° graduation
- Joint can be clamped (5 Nm) or swivel mounted
- Clamping and convenient adjustment of support joint using a clamping lever (5 Nm)
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design















Joint 40x40	Slot	ESD	No.	FS
Standard	10		**3 842 543 401**	2xFS3, 2xFS4
designLINE	10		**3 842 538 684**	2xFS3, 2xFS4


Material: Standard: Diecast aluminum
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)












Joint 40x40 support	Slot	ESD	No.	FS
Standard	10		**3 842 543 402**	2xFS3, 2xFS4
designLINE	10		**3 842 538 685**	2xFS3, 2xFS4

Material: Standard: Diecast aluminum
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)


Clamping lever M8x40	No.
For joint 40x40 support	**3 842 516 847**


Material: Diecast zinc; black polymer coating

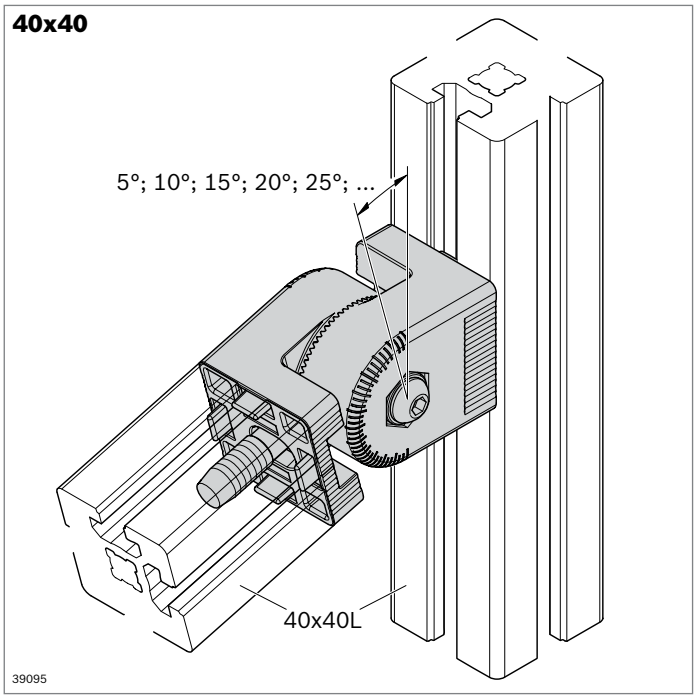


Joint 40x40 lockable

- For adjustable or rigid profile connections
- For high loads up to 100 Nm in the swivel direction
- Form fit thanks to Hirth teething
- Swivel range 180°
- Easy adjustment in the 5° modular dimensions
- Marking with a 5° graduation for easy detection of the adjustment angle
- Clamping and convenient adjustment of joint using a clamping lever or screw
- Profile finishing:
  Not required (self-cutting screw for end face to end face connections)
- Compatible with joint 40x40 and joint 40x40 support (p. 4-5)









Joint 40x40 lockable	Slot	ESD	No.	FS
Standard	10		**3 842 562 087**	2xFS1, 2xFS2


Material: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

Clamping lever M8x40	No.
For joint 40x40 lockable	**3 842 516 847**

Material: Diecast zinc; black polymer coating

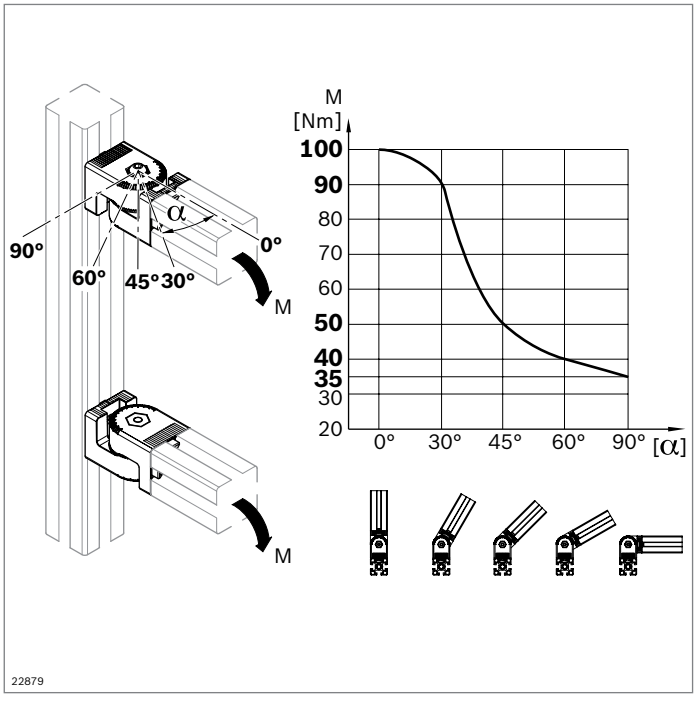

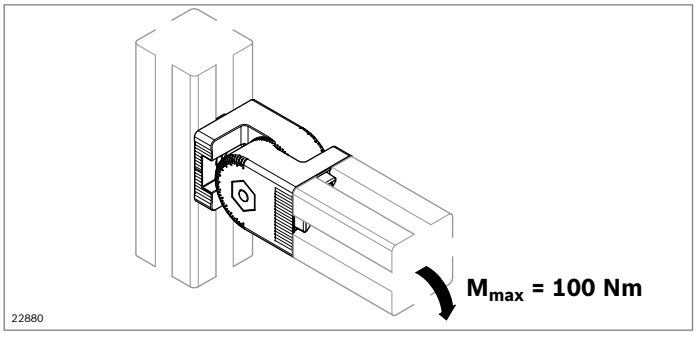


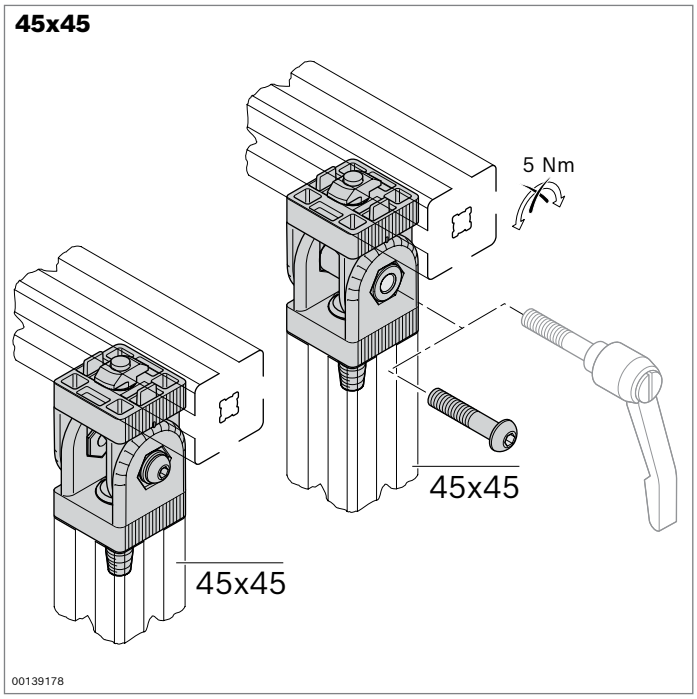



Joint 45x45, 45x45 support


designLINE

- For movable or rigid profile connections at any angle
- Swivel range 180°
- With a 15° graduation
- Joint can be clamped (5 Nm) or swivel mounted
- Clamping and convenient adjustment of support joint using a clamping lever (5 Nm)
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design













Joint 45x45	Slot	ESD	No.	FS
Standard	10		**3 842 543 403**	2xFS3, 2xFS4
designLINE	10		**3 842 538 686**	2xFS3, 2xFS4

Material: Standard: Diecast aluminum
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)










Joint 45x45 support	Slot	ESD	No.	FS
Standard	10		**3 842 543 404**	2xFS3, 2xFS4
designLINE	10		**3 842 538 687**	2xFS3, 2xFS4

Material: Standard: Diecast aluminum
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)


Clamping lever M8x45	No.
For joint 45x45 support	**3 842 538 607**

Material: Diecast zinc; black polymer coating

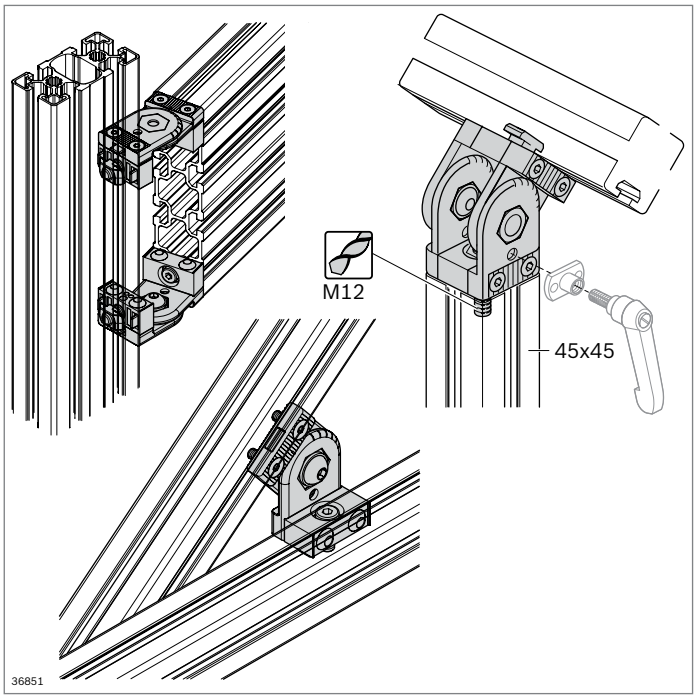

Joint 45x45

- For movable or rigid profile connections at any angle
- Swivel range 182°
- With a 15° graduation
- Joint can be clamped (5 Nm) or swivel mounted
- Option of permanent fixing via pins (15 Nm)

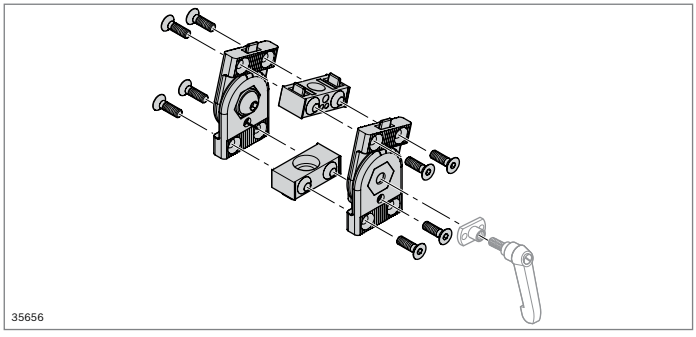



Joint 45x45	Slot	ESD	No.	FS
Standard	10		**3 842 502 684**	2xFS1, 2xFS2


Material:	Standard: Diecast zinc Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)


Clamping lever M5x10	ESD	No.
For joint 45x45		**3 842 505 144**

Material:	Diecast zinc; black polymer coating
















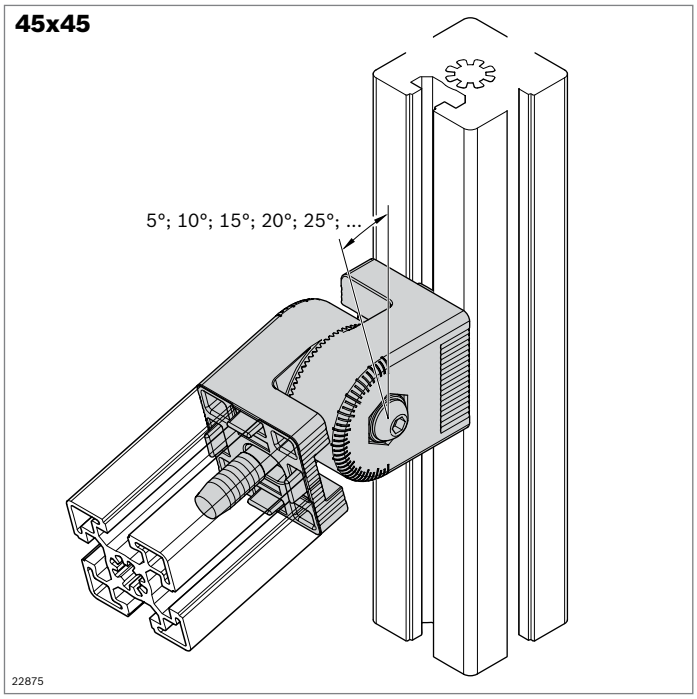







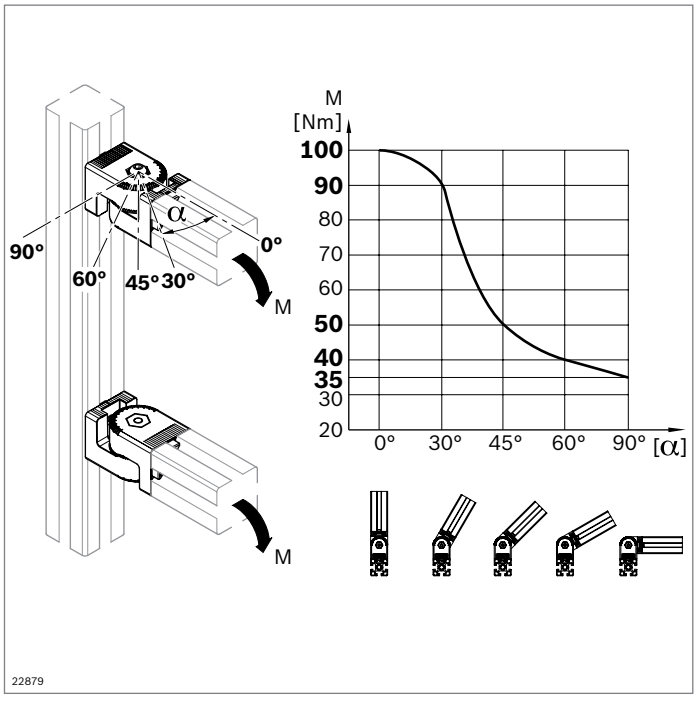

Joint 45x45 lockable


- For adjustable or rigid profile connections
- For high loads up to 100 Nm in the swivel direction
- Form fit thanks to Hirth teething
- Swivel range 180°
- Easy adjustment in the 5° modular dimensions
- Marking with a 5° graduation for easy detection of the adjustment angle
- Clamping and convenient adjustment of joint using a clamping lever or screw
- Profile finishing:
  Not required (self-cutting screw for end face to end face connections)
- Compatible with joint 45x45 and joint 45x45 support (p. 4-7)


Joint 45x45 lockable	Slot	ESD	No.	FS
	10		**3 842 546 564**	2xFS1, 2xFS2

Material:	Diecast zinc Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

Clamping lever M8x45	No.
For joint 45x45 lockable	**3 842 538 607**

Material:	Diecast zinc; black polymer coating

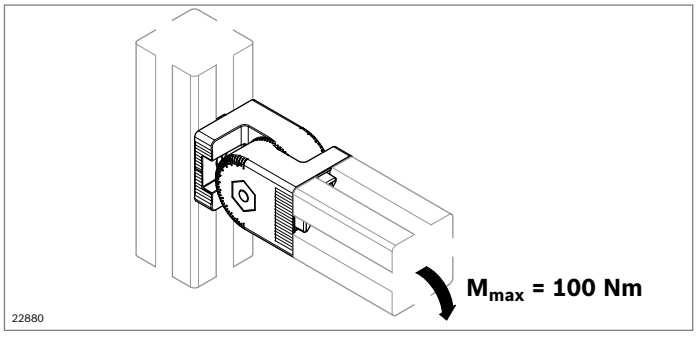


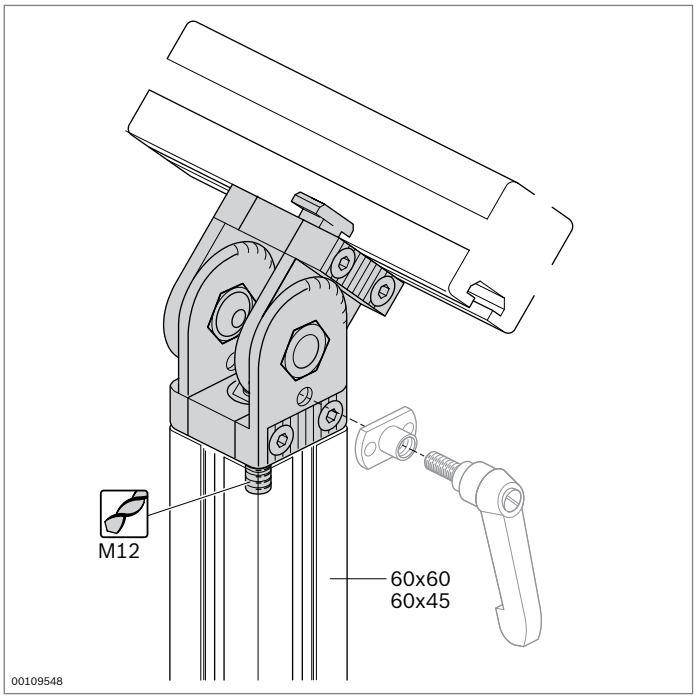



Joint 60x45, 60x60

designLINE

- For movable or rigid profile connections at any angle
- Swivel range 182°
- With a 15° graduation
- Joint can be clamped (5 Nm) or swivel mounted
- Optional pins for permanent fixing (15 Nm)
- *designLINE* version with special silver paint (RAL 9006)
- Profile finishing:
  Thread (M12) in central hole for end-face connection







FS5
DIN 7984 M12x40
ISO 7089-8 A8,4


FS6
DIN 7984 M8x20
10


Joint 60x45	Slot	ESD	No.	FS
Standard	10		**3 842 502 688**	2xFS5, 2xFS6
designLINE	10		**3 842 539 799**	2xFS5, 2xFS6


Material: Standard: Diecast zinc
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

Clamping lever M5x10	No.
For joint 60x45	**3 842 505 144**

Material: Diecast zinc; black polymer coating







FS5
DIN 7984 M12x40
ISO 7089-8 A8,4


FS6
DIN 7984 M8x20
10

Joint 60x60	Slot	ESD	No.	FS
Standard	10		**3 842 502 687**	2xFS5, 2xFS6
designLINE	10		**3 842 539 800**	2xFS5, 2xFS6


Material: Standard: Diecast zinc
designLINE: painted, RAL 9006
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

Clamping lever M5x10	No.
For joint 60x60	**3 842 505 144**

Material: Diecast zinc; black polymer coating

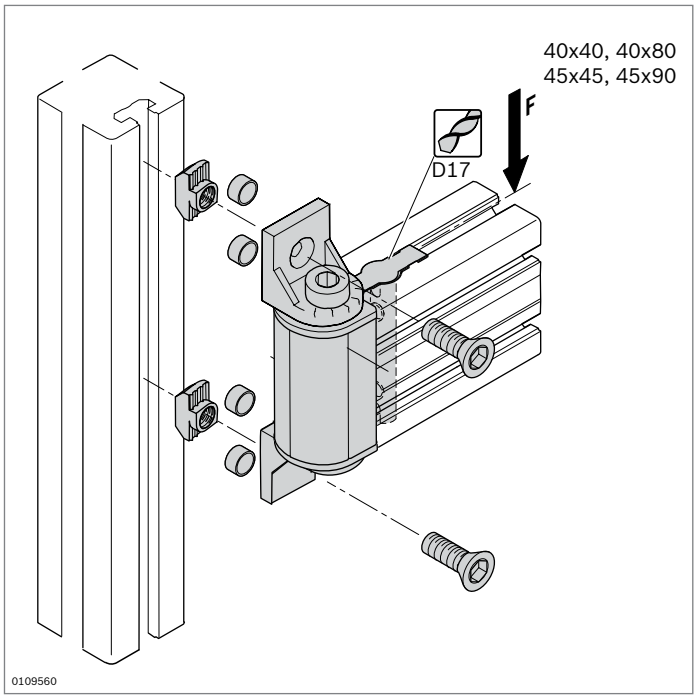



Swivel bearing



designLINE

- Suitable for swiveling right-angled profile connections, e.g. for constructing supporting arms or doors
- Can be locked in any position
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing:
  Through-hole D17



Profile	 M_{max} = F x L (Nm)
40x40	40
40x80	130

FS1





Swivel bearing		p (mm)	ESD	No.	FS
40x40	Standard	40	*	**3 842 554 404**	2xFS1
	designLINE	40	*	**3 842 554 412**	2xFS1
40x80	Standard	80	*	**3 842 554 406**	2xFS1
	designLINE	80	*	**3 842 554 414**	2xFS1

Material: Standard: Diecast aluminum
designLINE: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Cover cap: PP; signal gray


Scope of delivery: Incl. cover caps, bolt connectors, fastening material (FS)

* Swivel bearing creates conductive connection, but the cover caps included in the set are not ESD-compatible.



Profile	 M_{max} = F x L (Nm)
45x45	50
45x90	150

FS1




Swivel bearing		p (mm)	ESD	No.	FS
45x45	Standard	45	*	**3 842 554 408**	2xFS1
	designLINE	45	*	**3 842 554 416**	2xFS1
45x90	Standard	90	*	**3 842 554 410**	2xFS1
	designLINE	90	*	**3 842 554 418**	2xFS1

Material: Standard: Diecast zinc
designLINE: painted (RAL 9006)
Fastening material: Steel; zinc-plated
Cover cap: PP; signal gray

Scope of delivery: Incl. cover caps, bolt connectors, fastening material (FS)


* Swivel bearing creates conductive connection, but the cover caps included in the set are not ESD-compatible.

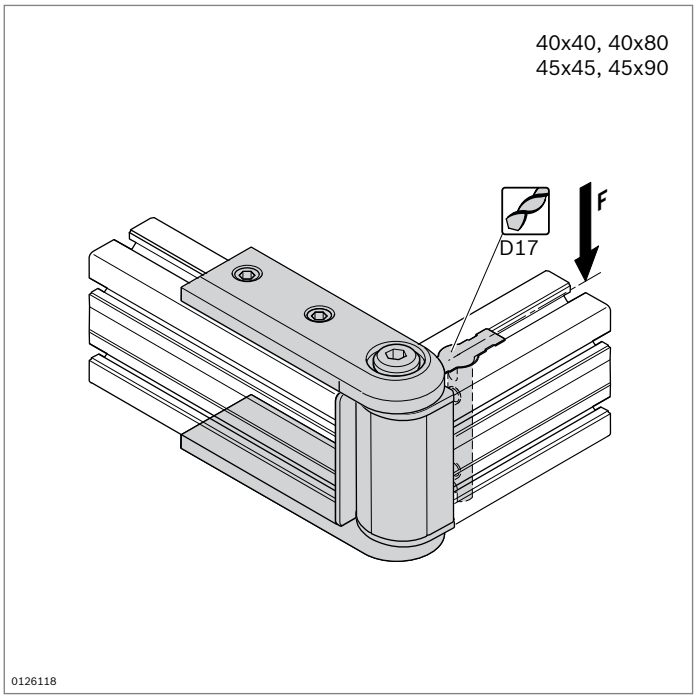

Supporting arm joint

designLINE

- Suitable for swiveling end connections, e.g. for the construction of supporting arms
- Can be locked in any position
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design
- Profile finishing:
  Through-hole D17




Profile	M_{max} = F x L (Nm)
40x40	40
40x80	130

FS1
ISO4762
M6x16

Supporting arm joint		p (mm)	ESD	No.	FS
40x40	Standard	40	*	**3 842 554 420**	4xFS1
	designLINE	40	*	**3 842 554 428**	4xFS1
40x80	Standard	80	*	**3 842 554 422**	4xFS1
	designLINE	80	*	**3 842 554 430**	4xFS1

Material: Standard: Diecast zinc
designLINE: painted (RAL 9006)
Cover cap: PP; signal gray
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. cover caps, bolt connectors, fastening material (FS)

* Supporting arm joint creates conductive connection, but the cover caps included in the set are not ESD-compatible.




Profile	M_{max} = F x L (Nm)
45x45	50
45x90	150

FS1
ISO4762
M6x16

Supporting arm joint		p (mm)	ESD	No.	FS
45x45	Standard	45	*	**3 842 554 424**	4xFS1
	designLINE	45	*	**3 842 554 432**	4xFS1
45x90	Standard	90	*	**3 842 554 426**	4xFS1
	designLINE	90	*	**3 842 554 434**	4xFS1

Material: Standard: Diecast zinc
designLINE: painted (RAL 9006)
Cover cap: PP; signal gray
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. cover caps, bolt connectors, fastening material (FS)


* Supporting arm joint creates conductive connection, but the cover caps included in the set are not ESD-compatible.

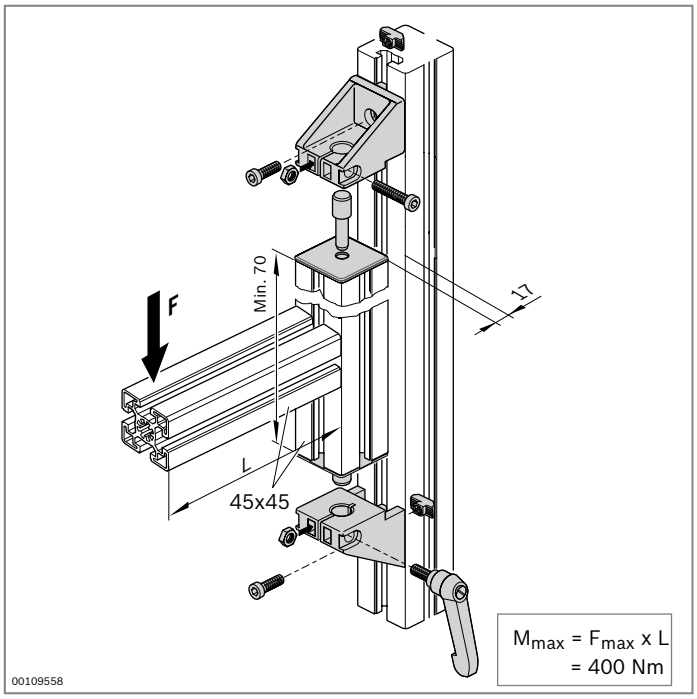


Bearing pedestal

10 *designLINE*

- Bearing pedestal for heavy superstructures which have to be swiveled
- *designLINE* version with special silver paint (RAL 9006) for an attractive, high-quality design






M_{max} = F x L (Nm)


400

FS1



Bearing pedestal	Slot	No.	FS
Standard	10	**3 842 547 868**	2xFS1
designLINE	10	**3 842 547 869**	2xFS1


Material:	Standard: Diecast zinc *designLINE*: painted (RAL 9006) Fastening material: Steel; zinc-plated Clamping lever handle: Diecast zinc; black plastic coated Cover cap: PP; signal gray
Scope of delivery:	Incl. fastening material (FS), 2 x cover cap, 2 x bolt, clamping lever (and additional standard parts for clamping the bearing pedestal)

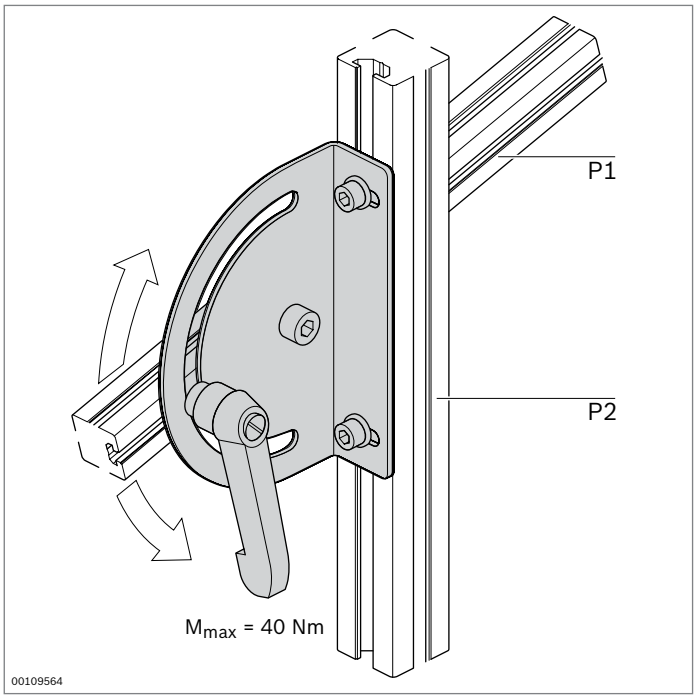

Swivel mounting 180°





- Swivel mounting for shelves, etc. which need to be positioned at an angle of ± 90°

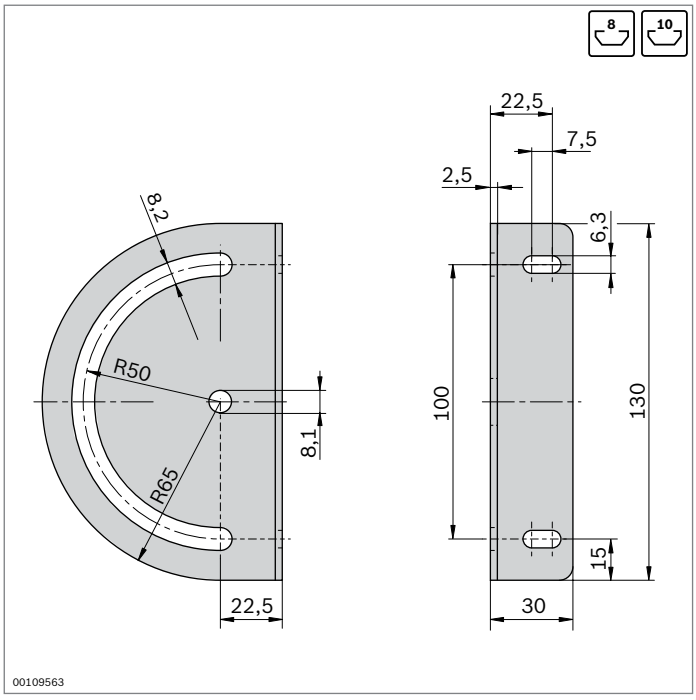


Swivel mounting 180°	P1 / P2	ESD	No.	FS
	8 / 8	ESD	**3 842 538 275**	FS1
	8 / 10			2xFS3
				2xFS4
				2xFS5
				1xFS6
	10 / 8	ESD	**3 842 538 276**	FS2
	10 / 10			2xFS3
				2xFS4
				2xFS5
				1xFS6

Material:	Swivel mounting: Steel; zinc-plated Clamping lever: Diecast zinc; black plastic coated
Scope of delivery:	Incl. fastening material (FS), clamping lever with disk and swivel-in sliding block with spring

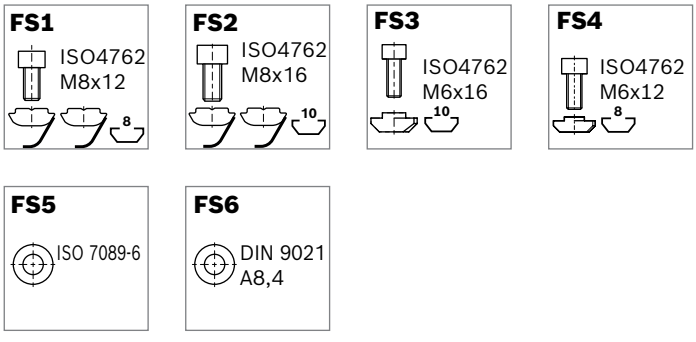

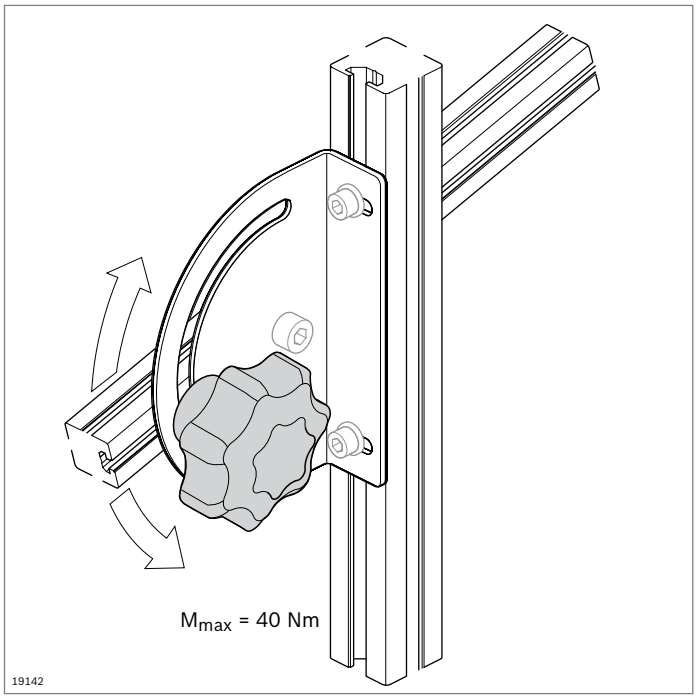


Clamping lever, star knob




- Clamping elements for adjustable connections

Accessories:


- Screws and sliding blocks; see fastening material (p. 4-14)




Clamping lever M5		L (mm)	No.
		10	**3 842 505 144**
Material:	Clamping lever: Diecast zinc; black plastic coated Screws: Steel; bronzed		




Clamping lever M6		L (mm)	No.
		25	**3 842 528 540**
		40	**3 842 528 539**
Material:	Clamping lever: Diecast zinc; black plastic coated Screws: Steel; galvanized and black chromated		



Clamping lever M8		L (mm)	No.
		12	**3 842 516 845**
		16	**3 842 522 124**
		20	**3 842 516 846**
		30	**3 842 564 090**
		40	**3 842 516 847**
		45	**3 842 538 607**
		55	**3 842 516 848**
Material:	Clamping lever: Diecast zinc; black plastic coated Steel parts: zinc-plated, strength class 5.8		



Star knob M6	**L** (mm)	**No.**
	15	**3 842 516 849**
	20	**3 842 516 850**
Material:	Star knob: PA; black Steel parts: zinc-plated, strength class 5.8	




Star knob M8		**No.**
		3 842 516 851
Material:	Star knob: PA; black Steel parts: zinc-plated, strength class 5.8	


Air-supply elements




Flanged plate (p. 5-3)




Connection piece (p. 5-4)




Connection screw fitting M12-1/4″ (p. 5-4)



Longitudinal end connection (p. 5-5)




Longitudinal end connector 45 Pneu (p. 5-6)




T-connector 45 Pneu (p. 5-6)

45x90
(p. 2-46)




19584

45x90




00109732

45x90L
45x90L 2N
45x90L 3NVS
(p. 2-43)




19585

45x90L




00109731

45x180
(p. 2-46)




19586

45x180




00109733

90x90L
90x90L 4N
90x90L 4NVS
(p. 2-48)




19587

90x90L




00109730

90x180L
(p. 2-51)



19588


90x180L



00109734

Air-supply elements

- Rexroth **strut profiles** can be used as compressed-air lines and reservoirs. The hollow chambers or central holes are used
- **Flanged plate** for end closing of profiles (p. 5-3)
- Compressed-air intake or discharge at the flanged plate, **connection piece**, or **connection screw fitting** (p. 5-4)
- Air-tight connection of profiles with **longitudinal end connectors or T-connectors** (p. 5-6, 5-5)
- The use of the heavy-duty profiles is preferable in the case of more demanding leak-tightness requirements (e.g. for underwater applications)

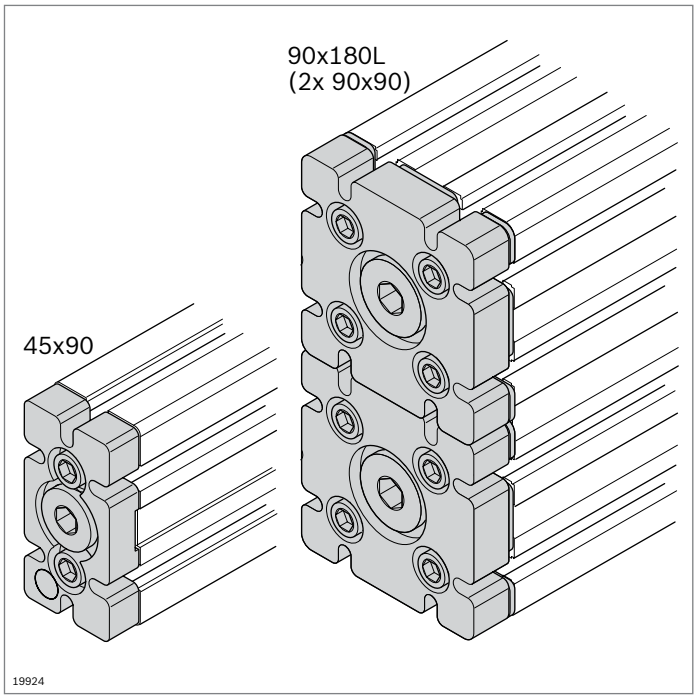


Flanged plate



- For sealing the ends of the hollow chambers.
  This enables the profiles to be used as a compressed-air line (p. 5-2)
- For compressed-air introduction or removal when screw plugs are replaced by pneumatic screw fittings
- Profile finishing: M12 thread cutting in the central holes
- For a maximum pressure (p_{max}) of 8 bar
- Operating temperature range of the seals:
  -10 °C to +70 °C

45x90




FS1

DIN 7984
M12x30

Flanged plate		No.	FS
45x90		**3 842 523 097**	2xFS1
Material:	Flanged plate: Diecast aluminum Seal: NBR Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS), screw plug, seals		

45x180




FS2

DIN 7984
M12x20

Flanged plate		No.	FS
45x180	2	**3 842 535 721**	2xFS2
Material:	Flanged plate: Aluminum Seal: NBR Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS), 2 x spacer, 3 x screw plug, seals		

90x90




FS1

DIN 7984
M12x30

Flanged plate		No.	FS
90x90		**3 842 523 098**	4xFS1
Material:	Flanged plate: Diecast aluminum Seal: NBR Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS), 4 x spacer, screw plug, seals		

Notice: Only suitable for light profiles 90x90L and 90x180L.

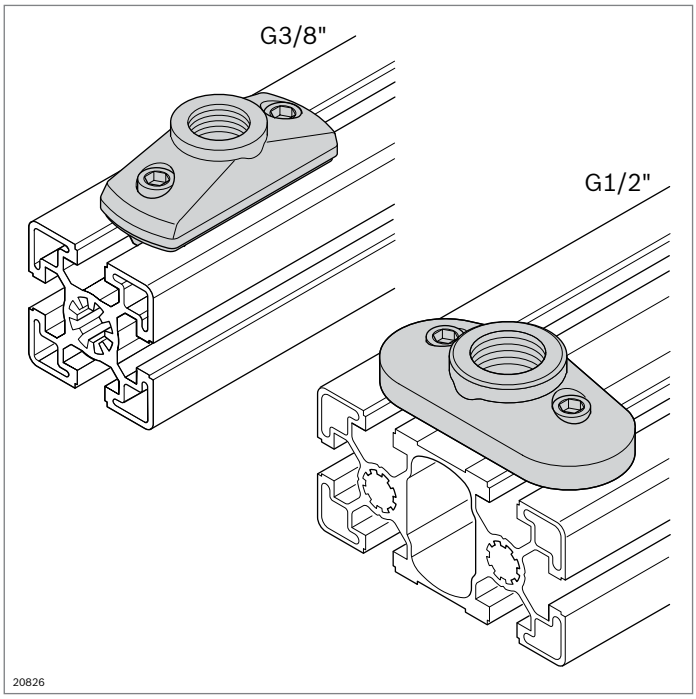



Connection piece
Connection screw fitting M12-1/4"

10


Connection piece


- For compressed-air intake or discharge at any point on the profile
- G3/8″ for connection at central hole
- G1/2″ for connection at hollow chamber
- Suitable for light and standard profiles
  - Profile finishing: Blind hole DI9.8; blind hole ø21 mm (drilling jig **3 842 528 574**, p. 14-3)
- For a maximum pressure (p_{max}) of 8 bar







Connection piece		No.	FS
G3/8"		**3 842 523 092**	2xFS1
Material:	Connection piece: Diecast aluminum Seal: NBR		
Scope of delivery:	Incl. fastening material, seals (**A**, **B**)		
Accessories:	Seals **A**, **B** (p. 5-6)		





Connection piece		No.	FS
G1/2"		**3 842 352 085**	2xFS1
Material:	Connection piece: Diecast zinc Seal: NBR		
Scope of delivery:	Incl. fastening material, seal (**A**)		
Accessories:	Seal **A** (p. 5-6)		






Connection screw fitting M12-1/4"

- For screw fitting in central hole
- Profile finishing: M12
- For a maximum pressure (p_{max}) of 8 bar

Connection screw fitting		No.
M12-1/4"	10	**3 842 535 719**
Material:	Connection screw fitting: Steel; zinc-plated Seal: PVC; hard	
Scope of delivery:	Incl. Seal	

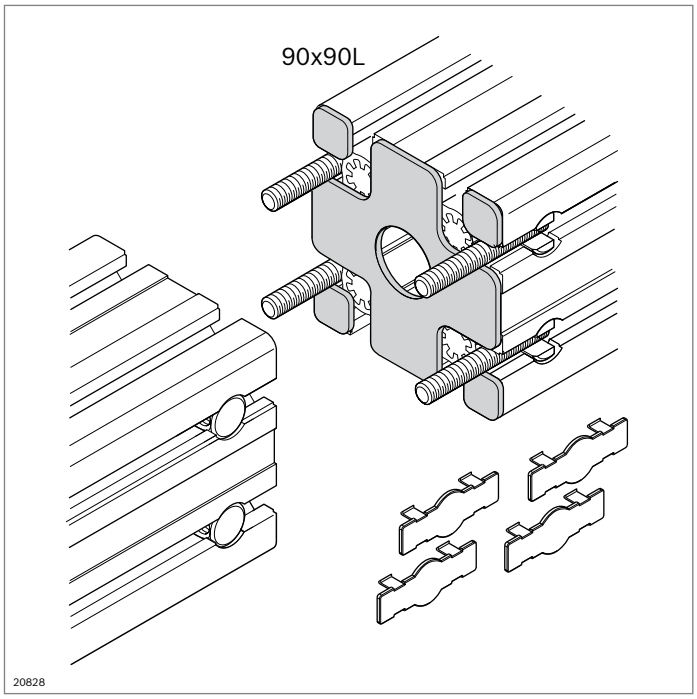


Longitudinal end connection


10

- Seal for end-to-end connection of profiles carrying compressed air
- Profile finishing: Through-hole D17 (45x90, 45x180); blind hole LF (90x90L)
- For a maximum pressure (p_{max}) of 8 bar
- Operating temperature range of the seals: -10 °C to +70 °C


Required accessories:
Longitudinal end connector for profile connection (p. 3-63)


5







Longitudinal end connection		No.
45x90		**3 842 508 087**
Material:	Seal: NBR Spacer: PA	
Scope of delivery:	Seal, 2 x spacer	






Longitudinal end connection		No.
45x180		**3 842 508 088**
Material:	Seal: NBR Spacer: PA	
Scope of delivery:	Seal, 2 x spacer	





Longitudinal end connection		No.
90x90		**3 842 510 145**
Material:	Seal: NBR Spacer: PA	
Scope of delivery:	Seal, 4 x spacer	


Notice: Only suitable for light profile 90x90L.

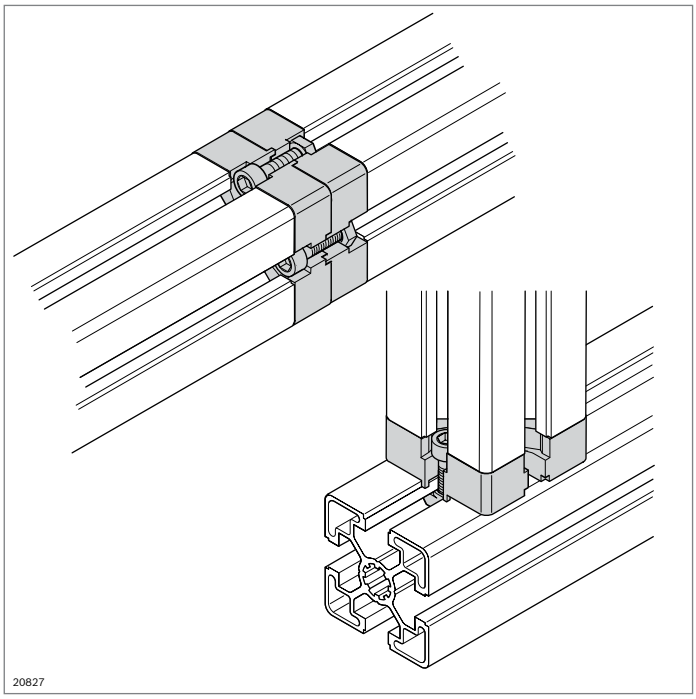



Longitudinal end connector 45 Pneu
T-connector 45 Pneu, seal




- Longitudinal end connector 45 Pneu for end face mechanical and pneumatic connections of two 45x45 or 45x45L profiles for using the central hole as a compressed-air line
- T-connector 45 Pneu for the mechanical and pneumatic connection of two 45x45 or 45x45L profiles at under a 90° angle for using the central hole as a compressed-air line
- Profile finishing: M12 in central hole; blind hole DI9.8; blind hole ø21 mm (drilling jig **3 842 528 574**, p. 14-3)
- For a maximum pressure (p_{max}) of 8 bar












Longitudinal end connector	No.	FS
45 Pneu	**3 842 523 094**	4xFS1, 2xFS2

Material:	Longitudinal end connector: Diecast aluminum Seal: NBR
Scope of delivery:	Incl. fastening material, sealing rings








T-connector	No.	FS
45 Pneu	**3 842 523 093**	2xFS3

Material:	T-connector: Diecast aluminum Seal: NBR
Scope of delivery:	Incl. fastening material, seals (**A**, **B**) for standard and light profiles



- Seal for connection piece and T-connector

Seal		t (mm)		No.
A	For standard profiles	4	10	**3 842 503 242**
B	For light profiles	7	10	**3 842 523 102**

Material: NBR

Feet and wheels



Modular leveling feet (p. 6-2)



Leveling foot, foot, damping ring (p. 6-4)





Plate (p. 6-6)



Base plate, steel (p. 6-8)



Base plate (p. 6-10)




Base plate (p. 6-11)



Foot (p. 6-13)



Double wheel (p. 6-15)




Wheel (p. 6-16)




Heavy-duty wheel (p. 6-19)



Lifting wheel (p. 6-21)




Roller with mounting flange (p. 6-23)

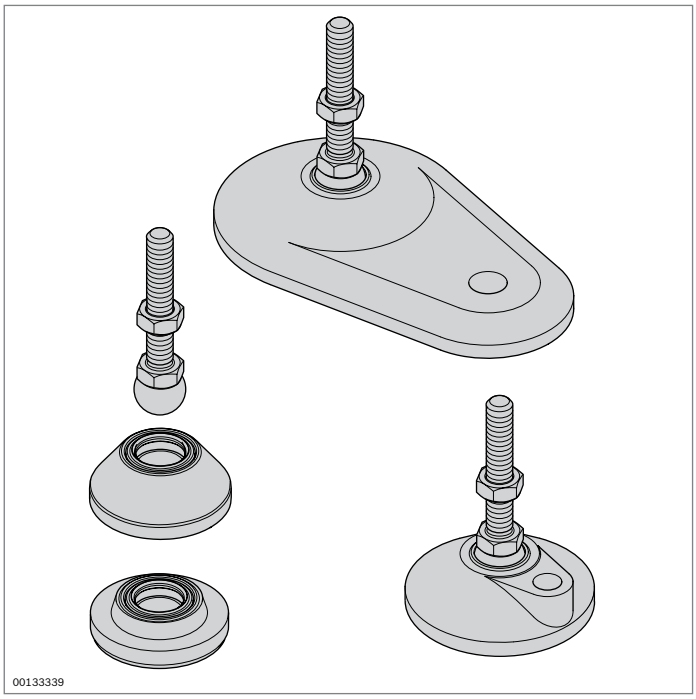


Modular leveling feet

- Leveling feet for compensating irregularities in the floor up to 10°
  - Modular system, various combinations possible
  - Spindles and base plates can be combined as desired
  - Base plates with screw hole for simple screw fitting to the floor
- The damping plate prevents the transfer of vibrations and allows a defined conduction of voltages via a set of grounding components (p. 17-2)
- Profile finishing: Thread M in central hole


Accessories: Bearing ring (p. 6-15)
Accessories, optional: Metal bracket 103x103x37, D12.5 (p. 3-35)

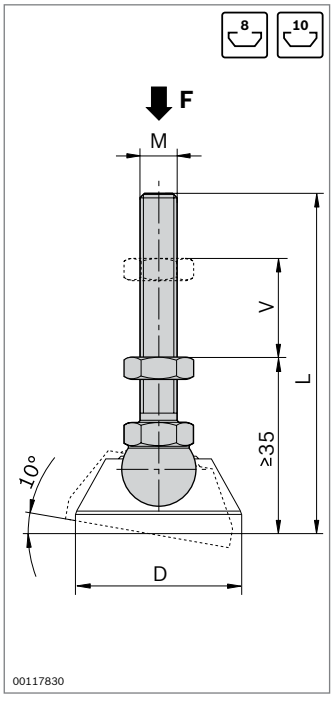

Spindle	F (N)	M	L (mm)	V (mm)	ESD		No.
Stainless steel	10000	M8	75	20		20	**3 842 536 811**
	20000	M12	85	30		20	**3 842 536 812**
	20000	M12	145	80		20	**3 842 537 223**
	20000	M12	200	135		20	**3 842 537 225**
	30000	M16	85	20		20	**3 842 537 227**
	30000	M16	145	80		20	**3 842 537 229**
	30000	M16	200	135		20	**3 842 537 231**
Steel; zinc-plated	10000	M8	75	20		20	**3 842 537 220**
	20000	M12	85	30		20	**3 842 537 222**
	20000	M12	145	80		20	**3 842 537 224**
	20000	M12	200	135		20	**3 842 537 226**
	30000	M16	85	20		20	**3 842 537 228**
	30000	M16	145	80		20	**3 842 537 230**
	30000	M16	200	135		20	**3 842 537 232**




Base plate	F (N)	D (mm)	ESD		No.
Stainless steel	20000	29	✓	20	**3 842 536 694**
	30000	39	✓	20	**3 842 536 695**
	30000	44	✓	20	**3 842 536 696**
	30000	59	✓	20	**3 842 538 673**
	30000	79	✓	20	**3 842 537 206**
Diecast zinc, black powder coating	20000	29		20	**3 842 538 674**
	30000	39		20	**3 842 538 675**
	30000	44		20	**3 842 538 676**
	30000	59		20	**3 842 538 677**
	30000	79		20	**3 842 538 678**
PA; black	5000	29		20	**3 842 538 832**
	9000	39		20	**3 842 538 833**
	9000	44		20	**3 842 538 834**
	9000	59		20	**3 842 538 835**
	9000	79		20	**3 842 538 836**




Base plate with screw hole	F (N)	D (mm)	a (mm)		No.
	30000	59	21	20	**3 842 538 932**
	30000	79	31	20	**3 842 538 934**

Material: Diecast zinc, black powder coating




Oval base plate with screw hole	F (N)	D (mm)	a (mm)	L (mm)		No.
	30000	59	52	100	20	**3 842 538 679**
	30000	79	65	130	20	**3 842 538 680**

Material: Diecast zinc, black powder coating



Damping plate	F (N)	D (mm)		No.
	1100	29	20	**3 842 538 555**
	1600	39	20	**3 842 538 556**
	2000	44	20	**3 842 538 557**
	2500	59	20	**3 842 538 558**
	2800	79	20	**3 842 538 559**

Material: PUR; black

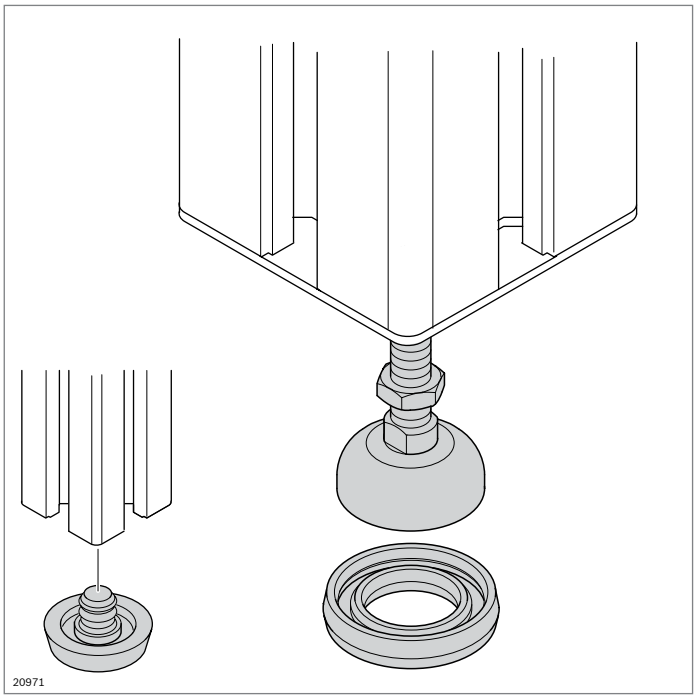

Leveling foot, foot, damping ring


Leveling foot

- For compensating irregularities in the floor up to 5°
- Fully assembled spindle and base plate
- Profile finishing: Threading in central hole

Damping ring


- The electrically insulating damping ring prevents the transfer of vibrations and allows a defined conduction of voltages via a set of grounding components (p. 17-2)

Accessories, optional:
Bearing ring (p. 6-15), for when cover caps with a hole are used, metal bracket 103x103x37, D12.5 (p. 3-35)




Leveling foot	M	D (mm)	L (mm)		No.
	M6	20	41	20	**3 842 518 743**

Material: Steel/plastic




Leveling foot	F (N)	M	D (mm)	L (mm)	V (mm)	ESD		No.
	5000	M8	30	65	15		20	**3 842 502 257**
	8000	M12	30	72	14		20	**3 842 529 025**

Material: Steel; zinc-plated




Leveling foot	F (N)	M	D (mm)	L (mm)	V (mm)	ESD		No.
	10000	M12	44	85	30		20	**3 842 352 061**
	20000	M16	44	145	80		20	**3 842 311 956**
	10000	M12	44	160	80		20	**3 842 536 470**
	20000	M16	44	200	135		20	**3 842 554 149**
	10000	M12	58	85	30		20	**3 842 511 893**
	20000	M16	90	85	20		20	**3 842 311 950**
	20000	M16	90	145	80		20	**3 842 311 951**
	20000	M16	90	200	135		20	**3 842 527 186**

Material: Steel; zinc-plated




Damping ring	F (N)	D (mm)	d (mm)		No.
	1600	30	39	20	**3 842 529 024**
	2000	44	52	20	**3 842 521 817**
	2500	58	66	20	**3 842 522 301**
	3000	90	98	20	**3 842 522 303**

Material: PUR; natural, hardness: Shore A 70-80



Leveling foot	F (N)	M	D (mm)	L (mm)	V (mm)		No.
	15000	M16	80	95	55	1	**3 842 533 310**

Material: Spindle: Stainless steel
Base plate: PA




Foot		No.
	100	**3 842 563 296**

Material: TPE; black

Accessories, optional:

- Threaded sleeve **3 842 504 790** (p. 6-7)

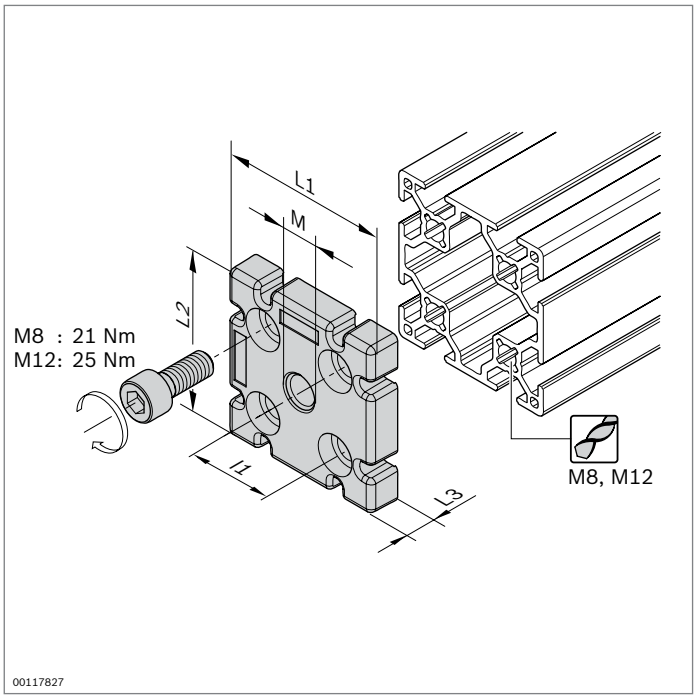

Plate



- For fastening leveling feet in profiles without a central hole
- For use as an end connector or T-connector
- Profile finishing: Tapping of thread in the central hole




Plate	F (N)	M	L1 (mm)	l1 (mm)	L2 (mm)	L3 (mm)	No.	FS
30x60	8000	M12	60	30	30	11	**3 842 536 560**	2xFS1
40x80	10000	M12	80	40	40	15	**3 842 536 562**	2xFS2
45x90	20000	M16	90	45	45	15	**3 842 536 564**	2xFS2

Material: Plate: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

FS1

DIN 7984 M8x20

FS2

DIN 7984 M12x20




Plate	F (N)	M	L1 (mm)	l1 (mm)	L2 (mm)	L3 (mm)	No.	FS
60x60 8N	10000	M12	60	30	60	11	**3 842 536 566**	4xFS1
80x80L	10000	M12	80	40	80	15	**3 842 529 416**	4xFS2
90x90L	20000	M16	90	45	90	15	**3 842 511 352**	4xFS2
100x100L	20000	M16	100	50	100	15	**3 842 529 417**	4xFS2


Material: Plate: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

FS1

DIN 7984 M8x20


FS2

DIN 7984 M12x20

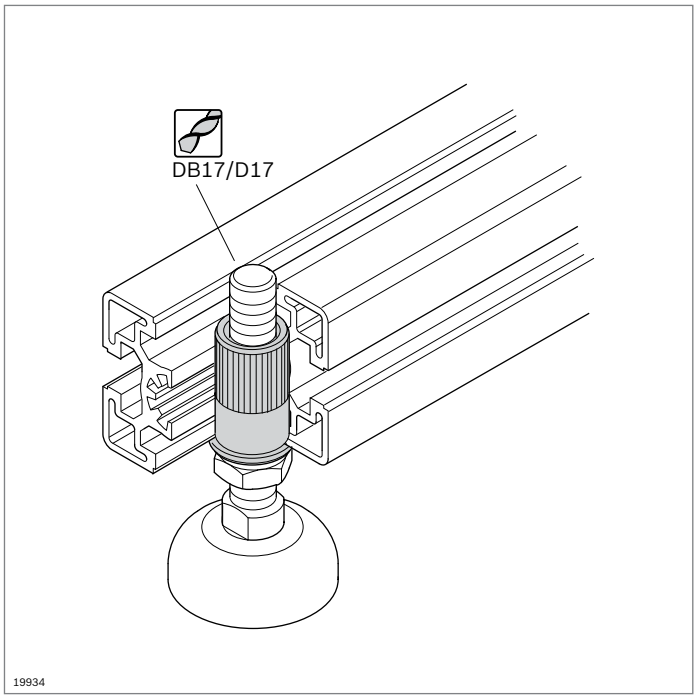


Threaded sleeve


- For fastening leveling feet at an angle to the longitudinal profile direction
- Profile finishing:
  - Drilling of blind hole DB17
  - Through-hole D17



Threaded sleeve		F (N)	M	No.
		8000	M12	**3 842 504 790**
Material:	Steel; zinc-plated			

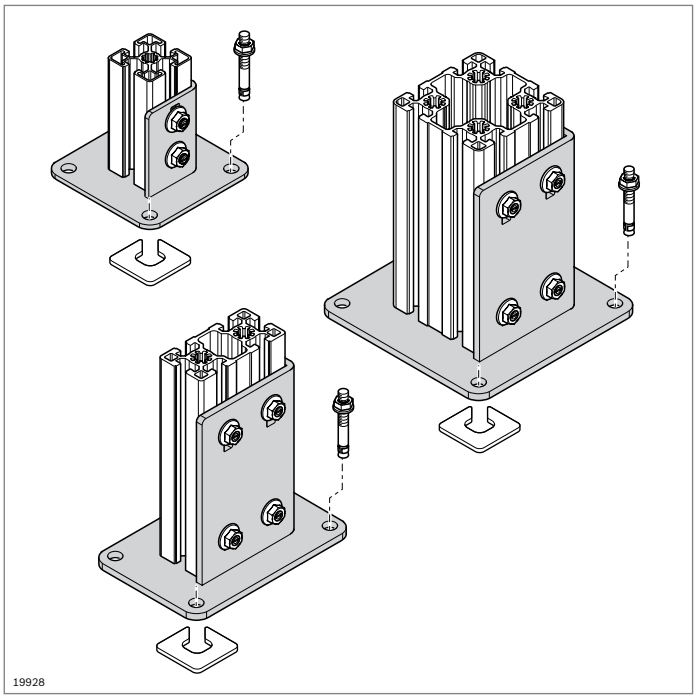

Base plate, steel




- For the construction of all kinds of leg sets
- Profile finishing: Not required


Accessories:

- T-bolt M8x20, 10 mm slot (p. 3-6)
- Flange nut M8 (p. 3-6)
- Floor dowel **3 842 526 561** (p. 6-13)
- Washer (p. 6-14)

40x40

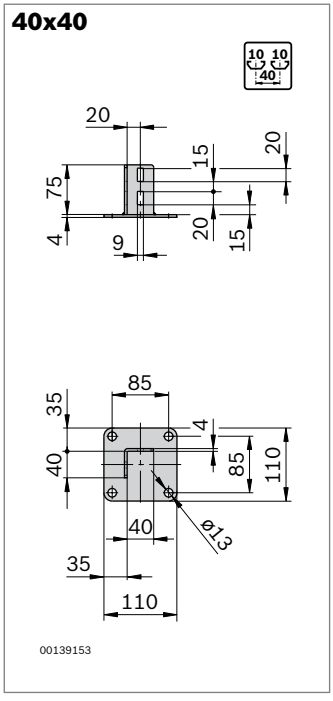


45x45

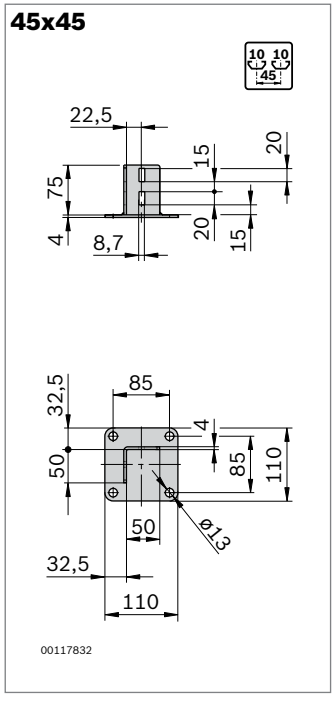


Base plate, steel	ESD	No.
40x40	ESD	**3 842 542 667**
45x45	ESD	**3 842 536 581**

Material: Steel; zinc-plated

40x80

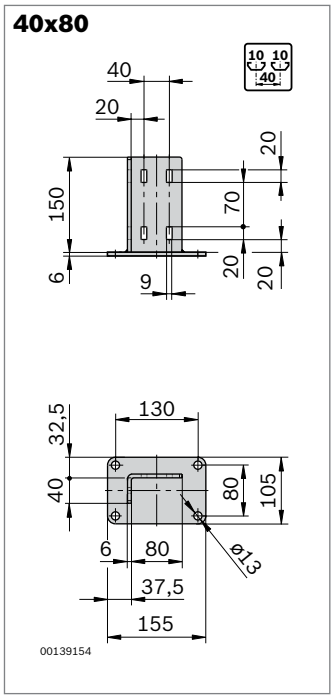


45x90

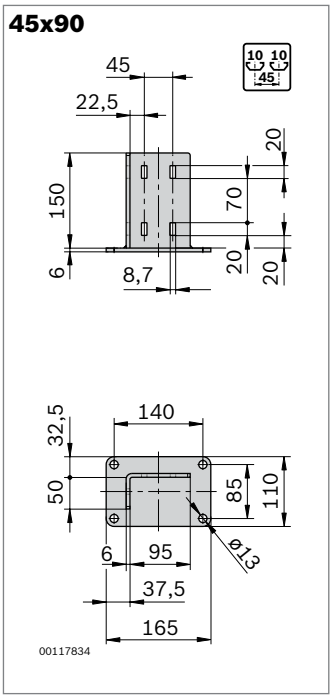


Base plate, steel	ESD	No.
40x80		**3 842 542 668**
45x90		**3 842 536 207**

Material: Steel; zinc-plated

80x80

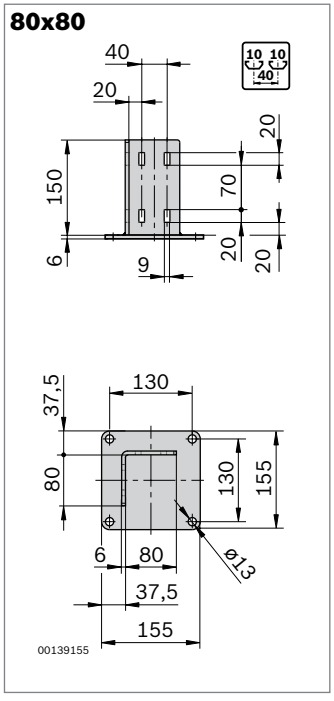


90x90

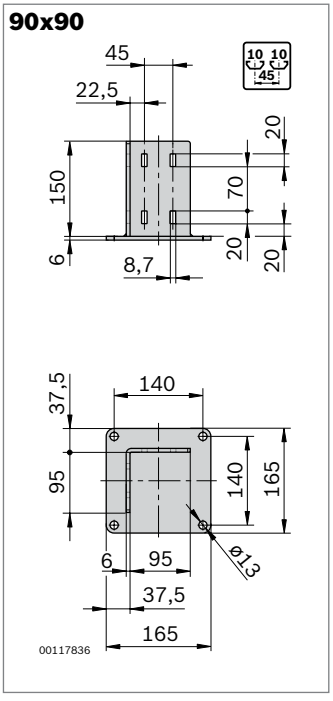

Base plate, steel	ESD	No.
80x80		**3 842 542 669**
90x90		**3 842 536 746**


Material: Steel; zinc-plated

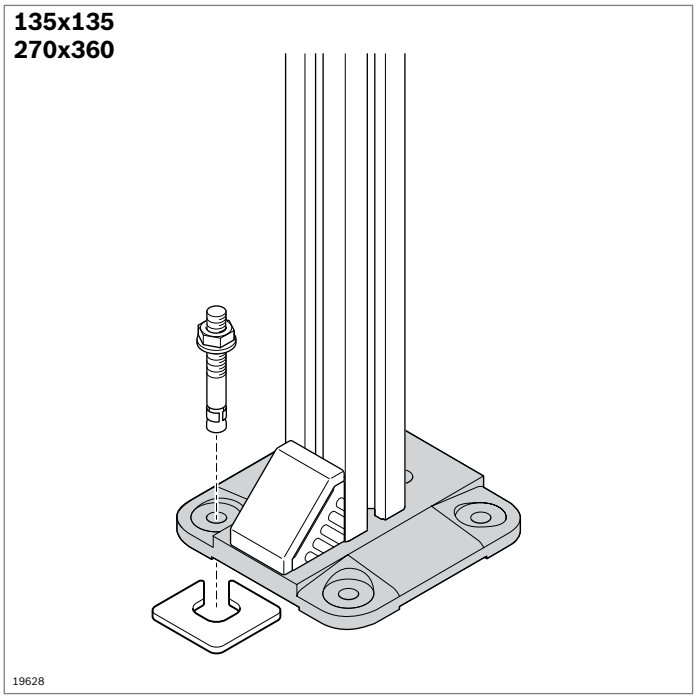

Base plate 135x135, 270x360


- Used in construction for supporting separating and protective walls
- Anchoring with floor dowel

Required accessories:
Bracket (p. 3-19)




Base plate		ESD	No.
135x135		⚠	**3 842 516 175**
Material:	Diecast aluminum		

Required accessories:
- Floor dowel **3 842 526 560** (p. 6-13)
- Washer (p. 6-14)

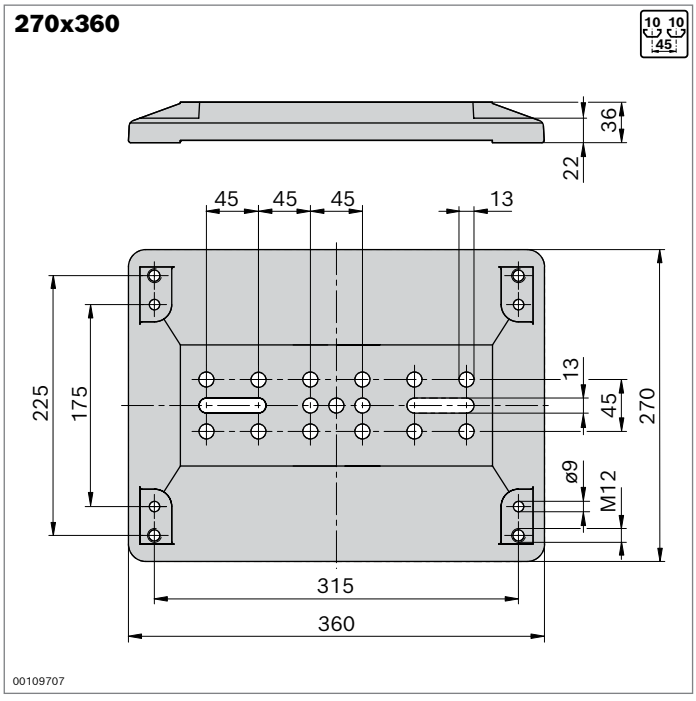


Base plate		No.
270x360		**3 842 514 567**
Material:	Gray cast iron; black powder-coated	

Required accessories:
- Floor dowel **3 842 540 668** (p. 6-13)
- Washer (p. 6-14)

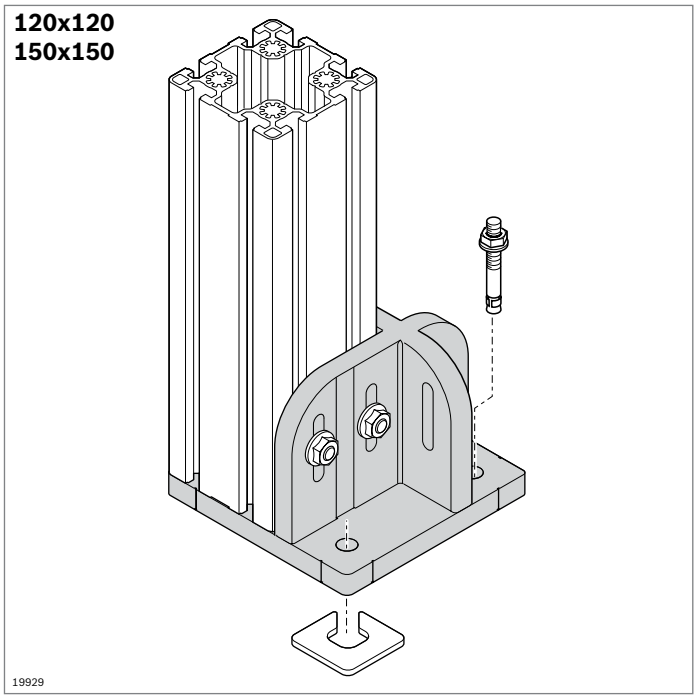


Base plate 120x120, 150x150




- For flush mounting of supports. No danger of tripping!
- Markings arranged at the center of the profile for precise alignment
- Anchoring with floor dowel


Accessories:

- T-bolt M8x30 **3 842 528 721** (p. 3-6)
- Flange nut M8 **3 842 345 081** (p. 3-6)
- Floor dowel **3 842 526 561** (p. 6-13)
- Washer (p. 6-14)
- Anchor bolt **3 842 564 815** (p. 6-14)

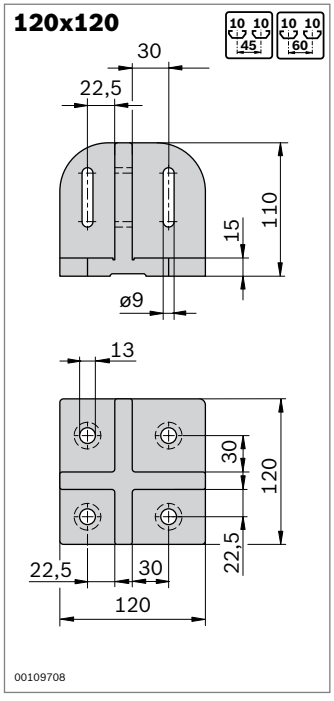


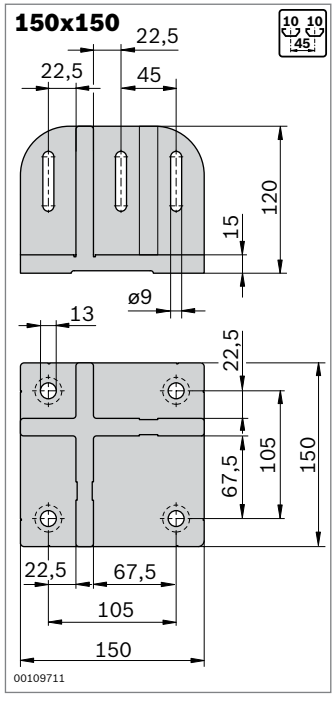

Base plate		ESD	No.
120x120		⚠	**3 842 527 553**
150x150		⚠	**3 842 524 469**
Material:	Diecast aluminum		

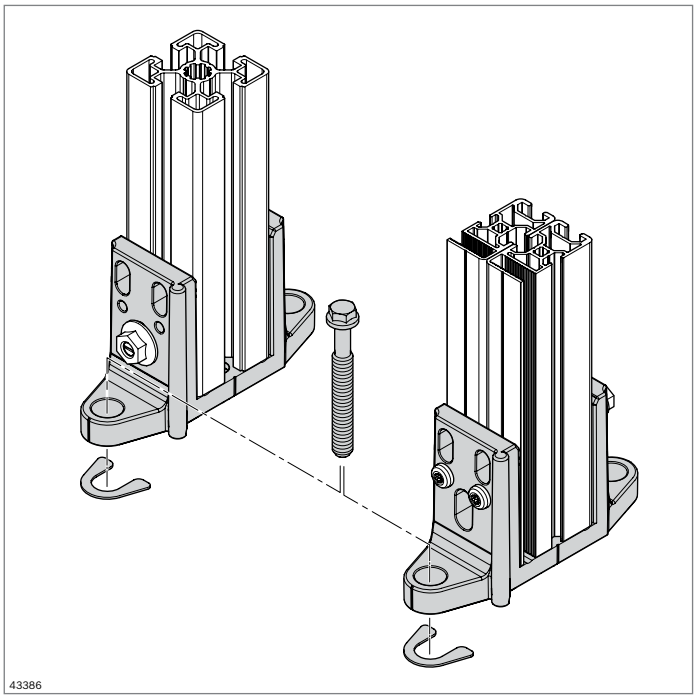


Foot 45x45




- For anchoring leg sets to the ground
- Hinge function for angular adjustment of 0-45 degrees
- For frame profile 22.5x45 or strut profile 45x45 (L)

Accessories:

- For fastening frame profile 22.5x45: 1x self-tapping screw 3 842 567 970; 1x T-bolt M6x20 3 842 523 921; 1x flange nut 3 842 523 925
- For fastening strut profile 45x45 (L): 2x T-bolt M8x25 3 842 528 718 2x flange nut 3 842 345 081
- No profile finishing required

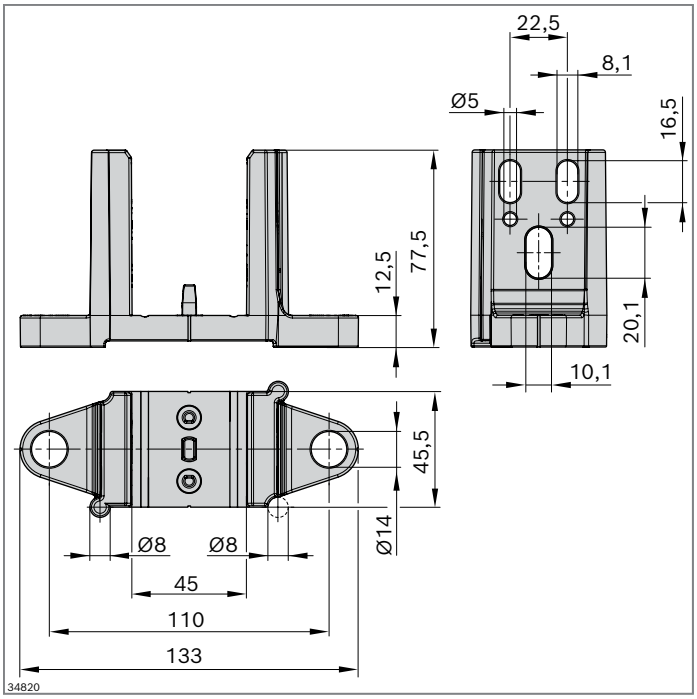


Foot 45x45		ESD	Slot	No.
		⚠	8, 10	**3 842 564 814**
Material:	Diecast zinc			



- Self-tapping screw for fastening frame profile 22.5x45 in the foot 45x45 on the closed side

Self-tapping screw ZE, PI 5, 5x45		ESD		No.
		⚠	100	**3 842 567 970**
Material:	Steel, galvanized			

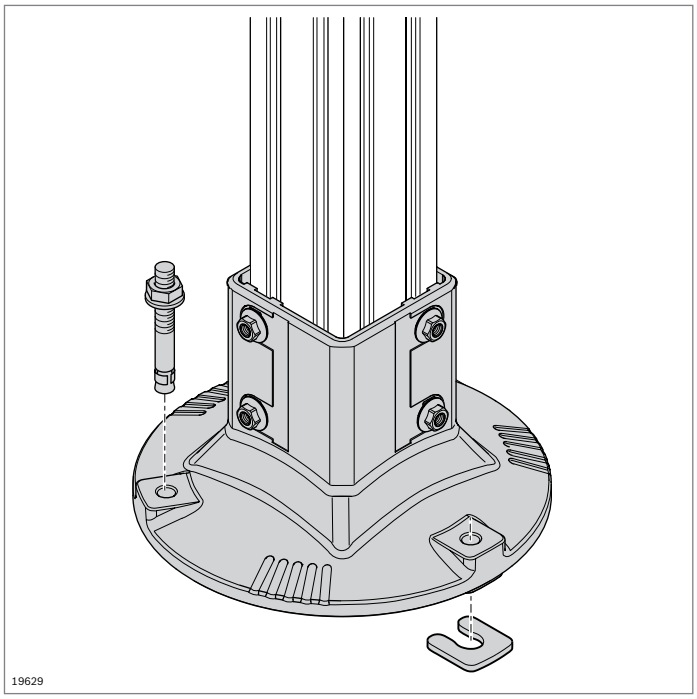


Foot
Floor dowel, washer


Foot

- For constructing supports made of 80x80L and 60x60 profiles
- Large standing surface for high stability
- Easy cleaning thanks to few horizontal surfaces
- Open on the inside to enable draining of liquids
- Stop as depth limit for profile (removable)


Required accessories:


- Floor dowel **3 842 540 668**
- Washer **3 842 546 717** or **3 842 546 718**






Foot AL		No.	FS
60x60	1	**3 842 544 875**	4xFS1
Material:	Aluminum, silver coating (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. Fastening material (FS1)		






Foot		No.	FS
80x80	1	**3 842 540 173**	4xFS2
Material:	Aluminum, silver coating (RAL 9006) Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. Fastening material (FS1)		



Floor dowel

- For anchoring the base plates


Floor dowel	ø (mm)	L (mm)	l_1 (mm)	$l_{2\,max}$ (mm)		No.
	8	80	65	15	100	**3 842 526 560**
	10	90	70	15	100	**3 842 526 561**
	8	95	65	30	100	**3 842 540 668**
Material:	Steel; zinc-plated					



Anchor bolt

- To anchor the foot to the ground
- Mechanical tightening with impact wrench
- Adjustability of attachment up to 2 times after assembly possible
- For cracked and non-cracked concrete


Anchor bolt SW15-10x100	ESD		No.
		100	**3 842 564 815**




Washer

- For leveling in case of uneven flooring


Washer	t (mm)		No.
for round feet	1	100	**3 842 546 717**
	3	100	**3 842 546 718**
Material:	Steel; stainless		



Washer	t (mm)		No.
for square feet	1	100	**3 842 528 189**
	4	100	**3 842 528 191**
Material:	Steel; stainless		




Washer	Ø (mm)	t (mm)	ESD		No.
for foot 45x45	23	1		100	**3 842 564 830**
	23	3		100	**3 842 564 831**
Material:	Stainless steel				

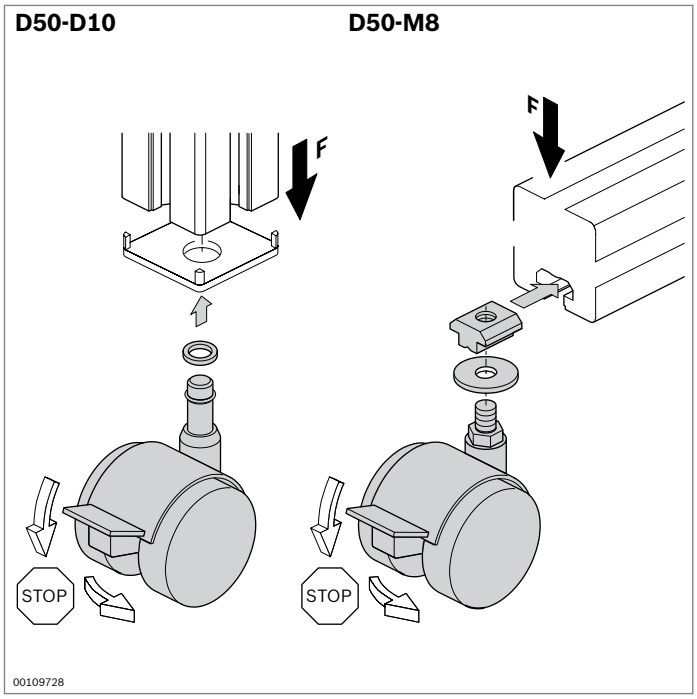

Double wheel




- Attractive double wheel for light applications
- Made of oil-resistant material
- Braked double roller
- Double wheel D50-D10 for insertion in the central hole with a diameter of 10 mm
- Double wheel D50-M8 for bolting in the profile slot




Double wheel	F (N)	ESD		No.
D50-D10	400		4	**3 842 515 457**
	400	1)	4	**3 842 515 459**

1) Antistatic ≤ 10^6 Ω according to DIN EN 12528

Material: Housing, wheel, lock: PA; black
Running surface: PU (not with ESD version)
Fastening material: Steel; zinc-plated







Double wheel	F (N)	ESD		No.	FS
D50-M8	400		4	**3 842 535 669**	FS1
	400	1)	4	**3 842 535 670**	FS1

1) Antistatic ≤ 10^6 Ω according to DIN EN 12528

Material: Housing, wheel, lock: PA; black
Running surface: PU (not with ESD version)
Fastening material: Steel; zinc-plated





Bearing ring

- For cover caps with hole in the sizes 40x40, 45x45,50x50 and 60x60
- For M12 threads
- To protect the cover caps when tightening accessories

Bearing ring		No.
	100	**3 842 555 653**


Material: Diecast zinc









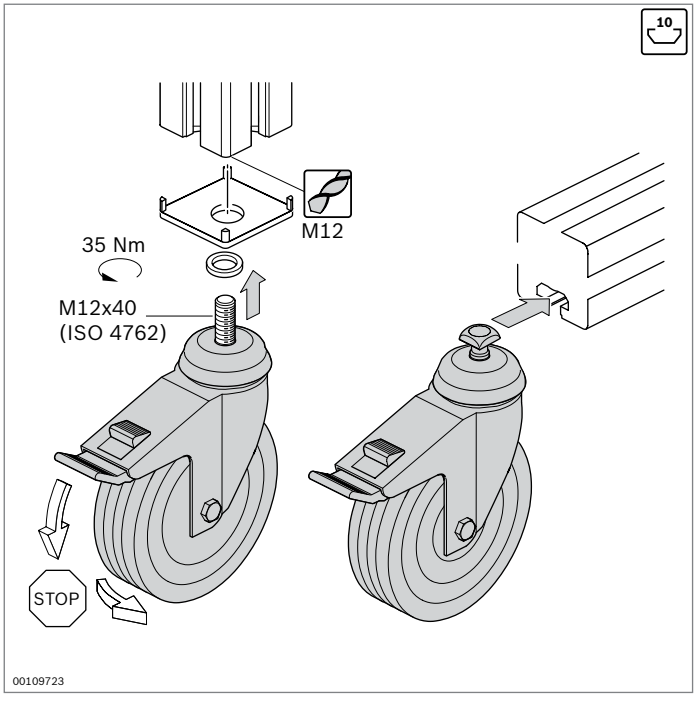

Roller

- Impressive versatility
- Wheels with excellent running properties
- Available as a castor wheel with lock, a castor wheel, and a trestle roller

Especially gentle on floors

Resistant to oil, suitable for workshop floors

Clean Room Suitable for use in clean rooms.
Conductive material version in accordance with DIN EN 61340-5-1; conduction resistance 10^3 to 10^8 Ω
Tested for particulate emissions.
Report No. BL1906-1121

Rubber running surface made of solid rubber with good deformation elasticity. No permanent flattening of the wheel due to it traveling over edges or not being moved for long periods

Suitable for ESD-sensitive areas.
Conductive material version in accordance with DIN EN 61340-5-1; conduction resistance ≤ 10^6 Ω


- Mounting of all wheels in the profile slot or central hole (accessories required)
- Profile finishing: Thread cutting M12 for assembly in central hole

Required accessories:

- Screw M12x40 (ISO 4762) for mounting in central hole (↻ 35 Nm)
- Bearing ring if cover cap with hole is used (p. 6-15)

Wheel selection guide


				
Tread	**Thermoplastic rubber**	**Polyamide 6**	**Solid rubber**	**Thermoplastic polyurethane**
ESD	yes / no (optional)	no	yes	yes
Tread hardness	85° Shore A	70° Shore D	80° Shore A	94° Shore A
Temperature resistance	–20 °C ... +60 °C	–25 °C ... 80 °C	–20 °C ... +60 °C	–20 °C ... +70 °C
Rolling resistance	very good	outstanding	good	very good
Travel noise	good	satisfactory	very good	good
Floor protection	good	satisfactory	very good	good
Deformation elasticity Tread	satisfactory	adequate	very good	good
Tread color	gray	black	black	gray
Makes no track marks	yes	yes	no	yes



FS1
M12X30
DIN 985
M12


▶ Castor wheel with lock: Lock prevents the wheel from rolling or turning

Castor wheel with lock	F (N)	D (mm)	h (mm)	ESD	No.	FS
	900	80	108		**3 842 541 226**	FS1
	1100	125	158		**3 842 541 228**	FS1
	900	80	108	⚠	**3 842 541 230**	FS1
	1100	125	158	⚠	**3 842 541 232**	FS1
	1100	125	158		**3 842 515 367**	FS1
Clean Room	1000	125	158	⚠	**3 842 562 055**	FS1
	600	80	108	⚠	**3 842 547 836**	FS1
	800	125	158	⚠	**3 842 547 838**	FS1



FS1
M12X30
DIN 985
M12

Castor wheel	F (N)	D (mm)	h (mm)	ESD	No.	FS
	900	80	108		**3 842 541 234**	FS1
	1100	125	158		**3 842 541 236**	FS1
	900	80	108	⚠	**3 842 541 238**	FS1
	1100	125	158	⚠	**3 842 541 240**	FS1
	1100	125	158		**3 842 515 366**	FS1
Clean Room	1000	125	158	⚠	**3 842 562 056**	FS1
	600	80	108	⚠	**3 842 547 835**	FS1
	800	125	158	⚠	**3 842 547 837**	FS1




FS1
M12x22
DIN 985
M12

Trestle roller	F (N)	D (mm)	h (mm)	ESD	No.	FS
	900	80	108	⚠	**3 842 541 242**	FS1
	1100	125	158	⚠	**3 842 541 244**	FS1
	600	80	108	⚠	**3 842 547 839**	FS1
	800	125	158	⚠	**3 842 547 840**	FS1

Material:

- Thermoplastic rubber
- Reinforced PA
- Clean Room: Gray TPU, housing: Steel; chrome-plated
- Solid rubber
- ⚠: Conductive, conduction resistance ≤10^6 Ω

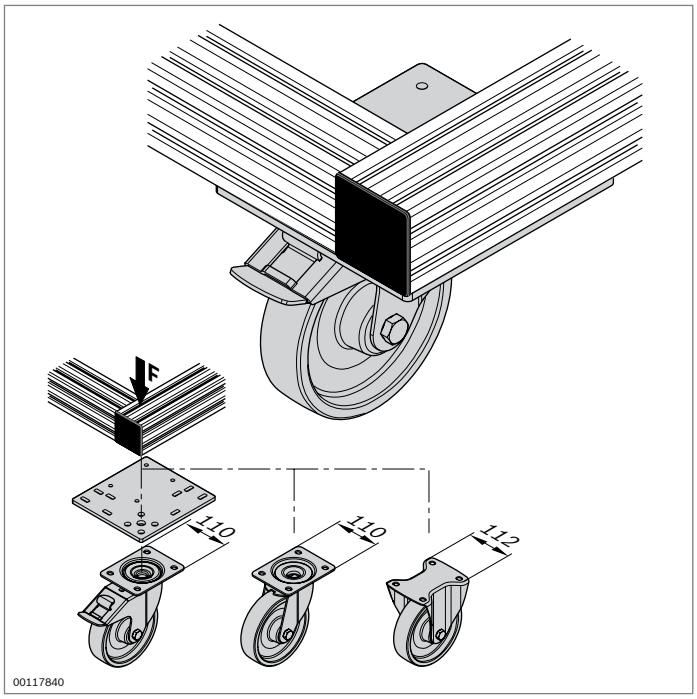


Heavy-duty wheel




- Heavy-duty wheel with mounting flange
- Available as a castor wheel with lock, a castor wheel, and a trestle roller
- Heavy-duty, particularly suited for workshop applications
- Wheels with excellent running properties

Required accessories:


- Screw M10x16 (ISO 4762), washer ISO 7089-10, lock washer 10FSt for fastening to the screw-on plate
- T-bolt, flange nut, central bolt M12 or S12 for fastening the screw-on plate to the profile frame




Castor wheel with lock		**F** (N)	**No.**
		3000	**3 842 562 057**
Material:	Housing: Steel; zinc-plated Wheel: TPU, hardness 94 Shore A, gray		



Castor wheel		**F** (N)	**No.**
		3000	**3 842 562 058**
Material:	Housing: Steel; zinc-plated Wheel: TPU, hardness 94 Shore A, gray		





Trestle roller		**F** (N)	**No.**
		3000	**3 842 562 059**
Material:	Housing: Steel; zinc-plated Wheel: TPU, hardness 94 Shore A, gray		

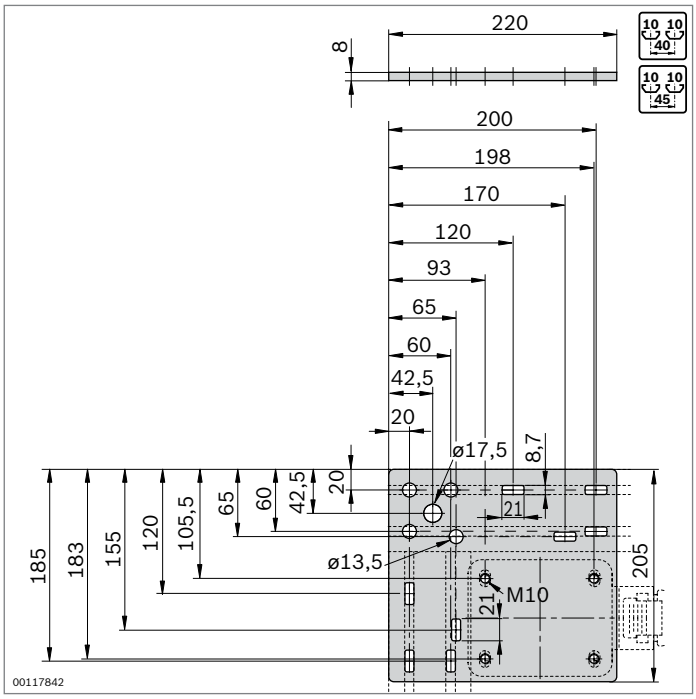


- Screw-on plate for attachment to 40 mm or 45 mm profiles

Screw-on plate			No.
		4	**3 842 536 701**
Material:	Steel; zinc-plated		

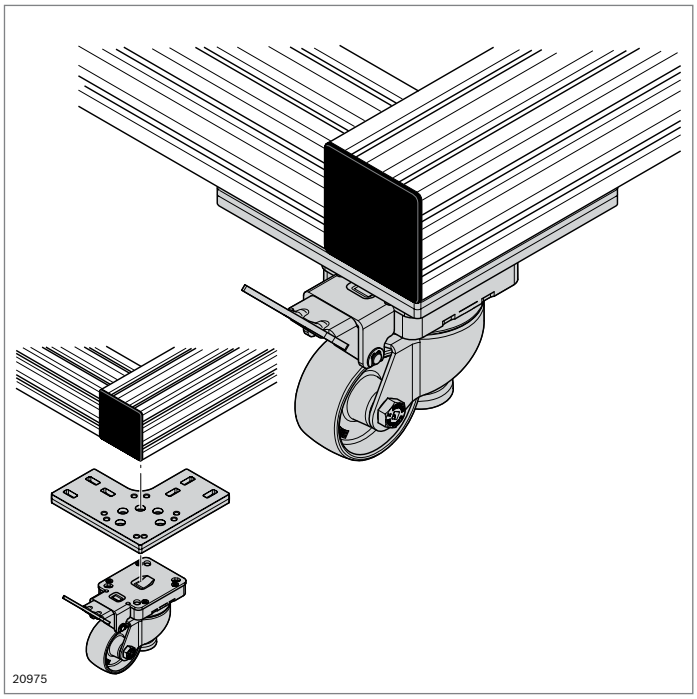

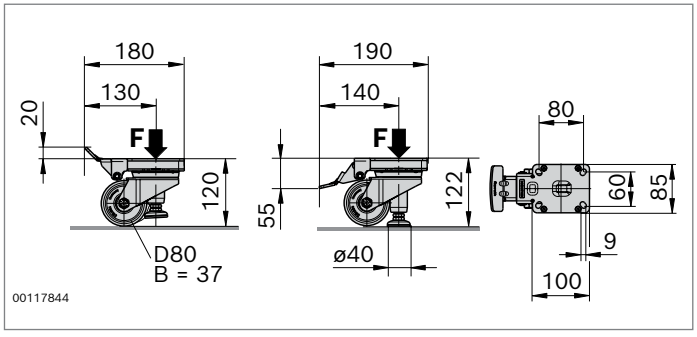

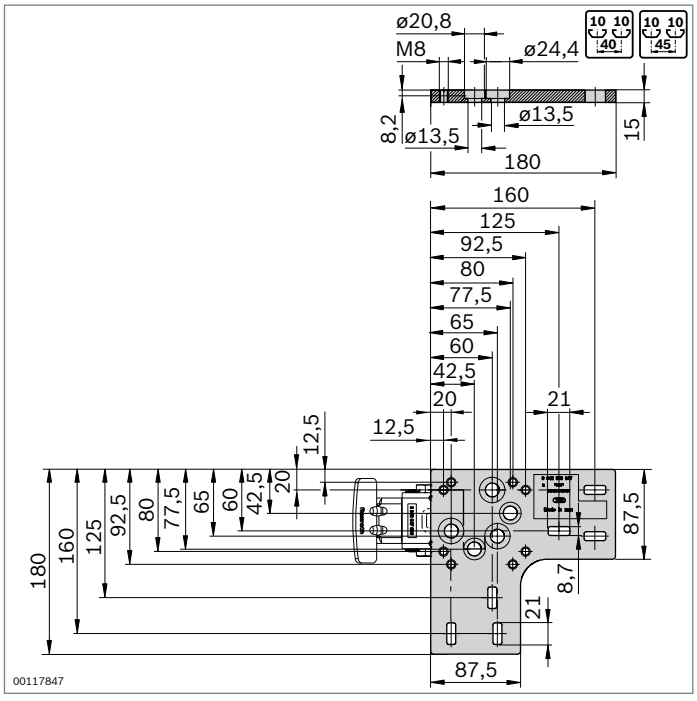

Lifting wheel




- Steerable lifting wheel
- The wheel turns into a stable base simply by engaging the stop lever
- Screw-on plate for mounting the lifting wheel
- With “Ideal-Stop”: Locking lever does not swivel with the castor wheel but remains in the defined position.
  The locking lever is fixed in position on the frame by means of the screw-on plate, and the castor wheel moves freely


Required accessories:

- Screw M8x35 (ISO 4762), washer 8 (DIN EN ISO 7089), lock washer 8 FSt for attaching to the screw-on plate
- T-bolt M8x30 (p. 3-6), flange nut M8 (p. 3-6), central bolt M12 or S12 (p. 3-43) for fastening the screw-on plate to the profile frame

Lifting wheel		**F** (N)	**No.**
		2300	**3 842 547 890**
Material:	Wheel: PA6, natural white Housing: Steel; zinc-plated Base plate: Rubber, gray		

Screw-on plate			**No.**
		4	**3 842 553 967**
Material:	Diecast aluminum		

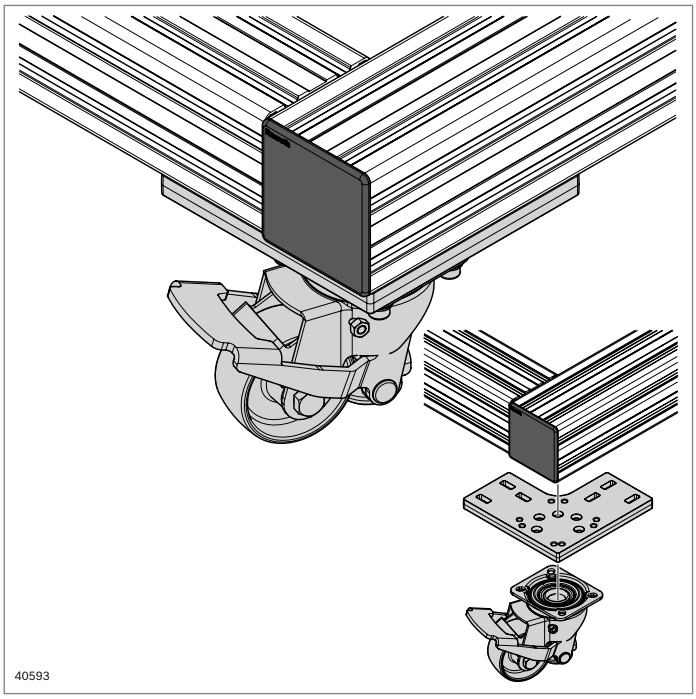

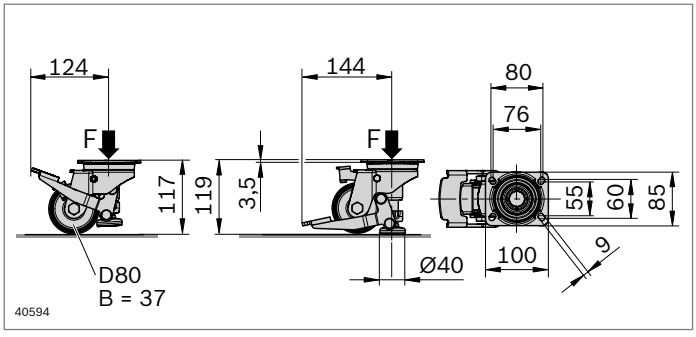

Lifting wheel – Rotatable Pedal ESD


- Steerable lifting wheel
- The wheel turns into a stable base simply by engaging the lock
- The locking lever moves with the wheel
- The locking lever can be moved under the frame if necessary
- The base is centered under the rotary table

Required accessories:

- Screw M8x20 (ISO 4762), washer 8 (DIN EN ISO 7089), lock washer 8 FSt for attaching to the screw-on plate
- Screw-on plate 3 842 553 967 (p. 6-21)
- Flange head screw similar to ISO 7380-2 10.9 M8x25, however, Torx 40 (tightening torque 25 Nm), T-nut 10 M8 (p. 3-4), central bolt M12 or S12 (p. 3-43) for fastening the screw-on plate to the profile frame

Lifting wheel	ESD	F (N)	No.
Rotatable Pedal	⏚	2300	**3 842 562 085**


Material: Wheel: PA6, natural white
Housing: Steel; zinc-plated
Base plate: Rubber; black

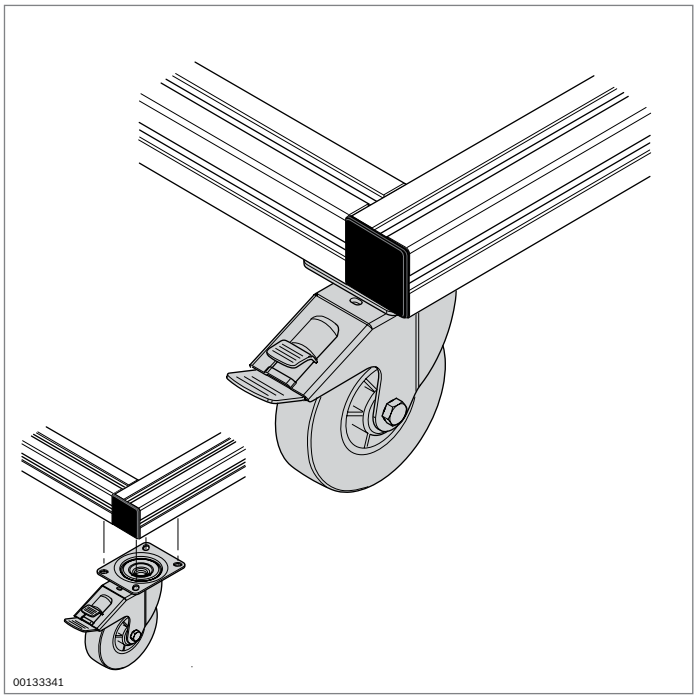

Roller with mounting flange


10

- Robust rollers with mounting flange
- Excellent running properties, particularly suitable for workshop floors
- Available as a castor wheel with lock and as a trestle roller
- Castor wheel with lock: Lock prevents the wheel from rolling or turning

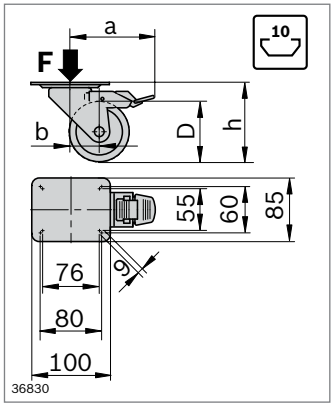


Castor wheel	F (N)	D (mm)	h (mm)	a (mm)	b (mm)	No.
	600	100	125	113	36±2	**3 842 259 790**
	900	125	150	123	40±2	**3 842 259 791**

Material: Wheel: Solid rubber
Rims: Polypropylene
Housing: Sheet steel; zinc-plated

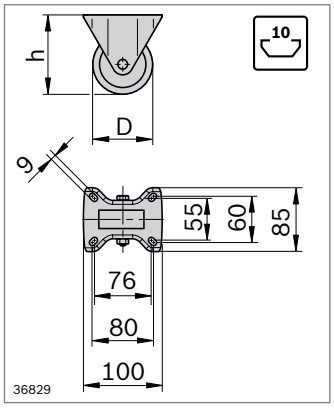

Trestle roller	F (N)	D (mm)	h (mm)	No.
	600	100	125	**3 842 259 792**
	900	125	150	**3 842 259 793**

Material: Wheel: Solid rubber
Rims: Polypropylene
Housing: Sheet steel; zinc-plated




- For castor wheel and trestle roller


Mounting kit		No.
	Set	**3 842 259 794**

Material: Steel; zinc-plated


Mounting of panel elements




Mounting rim profile (p. 7-2)




Mounting rim profile clean-room (p. 7-3)




PVC protective pane profile (p. 7-4)



Protective pane profile for cleanroom (p. 7-5)




Variofix block (p. 7-6)
Variofix block S (p. 7-7)




Bracket S (p. 7-8)




Locking ring (p. 7-9)



Screw bar profile (p. 7-10)




Potential equalizer (p. 7-12)




Protective grille profile (p. 7-13)



Clamp bushing (p. 7-14)




Quick plate holder (p. 7-11)

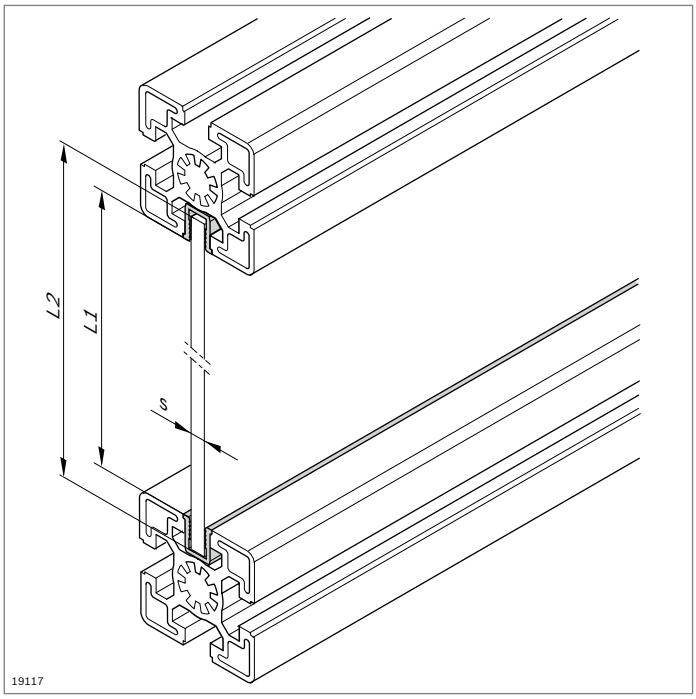


Mounting rim profile





- For the mounting of panel elements in the profile slot
- For panel elements up to 6 mm thick
- Installation during frame assembly
- Mounting rim profile PP can also be used as a cover profile







Mounting rim profile	Slot	s (mm)	L (mm)	No.
	6	1 ... 3	2000	**3 842 555 272**
	8	2 ... 6	2000	**3 842 555 274**
Material:	PP/TPE; signal gray RAL 7004			






Mounting rim profile	Slot	s (mm)	L (mm)	No.
	10	2 ... 6	2000	**3 842 555 276**
Material:	PP/TPE; signal gray RAL 7004			






Mounting rim profile	Slot	s (mm)	L (mm)	No.
	10	6	2000	**3 842 555 270**
Material:	PE; signal gray RAL 7004			

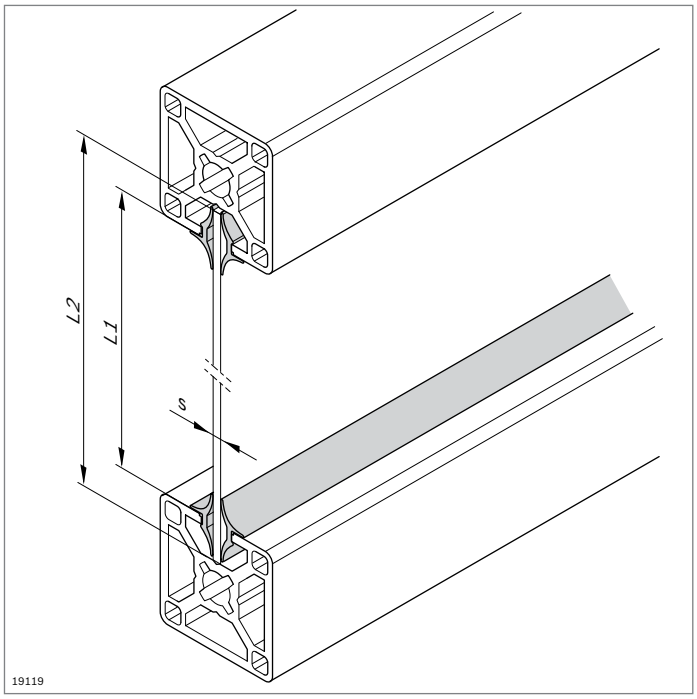


Mounting rim profile cleanroom



- For the mounting of panel elements in the profile slot
- For panel elements with a thickness of 2 ... 8 mm
- For use on one or two sides of the mounting rim profile, depending on the panel element thickness
- Installation during profile frame assembly
- Can be used under cleanroom conditions
- Tested for emission of volatile organic substances at room temperature,
  Report No. BO 2102-1208


7







Mounting rim profile, Clean	Slot	**s** (mm)	**L** (mm)	**No.**
	6	2 ... 4	10000	**3 842 555 278**
Material:	TPE; signal gray RAL 7004			






Mounting rim profile, Clean	Slot	**s** (mm)	**L** (mm)	**No.**
	8	2 ... 6	10000	**3 842 555 280**
Material:	TPE; signal gray RAL 7004			







Mounting rim profile, Clean	Slot	**s** (mm)	**L** (mm)	**No.**
	10	3 ... 8	10000	**3 842 555 282**
Material:	TPE; signal gray RAL 7004			

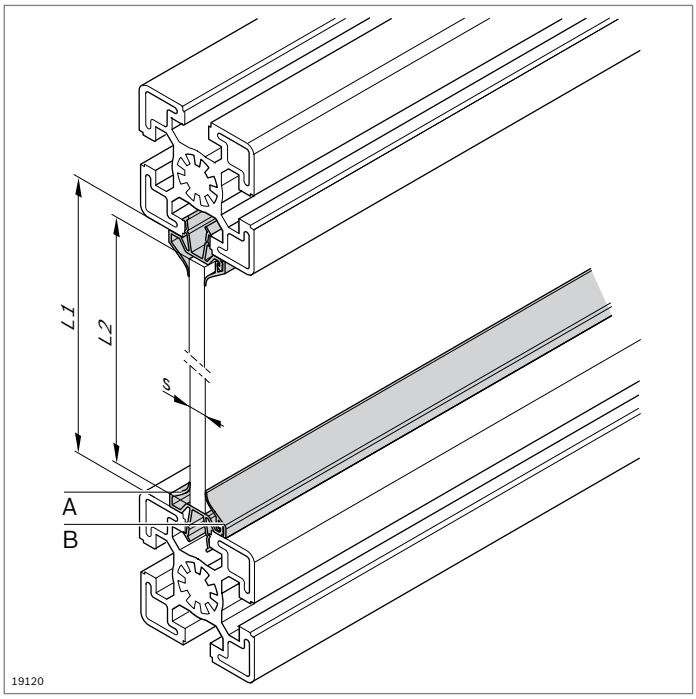



PVC protective pane profile



- For mounting panel elements
- For panel elements with a thickness of 1.5 ... 8 mm
- For subsequent installation in closed frame constructions
- Installation of panel elements at center of slot
- The protective pane profile consists of the basic profile (**A**) and the clip strip (**B**)
- With lip seals to protect the working space from splashing liquids

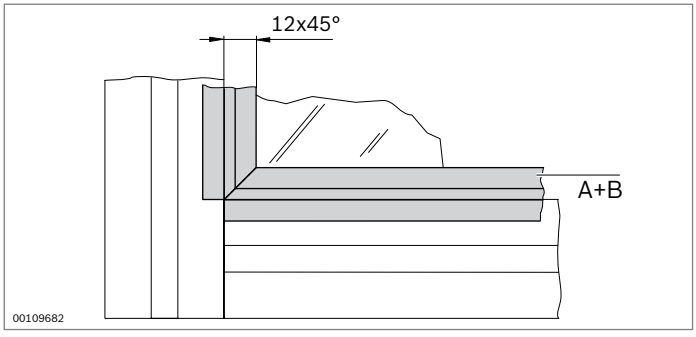







PVC protective pane profile		Slot	s (mm)	L (mm)		No.
A	Basic profile	8, 10	1.5 ... 8	2000	10	**3 842 555 284**
B	Clip strip	8, 10	1.5 ... 8	2000	10	**3 842 555 286**

Material: PVC; signal gray RAL 7004

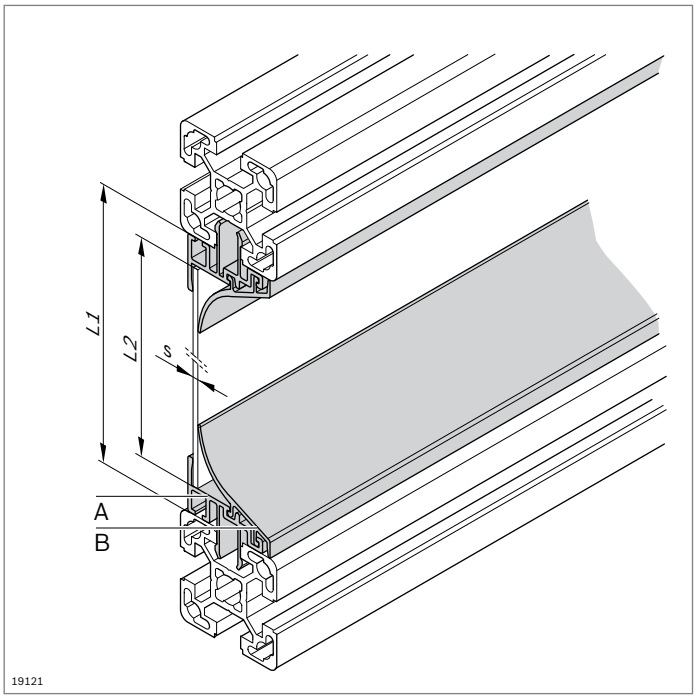



Protective pane profile cleanroom



- For mounting panel elements
- For panel elements with a thickness of 2 ... 8 mm
- For subsequent installation in closed frame constructions
- Installation of panel elements flush with the profile edge
- The protective pane profile consists of the basic profile (**A**) and the clip-on strip (**B**). Both profiles are required for proper functioning.
- Can be used under cleanroom conditions
- Tested for emission of volatile organic substances at room temperature, Report No. BO 2112-1289


7






Protective pane profile		Slot	s (mm)	L (mm)		No.
A	Basic profile	8	2 ... 6	2000	10	**3 842 524 025**
B	Clip strip	8	2 ... 6	2000	10	**3 842 555 288**


Material: Basic profile: Aluminum; anodized
Clip strip: PP/TPE; signal gray RAL 7004






Protective pane profile		Slot	s (mm)	L (mm)		No.
A	Basic profile	10	2 ... 8	2000	10	**3 842 529 761**
B	Clip strip	10	2 ... 8	2000	10	**3 842 555 292**


Material: Basic profile: Aluminum; anodized
Clip strip: PP/TPE; signal gray RAL 7004






Protective pane profile		Slot	s (mm)	L (mm)		No.
A	Basic profile	10	2 ... 8	2000	10	**3 842 524 027**
B	Clip strip	10	2 ... 8	2000	10	**3 842 555 290**

Material: Basic profile: Aluminum; anodized
Clip strip: PP/TPE; signal gray RAL 7004

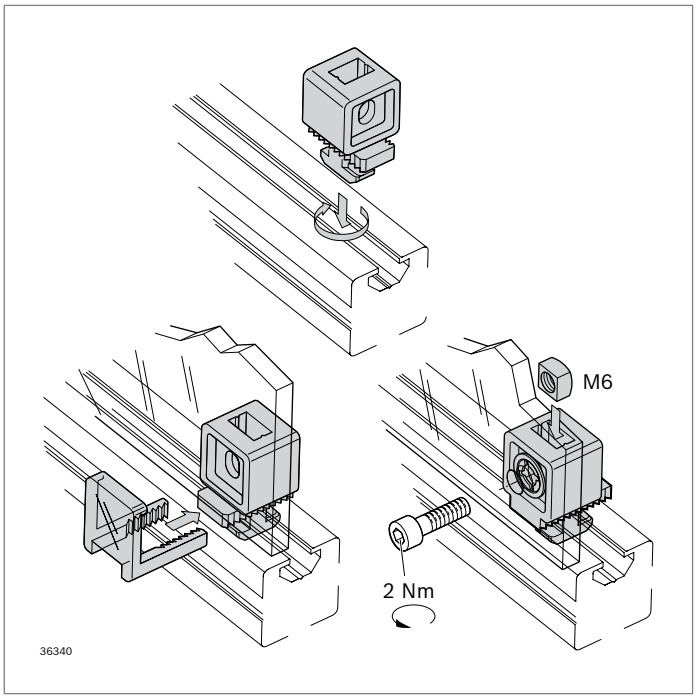


Variofix block




- For panel elements up to 13 mm thick
- For subsequent installation in closed frame constructions
- Asymmetrical form enables fastening of panel elements in two different positions
- Clamping via snap-in clip or screw fitting with square nut M6 (included in scope of delivery) and screw
- Retainer ring for connecting the screw to the panel element (Machinery Directive 2006/42/EC)


Accessories:


- Variofix remover (p. 14-8)
- Screw for fitting with square nut






Variofix block	Slot		No.
	8	10	**3 842 548 832**
Material:	PP; signal gray RAL 7004 Square nut: Steel; zinc-plated		
Scope of delivery:	Incl. square nut		






Variofix block	Slot		No.
	10	10	**3 842 548 834**
Material:	PP; signal gray RAL 7004 Square nut: Steel; zinc-plated		
Scope of delivery:	Incl. square nut M6, locking ring M6		



Snap-in clip		No.
	10	**3 842 184 738**
Material:	PA; colorless	

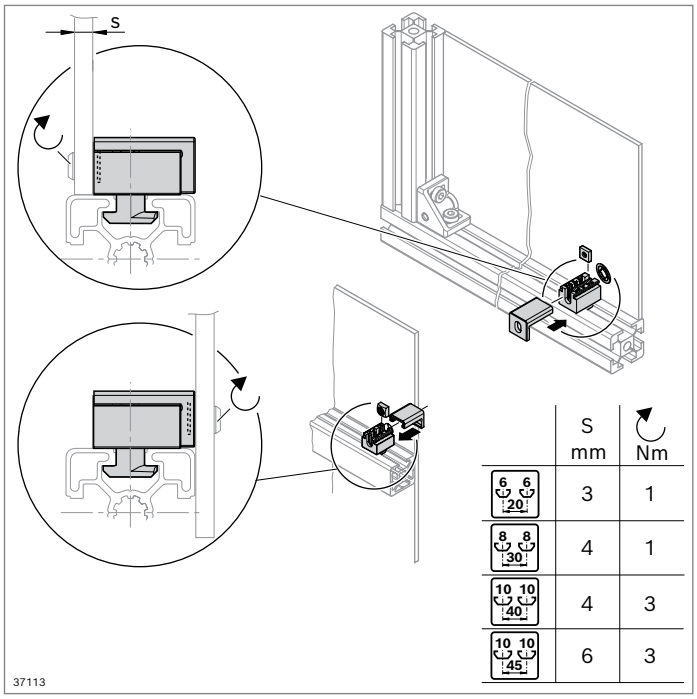


	S mm	Nm
6 6 20	3	1
8 8 30	4	1
10 10 40	4	3
10 10 45	6	3

Variofix block S




- For virtually gap-free panel element mounting
- For subsequent installation in closed frame constructions
- The asymmetrical design and cover cap enable variable mounting positions for the panel elements: flush with the profile edge or situated in front of the profile
- Retainer ring for connecting the screw to the panel element (Machinery Directive 2006/42/EC)


Required accessories:
Screw for fastening the panel element




Variofix block S		Slot		No.
		6	10	**3 842 548 836**
Material:	PP; signal gray RAL 7004 Square nut: Steel; zinc-plated			
Scope of delivery:	Incl. square nut M4, cap			



Variofix block S		Slot		No.
		8	10	**3 842 548 838**
Material:	PP; signal gray RAL 7004 Square nut: Steel; zinc-plated			
Scope of delivery:	Incl. square nut M5, cap, locking ring			

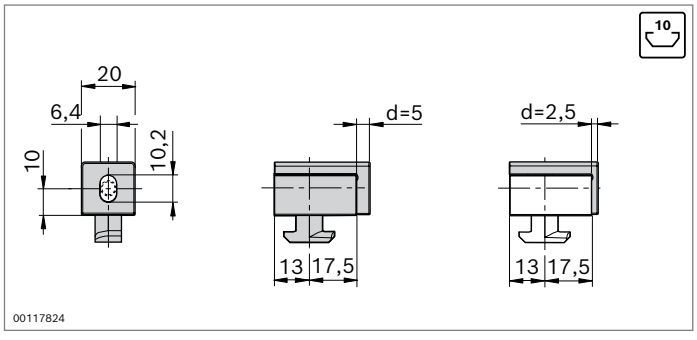

Variofix block S		Slot		No.
		10	10	**3 842 564 810**
Material:	PA; signal gray RAL 7004 Square nut: Steel; zinc-plated			
Scope of delivery:	Incl. square nut M5, 2 x caps (d = 2.5 mm; d = 5 mm), locking ring			

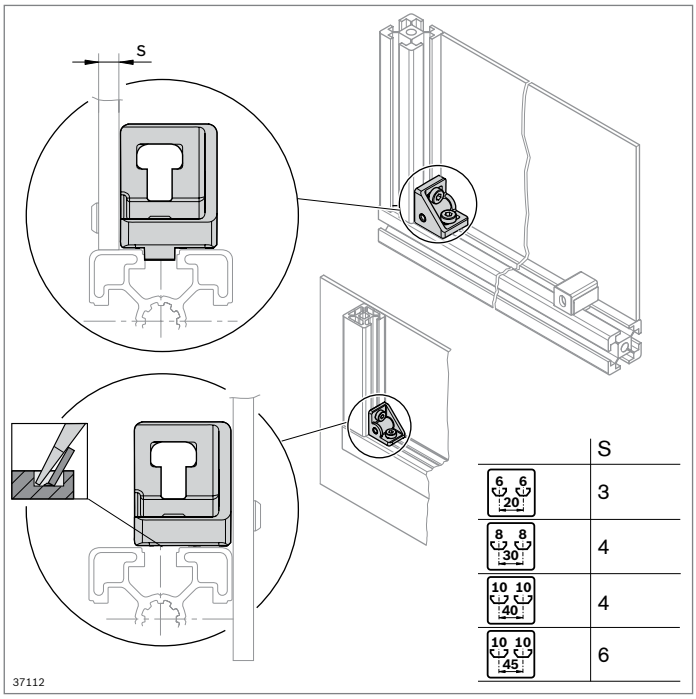


	S
6 6 20	3
8 8 30	4
10 10 40	4
10 10 45	6

Bracket S




- Bracket with thread for virtually gap-free mounting of panel elements
- For subsequent installation in closed frame constructions
- Panel elements can be mounted in different positions: flush with the profile edge or situated in front of the profile (by breaking off the centering lug)

Required accessories:
Screw for fastening the panel element
Accessories, optional:
- Variofix block S (p. 7-7)
- Locking ring (p. 7-9)




FS1




Bracket S	Slot		No.	FS
20x20	6	20	**3 842 536 489**	
20x20 set	6	1	**3 842 536 670**	2xFS1

Material: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




FS2




Bracket S	Slot		No.	FS
30x30	8	20	**3 842 536 490**	
30x30 set	8	1	**3 842 536 671**	2xFS2

Material: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)




FS3




Bracket S	Slot		No.	FS
40/45	10	20	**3 842 536 491**	
40/45 set	10	1	**3 842 536 672**	2xFS3

Material: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Set incl. fastening material (FS)

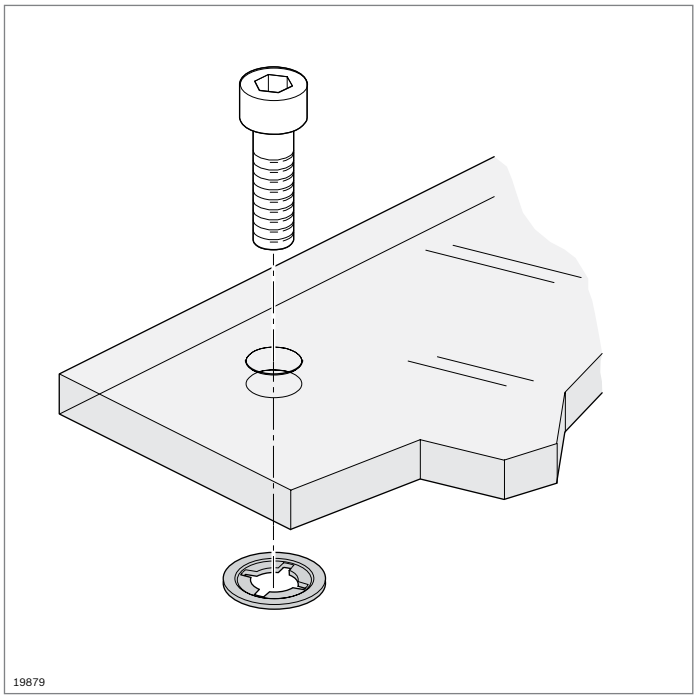


Locking ring

- Secures the fastening screw to the panel element
- When using with bracket S, ensure that the support point for the panel element is raised
- Can be retrofitted
- For various thread sizes




Locking ring	D (mm)	d (mm)	h (mm)		No.
M4	9.0	3.4	1.0	100	**3 842 542 328**
M5	10.0	4.5	1.0	100	**3 842 542 329**
M6	12.5	5.5	1.5	100	**3 842 542 330**

Material: PA; black

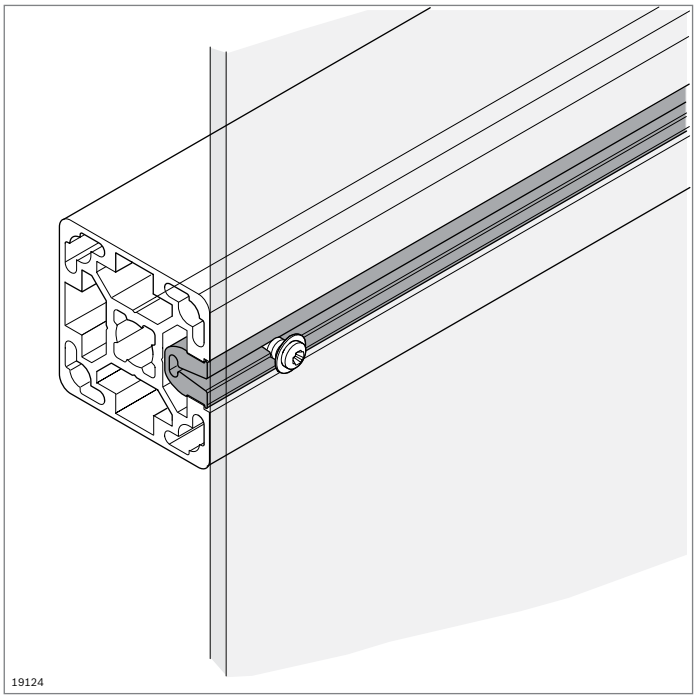


Screw bar profile




- Screw bar profile for fastening panel elements using commercially available sheet metal screws
- Clipping the screw bar profile into the profile slot
- Low-cost connection element


Required accessories:
Sheet metal screws for fastening panel elements

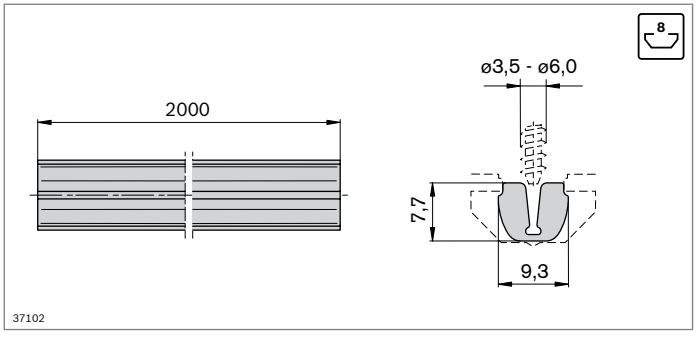


Screw bar profile	Slot	L (mm)	No.
	8	2000	**3 842 555 550**
Material:	PVC; signal gray RAL 7004		

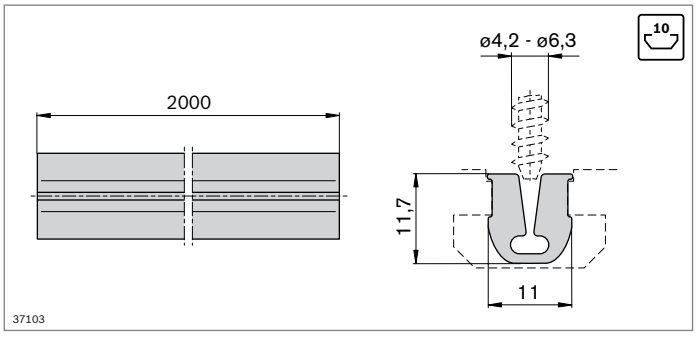

Screw bar profile	Slot	L (mm)	No.
	10	2000	**3 842 555 552**
Material:	PVC; signal gray RAL 7004		

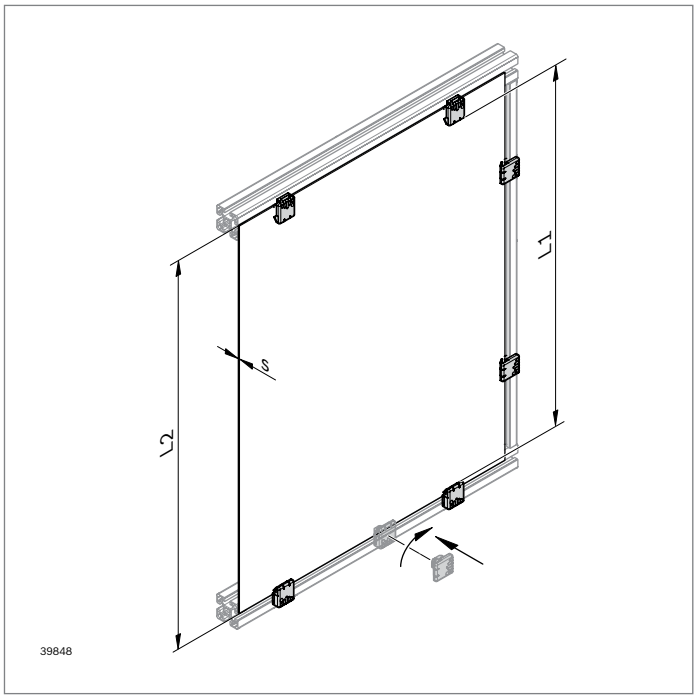



Quick plate holder




- Plate holder for virtually gap-free panel element mounting
- Holders for panel elements in front of the profile
- For panel elements with a thickness of s = 2 ... 6 mm
- For subsequent installation in closed frame constructions
- Protection against disassembly possible with headless setscrew (Machinery Directive 2006/42/EC)

Accessories, recommended:
Headless setscrew M5x10

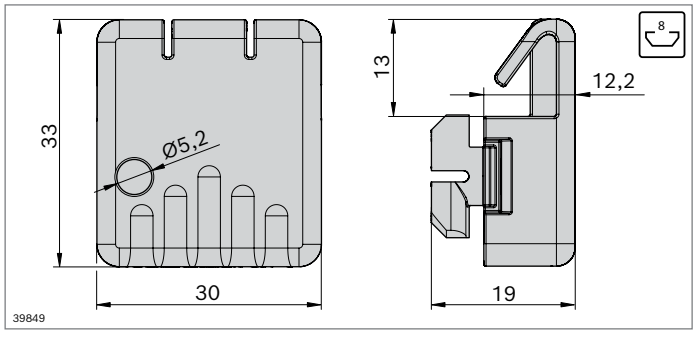


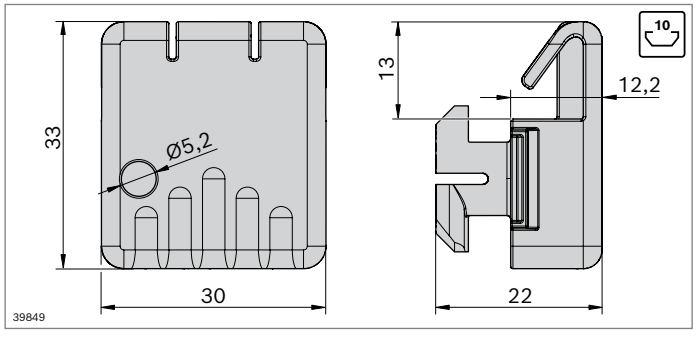



Quick plate holder	Slot		No.
	8	10	**3 842 564 671**
	10	10	**3 842 564 670**

Material: POM; signal gray RAL 7004

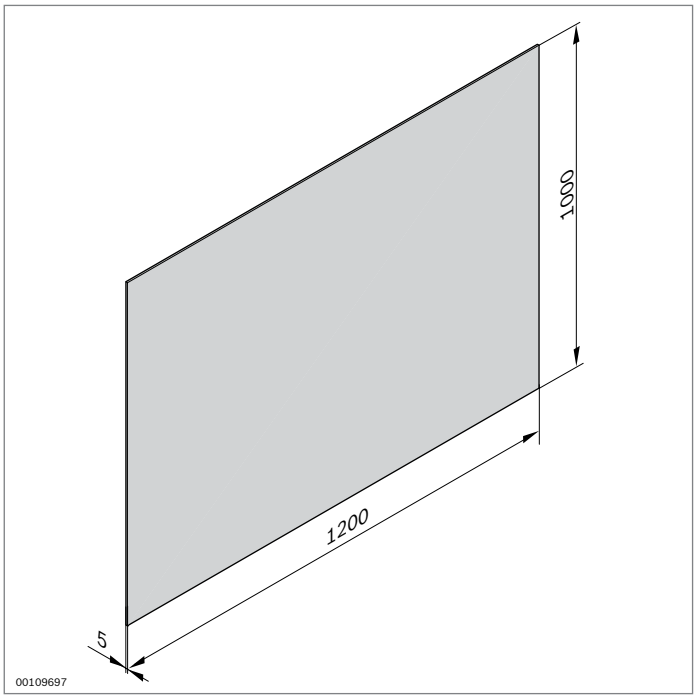

Universal plate




- For the construction of trays, material shuttles, or privacy shields on tables or frames

Accessories:
Frame profile, mounting of panel elements

Universal plate	ESD	No.
PP		**3 842 516 837**
PS	ESD	**3 842 516 838**

Material: PP: gray, smooth on one side, grained on the other
PS: black, smooth on both sides

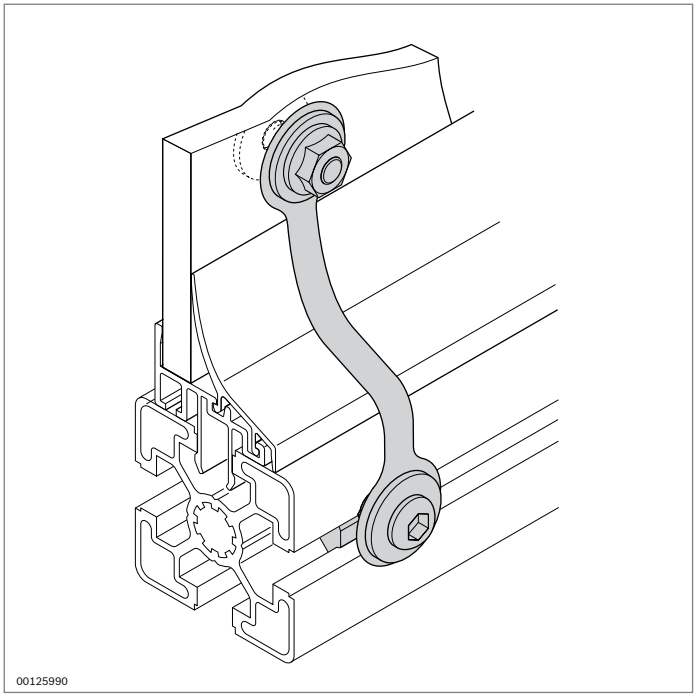


Potential equalizer





- Potential equalizer for creating electrostatic conduction between panel elements and strut profiles

Potential equalizer	ESD		No.	FS
	ESD	10	**3 842 536 148**	FS1, FS2

Material: Strip steel, stainless
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)





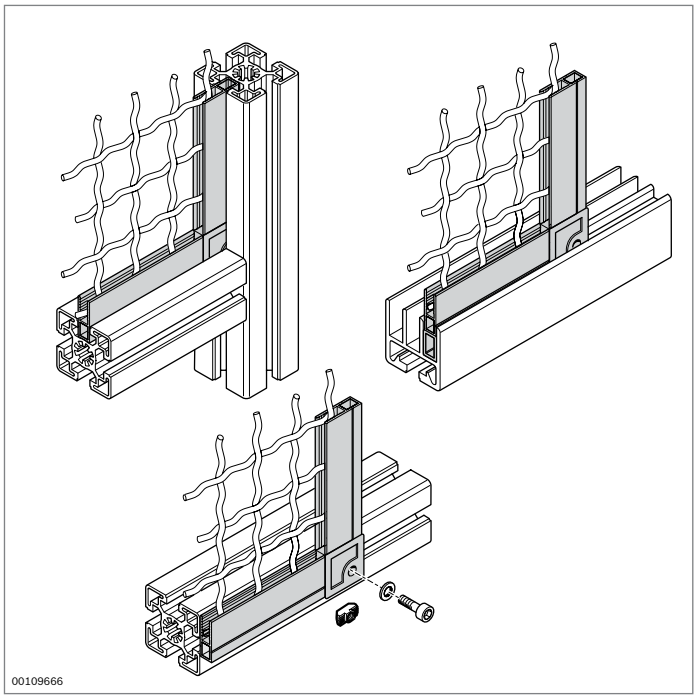



Protective grille profile

10

- For constructing frames for woven wire grilles or panel elements
- For woven wire grilles with a wire diameter up to 3.1 mm
- For panel elements up to 6 mm thick
- Screw fitting of frame to the outside of strut profiles (subsequent installation)
- Insertion of frame into the slot of a strut profile or a sliding door profile AI 45
- Corner pieces for inner and outer corners

Accessories, optional:
- T-nut M6 (p. 3-4)
- Screw M6







Protective grille profile	L (mm)		No.
	3000[1]	20	**3 842 305 766**

[1] Due to the (anodic oxidation) contact points produced in the manufacturing process, supplied in profile length of 3100 mm


Material: Aluminum; black anodized






Inner corner piece		No.
	20	**3 842 305 768**


Material: PA; black






Outer corner piece		No.
	20	**3 842 305 767**


Material: PA; black

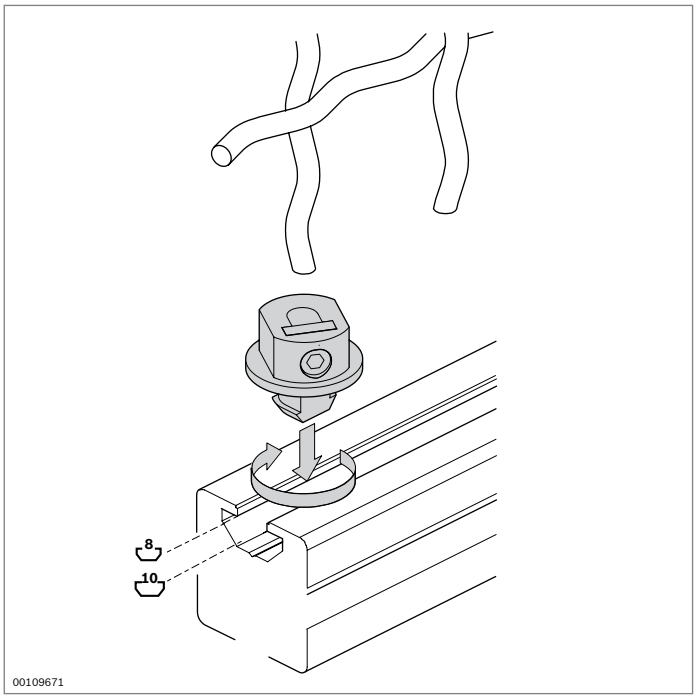


Clamp bushing



- For fastening woven wire grilles in the profile slot
- For woven wire grilles with a wire diameter up to 3.1 mm
- Suitable for 8 mm and 10 mm slots
- Low-cost connection element
- Rattle-free mounting



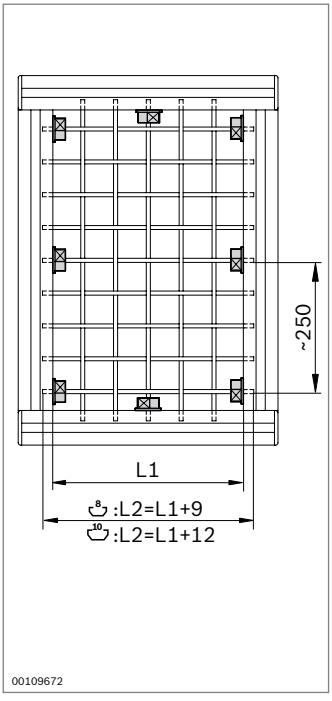


Clamp bushing	Slot		No.	FS
	8, 10	100	**3 842 515 244**	FS1

Material: Diecast zinc
Fastening material: Steel; zinc-plated


FS1

EN ISO 4027
M6x10
DIN 562
M6-04

Doors and fittings




Hinge profile
(p. 8-3)




Hinge
(p. 8-4)




Hinge, plastic
(p. 8-5)




Plastic double hinge
(p. 8-6)




Hinge, aluminum
(p. 8-7)




LIFTOFF hinge
(p. 8-8)




Hinge, removable
(p. 8-9)



Hinge, adjustable
(p. 8-10)



Folding door element
(p. 8-11)



Door lock for swing and sliding doors
(p. 8-12)



Door lock
(p. 8-13)



Door lock for EcoSafe sliding doors
(p. 8-14)




Door lock for swing doors
(p. 8-15)



Door lock Multi Use
(p. 8-16)



Door lock Compact
(p. 8-18)



Chamber lock
(p. 8-20)



Mortise lock for swing doors (p. 8-22)




Bow-type handle (p. 8-24)




Safety handle (p. 8-25)




Sealing strip (p. 8-26)
Sealing profile (p. 8-27)




Slider (p. 8-28)




Sliding door profile PVC (p. 8-29)




Sliding door profile Al clip-in (p. 8-30)



Sliding door profile Al 45 (p. 8-31)



Edge protector, door handle profile (p. 8-33)

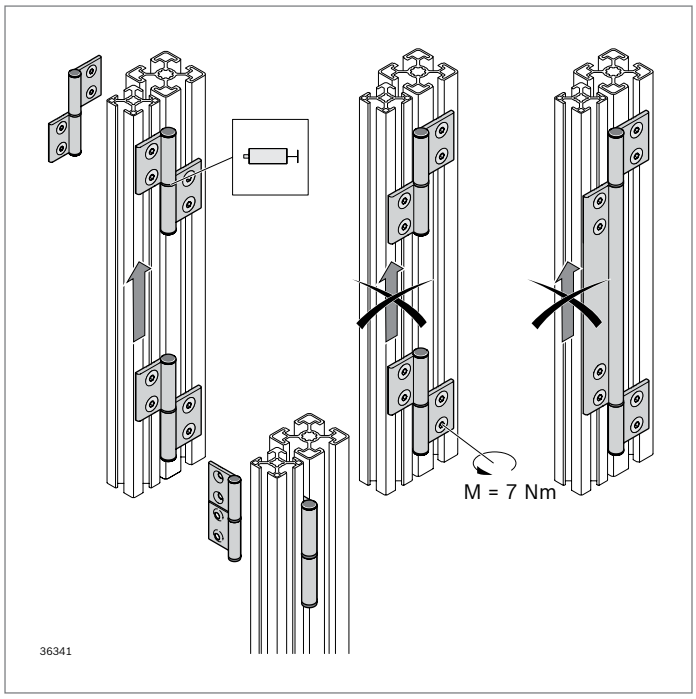



Hinge profile


- For self-assembly of hinges or hinge bands
- Possible to use as a non-transparent hinge band to fully cover the door gap
- Hinge profiles for slot dimensions 30 and 40/45/50 can also be combined for maximum flexibility
- For doors with profile frames or doors made of solid panel elements
- Assembly on exterior or interior
- Assembly as removable and non-removable hinges
- Opening to the right and left
- Centering slots as a drill guide for mounting bores
- Required finishing:
  - Cut the hinge halves to length
  - Drill holes for fixing


Required accessories:


- Hinge pins
- T-nut M6 (p. 3-4)
- Screw ISO 10642 M6x12 (8 mm slot)
- screw ISO 10642 M6x16 (10 mm slot)












Hinge profile	L (mm)		No.
30	3000[1]	10	**3 842 543 371**
40/45/50	3000[1]	10	**3 842 543 372**

[1] Due to the (anodic oxidation) contact points produced in the manufacturing process, supplied in profile length of 3100 mm

Material: Aluminum; anodized

Slot	F_{max}
8	300 N
10	300 N


Hinge pins		No.
	10	**3 842 544 661**
Material:	Grooved pin: Steel; zinc-plated Washer: PA, cover cap: TPE	
Scope of delivery:	Incl. grooved pin, 2 x cover cap, washer	

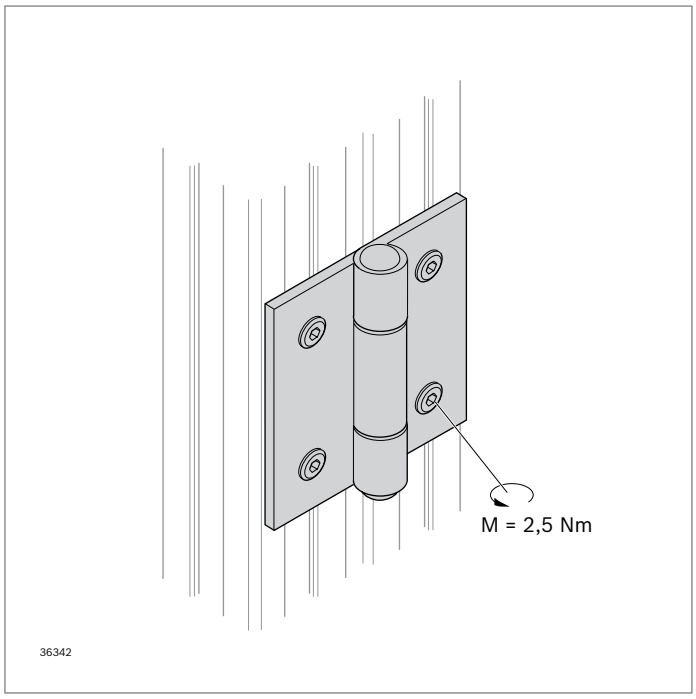

Hinge



- Assembly possible on solid panel elements
- For small doors and flaps
- Steel hinge for profiles with 6 mm slot

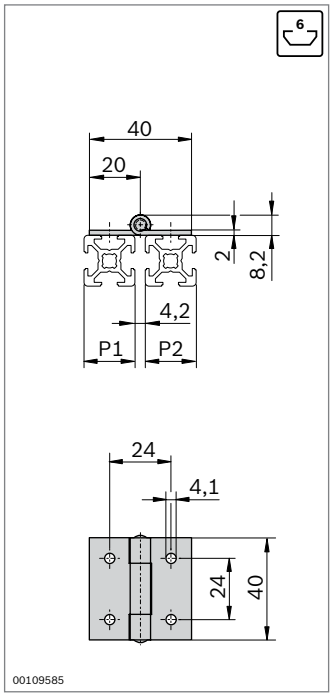


Slot	F_{max}
6	300 N

FS1




Hinge	P1 (mm)	P2 (mm)	ESD		No.	FS
	20	20		2	**3 842 535 684**	4xFS1


Material:	Steel; stainless Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

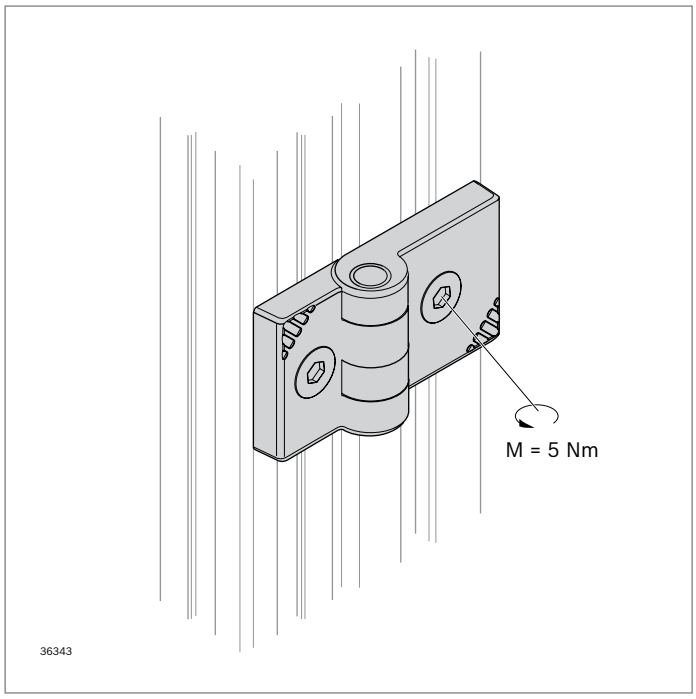

Hinge, plastic



- Plastic hinge for profiles with 8 mm or 10 mm slot
- Assembly possible on solid panel elements
- Centering bolts for easing mounting and as an anti-torsion element

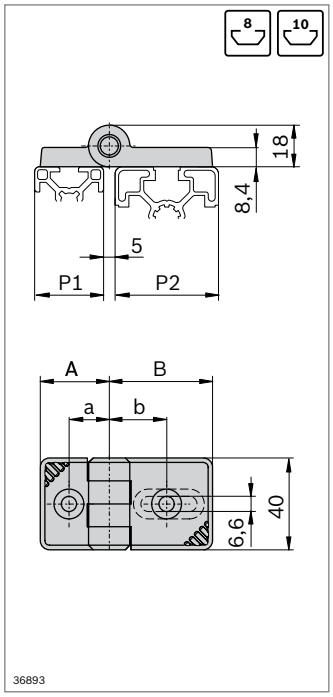

Slot	F_{max}
8	150 N
10	150 N

FS1




FS2




Hinge, plastic	P1 (mm)	P2 (mm)		No.	FS
	30	30	2	**3 842 554 458**	2xFS1
	30	40/50	2	**3 842 554 460**	1xFS1, 1xFS2
	30	45	2	**3 842 554 462**	1xFS1, 1xFS2
	30	60	2	**3 842 554 464**	1xFS1, 1xFS2
	40/50	40/50	2	**3 842 554 466**	2xFS2
	45	45	2	**3 842 554 468**	2xFS2
	45	60	2	**3 842 554 470**	2xFS2
	60	60	2	**3 842 554 472**	2xFS2

Material: PA; signal gray
Hinge axle: Steel; zinc-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)


P1/P2 (mm)	A/B (mm)	a/b (mm)
30	30	17.5
40	39	22.5
45	45	25.0
50	39	27.5
60	60	32.5

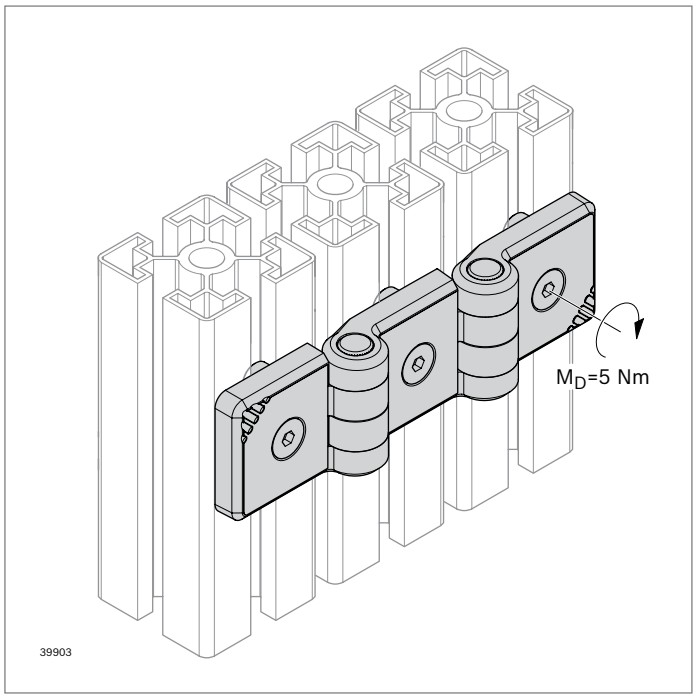

Plastic double hinge



- Plastic double hinge for profiles with 8 mm or 10 mm slot
- Assembly possible on solid panel elements
- Centering bolts for easing mounting and as an anti-torsion element

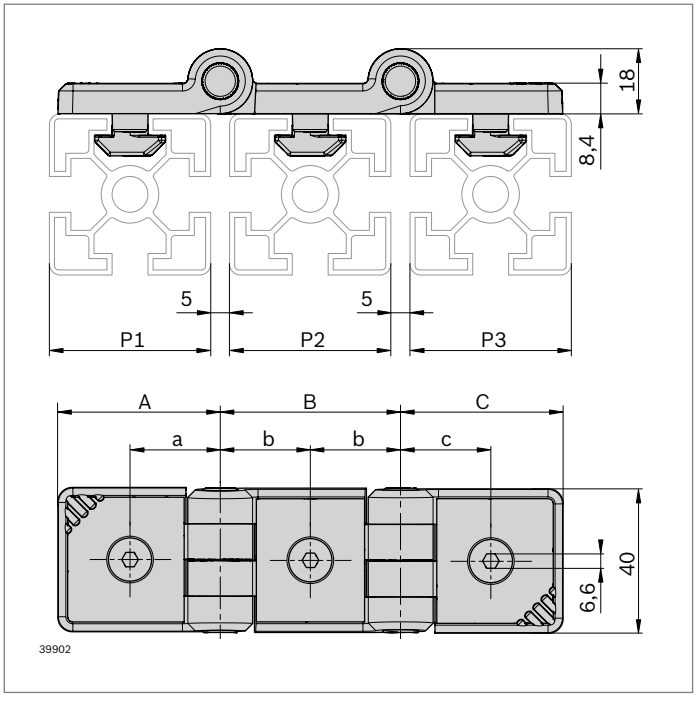


Plastic double hinge	Slot	P1 (mm)	P2 (mm)	P3 (mm)	ESD	No.	FS
	8	30	30	30		2 **3 842 564 133**	3xFS1
	10	45	45	45		2 **3 842 564 130**	3xFS2

Material: Hinge: PA; signal gray
Axis: Steel, galvanized
Fastening material: Steel; zinc-plated


Scope of delivery: Incl. Fastening material

Slot	F_{max} F_{max}
8	150 N
10	150 N


FS1



FS2




P1/P2/P3 (mm)	A/C (mm)	B (mm)	a/b/c (mm)
45	45	50	25
30	30	35	17.5

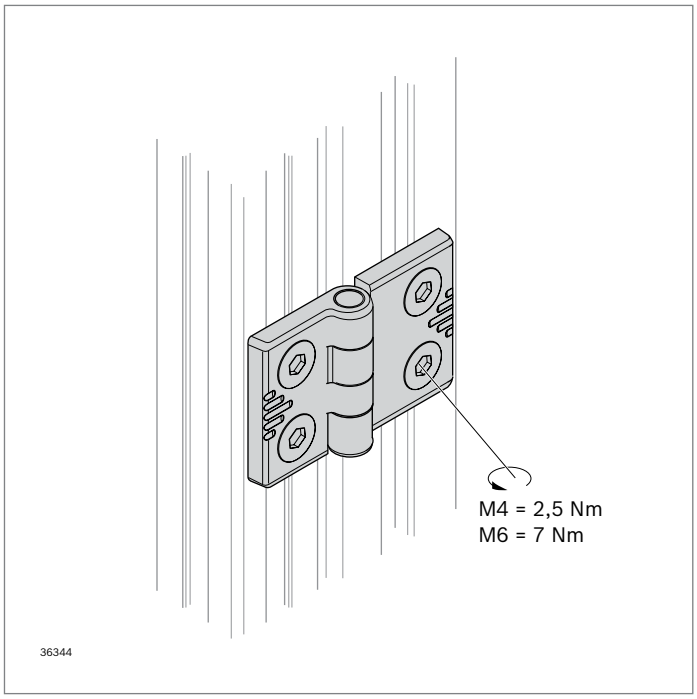

Hinge, aluminum

- Aluminum hinge for all slot systems
- Assembly possible on solid panel elements
- High-quality version
- Conductive version
- Suitable for use under cleanroom conditions thanks to wear-resistant guide bushings
- Tested for particulate emissions.
  Report No. BO2112-1289

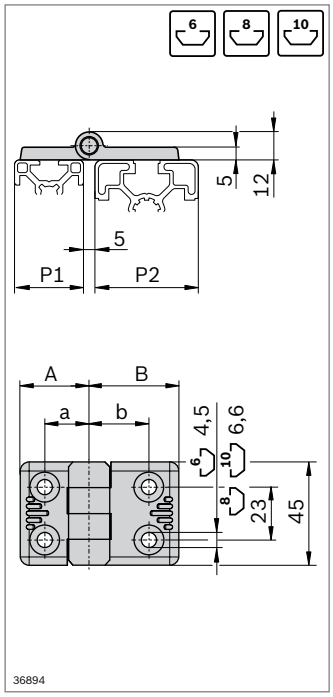

Slot	F_{max}
6	300 N
8	300 N
10	300 N

FS1
DIN7991 M4x8


FS2
DIN7991 M6x12

FS3
DIN7991 M6x16


Hinge, aluminum	P1 (mm)	P2 (mm)	ESD	No.	FS
	20	20	2	**3 842 544 525**	4xFS1
	20	30	2	**3 842 544 526**	2xFS1, 2xFS2
	30	30	2	**3 842 544 527**	4xFS2
	30	40	2	**3 842 544 528**	2xFS2, 2xFS3
	30	45	2	**3 842 544 529**	2xFS2, 2xFS3
	40	40	2	**3 842 544 530**	4xFS3
	45	45	2	**3 842 544 531**	4xFS3

Material: Diecast aluminum; nickel-plated
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

P1/P2 (mm)	A/B (mm)	a/b (mm)
20	20	12.5
30	28	17.5
40	37	22.5
45	40	25.0

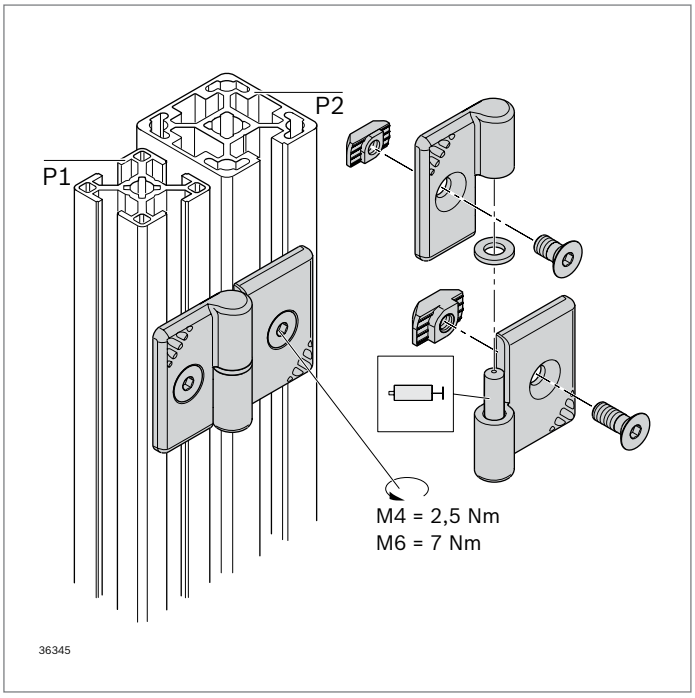


LIFTOFF hinge



designLINE

- Removable compact hinge, opening to the right or left
- designLINE version with special silver paint (RAL 9006) for an attractive, high-quality design
- Centering lugs as an assembly aid and anti-torsion element

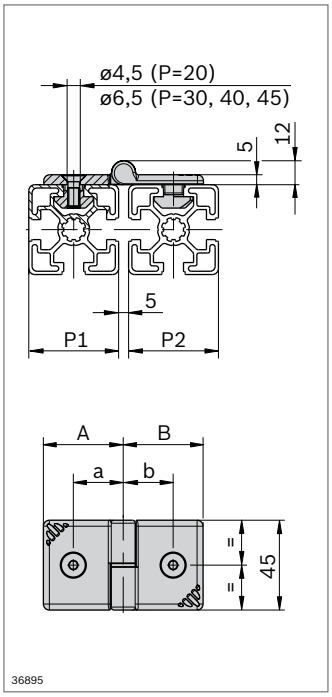

Slot	F_{max}
6	300 N
8	300 N
10	300 N

FS1
DIN7991 M4x8
6

FS2
DIN7991 M6x12
8

FS3
DIN7991 M6x16
10


FS4
DIN 125 A6,4

P1/P2 (mm)	A/B (mm)	a/b (mm)
20	20	12.5
30	28	17.5
40	37	22.5
45	40	25.0


LIFTOFF hinge	P1 (mm)	P2 (mm)		No.	FS
right	20	20	2	**3 842 543 334**	2xFS1, FS4
	20	30	2	**3 842 543 333**	FS1, FS2, FS4
	30	30	2	**3 842 543 332**	2xFS2, FS4
	30	40	2	**3 842 543 331**	FS2, FS3, FS4
	30	45	2	**3 842 543 330**	FS2, FS3, FS4
	40	40	2	**3 842 543 329**	2xFS3, FS4
	45	45	2	**3 842 543 328**	2xFS3, FS4
left	20	20	2	**3 842 543 327**	2xFS1, FS4
	20	30	2	**3 842 543 326**	FS1, FS2, FS4
	30	30	2	**3 842 543 325**	2xFS2, FS4
	30	40	2	**3 842 543 324**	FS2, FS3, FS4
	30	45	2	**3 842 543 323**	FS2, FS3, FS4
	40	40	2	**3 842 543 322**	2xFS3, FS4
	45	45	2	**3 842 543 321**	2xFS3, FS4

Material: Hinge: Diecast aluminum, painted
Fastening material: Steel; zinc-plated
Grooved pin: Steel; zinc-plated
Washer: PA


Scope of delivery: Incl. fastening material (FS)

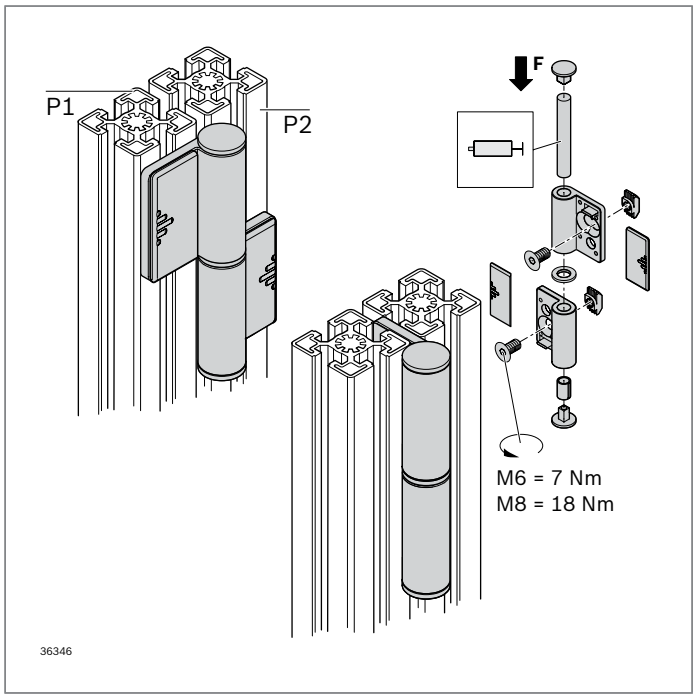



Hinge, removable



- For constructing large, heavy doors
- Removable
- For left and right stop
- Externally mounted: Opening angle approx. 180°
- Internally mounted: Prevents unauthorized removal, e.g. for safety devices









Slot	F_{max}
8	300 N
10	300 N

FS1



FS2




Hinge, removable	**P1** (mm)	**P2** (mm)		**No.**	**FS**
	30	30	2	**3 842 555 572**	2xFS1
	30	45	2	**3 842 555 574**	1xFS1,
	30[1)]	60			1xFS2
	45	45	2	**3 842 555 576**	2xFS2
	45[1)]	60			
	60[1)]	60			


[1)] Not suitable for installing on inner side

Material: Hinge: Diecast zinc
Cover cap: PA; signal gray
Fastening material: Steel; zinc-plated

Scope of delivery: Incl. fastening material (FS), 2 x cover cap

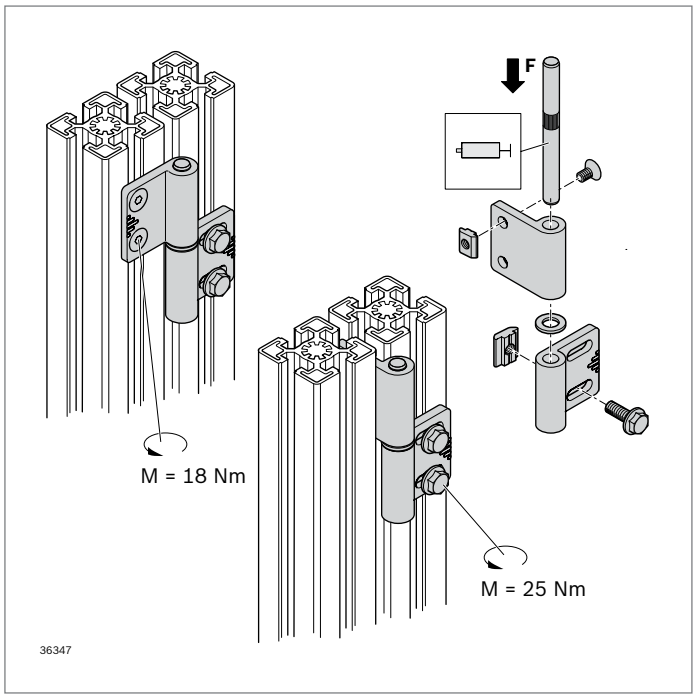



Hinge, adjustable




- For constructing large, heavy doors
- Adjustable for compensating clearance tolerances
- Removable
- For left and right stop
- Opening angle approx. 180°

Accessories:
T-nut slot 10, M8 (p. 3-4) for fixing a door with 10 mm slot






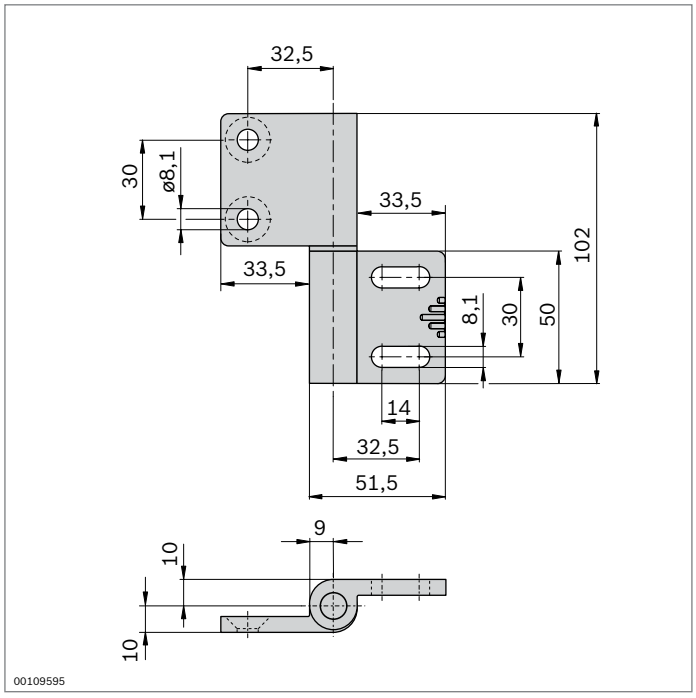


Hinge, adjustable		No.	FS
	2	**3 842 544 562**	2xFS1, 2xFS2


Material: Diecast aluminum
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)


Slot	
8	300 N
10	300 N

FS1




FS2




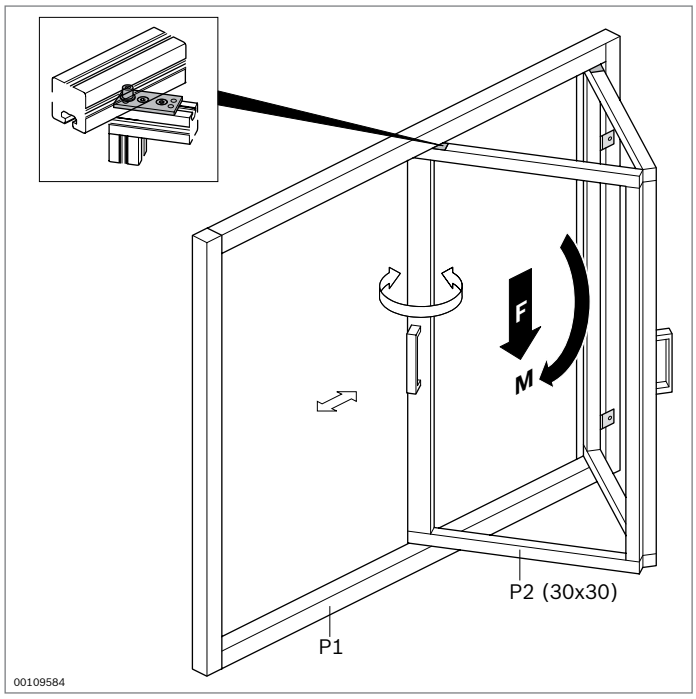


Folding door element




- For a simultaneous swinging and sliding action on folding doors made of 30 mm profiles
- Very long service life (approx. 50000 actuations)
- Suitable for frames made of profiles with 8 mm and 10 mm slot
- The frame and door profile are always flush (the guide ring position depends on the thickness of the frame profile)

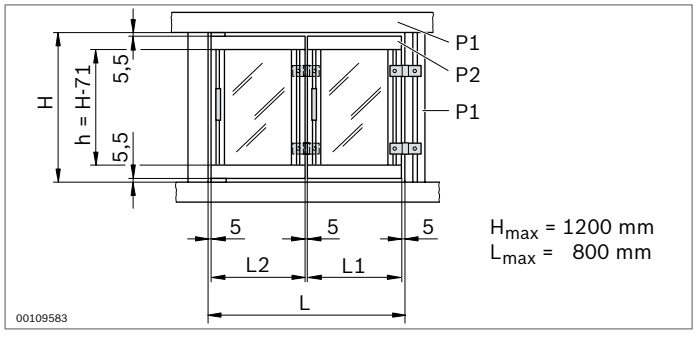

P2 (mm)	**P1** (mm)	**L1** (mm)	**L2** (mm)
30X30	45x45	0,5L - 29.5	0,5L + 14.5
	40x40	0,5L - 28.3	0,5L + 13.3
	30x30	0,5L - 25.8	0,5L + 10.8

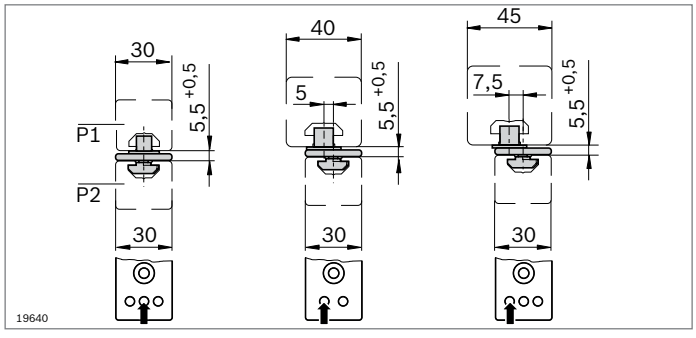





Slot	F_{max}	M_{max}
8	120 N	20 Nm
10	120 N	20 Nm

Folding door element	**No.**	**FS**
	3 842 516 715	2xFS1


Material: Folding door element: Diecast zinc
Guide ring: PA; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

FS1



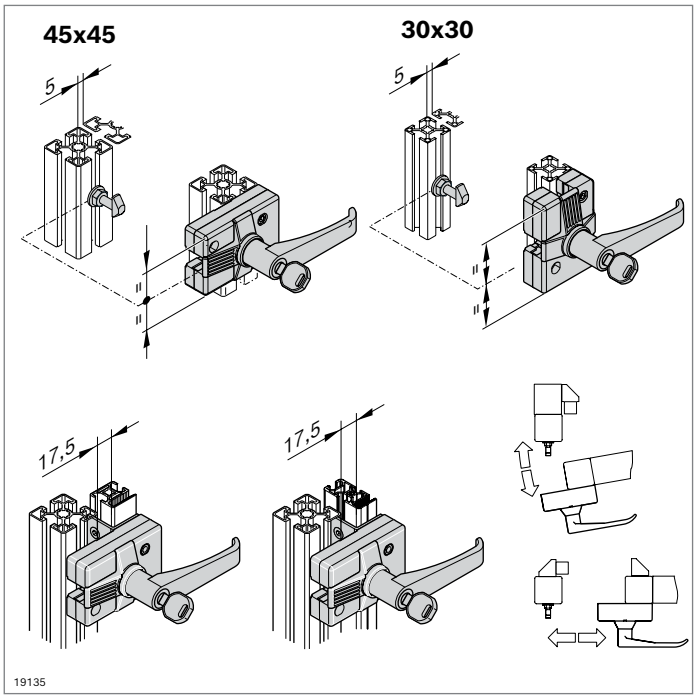


Door lock for swing and sliding doors




- Opening to the right and left
- Suitable for profiles 45x45 and 30x30
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key
- Version with door handle or as two-way lock

Accessories:
Adapter plate for connecting to a 22.5x45 frame profile (p. 10-41) or a WG40 or WG30 woven wire grille profile (p. 10-28)











Door lock		No.	FS
Standard locking	30x30, 45x45	**3 842 525 821**	2xFS1, 1xFS2, 3xFS3
Uniform locking	30x30, 45x45	**3 842 525 822**	2xFS1, 1xFS2, 3xFS3

Material:	Housing: Diecast aluminum Door handle: PA; black Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 3 keys, fastening material (FS)












Door lock		No.	FS
	30x30, 45x45	**3 842 525 823**	2xFS1, FS2, 3xFS3

Material:	Diecast aluminum Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 1 x two-way key, fastening material (FS)









- Adapter plate for mounting the door lock on an EcoSafe protective frame (p. 10-25 ff)

Adapter plate EcoSafe PG	ESD	No.	FS
	⚠	**3 842 567 960**	2xFS4, 2xFS5

Material:	Steel; zinc-plated
Scope of delivery:	Incl. Fastening material

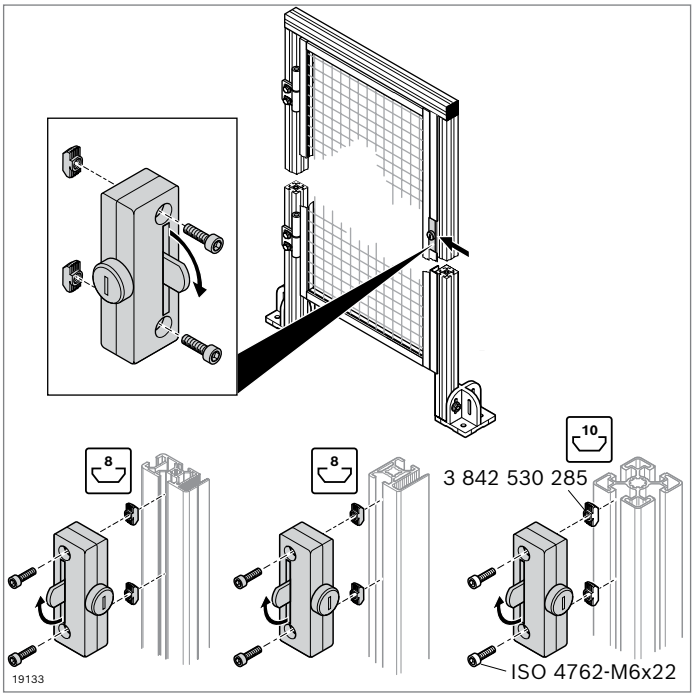


Door lock





- Opening to the right and left
- For frame profile 30x30 WG (EcoSafe protective fence system); incl. fastening material
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key

Accessories for assembly on profile with 10 mm slot:

- 2 x T-nut M6, **3 842 530 285** (p. 3-4)
- 2 x screw ISO4762 M6x22

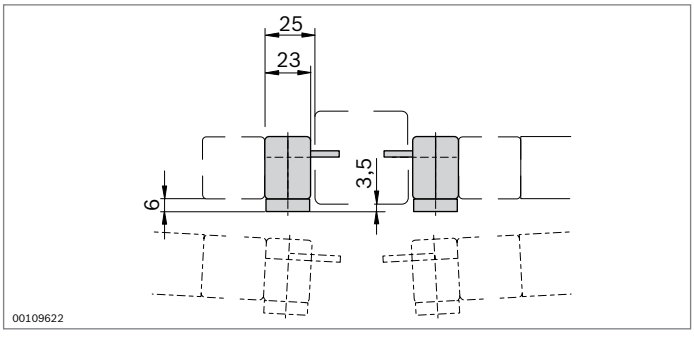

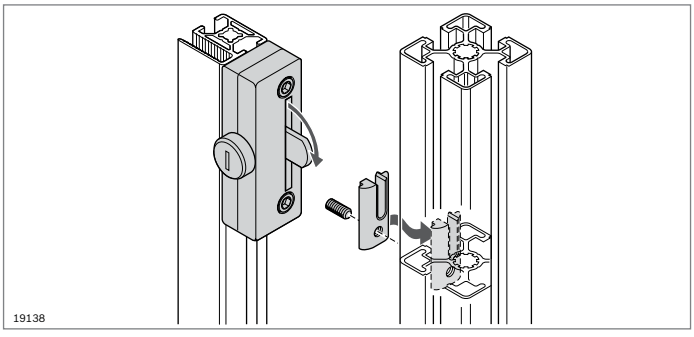

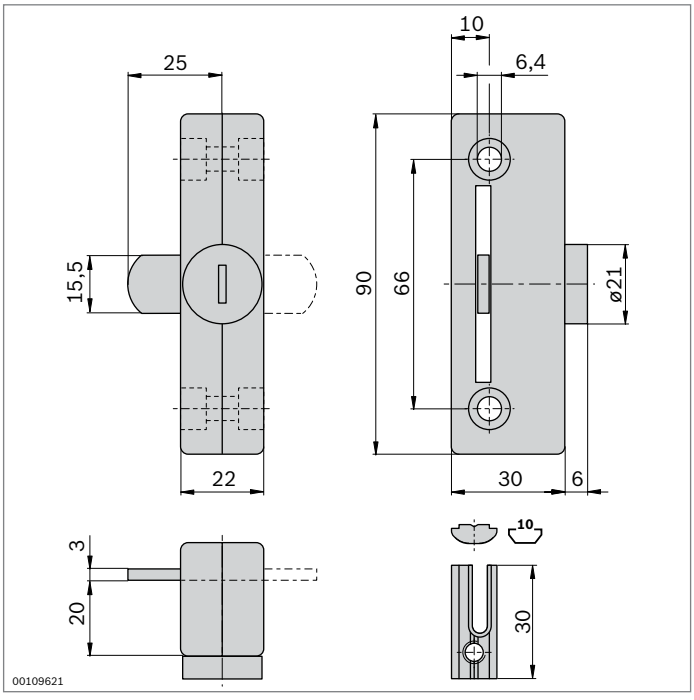


Door lock	No.	FS
Standard locking	**3 842 522 479**	2xFS1, 1xFS2
Uniform locking	**3 842 571 998**	2xFS1, 1xFS2


Material: Diecast zinc
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. 3 keys, fastening material (FS)

FS1
ISO 4762 M6x22
8

FS2
ISO 4027 M6x10

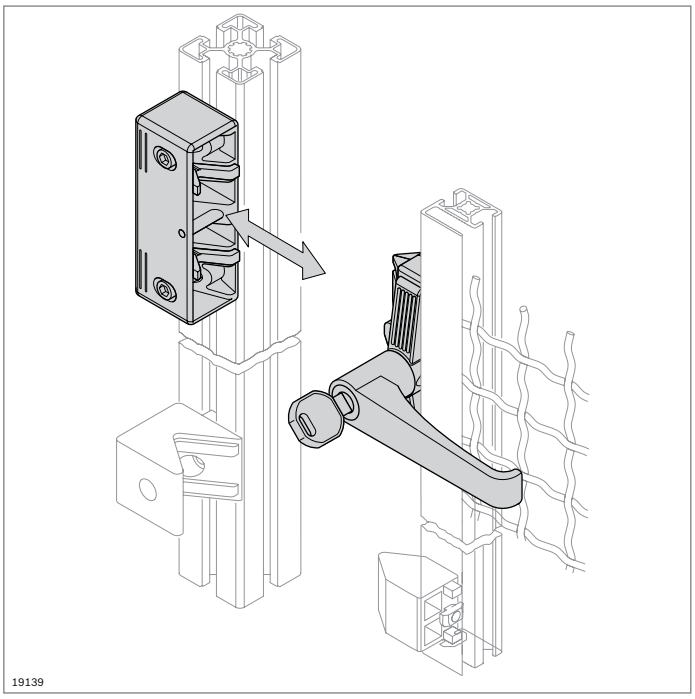


Door lock for EcoSafe sliding doors




- Opening to the right and left
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key


Accessories, optional:
Stop kit for cushioned closing of the doors (p. 12-5)

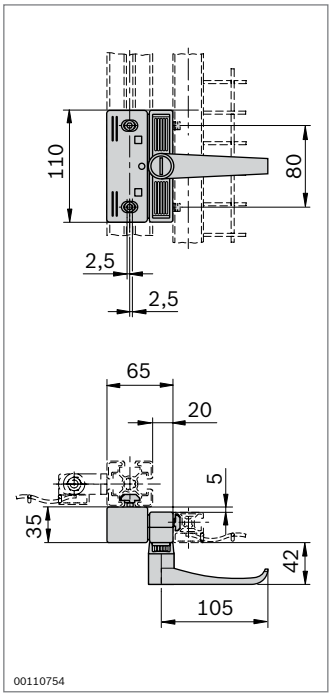

FS1




FS2




Door lock for sliding doors	No.	FS
Standard locking	**3 842 525 946**	2xFS1, 2xFS2
Uniform locking	**3 842 525 947**	2xFS1, 2xFS2


Material:	Housing: Diecast aluminum Door handle: PA; black Cover cap: PA6 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 3 keys, fastening material (FS)

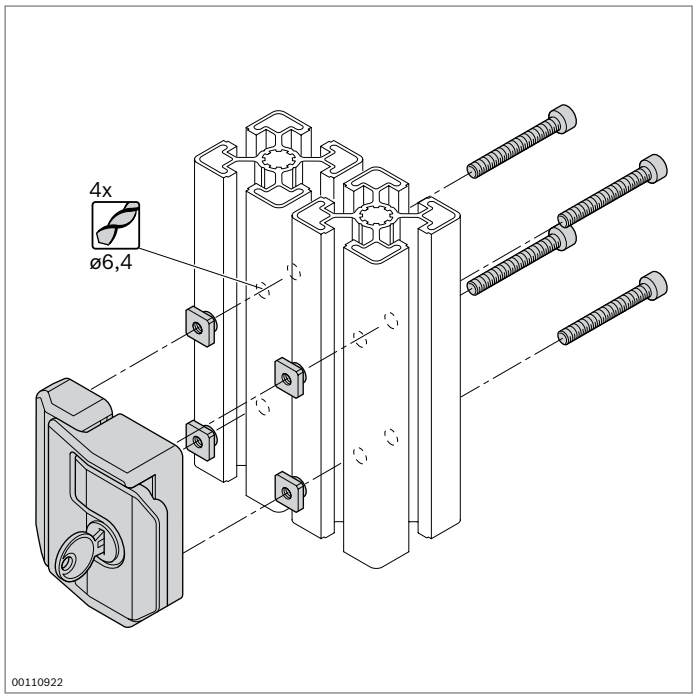


Door lock for swing doors



- Opening to the right and left
- Self-locking mechanism in the closed position
- Smooth closing
- Ergonomically designed folding handle for opening
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key
- Profile finishing: Drill hole D6.4

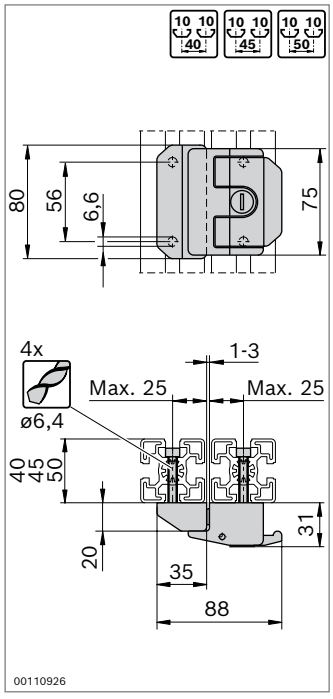











Door lock	No.	FS
Standard locking	**3 842 530 353**	4xFS1, 4xFS2, 4xFS3, 4xFS4
Uniform locking	**3 842 530 352**	4xFS1, 4xFS2, 4xFS3, 4xFS4

Material:	Diecast zinc; black powder-coated Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 2 keys, fastening material (FS)

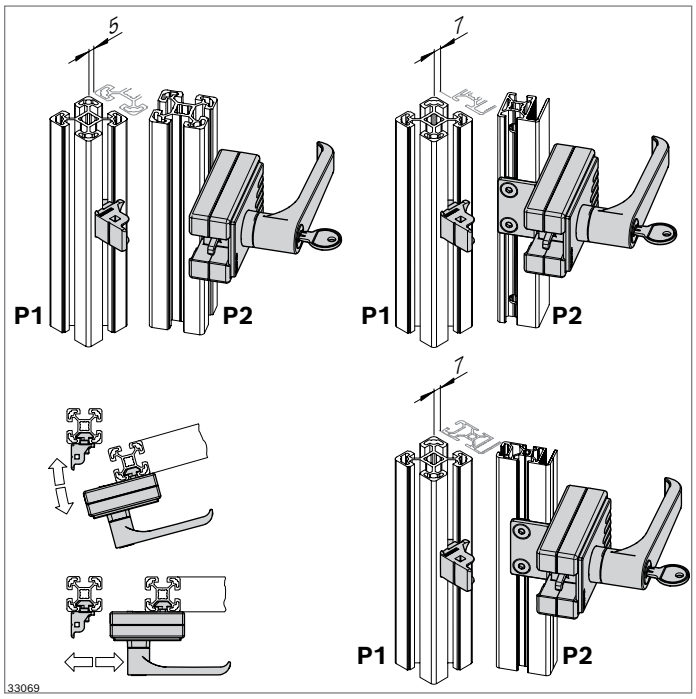


Door lock “Multi Use” for swing and sliding doors



- Opening to the right and left
- For numerous profile combinations
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key
- Version with door handle or as two-way lock
- Covered fastening screws
- Differing gap measurements for doors <400 mm with modular dimensions up to 45 mm and < 600 mm for modular dimensions of 50 mm (see assembly instructions **3 842 554 184**)
- Without profile finishing


Accessories, optional:
Adapter plate for connecting to a 22.5x45 frame profile or a WG40 or WG30 woven wire grille profile (p. 10-28)

P1	P2	P2	P2	P2	P2	P2
30	22.5x45	WG30/40	30	–	–	–
40	22.5x45	WG30/40	30	40	–	–
45	22.5x45	WG30/40	30	40	45	–
50	22.5x45	WG30/40	30	40	45	50
60	22.5x45	WG30/40	30	40	–	–
















Door lock “Multi Use” for swing and sliding doors	No.	FS
Standard locking	**3 842 548 971**	3xFS1, FS2, FS3, 2xFS4, 2xFS5
Uniform locking	**3 842 548 970**	3xFS1, FS2, FS3, 2xFS4, 2xFS5


Material:	Housing: Diecast zinc Door handle: PA6; black Cover: PP; signal gray RAL 7004 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 3 keys, Fastening material (FS)
















Door lock “Multi Use” for swing and sliding doors	No.	FS
Two-way lock	**3 842 548 965**	3xFS1, FS2, FS3, 2xFS4, 2xFS5

Material:	Housing: Diecast zinc Cover: PP; signal gray RAL 7004 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 1x two-way key, fastening material









Adapter plate Multi Use EcoSafe PG	ESD	No.	FS
	⏚	**3 842 567 961**	2xFS6 2xFS7

Material:	Steel; zinc-plated
Scope of delivery:	Incl. Fastening material

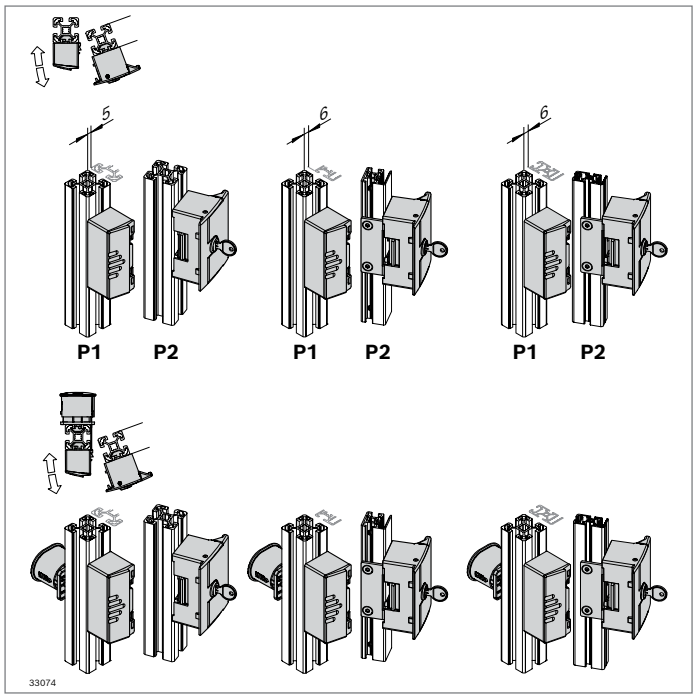

Door lock “Compact” for swing doors




- Opening to the right and left
- For numerous profile combinations
- “Standard locking” variant with random key selection (each lock has a different key)
- “Uniform locking” variant always has the same key
- Covered fastening screws
- Installation of an emergency opening mechanism for unlocking from inside in emergency possible (Gap measurements according to assembly instructions **3 842 554 192**)
- Without profile finishing


Accessories, optional:


- Adapter plate for connecting to a 22.5x45 frame profile or a WG40 or WG30 woven wire grille profile (p. 10-28)
- Emergency opening mechanism (p. 8-19)

P1	P2	P2	P2	P2	P2	P2
30	22.5x45	WG30/40	30	–	–	–
40	22.5x45	WG30/40	30	40	–	–
45	22.5x45	WG30/40	30	40	45	–
50	22.5x45	WG30/40	30	40	45	50
60	22.5x45	WG30/40	–	40	45	50











Door lock “Compact” for swing doors	No.	FS
Standard locking	**3 842 553 640**	4xFS1, 2xFS2, 2xFS3
Uniform locking	**3 842 553 639**	4xFS1, 2xFS2, 2xFS3

Material:	Housing: Diecast aluminum Cover: PP; signal gray RAL 7004 Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. 2 keys, Fastening material







- For emergency opening of the door lock “compact” from the inside in its locked state

Emergency unlocking	No.	FS
Compact	**3 842 554 134**	FS4

Material: Tab: Steel; zinc-plated
Pushbutton: PA6; red RAL 3020
Fastener: PA6; RAL 7004
Fastening material: Steel; zinc-plated

Scope of delivery: Incl. Fastening material








Adapter plate Compact EcoSafe PG	ESD	No.	FS
		3 842 567 962	2xFS5, 2xFS6


Material: Steel; zinc-plated

Scope of delivery: Incl. Fastening material

8

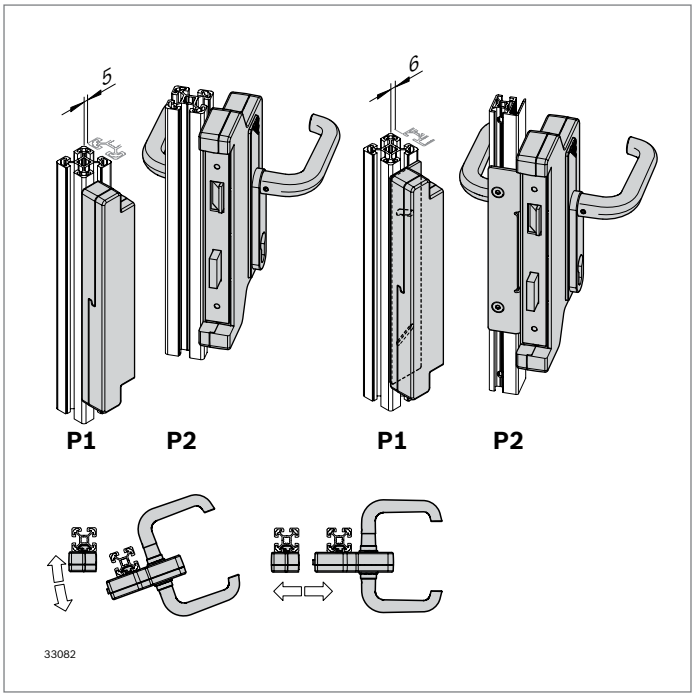

Chamber lock for swing and sliding doors





- Opening to the right and left
- For numerous profile combinations
- For installation of a standard lock cylinder (not included in the scope of delivery)
- Version with door handle, can be opened from inside and outside
- Without profile finishing
- Covered fastening screws

Accessories, optional:


- Adapter plate for connecting to a 22.5x45 frame profile or a WG40 or WG30 woven wire grille profile (p. 10-28)
- Lock cylinder (p. 8-21)


P1	P2	P2	P2	P2	P2	P2
30	22.5x45	WG30/40	30	–	–	–
40	22.5x45	WG30/40	30	40	–	–
45	22.5x45	WG30/40	30	40	45	–
50	22.5x45	WG30/40	30	40	45	50
60	22.5x45	WG30/40	30	40	45	50














Chamber lock	No.	FS
Sliding door	**3 842 554 151**	4xFS1, 4xFS2, 4xFS3, 2xFS4
Swing door	**3 842 554 150**	4xFS1, 4xFS2, 4xFS3, 2xFS4

Material:	Housing: PA6 signal gray (RAL7004) Door handle: Aluminum; anodized Fastening material: Steel; zinc-plated Washer: Aluminum
Scope of delivery:	Incl. Fastening material








Adapter plate Box Lock EcoSafe PG	ESD	No.	FS
		3 842 567 963	2xFS5


Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material

- Conventional lock cylinder 27.5/27.5 (not included in the scope of delivery)

8

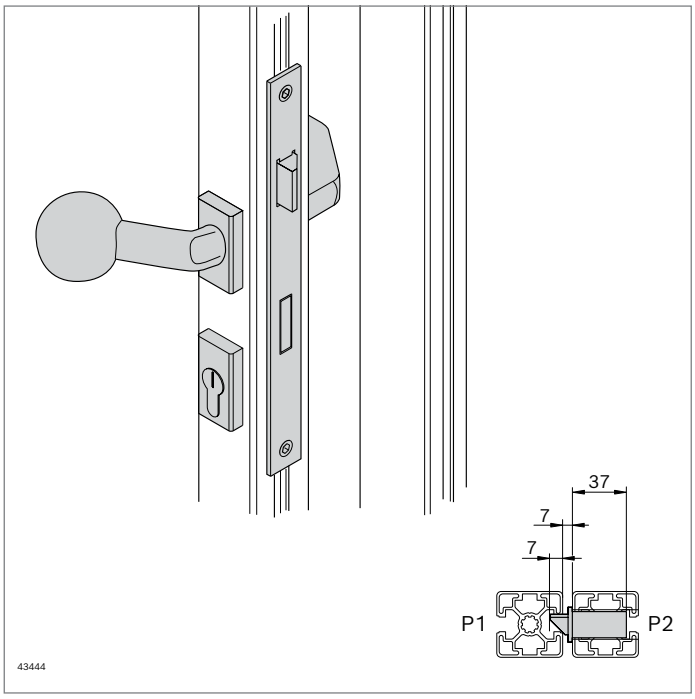


Mortise lock for swing doors




- For installation in 45x45 profiles or larger
- For installation of a standard lock cylinder (not included in the scope of delivery)
- Robust design for high loads
- Door handle in the variants: Handle/handle, Handle/knob
- Milled profile finishing


Accessories:


- Handle/handle
- Handle/knob
- Lock cylinder (p. 8-23)






Mortise lock	Slot	No.	FS
	10	**3 842 538 241**	2xFS1
Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. Fastening material		






Handle/handle		No.	FS
		3 842 553 631	8x FS2
Material:	Aluminum; anodized Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. Fastening material		







Handle/knob		No.	FS
		3 842 553 630	8x FS3
Material:	Aluminum; anodized Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. Fastening material		

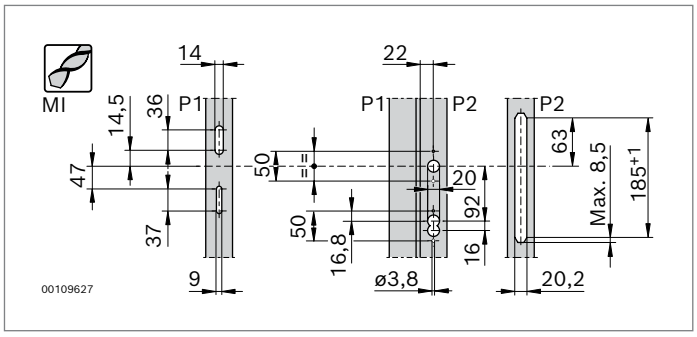


- Dimensional drawing of the profile finishing for mortise lock
- Machining type “MI” (long milling)



- Conventional lock cylinder 35/35 (not included in the scope of delivery)

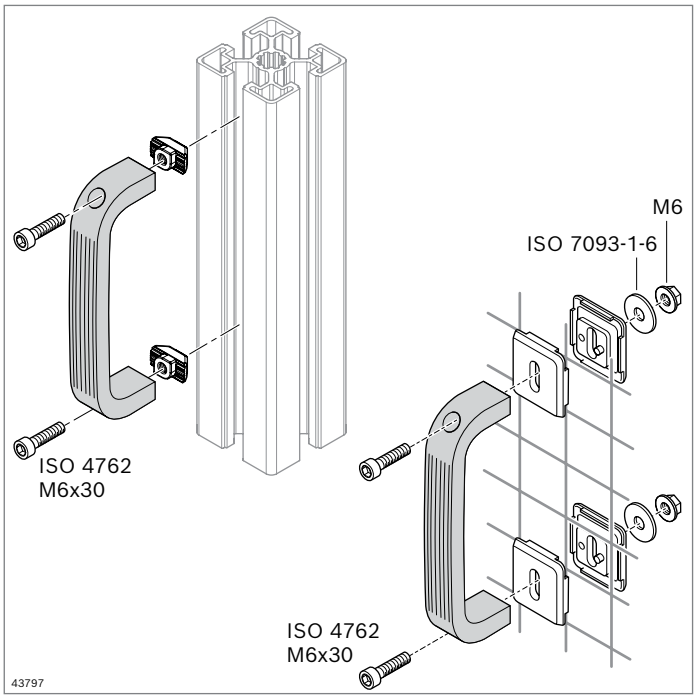

Bow-type handle



Bow-type handle


- Robust construction equipped to withstand strong forces
- Fastening in the profile slot or on a woven wire grille with the clamping element
- Suitable for use in ESD-protected environments

Required accessories:


- For bow-type handle N6:
  - Sliding block 6 M3 (p. 3-7)
  - Cylinder head screw M3x8 ISO 4762
- For bow-type handle N8:
  - T-nut 8 M6 (p. 3-4)
  - Cylinder head screw M6x16 ISO 4762
- For bow-type handle N10:
  - T-nut 10 M6 (p. 3-4)
  - Cylinder head screw M6x30 ISO 4762


Accessories, optional:

- Clamping element for mounting on woven wire grille (p. 10-43)
- T-nut (p. 3-4)




Bow-type handle	Color		No.
	Signal gray RAL 7004	10	**3 842 554 716**
Material:	PA		






Bow-type handle	Color	ESD		No.
26x133x50	Signal gray RAL 7004		10	**3 842 554 718**
	Black	ESD	10	**3 842 525 481**
26x195x58	Signal gray RAL 7004		10	**3 842 554 720**
	Black	ESD	10	**3 842 525 767**
Material:	PA			

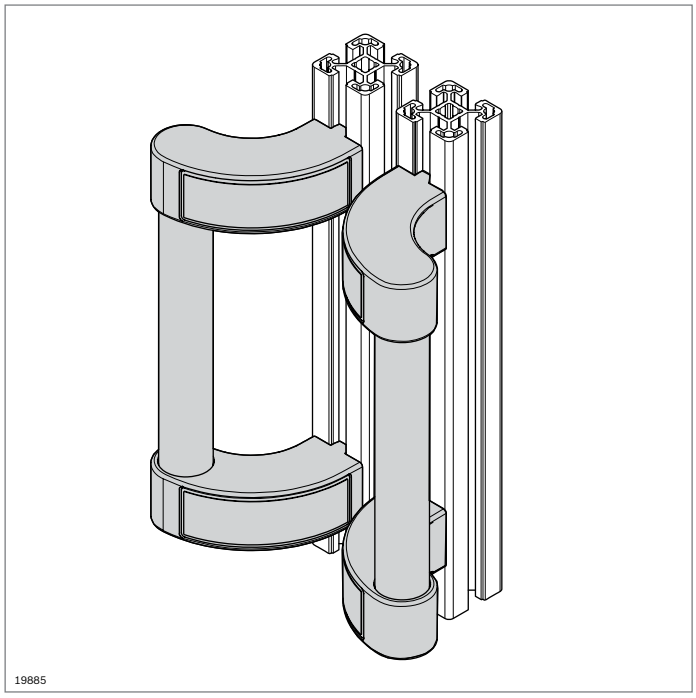

Safety handle


10

- Prevents injuries caused by catching of body parts when closing sliding doors
- Suitable for sliding or swing doors
- The length of the handle can be varied by changing the tube D28

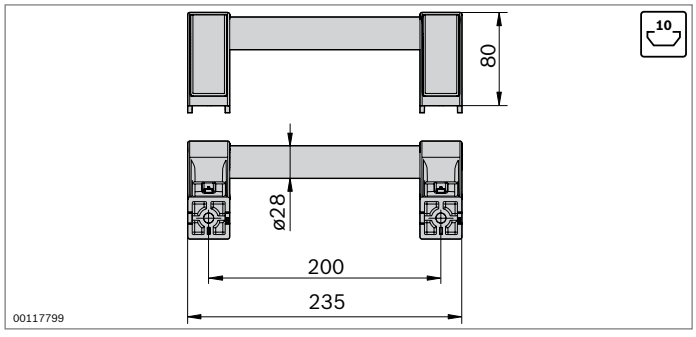


Safety handle		No.	FS
		3 842 555 564	2xFS1
Material:	Round tube D28: Aluminum; anodized Holder: PA; signal gray RAL 7004		
Scope of delivery:	Incl. fastening material (FS)		




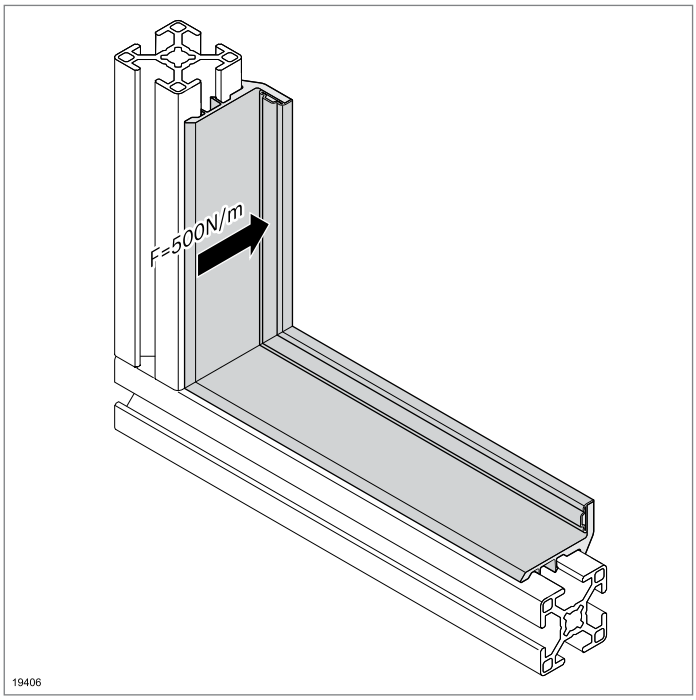


Sealing strip




- For sealing doors (width > 500 mm) with an elastic lip seal
- Can be clipped into the slot
- Non-transparent elastic lip seal covers the door gap
- Stop for swing doors (impact force: 500 N/m)





Sealing strip	L (mm)		No.
30/30	3000	10	**3 842 555 554**
Material:	PVC/NBR; signal gray RAL 7004		






Sealing strip	L (mm)		No.
40/30	3000	10	**3 842 555 562**
45/30	3000	10	**3 842 555 560**
Material:	PVC/NBR; signal gray RAL 7004		







Sealing strip	L (mm)		No.
40/40	3000	10	**3 842 555 558**
45/45	3000	10	**3 842 555 556**
Material:	PVC/NBR; signal gray RAL 7004		

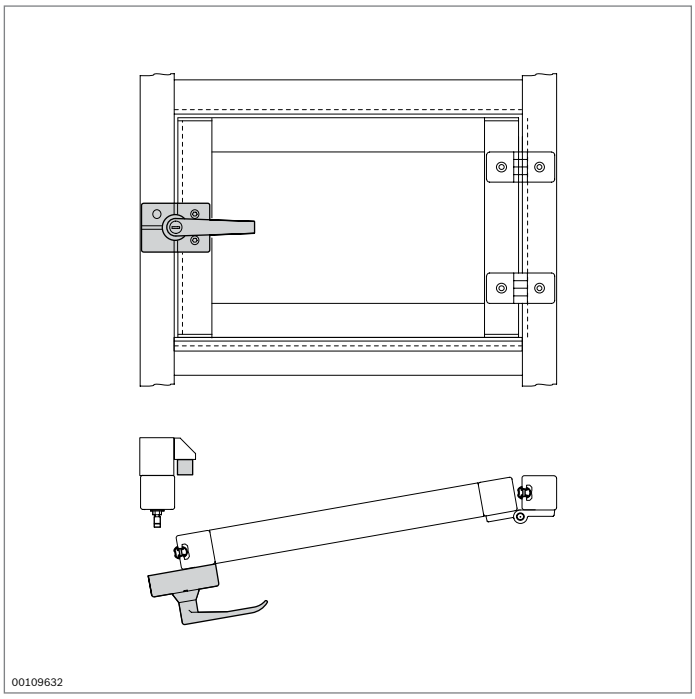


Sealing profile



- For sliding and swing doors
- Prevents particles from entering or escaping







- Suitable for use in cleanroom environments
- Two-piece seal (**B**) also performs a stop function.
- Tested for emission of volatile organic substances at room temperature.
  Report No. BO2112-1289

Sealing profile	Slot	L (mm)	No.
A	6	10000	**3 842 554 728**
B	6	10000	**3 842 554 730**


Material: TPE; signal gray RAL 7004, hardness: 64° ±5 Shore A





Sealing profile	Slot	L (mm)	No.
C	8	10000	**3 842 516 598**
D	10	10000	**3 842 518 492**


Material: NBR; black, hardness 60° Shore A

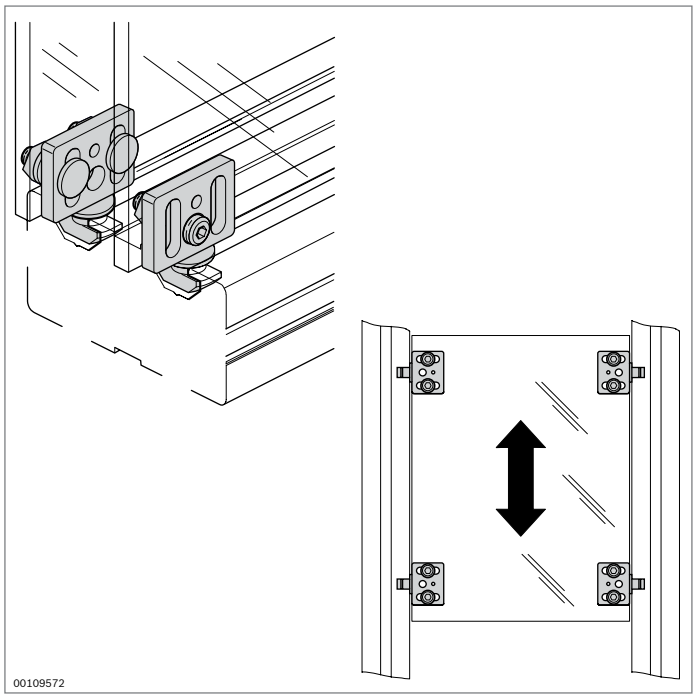


Slider




- For constructing inexpensive sliding and lifting doors
- Good functional reliability



Slider		No.
	10	**3 842 564 170**
Material:	POM; signal gray RAL 7004	

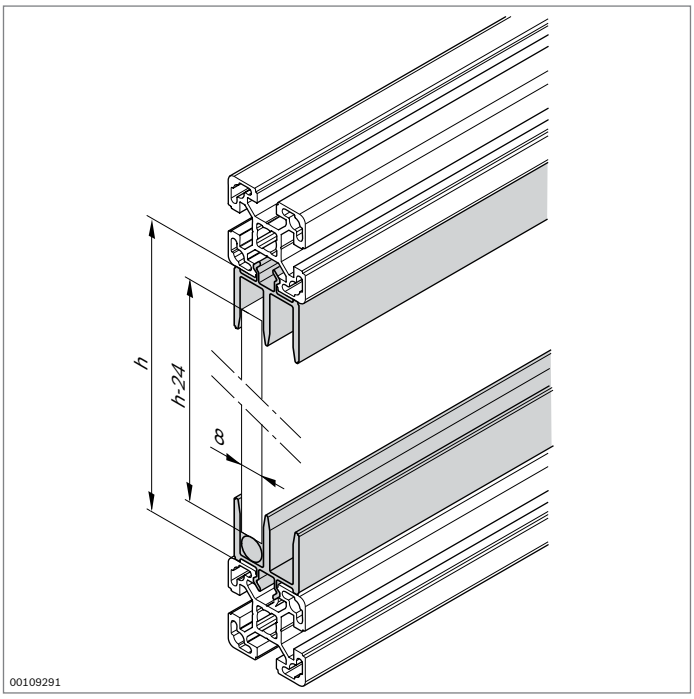


Sliding door profile PVC clip-in




- Can be clipped into the supporting frame made of strut profiles
- Round bar to minimize the displacement force required
- For panel elements of a thickness of 8 mm
- Insertion of the panel element into closed frame

Accessories, optional:


- Edge protector (p. 8-33)
- Door handle profile (p. 8-33)
- Bow-type handle (p. 8-24)




Sliding door profile PVC clip-in	Slot	L (mm)		No.
	8	2000	10	**3 842 555 262**
Material:	PVC; signal gray RAL 7004			



Sliding door profile PVC clip-in	Slot	L (mm)		No.
	10	2000	10	**3 842 555 260**
Material:	PVC; signal gray RAL 7004			




Round bar	L (mm)		No.
	2000	10	**3 842 516 694**
Material:	POM; black		

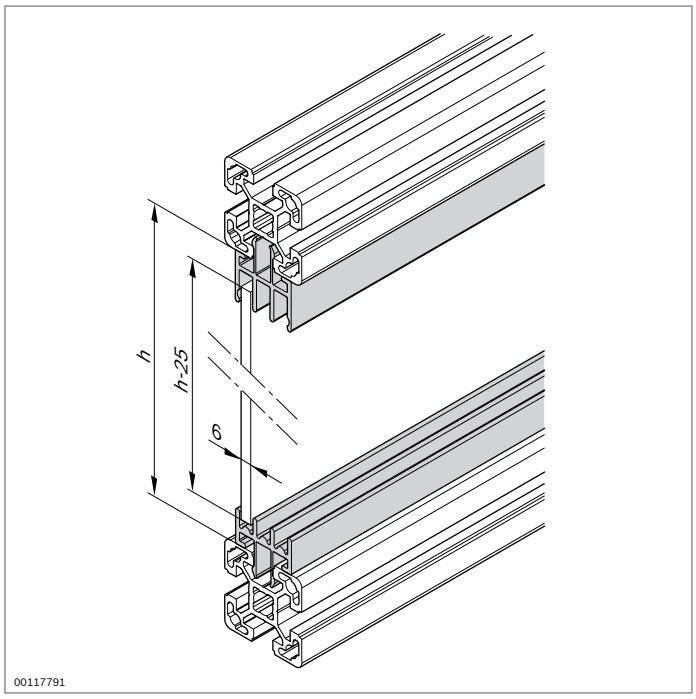

Sliding door profile Al clip-in




- Can be clipped into the supporting frame made of strut profiles
- Sliding door profile, bottom, with half-round floor contour to minimize the displacement force required
- For panel elements with a thickness of 5 or 6 mm
- Insertion of the panel element into closed frame




Sliding door profile, top		L (mm)	No.
1 pc		40 ... 3000	**3 842 993 425 / L**
10 pcs		3000	**3 842 536 531**

Material: Aluminum; anodized



Sliding door profile, bottom		L (mm)	No.
1 pc		40 ... 3000	**3 842 993 426 / L**
10 pcs		3000	**3 842 536 532**

Material: Aluminum; anodized

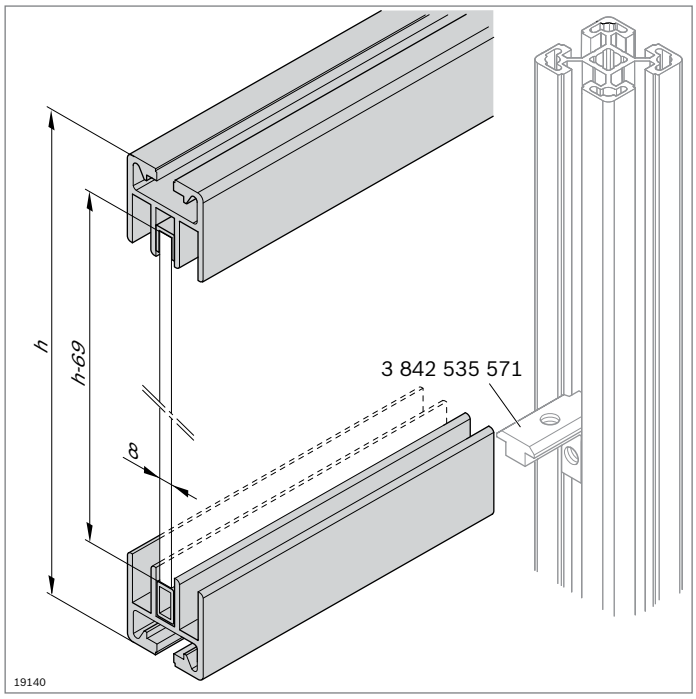

Sliding door profile Al 45
Cover cap, end piece

10


Sliding door profile Al 45

- Aluminum profile as a supporting construction element
- Installation using inner brackets between two vertical struts
- Glide profile to edge the upper part of the sliding door
- Insertion profile acts as a slide surface
- For panel elements of a thickness of 8 mm
- Insertion of the panel element into closed frame


Accessories:

- Cover cap (p. 8-32)
- End piece (p. 8-32)
- Inner bracket (p. 3-15), inner bracket R (p. 3-16)


8




Sliding door profile		L (mm)	No.
1 pc		100 ... 6070	**3 842 990 115 / L**
1 pc F1	F1	100 ... 6000	**3 842 990 116 / L**
1 pc		6070	**3 842 558 305**
20 pcs		6070	**3 842 557 943**
Material:	Aluminum; anodized		



Glide profile		L (mm)		No.
		3000	10	**3 842 554 724**
Material:	Hard PVC; signal gray RAL 7004			




Insertion profile	L (mm)		No.
	3000	10	**3 842 554 726**
Material:	PA; signal gray RAL 7004		



Cover cap

- As a design element and to prevent injuries

Cover cap	Color	ESD	No.
	Signal gray	20	**3 842 551 662**
Material:	PP; signal gray RAL 7004		



FS1




DIN 916
M8x16

End piece


- For use as a stop for sliding elements
- Clamping with setscrew in the profile slot

End piece	ESD		No.	FS
		20	**3 842 191 194**	FS1
Material:	Diecast aluminum			
Scope of delivery:	Incl. fastening material (FS)			

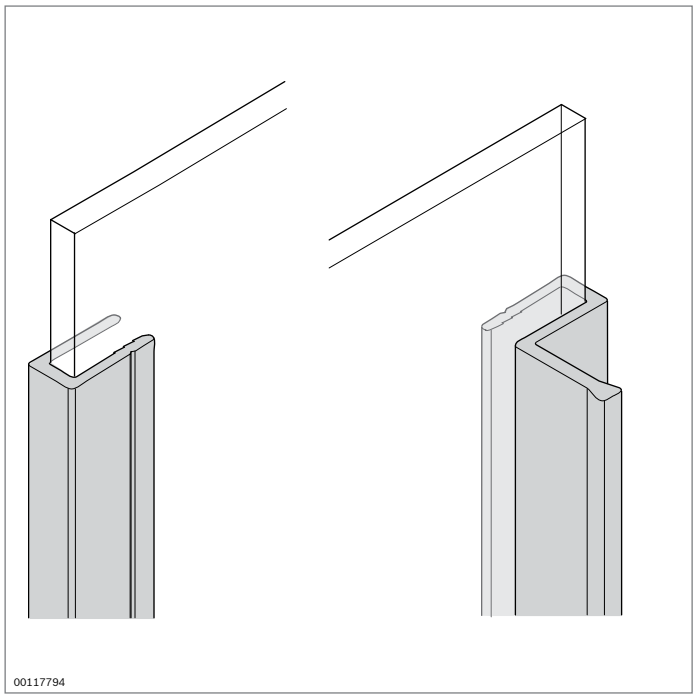


Edge protector
Door handle profile

- For reinforcing frameless panel elements on sliding doors
- Profile for s = 6 mm can also be used for 1/4 inch plates



Edge protector		s (mm)	L (mm)	No.
1 pc		5	40 ... 3000	**3 842 993 429 / L**
10 pcs		5	3000	**3 842 536 537**
1 pc		6	40 ... 3000	**3 842 993 430 / L**
10 pcs		6	3000	**3 842 536 540**


Material: Aluminum; anodized




Door handle profile		s (mm)	L (mm)	No.
1 pc		5	40 ... 3000	**3 842 993 427 / L**
10 pcs		5	3000	**3 842 536 533**
1 pc		6	40 ... 3000	**3 842 993 428 / L**
10 pcs		6	3000	**3 842 536 536**

Material: Aluminum; anodized

Accessories for protective equipment




Counterbalance
(p. 9-2)




Safety catch (p. 9-4)



Bumper (p. 9-5)



Handle bar (p. 9-5)




Magnet catch (p. 9-6)



Double ball stop latch
(p. 9-7)




Ball catch (p. 9-8)

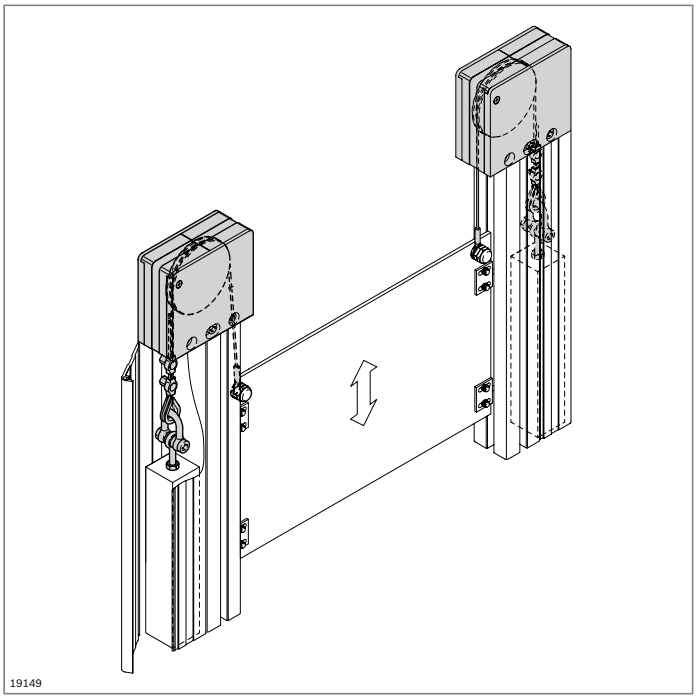


Counterbalance

- For lifting doors comprising a deflection pulley and control cable
- Counterweight individually adjustable and preferably guided in a cable duct
- Length of cable can be adjusted
- Service life: 50000 actuations
- Profile finishing:
  - M12 for fastening the deflection pulley
- Fit lifting doors with a back-up fall arrestor in accordance with the Machinery Directive 2006/42/EC


Required accessories:
Counterbalance weight (square profile 35x35 mm)

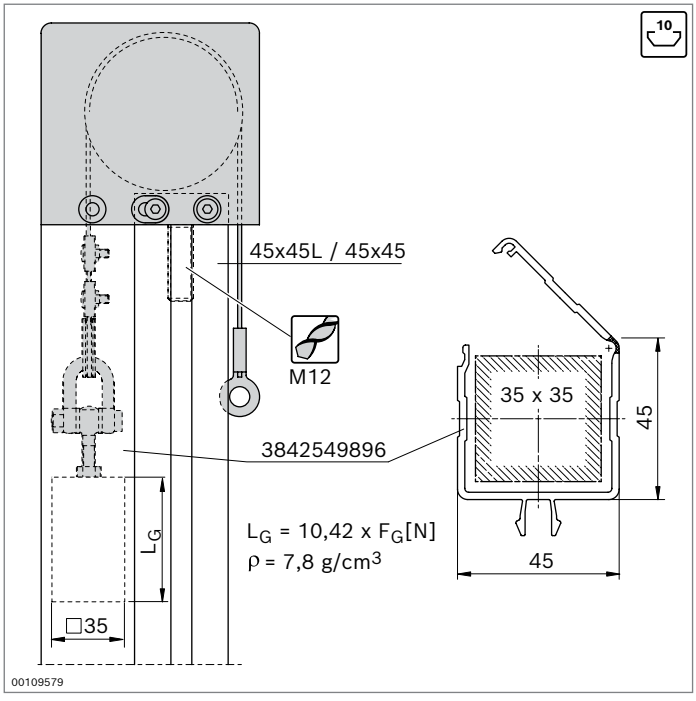


Accessories, optional:
- Cable duct 45x45 (p. 11-2)
- Slider (p. 12-3/8-28)
- Safety catch (p. 9-4)

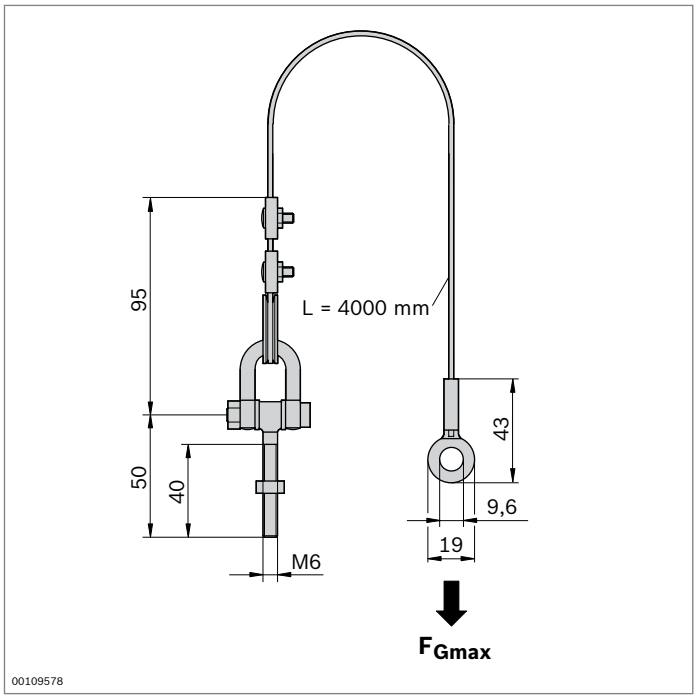


Counterbalance control cable	No.
	3 842 518 798
Material:	Steel; stainless




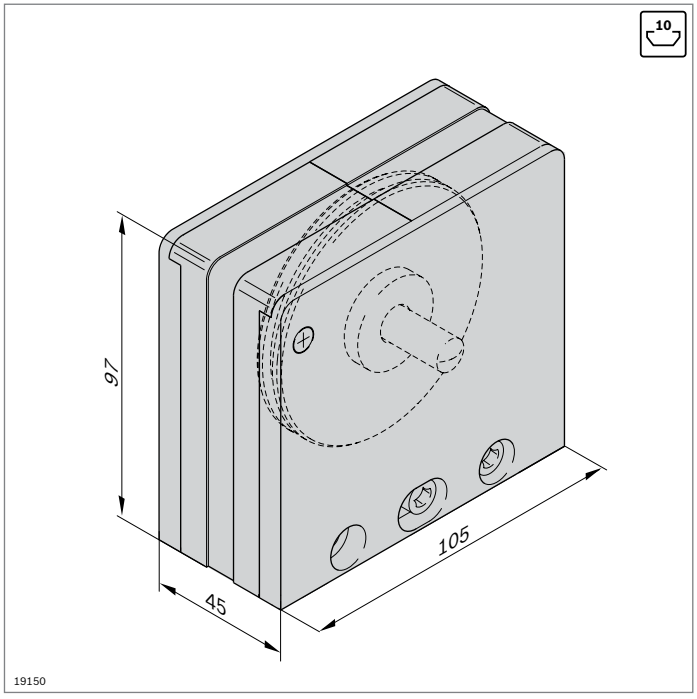



Counterbalance deflection pulley	No.	FS
	3 842 555 566	FS1, FS2
Material:	Housing: PA; signal gray (RAL 7004) Fastening material: Steel; zinc-plated	
Scope of delivery:	Incl. fastening material (FS)	







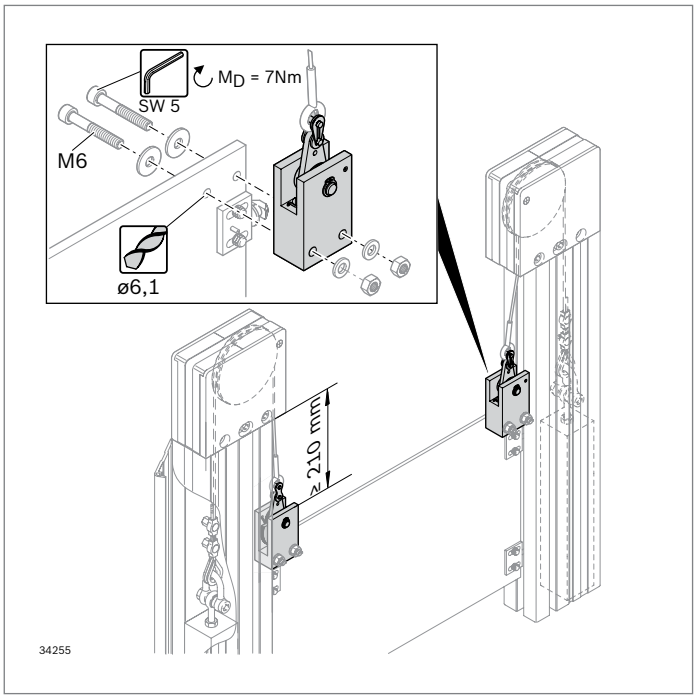

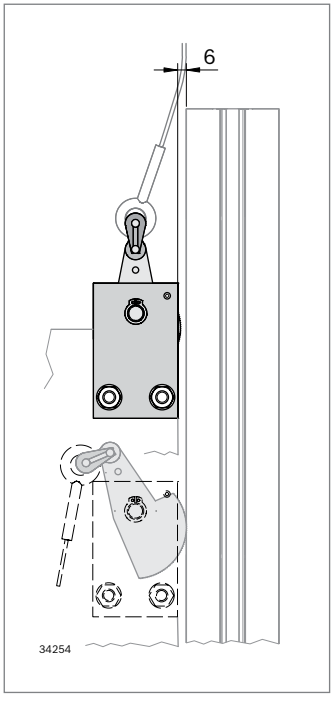

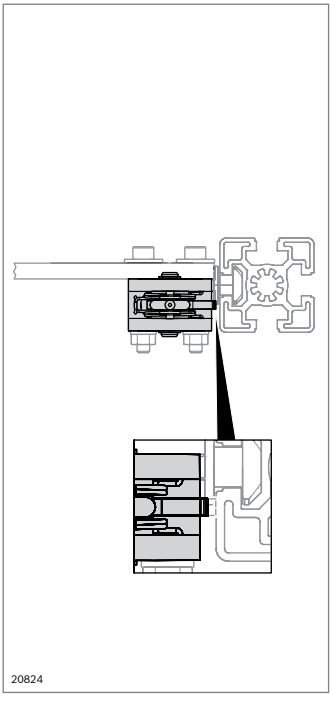





Safety catch




- The safety catch in conjunction with the other components prevents a lifting door from falling if a cable breaks
- If a cable breaks, the revolving part of the safety catch jams against a counterbearing and is wedged in position in the guide profile
- Gap dimension between safety catch body and lateral guide profile: 6 mm
- One safety catch is required for each cable.
- Max. load per safety catch: 250 N
- Min. load per safety catch: 25 N
- The counterbearing (e.g. slider 3 842 555 226) should be mounted under the safety catch and as close as possible to it
- It can also be mounted without a frame on panel elements which have adequate transverse rigidity
- Before installation and use please read the data sheet containing notes on use which is enclosed with the product

Accessories, optional:

- Slider (p. 12-3/)
- Fastening material for attaching the safety catch to the lifting door
- Counterbalance (p. 9-2)
- Strut profiles (from p. 2-1)

Safety catch		No.
		3 842 546 519
Material:	Housing: Aluminum Turntable: Steel; stainless Bolt: Steel; hardened Chain lock: Steel; nickel-plated Spacer disk: POM	
Scope of delivery:	Incl. chain lock for securing the cable	
Condition on delivery:	Assembled	

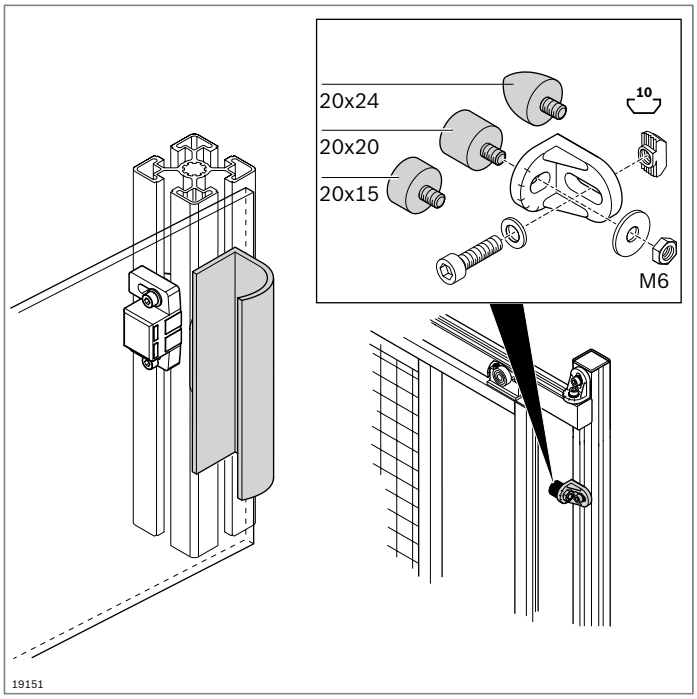

Bumper
Handle bar

Bumper

- For damping impact and noise on doors, flaps, and covers


Accessories:
Nut, T-nut M6 (p. 3-4)

Handle bar

- Can be used, for example, on covers, drawers, or doors
- Machining: Drill holes for fixing


Required accessories:
Fastening material

20x24




Bumper			No.
20x24		10	**3 842 510 165**
Material:	NBR; hardness 55° Shore A		


20x15, 20x20



Bumper	L (mm)		No.
20x15	15	10	**3 842 510 464**
20x20	20	10	**3 842 510 462**
Material:	NBR; hardness 55° Shore A		



Handle bar	L (mm)		No.
	50 ... 3000	1	**3 842 990 111 / L**
	3000	10	**3 842 500 287**
Material:	Aluminum; anodized		

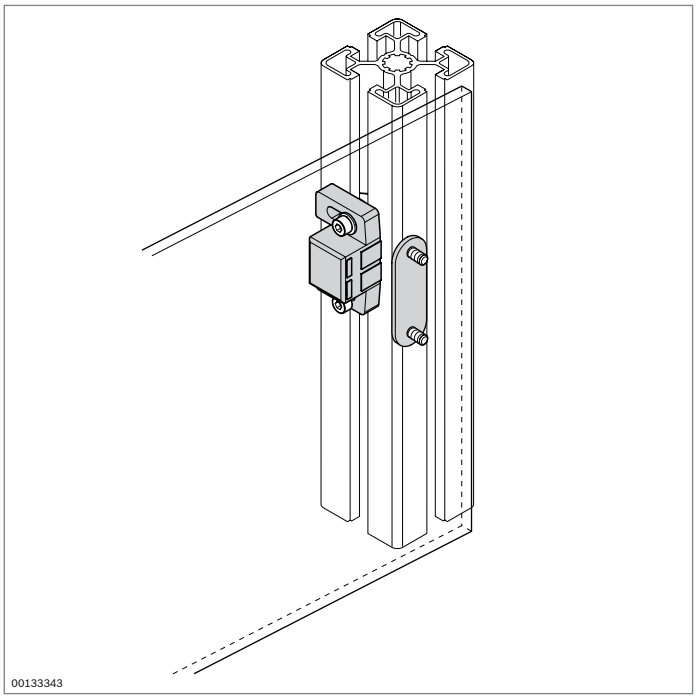



Magnet catch



- The magnet catch prevents doors and flaps from banging or being unintentionally opened
- Elongated holes to compensate for different panel element thicknesses


Accessories:
Cylinder bolt ISO 4762, washer, T-nut (p. 3-4)








Magnet catch	Slot	No.	FS
	6	**3 842 558 323**	2xFS1
Material:	PP; white / steel; zinc-plated		
Scope of delivery:	Incl. counterpiece, bracket, fastening material (FS)		

FS1
ISO 4762
M3x8
DIN
ISO 7089-3











Magnet catch	Slot	No.
	8, 10	**3 842 555 568**
Material:	PA; signal gray (RAL 7004) Steel; zinc-plated	
Scope of delivery:	Incl. counterpiece	




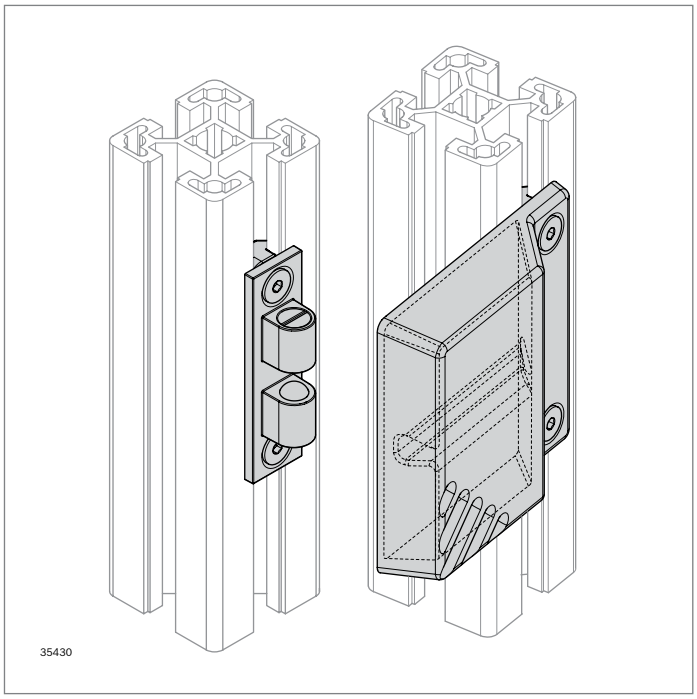

Double ball stop latch





- For arresting doors made of profile frames and for bridging door gaps
- Suitable for profiles with modular dimensions 40 mm, 45 mm, and 50 mm
- Locking also possible with varying profile spacing

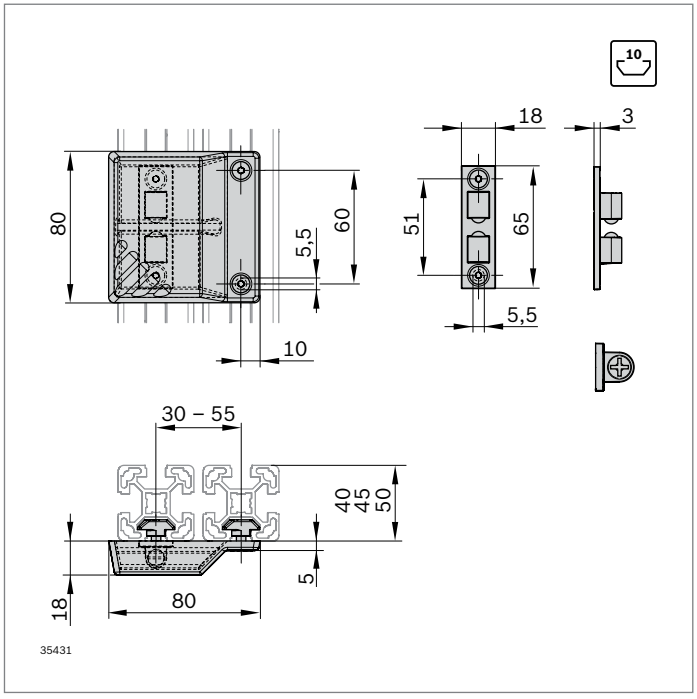


Double ball stop latch	Slot	No.	FS
	10	**3 842 558 570**	2xFS1

Material:	Fitting; diecast zinc; painted (RAL 9006) Double ball stop latch: Diecast zinc Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)





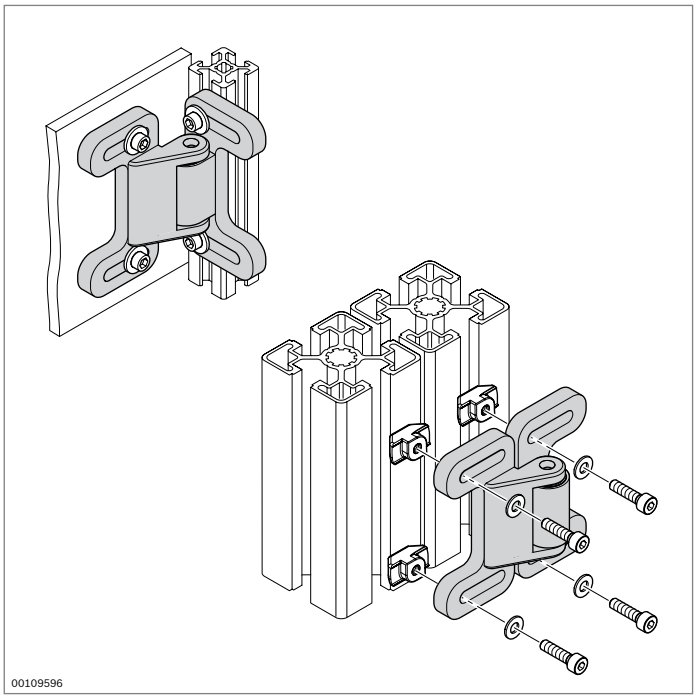


Ball catch




- Ball catch for doors and flaps
- For sliding and swing doors
- For doors with or without frames
- Elongated hole to adjust for differing spacing
- Can be used under cleanroom conditions
- Tested for particulate emissions
  Report No. BO2112-1289

Accessories:

- For slot 6:
  - Cylinder head screw ISO 4762 M4x12
- For slots 8 and 10:
  - Cylinder head screw ISO 4762 M5x16
- Washer M5
- T-nut (p. 3-4)

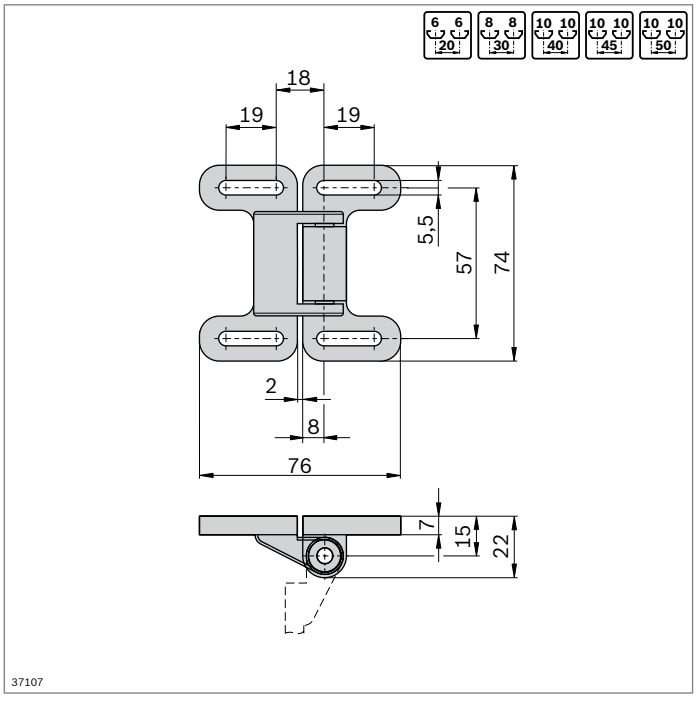

Ball catch	Color	ESD		No.
	Signal gray (RAL 7004)		10	**3 842 555 570**
	Black		10	**3 842 524 986**
Material:	PA			



Protective equipment and partition walls EcoSafe




EcoSafe – frame profile 22.5x45 (p. 10-6)



EcoSafe – frame profile 30x30 WG (p. 10-24)




EcoSafe – leg set (p. 10-31)



EcoSafe – door kits (p. 10-32)



EcoSafe – accessories (p. 10-42)



Suspension piece (p. 10-46)

EcoSafe – modular components for safety fences and enclosures




With a successful history spanning over 25 years, the modular EcoSafe construction kit offers a broad range of products for assembling protective equipment.

Plan, erect, and adapt safety fences in an economic manner:
The EcoSafe range of modular components for constructing safety fences and protective enclosures sets standards in terms of stability, flexibility, and cost-effectiveness. Work to install new fences and extend existing ones can now be planned and carried out quickly.

Safety fences can be found in nearly every factory.
They serve as safety barriers for entire production lines or enclosures for individual machines. Regardless of their size, however, one requirement always applies:
The protective equipment must be planned and erected quickly and cost-effectively. Flexible conversion options are also required in variable production environments.
And naturally the standards in force must be complied with at all times.

Standard, fast, cost-effective: The assembly and conversion from prefabricated protective frames is quick and cost-effective. Even individual solutions can be planned and achieved in a very short space of time. The components provide detailed performance data to support compliance with common standards.


Rexroth offers two variants of safety fences, which are based on different frame profiles. Both variants are available in the same modular dimensions and are therefore compatible, however they differ visually. Some accessories can be used for both variants

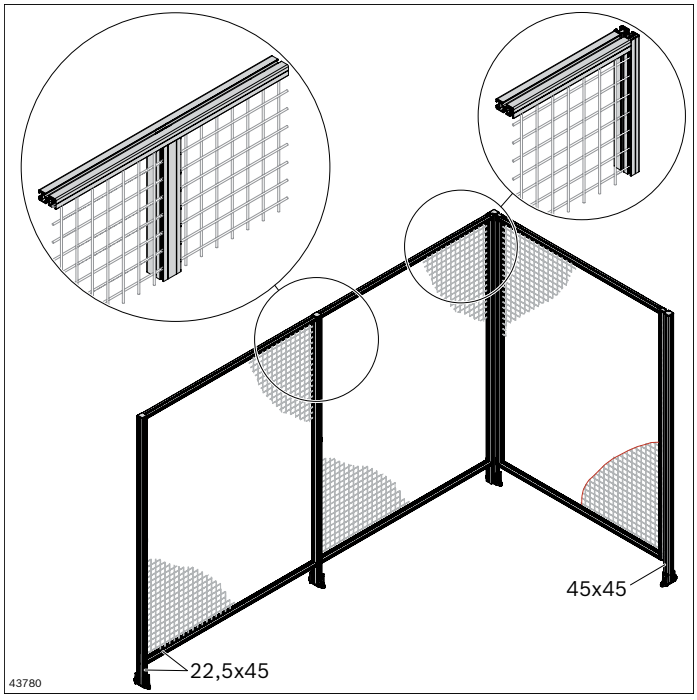

EcoSafe frame profile 22.5x45 – the new range

The safety fence is based on the 22.5x45 frame profile, which can be used not only to create the classic suspension panels, but also to create quick-install direct panels.

The standard fillers are spot-weld wire grilles.

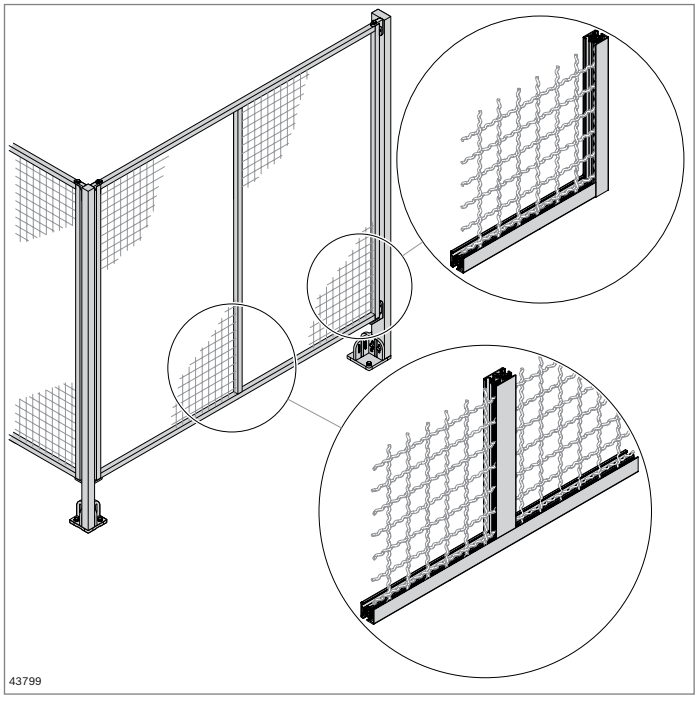

EcoSafe frame profile 30x30WG – the established range

This variant is established on the market and is based on the 30x30 WG40 frame profile. In this variant, we only offer suspension panels that are mounted between two leg sets.

The standard fillers are woven wire grilles.

Compliance with standards

Reliable planning of your protective equipment through compliance with all relevant standards and guidelines by the user, such as:

- EN ISO 12100 Safety of machinery
- EN ISI 13857 Safety of machinery - Safety distances to prevent hazard zones being reached by upper and lower limbs
- EN ISO 14120 Safety of machinery – Guards
- Relevant C standards (e.g. DIN EN 619)
- DIN 4103-1 Internal non-loadbearing partitions – Part 1: Requirements and verification
- Machinery Directive 2006/42/EC
- Country-specific regulations

- **Testing and applying other normative requirements for special applications.**
- **Compliance with all prescribed safety distances.**

Protective equipment subject to standards must be validated and documented by the designer. The technical data in this catalog support the designer in the design and documentation.

Safety distances according to EN ISO 13857
The safety distances depend on the ground clearance, the height of the protective equipment and the openings in the protective grille. With a mesh size of 40x40 mm, you only need a distance of 200 mm from the danger area (persons aged 14 and over).


The standard fence height of the EcoSafe protective frame of 2000 mm provides adequate protection in conjunction with a relatively small safety distance. The graphics show a profile with the safety distances for two different system heights (example of only minor injuries and a low probability of occurrence).


The example shows the safety distances with a ground clearance of 150 mm. This results in a distance of 665 mm from the danger area for the lower limbs.

Attention: According to the standard, slot-shaped openings that are larger than 180 mm allow the whole body to fit through. Depending on customer requirements, the ground clearance must be reduced or additional safety measures must be taken.

Safety distances


Example: Distances according to DIN EN ISO 13857 for the case: Passing over protective designs – Only minor injuries along with a low probability of occurrence.

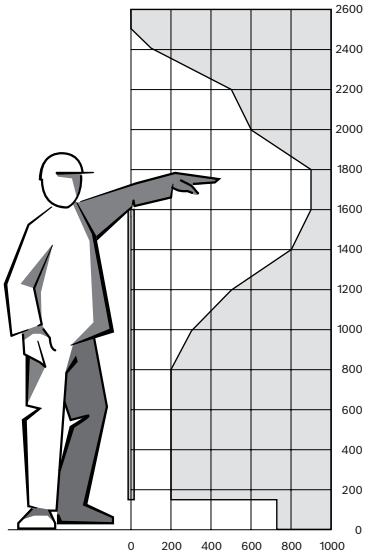


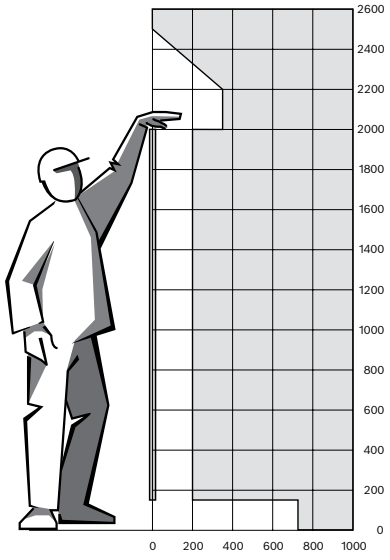

Safety distances where there is 150 mm ground clearance


Example: Distances according to DIN EN ISO 13857 to prevent free access of the lower limbs.

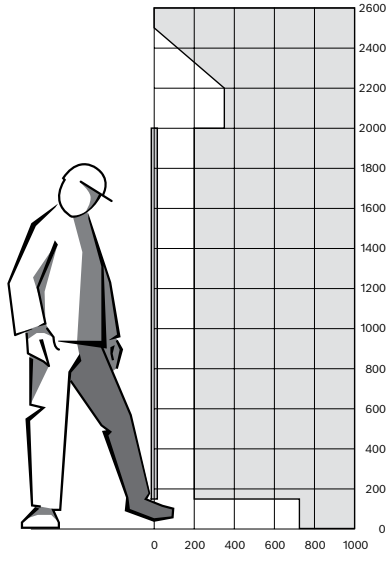

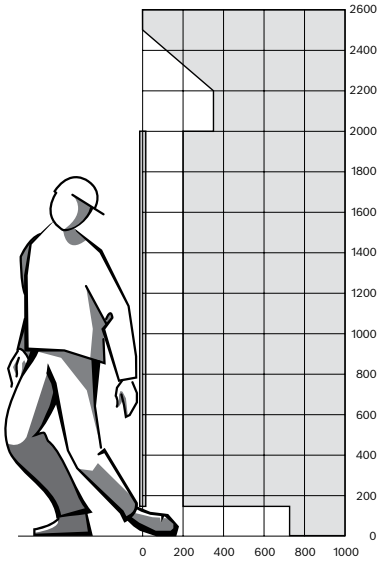


EcoSafe protective fence components – frame profile 22.5x45


1 x direct panel

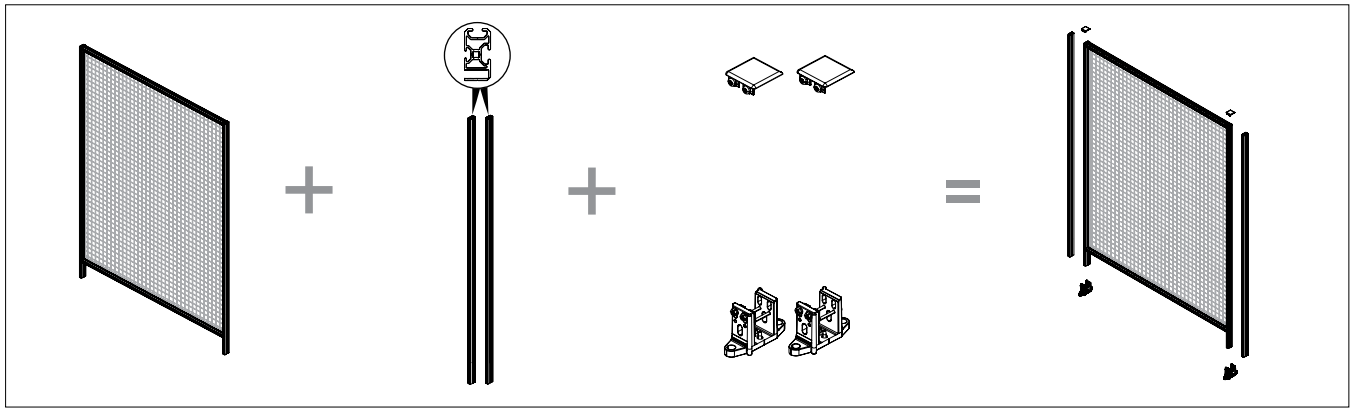


2 x direct panel

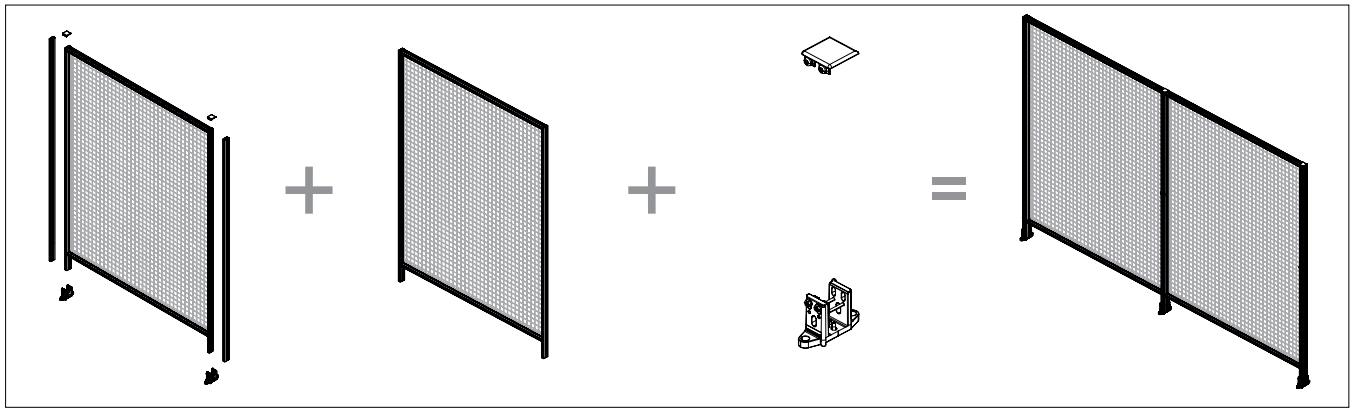


90 degree corner

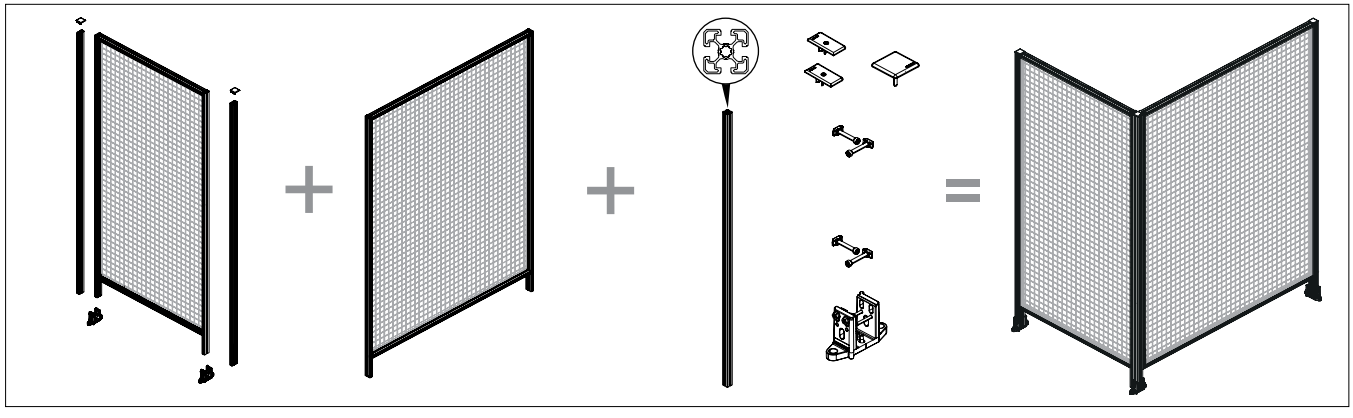


Corner with variable angle

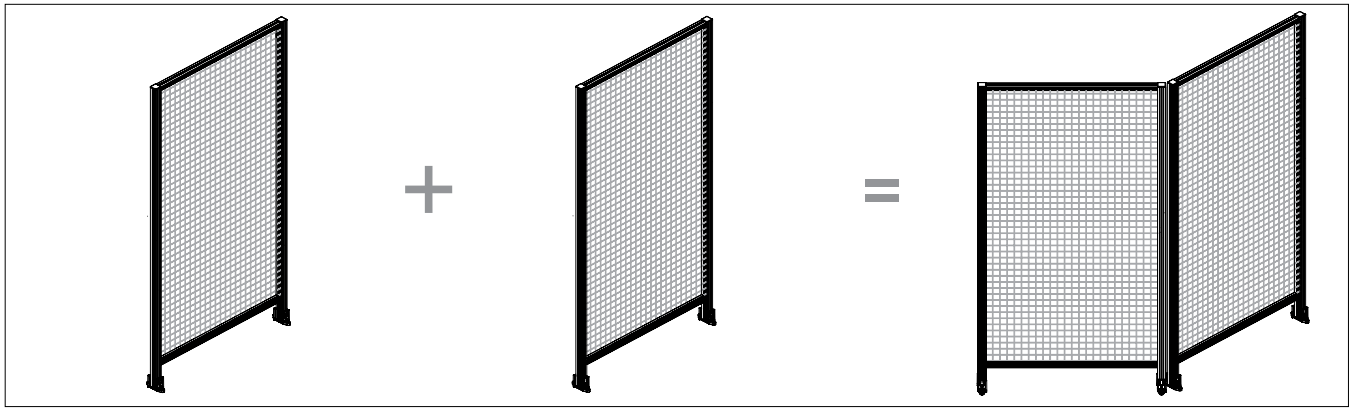


Transition from direct field to suspension field

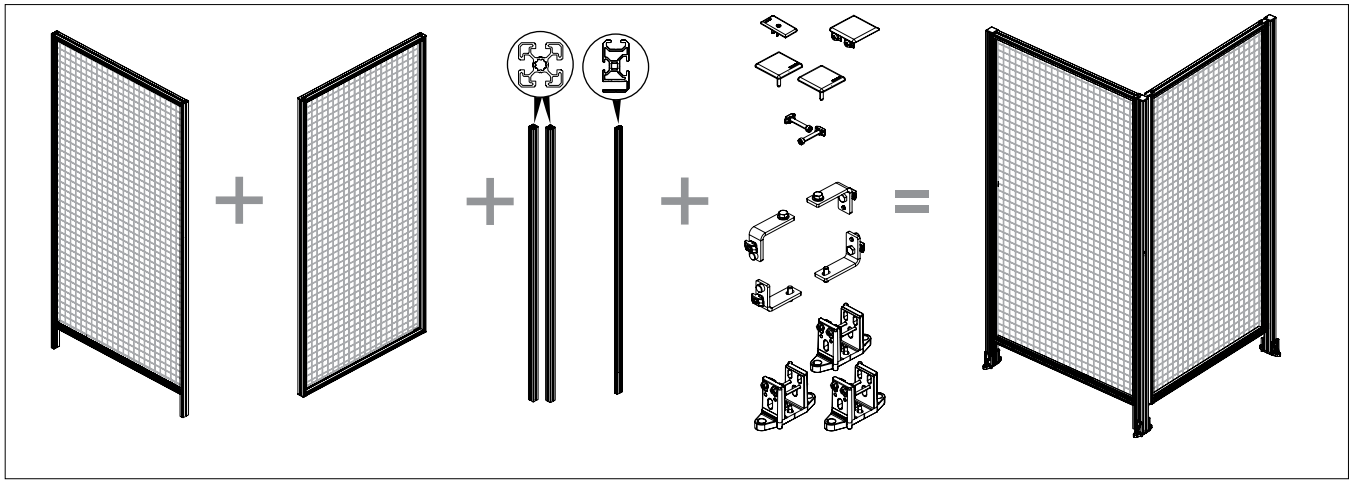


1 x suspension panel

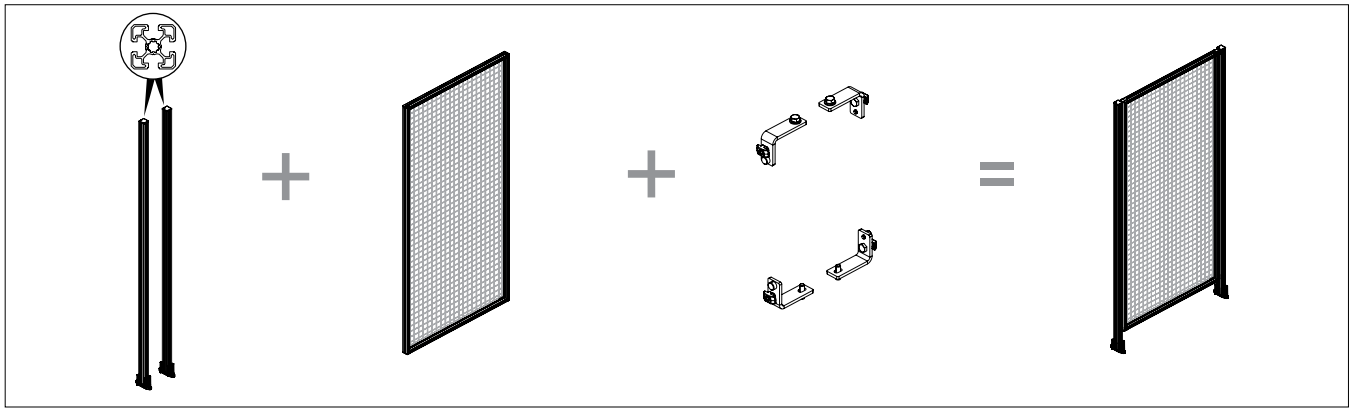


2 x suspension panel

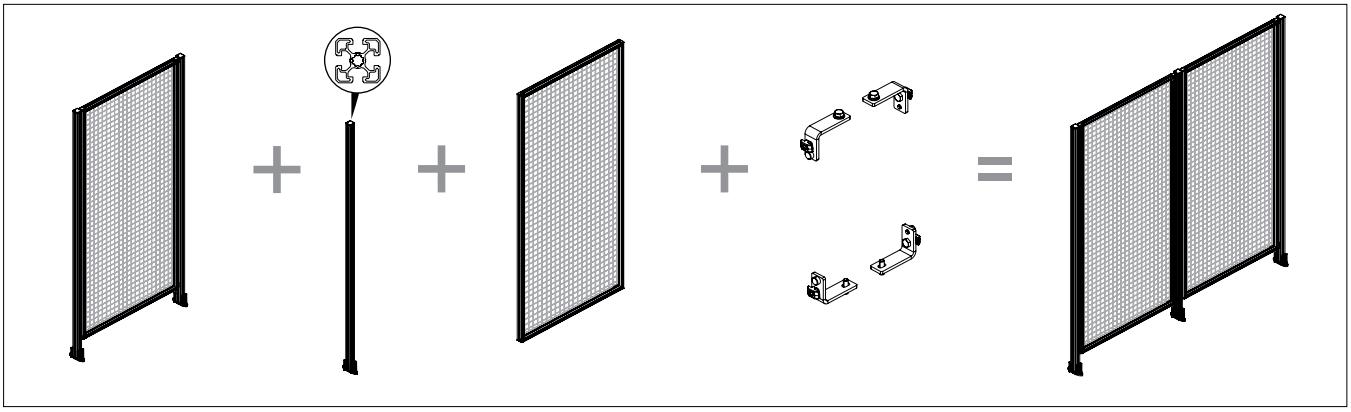


System door

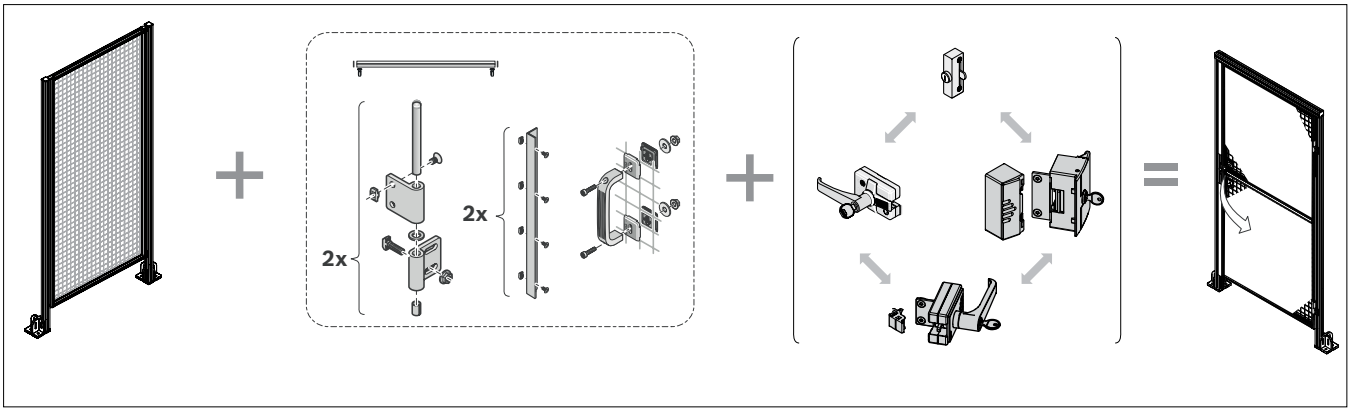


Sliding door with superstructure

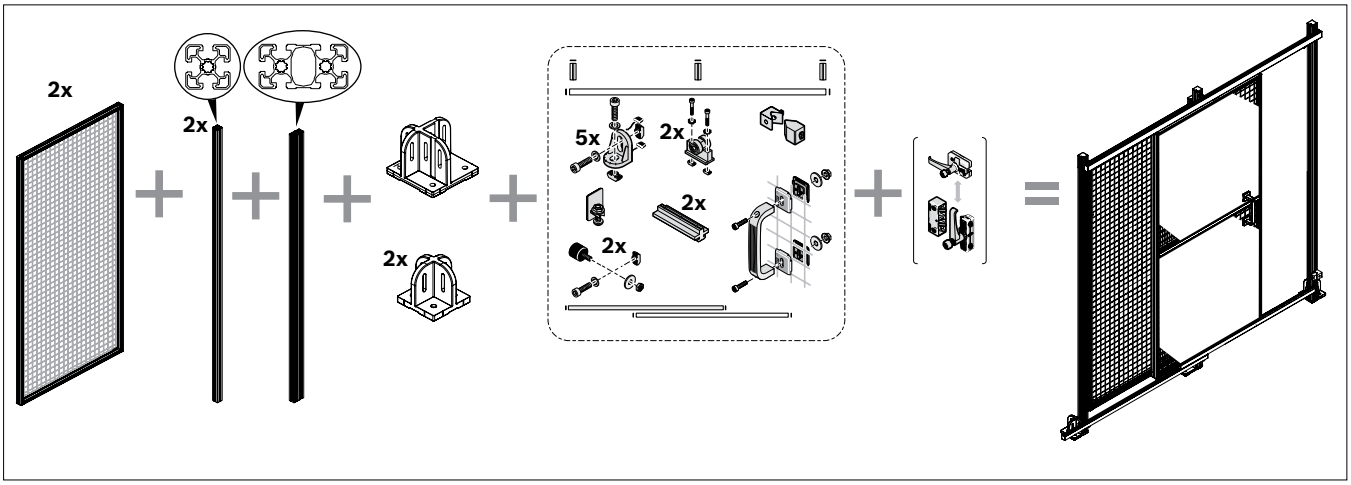

EcoSafe protective fence components frame profile 22.5x45

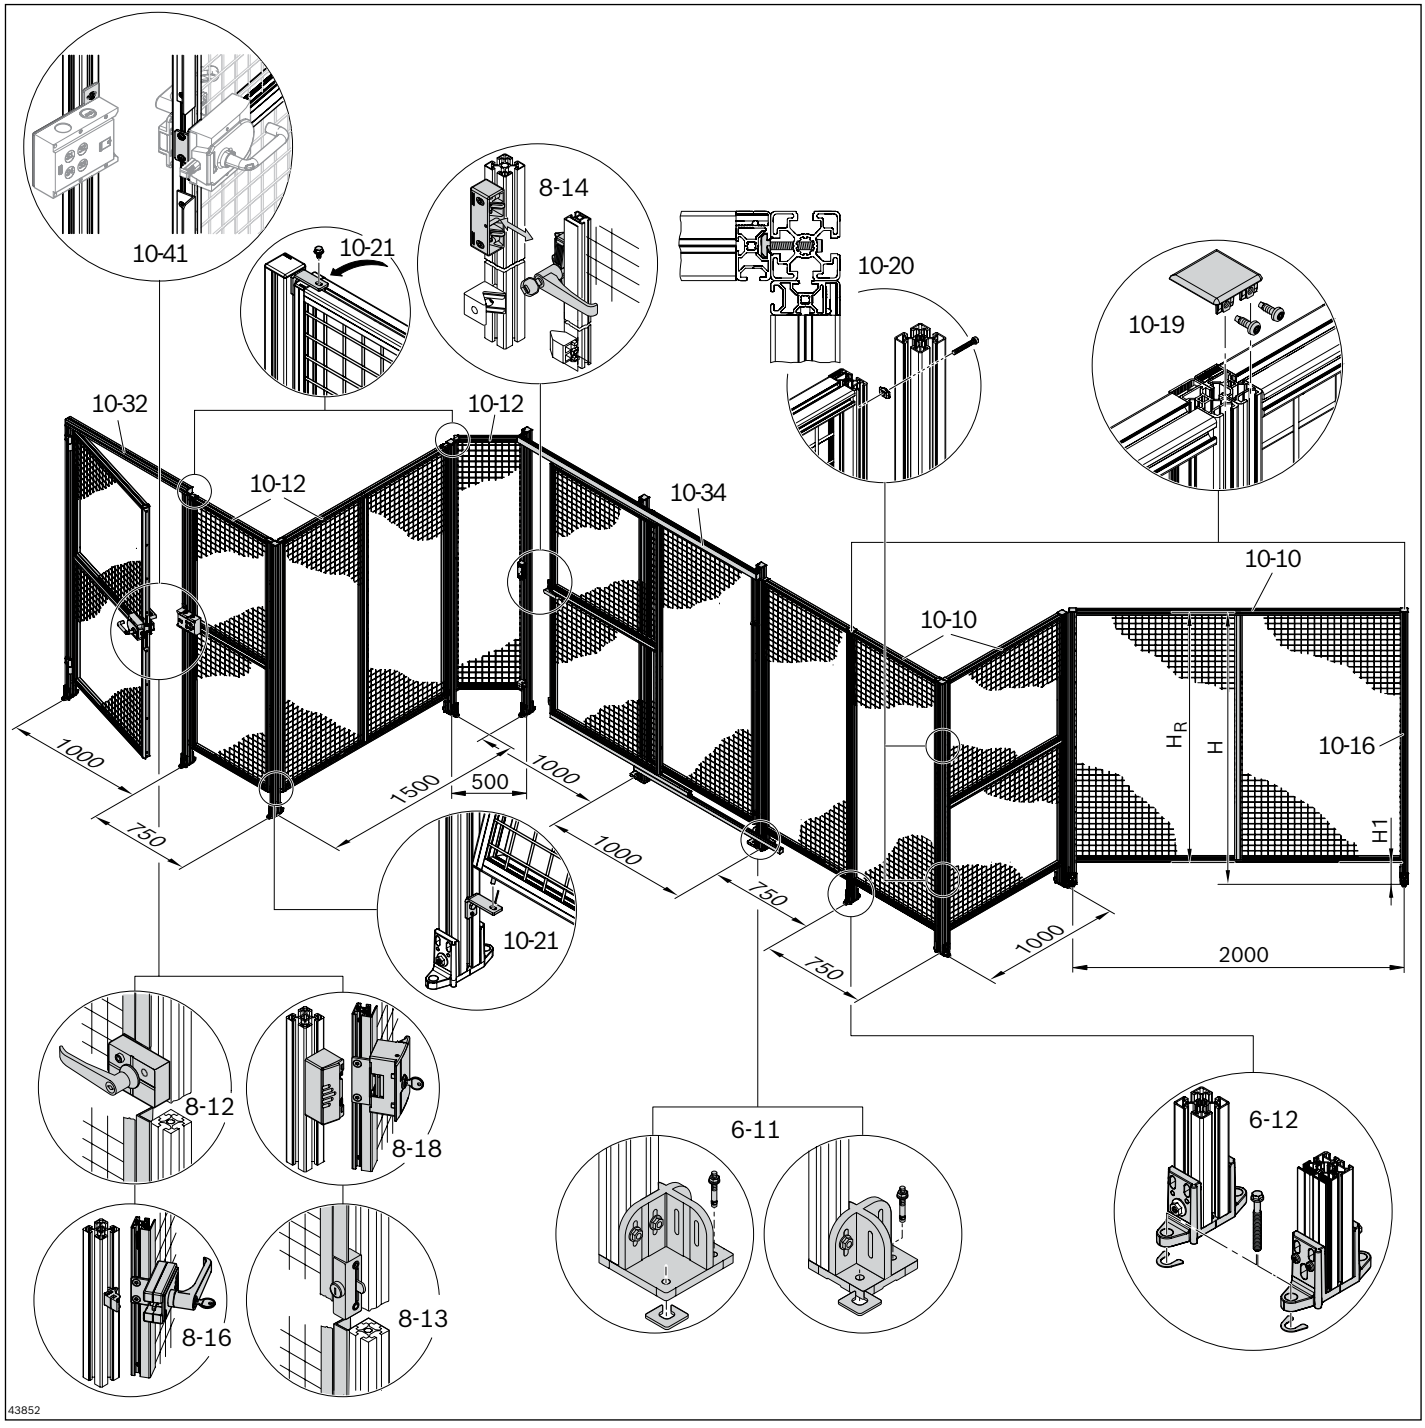

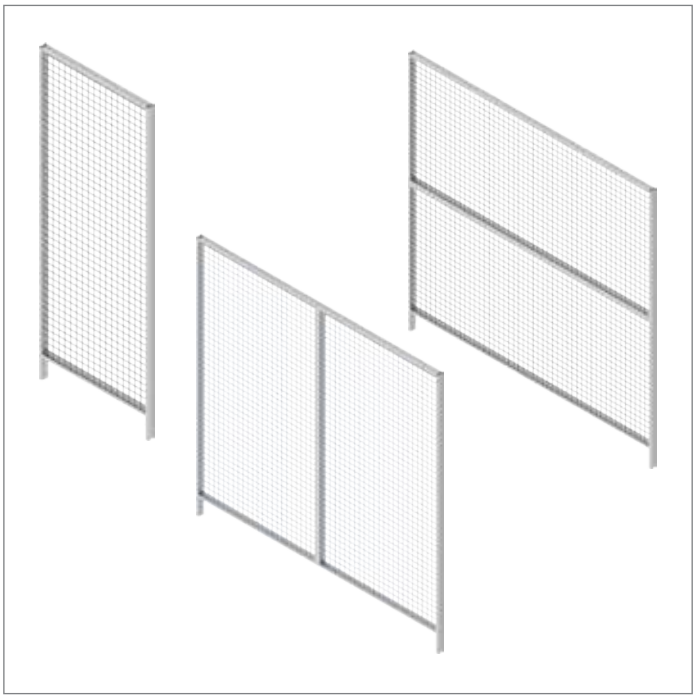


Protective frame – direct panel

- Direct panels can be assembled to form a safety fence without additional leg sets
- Protective frame made of frame profile 22.5 x 45
- With spot-weld wire grille 40 x 40 x 3.8
- Various colors available (galvanized, black, yellow)
- Fully assembled
- Easy installation via the foot 45x45. Single fitter is sufficient
- Horizontally and vertically divided protective frames provide additional stability for large surfaces
- Modular dimension “B” relates to the leg sets 22.5x45 (outer dimension)
- Direct panels are connected to each other via the foot 45x45 (3 842 564 814)


Required accessories:

- Foot 45x45 (3 842 564 814) page 6-12
- Mounting cap 45x45 (3 842 564 817) page 10-19

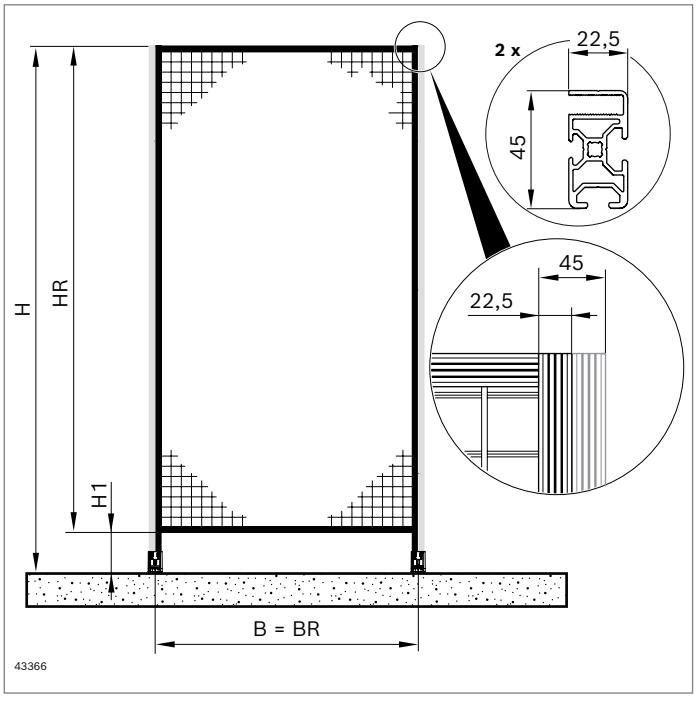

System dimensions

B = **BR** = Frame width (left outer edge/right outer edge)
HR = Frame height (lower/upper edge of frame)
H1 = Ground clearance (floor/bottom edge of frame)
H = **HR** + **H1** (total height)

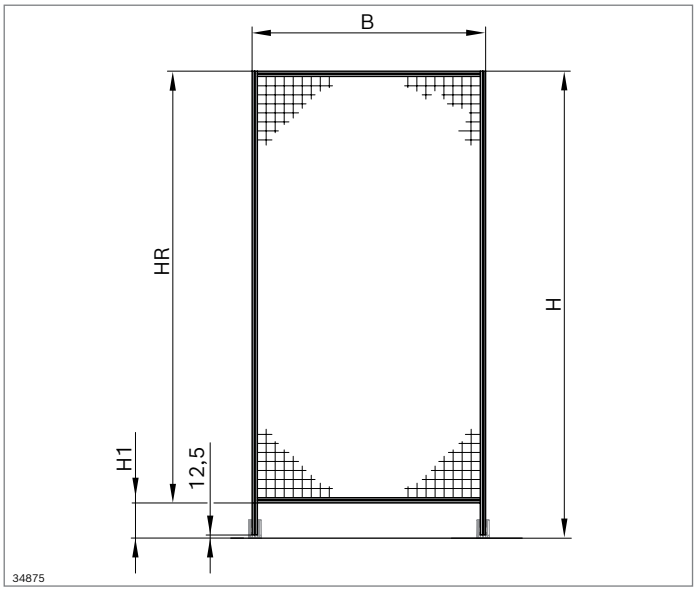


Direct panel	**H** (mm)	**H1** (mm)	**HR*** (mm)	**B** (mm)	**No.**
Galvanized	2000	150	1850	500	**3 842 567 902**
				750	**3 842 567 903**
				1000	**3 842 567 904**
				1500	**3 842 567 905**
Black	2000	150	1850	500	**3 842 567 906**
				750	**3 842 567 907**
				1000	**3 842 567 908**
				1500	**3 842 567 909**
	Hmax = 2500mm	80 ... 2400	100 ... 2420	100 ... 1500	**3 842 994 244 /H1, HR, B, FA**

Material: Frame: Aluminum; anodized
Grille: Steel; hot-zinc-plated

Grille color: FA = 0: hot-zinc-plated
FA = 1: black; RAL 9005 (e.g. for fence)
FA = 2: yellow; RAL 1023 (e.g. for doors)

* HR ≤ 2500–H1

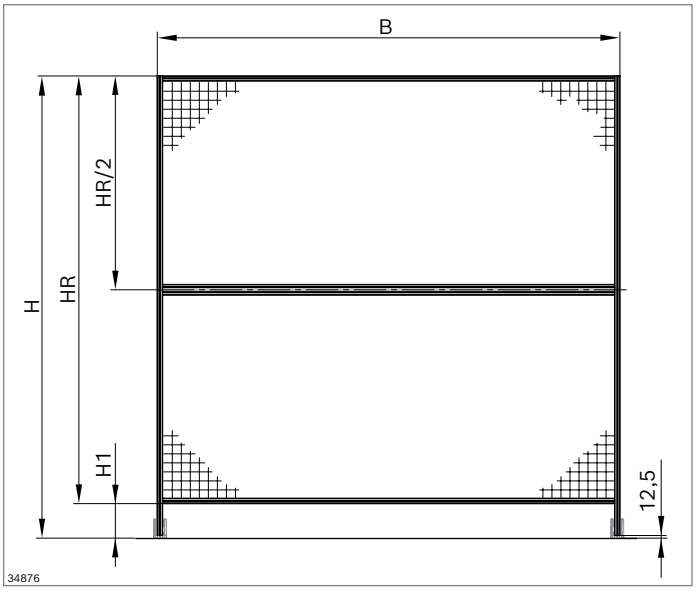


Direct panel, horizontally divided	**H** (mm)	**H1** (mm)	**HR*** (mm)	**B** (mm)	**No.**
Galvanized	2000	150	1850	2000	**3 842 567 910**
Black	2000	150	1850	2000	**3 842 567 911**
	Hmax = 2500mm	80 ... 2300	200 ... 2420	100 ... 2500	**3 842 994 245 /H1, HR, B, FA**

Material: Frame: Aluminum; anodized
Grille: Steel; hot-zinc-plated

Grille color: FA = 0: hot-zinc-plated
FA = 1: black; RAL 9005 (e.g. for fence)
FA = 2: yellow; RAL 1023 (e.g. for doors)

* HR ≤ 2500–H1

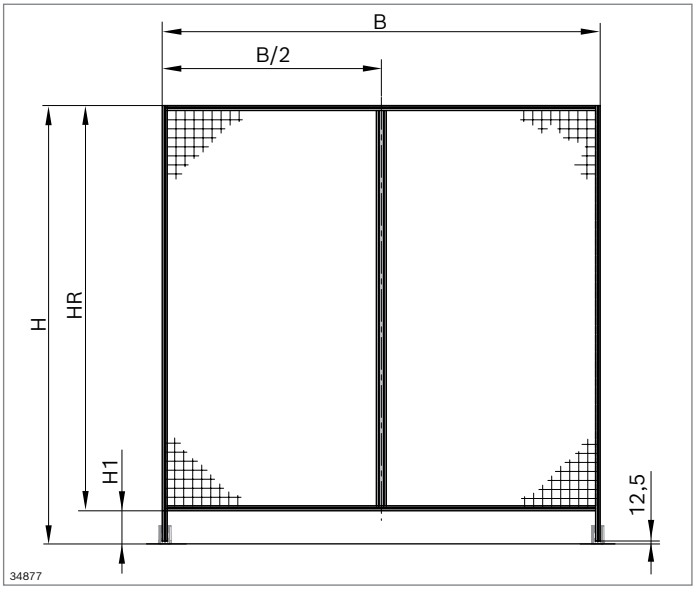


Direct panel, vertically divided	**H** (mm)	**H1** (mm)	**HR*** (mm)	**B** (mm)	**No.**
	Hmax = 2500mm	80 ... 2400	100 ... 2420	200 ... 2500	**3 842 994 246 / H1, HR, B, FA**

Material: Frame: Aluminum; anodized
Grille: Steel; hot-zinc-plated


Grille color: FA = 0: hot-zinc-plated
FA = 1: black; RAL 9005 (e.g. for fence)
FA = 2: yellow; RAL 1023 (e.g. for doors)

* HR ≤ 2500–H1

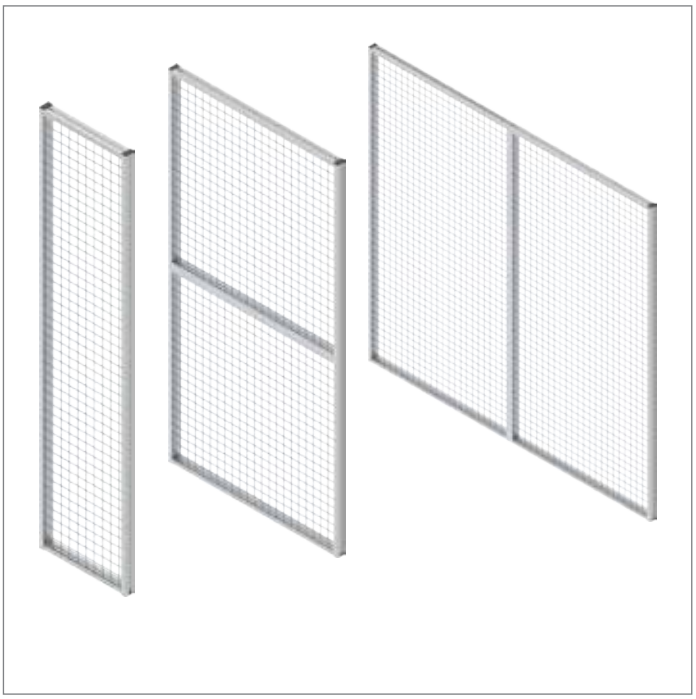


Protective frame – suspension panel

- Suspension panels are mounted between 2 leg sets using suspension brackets (p. 10-31)
- Protective frame made of frame profile 22.5 x 45
- With spot-weld wire grille 40 x 40 x 3.8
- Various colors available (galvanized, black, yellow)
- Fully assembled
- Easy assembly. Single fitter is sufficient
- Horizontally and vertically divided protective frames provide additional stability for large surfaces
- Suitable kits enable the construction of doors (system doors, sliding doors, double doors)
- Modular dimension “B” relates to the leg sets 45x45 (center of leg set - center of leg set)

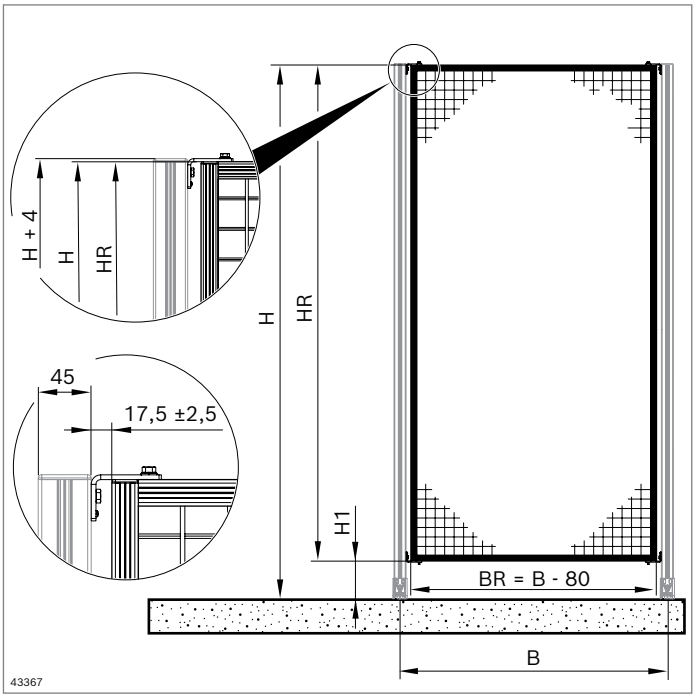


System dimensions


B = center of leg set/center of leg set
BR = frame width (left outer edge/right outer edge)
HR = frame height (lower/upper edge of frame)
H1 = ground clearance (floor/bottom edge of frame)
H = (total height)

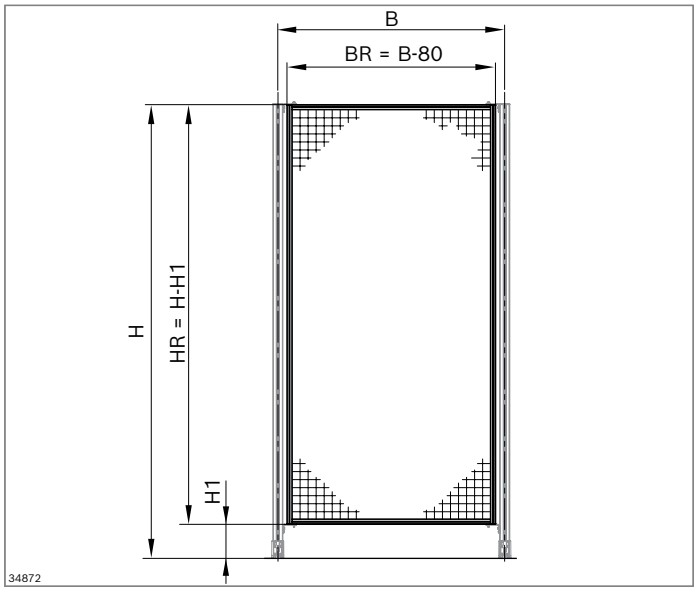

Suspension panel	**HR** (mm)	**B** (mm) **No.**
Galvanized	1850	500 **3 842 567 945**
		750 **3 842 567 946**
		1000 **3 842 567 947**
		1500 **3 842 567 948**
Black	1850	500 **3 842 567 949**
		750 **3 842 567 950**
		1000 **3 842 567 951**
		1500 **3 842 567 952**
	100 ... 2350	180 ... 1500 **3 842 994 247 /HR, B, FA**
Material:	Frame: Aluminum; anodized Grille: Steel; hot-zinc-plated	
Grille color:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)	

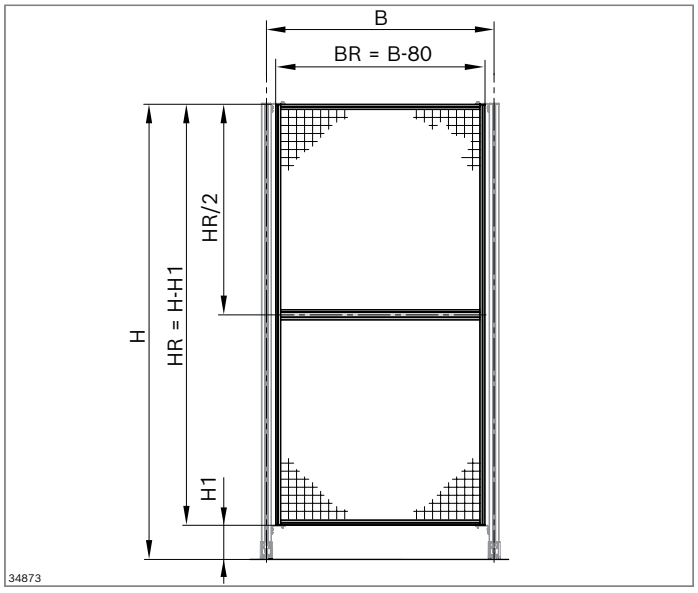

Suspension panel, horizontally divided	**HR** (mm)	**B** (mm) **No.**
Galvanized	1850	1000 **3 842 567 953**
Black	1850	1000 **3 842 567 954**
	200 ... 2350	180 ... 2500 **3 842 994 248 /HR, B, FA**
Material:	Frame: Aluminum; anodized Grille: Steel; hot-zinc-plated	
Grille color:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)	

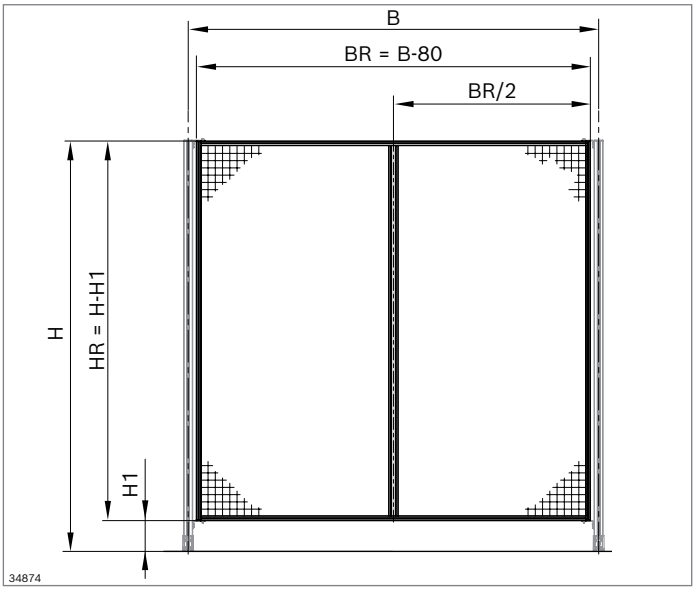

Suspension panel, vertically divided	**HR** (mm)	**B** (mm) **No.**
Galvanized	1850	2000 **3 842 567 955**
Black	1850	2000 **3 842 567 956**
	100 ... 2350	280 ... 2500 **3 842 994 249 /HR, B, FA**
Material:	Frame: Aluminum; anodized Grille: Steel; hot-zinc-plated	
Grille color:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)	




Frame profiles

- For the low-cost assembly of protective frames with spot-weld wire grille 40 x 40 x 3.8 (optional woven wire grille WG40 or panel elements)
- Fastening of welded and woven wire grilles: Directly in the special profile slot
- Fastening of panel elements: In the special profile slot using clamping profiles (accessories)


Required accessories:

- Connection screw (p. 10-17)
- Clamping piece PG 8x10x90 (p. 10-17)
- Clamping profile (p. 10-14)
- For suspension panels: Sliding block and spring (p. 10-17)


Direct panel (DF) installation

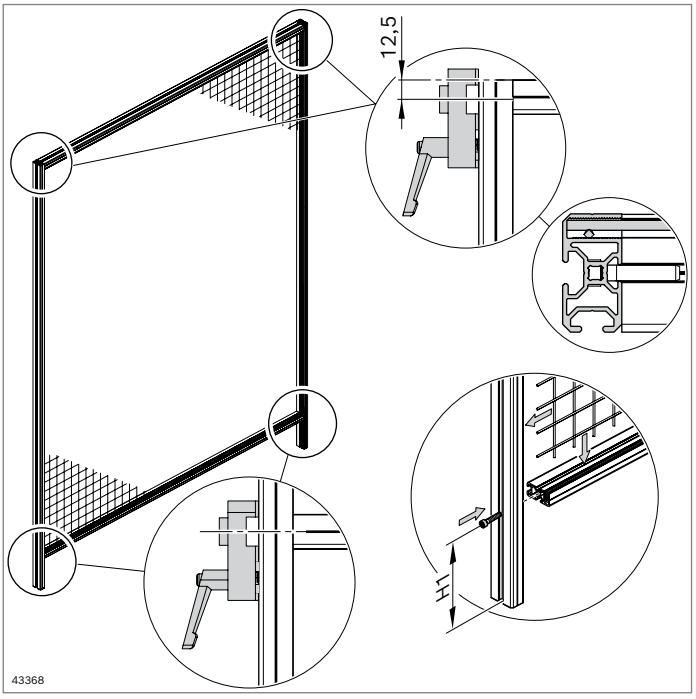

Suspension panel (HF) installation

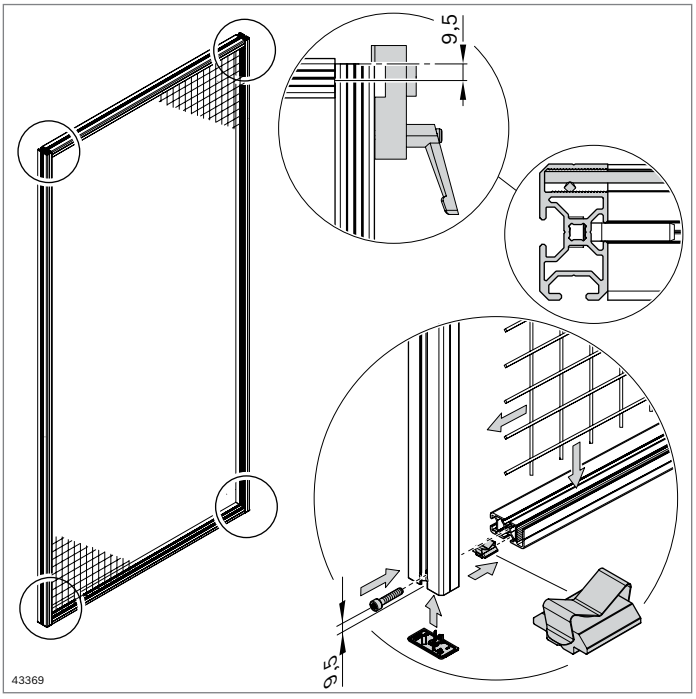

Cut-to size spot-weld wire grille 40 x 40 x 3.8 and woven wire grille 40 x 40 x 4

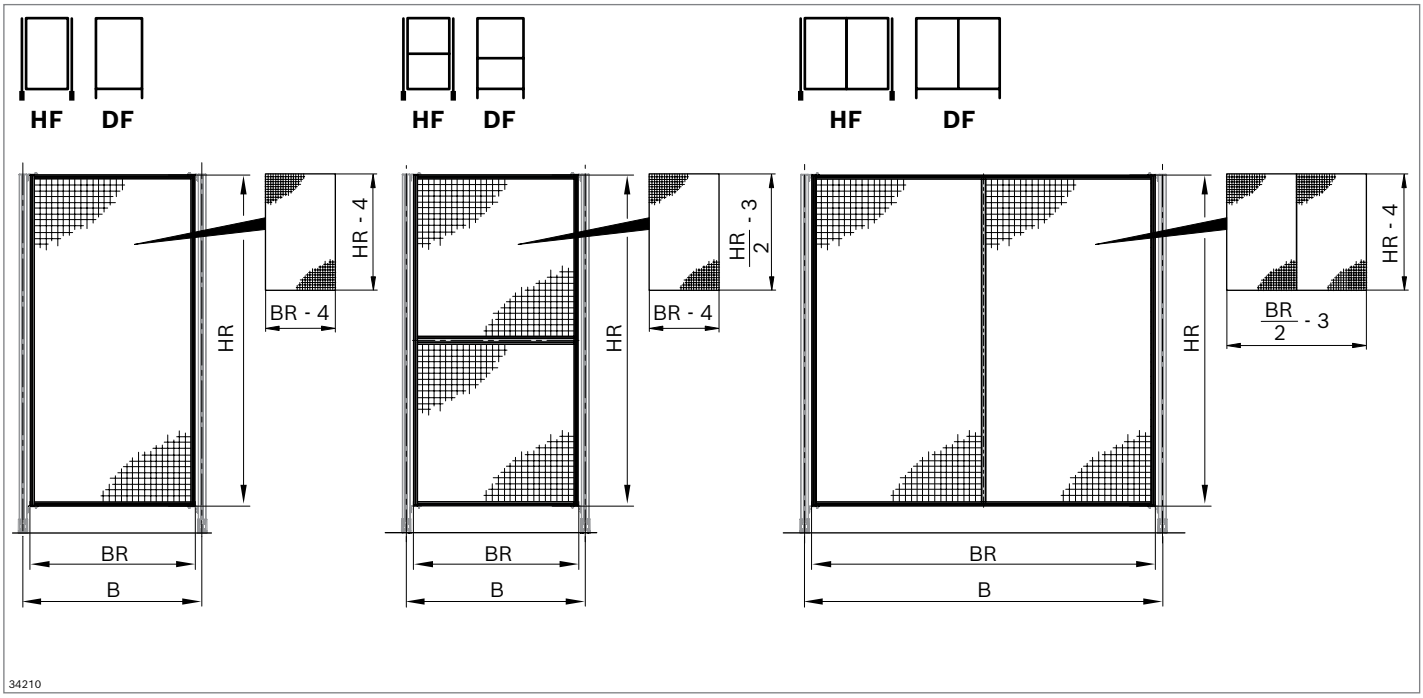


System dimensions

B = center of leg set/center of leg set


BR = frame width (left outer edge/right outer edge)

HR = frame height (lower/upper edge of frame)

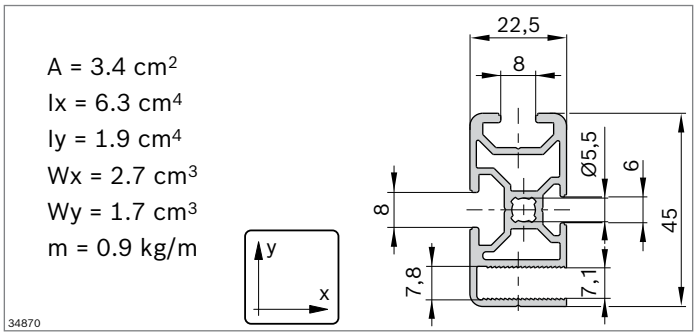


▶ For frame construction of protective frames

Frame profile 22.5x45			L (mm)	No.
	1 pc		100 ... 6070	**3 842 994 232 / L**
	1 pc		6070	**3 842 564 812**
	24 pcs		6070	**3 842 564 813**
Material:	Aluminum; anodized			

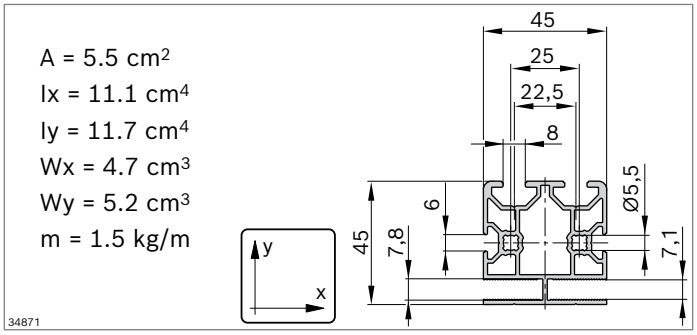


▶ For central stiffening of divided protective frames

Frame profile 45x45			L (mm)	No.
	1 pc		100 ... 6070	**3 842 994 236 / L**
	1 pc		6070	**3 842 564 821**
	20 pcs		6070	**3 842 564 824**
Material:	Aluminum; anodized			

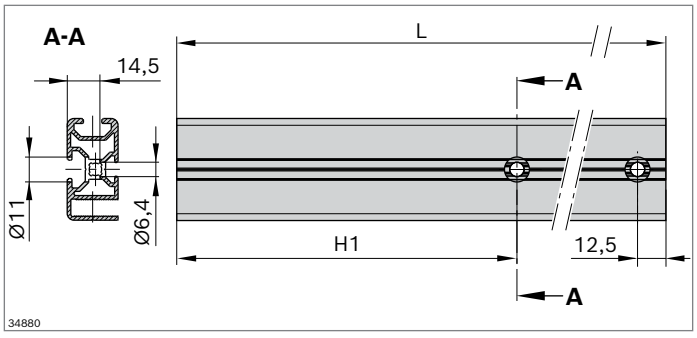


▶ For direct panel (DF) vertical frame profile left

Frame profile 22.5x45		H1 (mm)	L (mm)	No.
DF	1 pc	9.5 ... (L-50)	100 ... 5400	**3 842 994 233 / L, H1**
Material:	Aluminum; anodized			

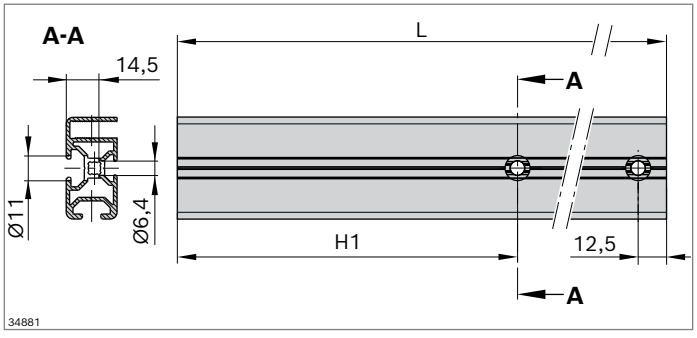


▶ For direct panel (DF) vertical frame profile right

Frame profile 22.5x45		H1 (mm)	L (mm)	No.
DF	1 pc	9.5 ... (L-50)	100 ... 5400	**3 842 994 234 / L, H1**
Material:	Aluminum; anodized			

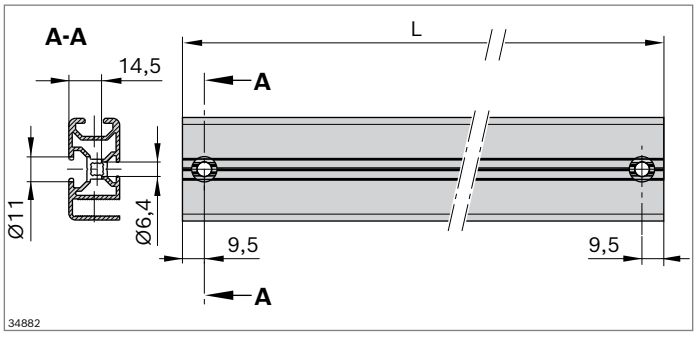


▶ For suspension panel (HF) vertical frame profiles left/right

Frame profile 22.5x45		L (mm)	No.
HF	1 pc	100 ... 5400	**3 842 994 235 / L**
Material:	Aluminum; anodized		




- Cover cap as a design element and to prevent injuries

Cover cap	Color	ESD		No.
22.5x45	Signal gray		20	**3 842 572 021**
	Black		20	**3 842 572 022**
Material:	PP			




- Screw for corner connection of protective frame (DF + HF)
- Connection element for assembly of protective frame with frame profiles 22.5x45 or 45x45
- Required profile finishing: Step drilling M6
- Accessories: Drilling template (3 842 567 976)


Connection screw	ESD		No.
		100	**3 842 567 978**
Material:	Steel; zinc-plated		

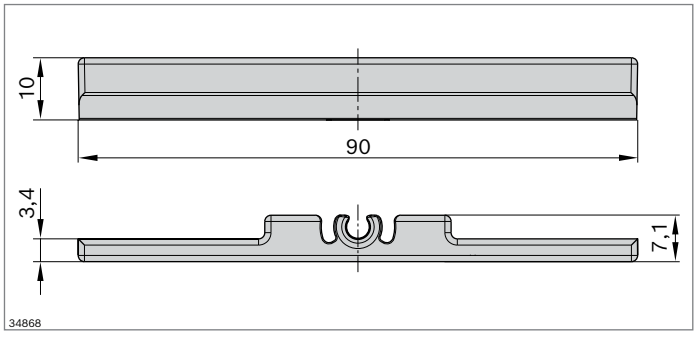

- Prevents clearance of the welding grid 40x40x3.8 in the special groove of the frame profile 22.5x45 and 45x45, if wire can only be inserted in one layer

Clamping piece PG		No.
	100	**3 842 571 958**
Material:	PP; signal gray	






- Used to fasten the suspension brackets to the suspension panel


Sliding block	M	h (mm)	h_1 (mm)	l (mm)		No.
	8	6.0	2.0	16	100	**3 842 514 930**
Material:		Steel; zinc-plated				

Spring	Slot		No.
	8	100	**3 842 571 958**
Material:	Spring steel; stainless		

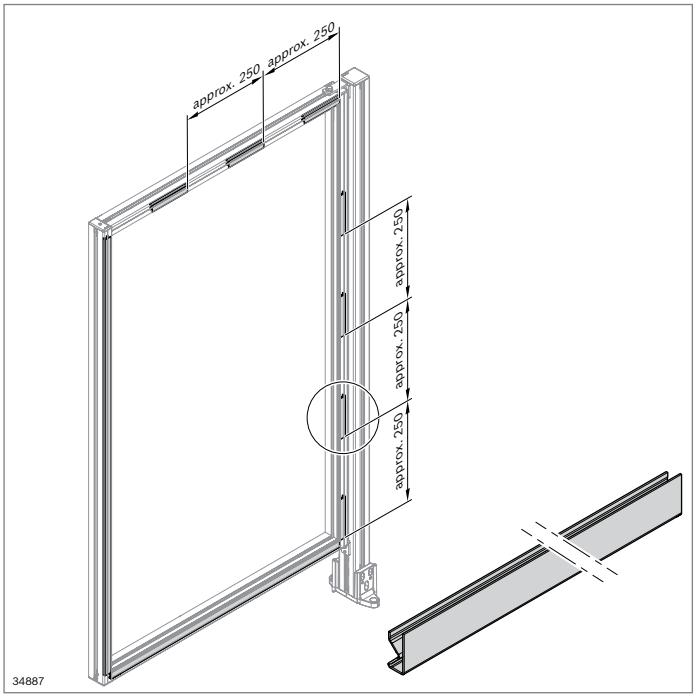

Clamping profile

- For zero-clearance installation of panel elements in the special slot of frame profiles 22.5x45 and 45x45
- For panel elements with a thickness of 2 mm to 5 mm
- Enclosure over the entire outer edge or partially possible





Clamping profile PG		L (mm)	No.
	10	2000	**3 842 567 975**
Material:	PP; signal gray		

System dimensions

B = center of leg set/center of leg set
BR = frame width (left outer edge/right outer edge)
HR = frame height (lower/upper edge of frame)


Cut-to-size panel elements

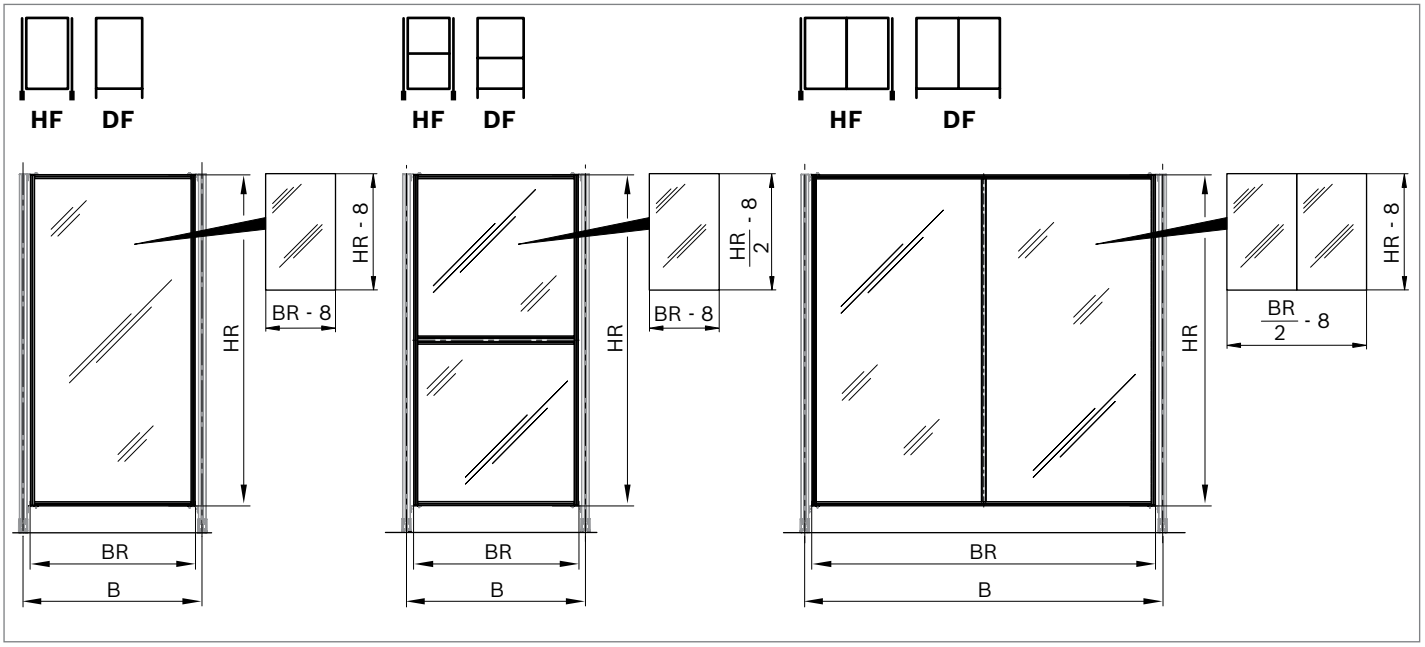


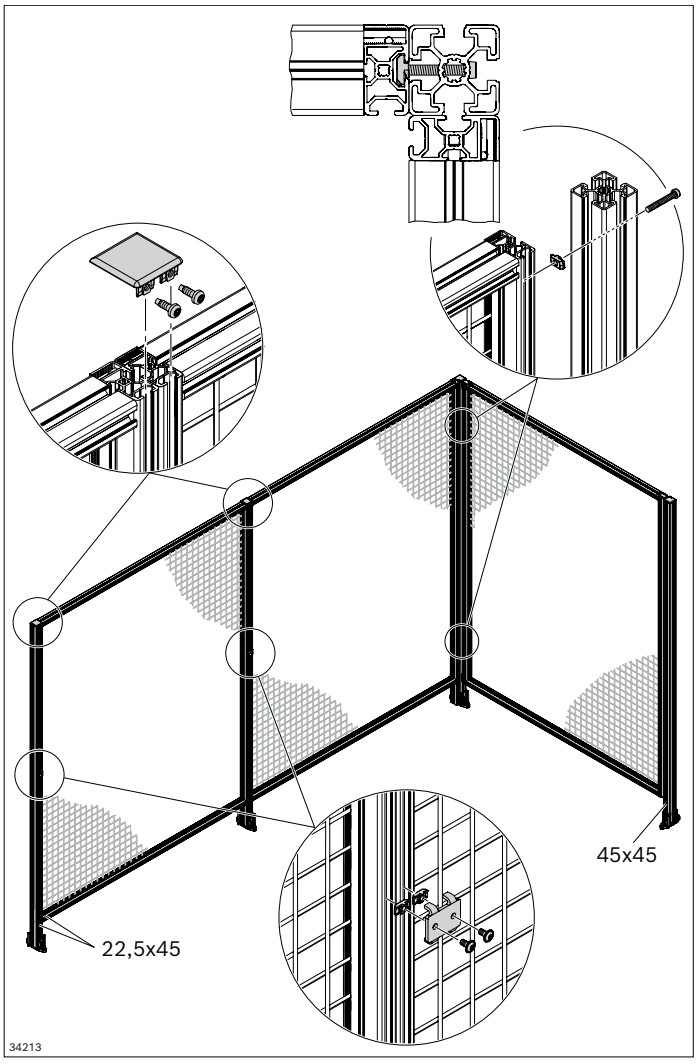

Mounting cap, connection kit, mounting kit

- Mounting cap
- Connection kit
- Mounting kit








- For connecting two direct panels or frame profiles 22.5x45
- Also serves as cover cap
- Mounting via self-tapping screws

Mounting cap 45x45 SET	ESD		No.	FS
		10	**3 842 564 817**	2xFS1

Material:	Cap: Diecast zinc; fastening material: Steel, galvanized
Scope of delivery:	Incl. fastening material (FS)







- For direct panels
- Optional element to join parallel frame profiles or direct panels
- For frame profile 22.5x45


Connection kit DF	Slot	ESD		No.	FS
	8		10	**3 842 564 823**	2xFS1
Material:	Bracket: Aluminum; anodized; Fastening material: Steel, galvanized				
Scope of delivery:	Incl. fastening material (FS)				

- For parallel connection of a 22.5x45 frame profile to a leg set with 10 mm profile slot
- Transition of EcoSafe direct panel to leg set
- Solution for corner with 90 degrees or transition to EcoSafe system doors
- Profile finishing of the leg set required: Stepped drilling Ø5.5 / Ø9.5

Accessories, recommended:

- Drilling template (3 842 567 969); step drill (3 842 567 968)

10 DF mounting kit	Slot	ESD		No.
	8		20	**3 842 571 959**
Material:	Steel, galvanized			

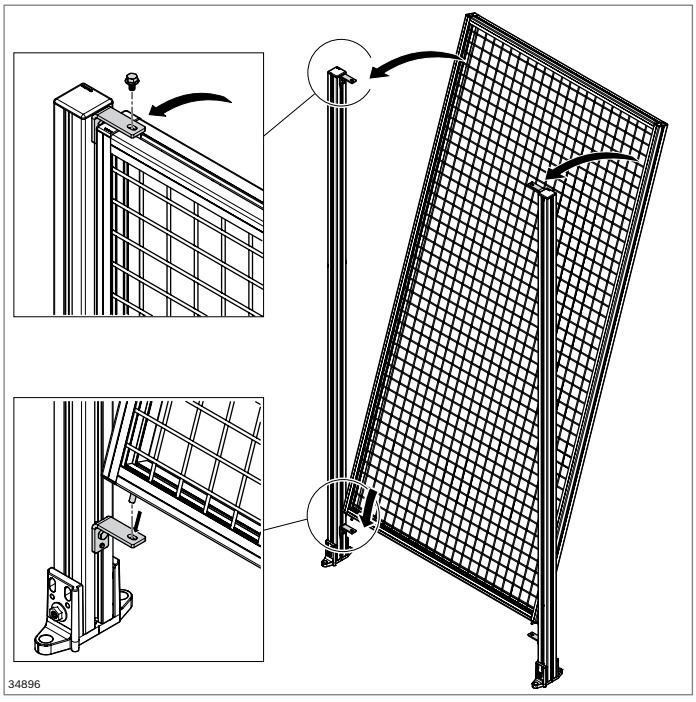


Suspension bracket set, Safety Strip loss prevention




Suspension bracket set


- Set consists of 4 brackets for installation of one suspension field (incl. fastening material)
- For easy installation of the suspension panel at the leg set at various angles or straight
- Suspension bracket with centering lugs as anti-torsion element
- For protective frames made of frame profile 22.5 x 45
- Meets the requirements of the Machinery Directive 2006/42/EC via optional Safety Strip for maintenance fields

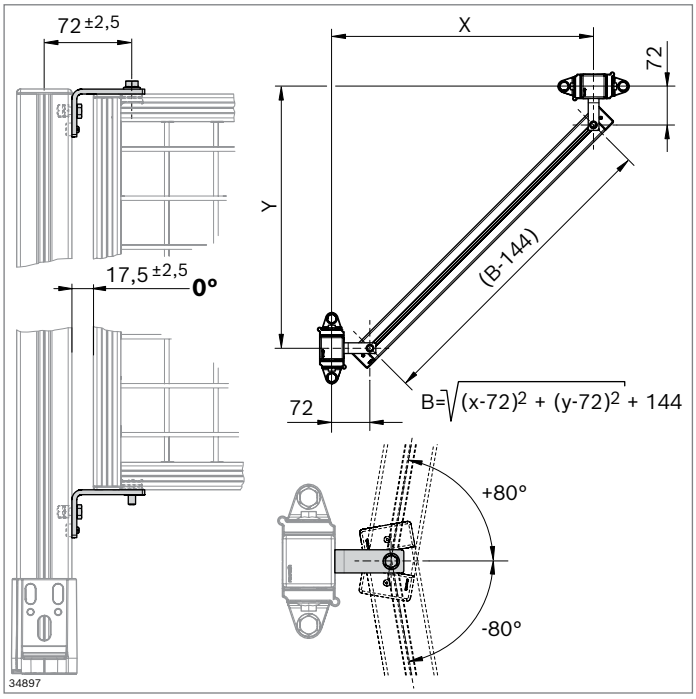


Suspension bracket HF SET	ESD		No.	FS
		1	**3 842 567 942**	4xFS1 2xFS2 2xFS3 4xFS4


Material:	Bracket Steel; zinc-plated; fastening material: Steel, galvanized Centering bolts: PA6
Scope of delivery:	Incl. fastening material (FS)


















Safety Strip loss prevention


- Loss prevention for the fastening screw of EcoSafe suspension fields
- Easy assembly; can be retrofitted
- Meets the requirements of Machinery Directive 2006/42/EC: Screw remains connected to the suspension bracket after loosening


Loss prevention Safety Strip HF		No.
	100	**3 842 567 935**
Material:	PC; translucent	

EcoSafe protective fence components - frame profile 30x30WG

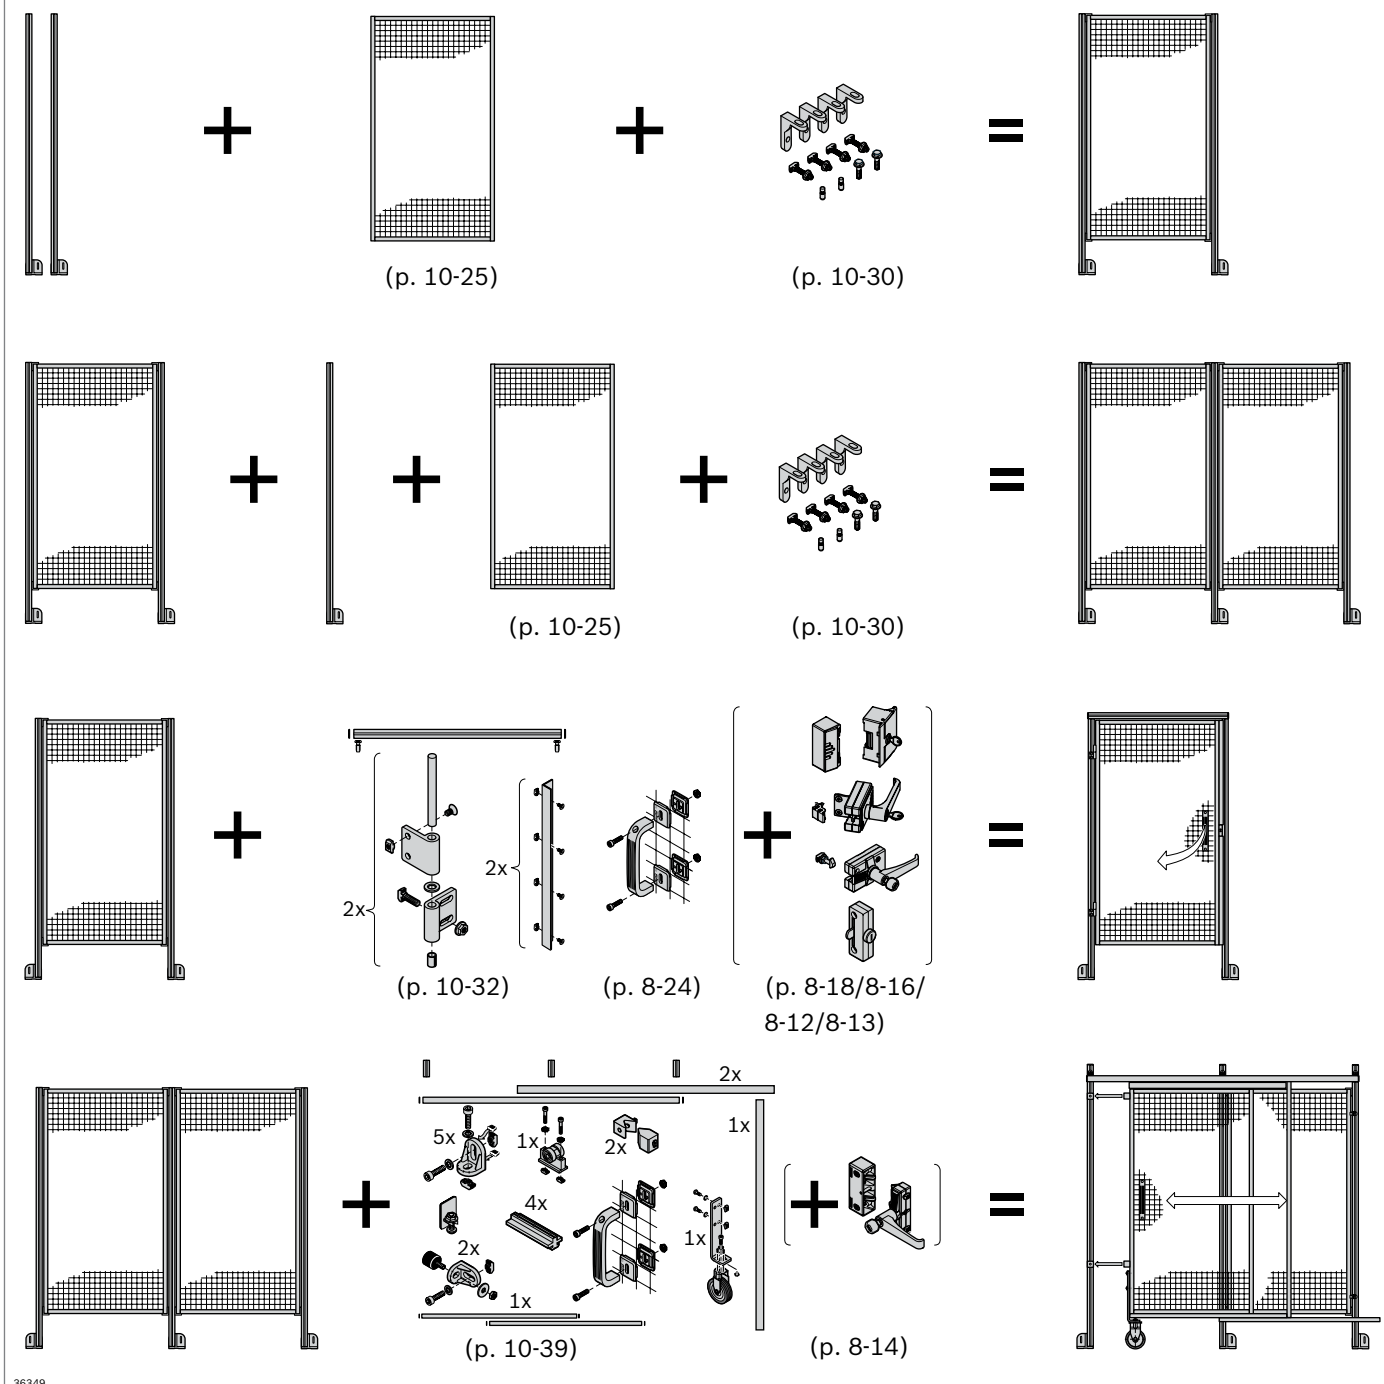

EcoSafe protective fence components - frame profile 30x30WG

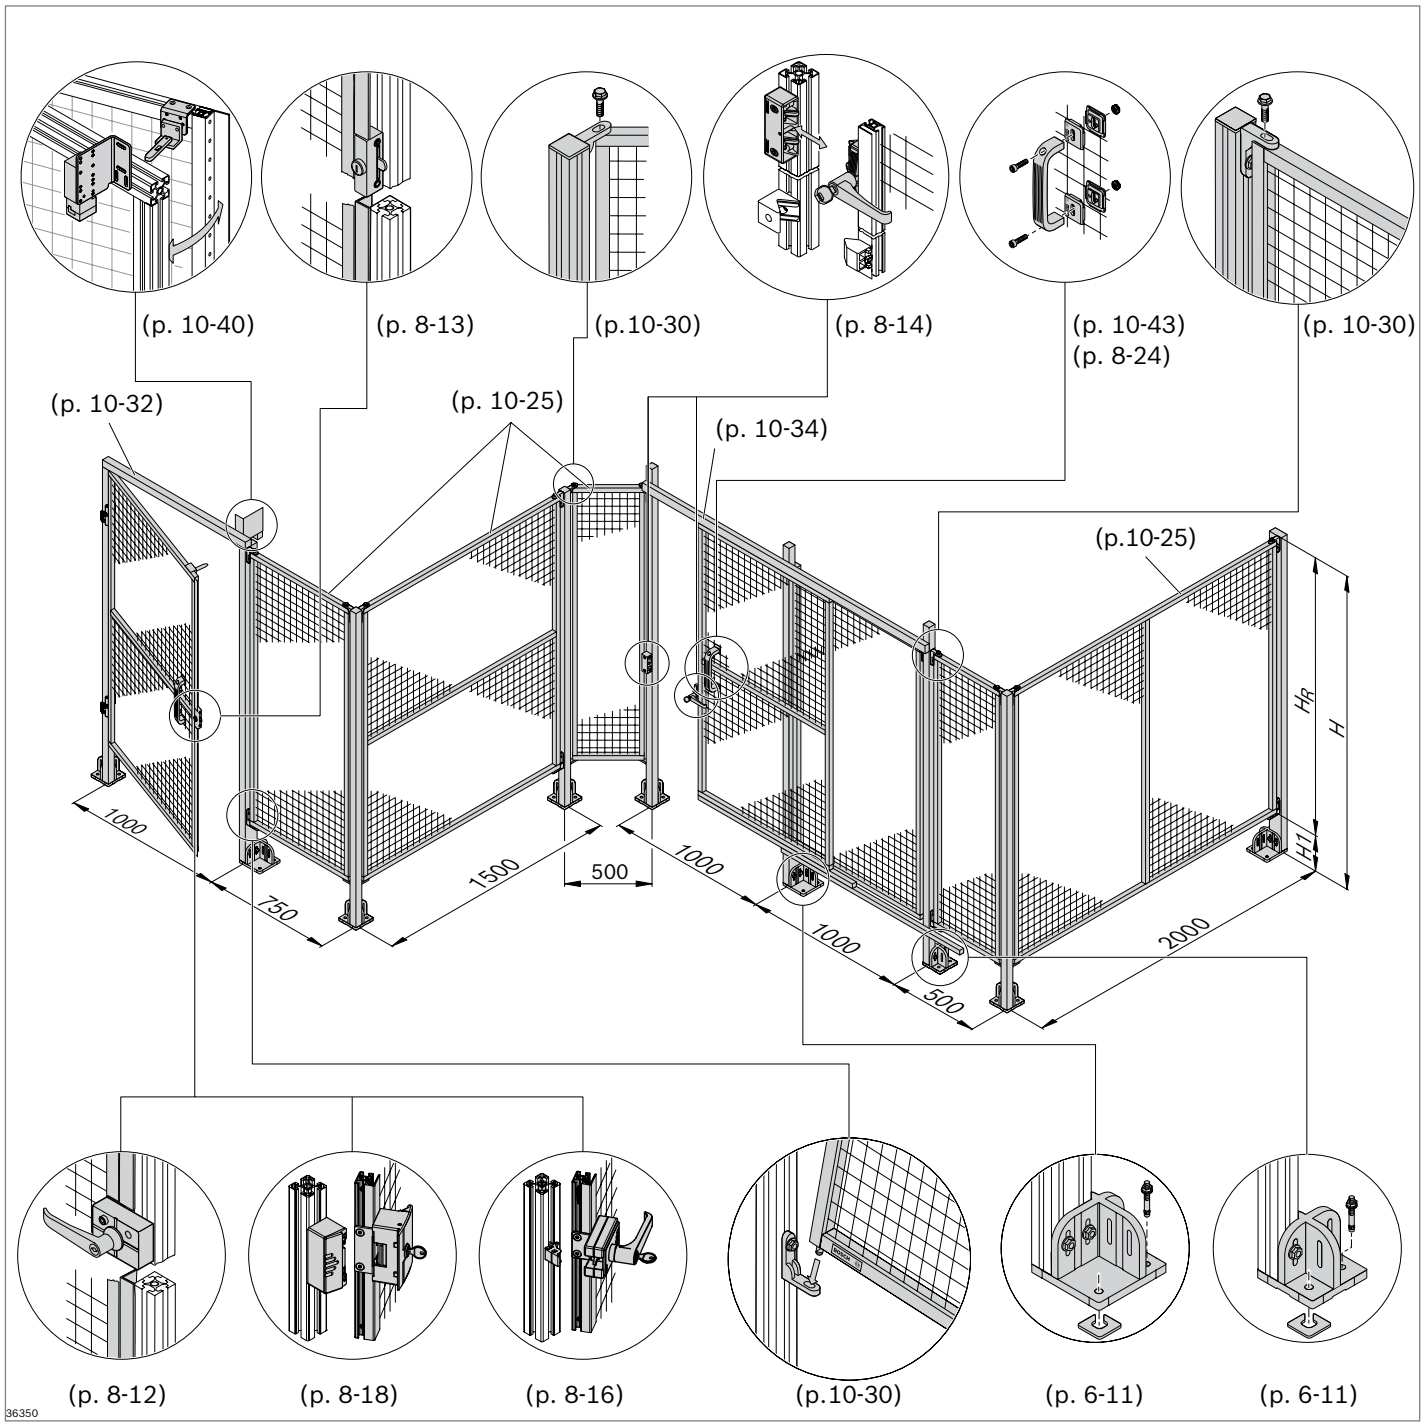


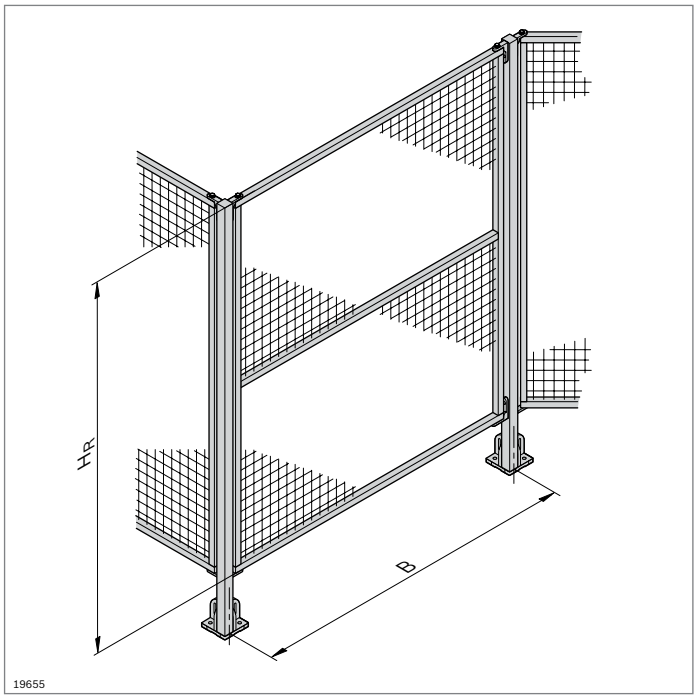


Protective frame suspension panel

- Protective frame made of frame profile 30x30 WG40 (p. 10-27) with woven wire grille 40x40x4
- Suitable kits enable the construction of doors (system doors, sliding doors, double doors)
- Fully assembled on delivery
- Simple mounting on the supports using the suspension brackets. Single fitter is sufficient
- Standard widths or customized dimensions
- Horizontally or vertically divided protective frames provide additional stability for large surfaces
- Color-coated woven wire grilles improve visual contrast in the protected area and facilitate recognition of access routes and emergency exit routes
- Modular dimension “B” relates to 45x45 supports


Matching leg sets (p. 10-31)

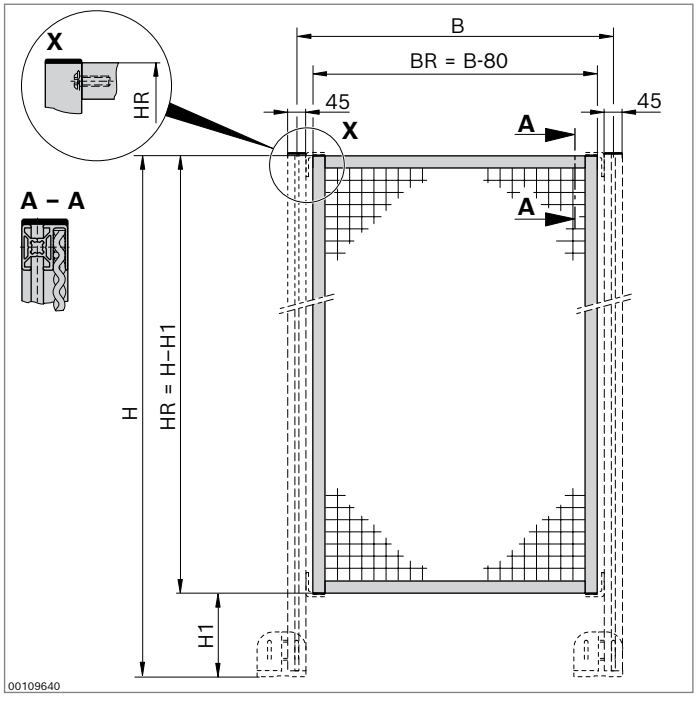


Protective frame	HR (mm)	B (mm) No.
	1800	500 **3 842 554 282**
		750 **3 842 554 283**
		1000 **3 842 554 284**
		1500 **3 842 554 285**
	250 ... 2300	250 ... 1500 **3 842 994 742 / HR, B, FA**
Material:	Frame: Aluminum; anodized Woven wire grille: Steel; hot-zinc-plated	
Color of woven wire grille:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)	

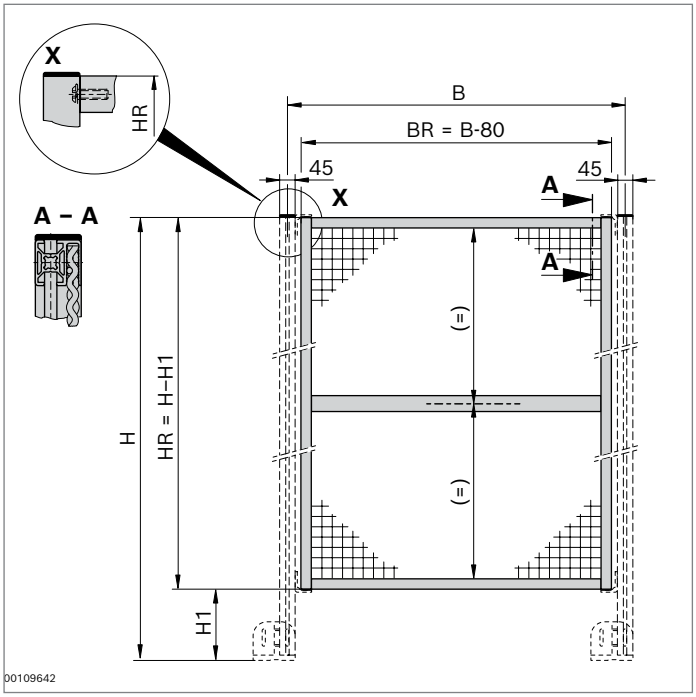

Protective frame, horizontal sections	**HR** (mm)	**B** (mm)	**No.**
	1800	1000	**3 842 554 281**
	500 ... 2300	250 ... 2500	**3 842 994 745 / HR, B, FA**
Material:	Frame: Aluminum; anodized Woven wire grille: Steel; hot-zinc-plated		
Color of woven wire grille:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)		

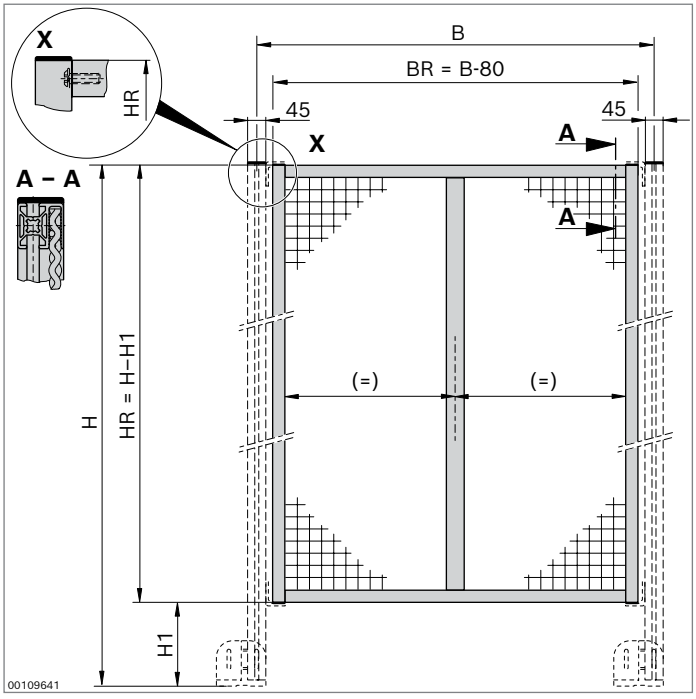

Protective frame, vertical sections	**HR** (mm)	**B** (mm)	**No.**
	1800	2000	**3 842 554 280**
	250 ... 2300	500 ... 3000	**3 842 994 744 / HR, B, FA**
Material:	Frame: Aluminum; anodized Woven wire grille: Steel; hot-zinc-plated		
Color of woven wire grille:	FA = 0: hot-zinc-plated FA = 1: black; RAL 9005 (e.g. for fence) FA = 2: yellow; RAL 1023 (e.g. for doors)		

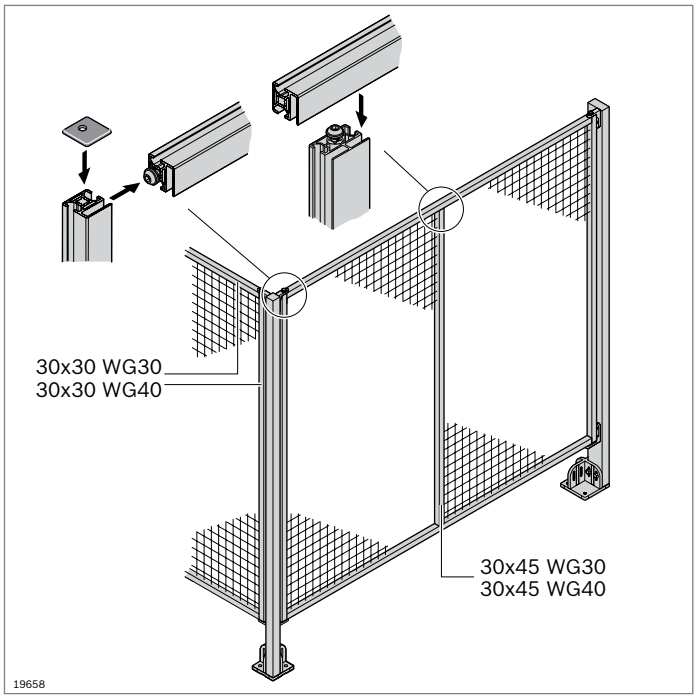

Frame profiles




- For the low-cost construction of protective equipment with woven wire grilles WG30 and WG40
- Fastening of woven wire grilles: Directly in the special profile slot
- Fastening of panel elements: In the special profile slot using spring clamping elements (accessories)
- The profiles are connected using a central bolt (profile finishing required)
- Modular dimension “B” relates to 45x45 supports

Required accessories:


- Central bolt (p. 3-43)
- Spring clamping elements (p. 10-29)

10

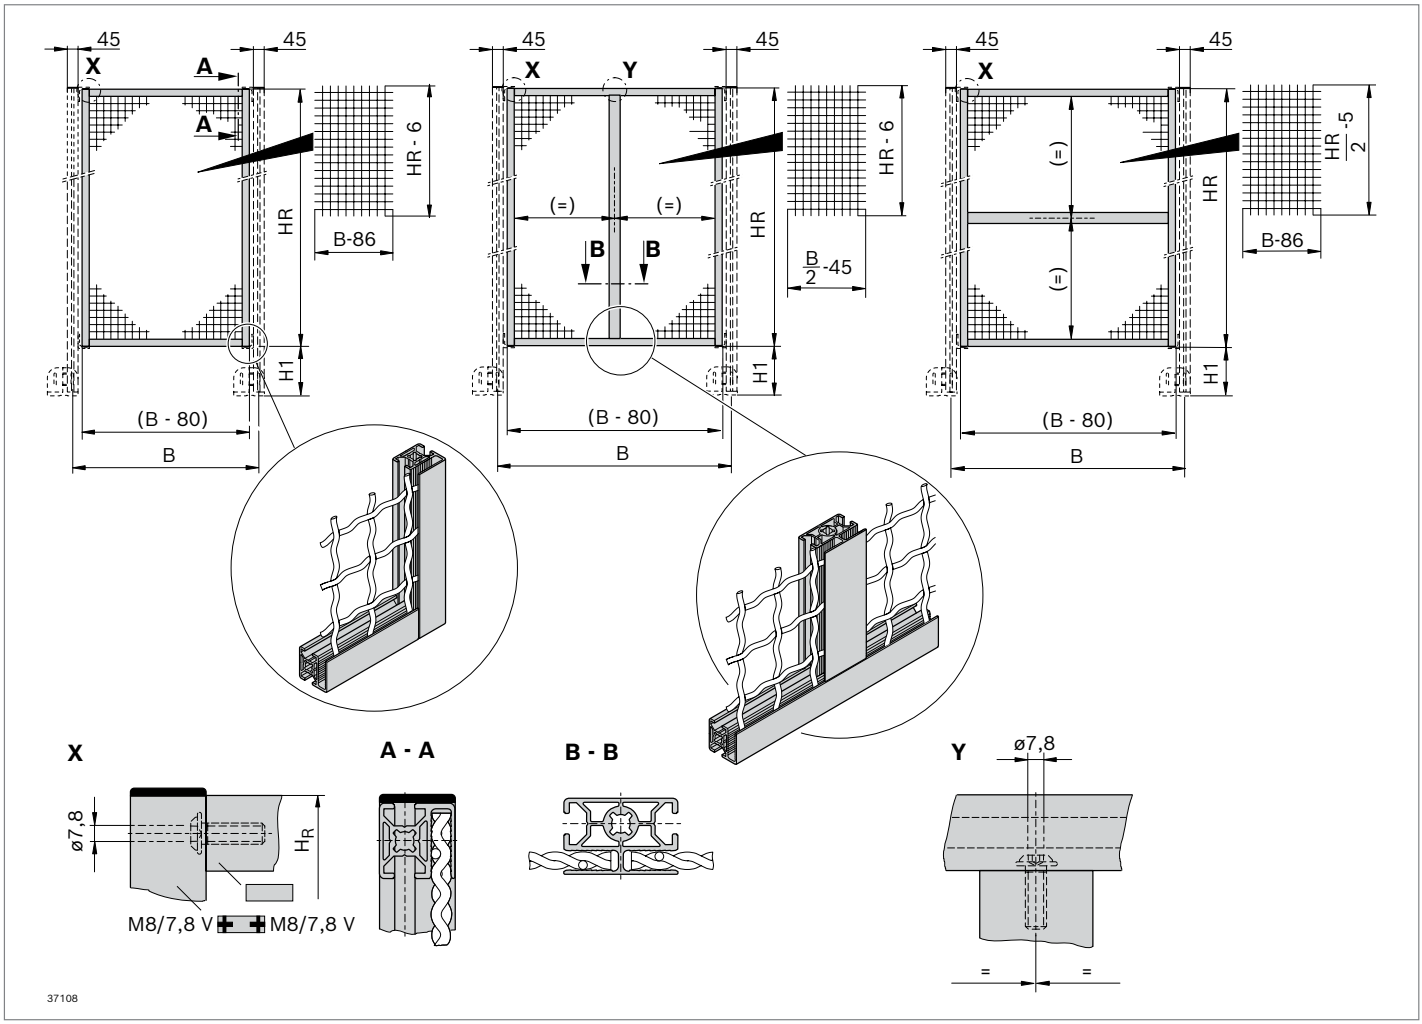

30x30 WG30

A = 3,2 cm²
I_x = 2,5 cm⁴
I_y = 3,0 cm⁴
W_x = 1,6 cm³
W_y = 1,9 cm³
m = 0,9 kg/m

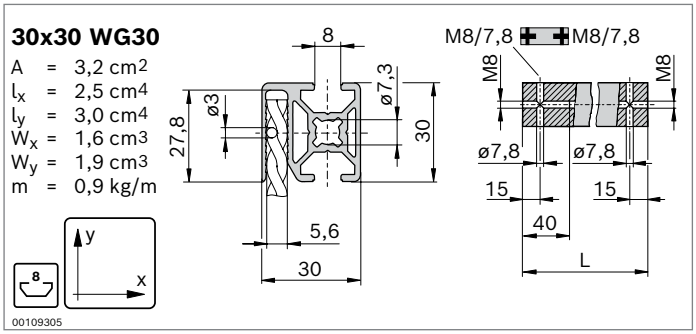


Frame profile 30x30 WG30			L (mm)	No.
1 pc			100 ... 6070	**3 842 992 970 / L**
1 pc	M8/7,8	M8/7,8	100 ... 6000	**3 842 992 977 / L**
1 pc			6070	**3 842 557 237**
20 pcs			6070	**3 842 557 227**

Material: Aluminum; anodized

30x30 WG40

A = 3,2 cm²
I_x = 2,4 cm⁴
I_y = 2,9 cm⁴
W_x = 1,5 cm³
W_y = 1,8 cm³
m = 0,9 kg/m

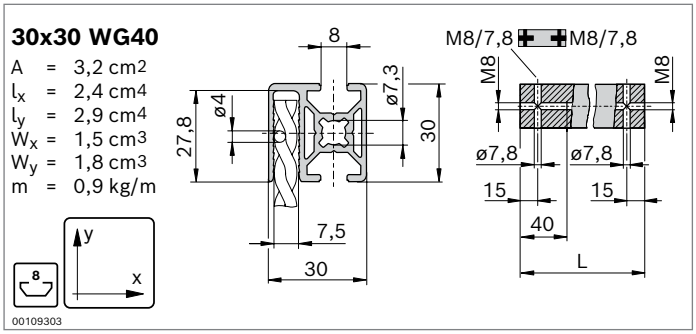


Frame profile 30x30 WG40			L (mm)	No.
1 pc			100 ... 6070	**3 842 992 972 / L**
1 pc	M8/7,8	M8/7,8	100 ... 6000	**3 842 992 978 / L**
1 pc			6070	**3 842 557 239**
20 pcs			6070	**3 842 557 229**

Material: Aluminum; anodized

30x45 WG30

A = 4,5 cm²
I_x = 7,3 cm⁴
I_y = 4,2 cm⁴
W_x = 3,2 cm³
W_y = 2,7 cm³
m = 1,2 kg/m

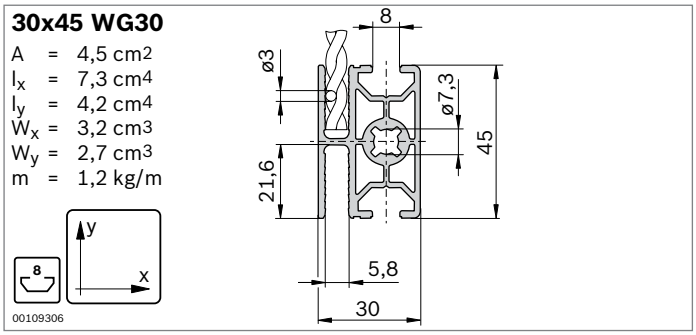


Frame profile 30x45 WG30			L (mm)	No.
1 pc			100 ... 6070	**3 842 992 971 / L**
1 pc			6070	**3 842 557 238**
20 pcs			6070	**3 842 557 228**

Material: Aluminum; anodized


30x45 WG40

A = 4,5 cm²
I_x = 6,9 cm⁴
I_y = 4,1 cm⁴
W_x = 4,3 cm³
W_y = 1,8 cm³
m = 1,2 kg/m

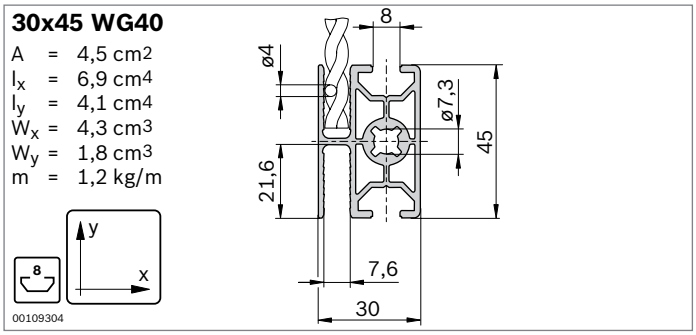

Frame profile 30x45 WG40			L (mm)	No.
1 pc			100 ... 6070	**3 842 992 973 / L**
1 pc			6070	**3 842 557 247**
20 pcs			6070	**3 842 557 240**


Material: Aluminum; anodized



▶ Cover cap for a more attractive appearance and to prevent injuries


Cover cap	Color	ESD		No.
30x30	Signal gray		20	**3 842 555 134**
30x30	Black		20	**3 842 555 135**


Material: PP

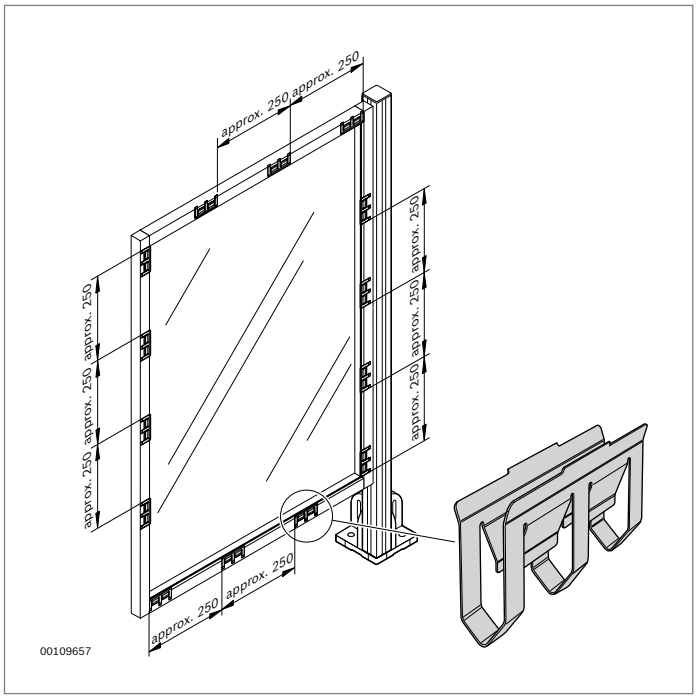



Spring clamping element


- For clamping panel elements in EcoSafe safety fence profiles 30x30 WG30 and 30x30 WG40
- Play-free clamping
- Individual sections of the protective frames can be filled as you wish












Spring clamping element		No.
	100	**3 842 525 014**
Material:	Spring steel; stainless	

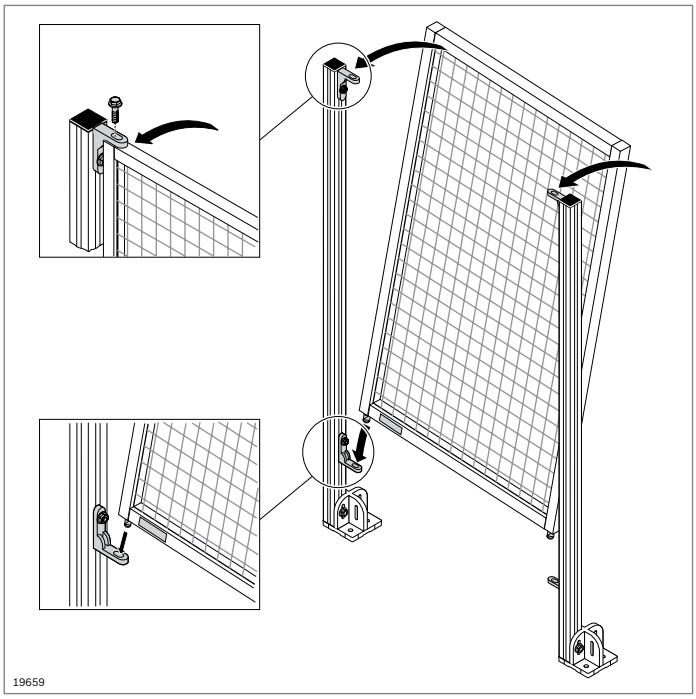

Suspension bracket
Safety Strip safety kit


10

Suspension bracket

- For mounting the EcoSafe protective frame on the support at various angles
- Suspension bracket with centering lugs as anti-torsion element

Safety Strip safety kit


- Safe and inexpensive
- Easy assembly; can be retrofitted
- Patented
- Meets the requirements of Machinery Directive 2006/42/EC: Screw remains connected to the suspension bracket after loosening

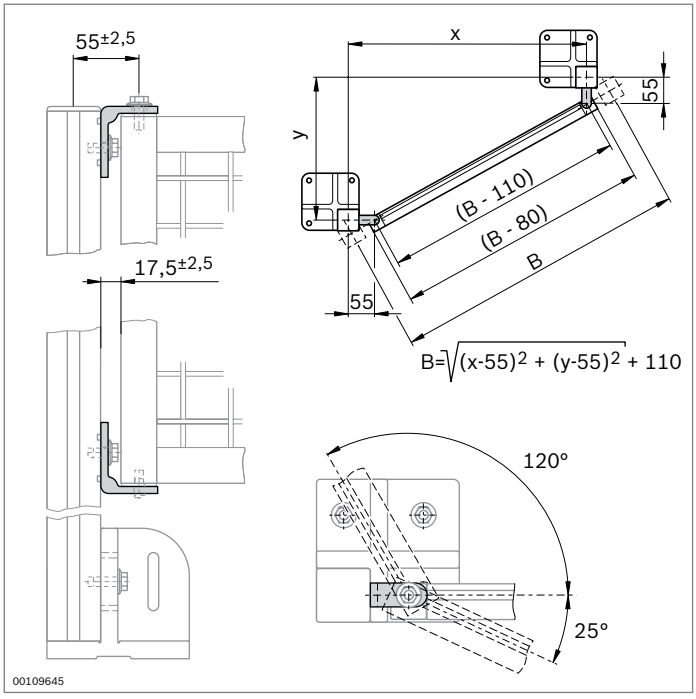


Suspension bracket	No.	FS
Set	**3 842 522 481**	4x FS1, 2x FS2, 2x FS3

Material: Diecast zinc
Fastening material: Steel; zinc-plated

Scope of delivery: In a set with four brackets, incl. fastening material (FS)




FS1





FS2



FS3







Safety Strip safety kit		No.	FS
	10	**3 842 542 146**	FS1

Material: PC translucent, washer: PA6, fastening material: Steel, galvanized

Scope of delivery: Incl. fastening material (FS)

FS1




EcoSafe leg set




- Leg set as a component for suspension panels, doors and safety fence systems
- For corner connections of two panels

Individually construct the leg sets using standard components



Leg set with foot 45x45


Component		Pcs	No.	Page
1	Profile 45x45L	1	**3 842 992 425 / L**	2-37
2	Cover cap 45x45 ESD	1	**3 842 548 753**	2-37
3	Foot 45x45	1	**3 842 564 814**	6-12
4	T-bolt M8x25	2	**3 842 528 718**	3-6
5	Flange nut M8	2	**3 842 345 081**	3-6



Leg set with base plate 120x120

Component		Pcs	No.	Page
1	Profile 45x45L	1	**3 842 992 425 / L**	2-37
2	Cover cap 45x45 ESD	1	**3 842 548 753**	2-37
3	Base plate 120x120	1	**3 842 527 553**	6-11
4	T-bolt M8x30	2	**3 842 528 721**	3-6
5	Flange nut M8	2	**3 842 345 081**	3-6
6	Central bolt S12x30-T50	1	**3 842 530 236**	3-43

Door kits

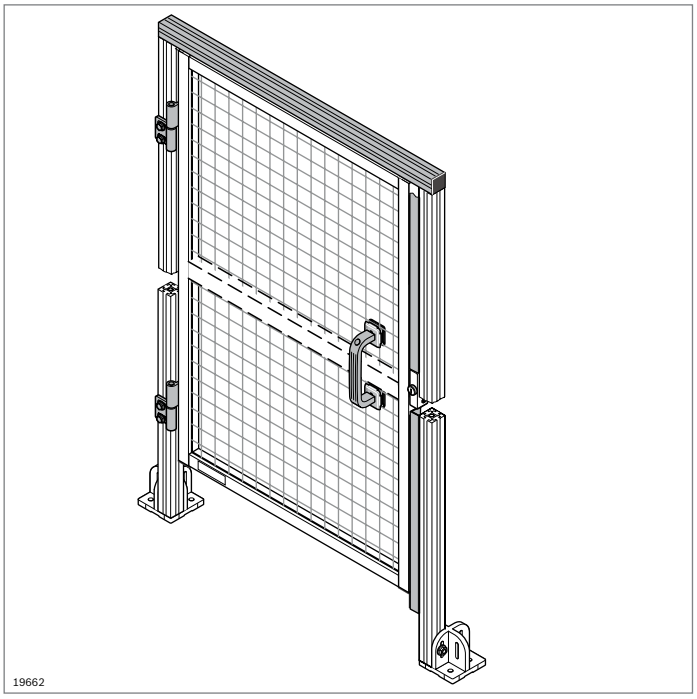


EcoSafe system door kit

- For assembling an EcoSafe system door
- Use of finished protective frame as a door
- For doors that open to the left or right
- Required components:
  - Assembly kit for system door
  - Protective frame (p. 10-33)
- Also available with leg sets with 45x90L profiles for more stability

Accessories, optional:


- Door lock (p. 8-12, 8-13, 8-14, 8-16, 8-18, 8-20)
- Attachment kit for safety switch (p. 10-40)
- Base plate 150x150 (3 842 524 469) with leg set made of 45x90L profiles
- For doors HR > 1850 mm, an additional hinge (3 842 544 562) is recommended

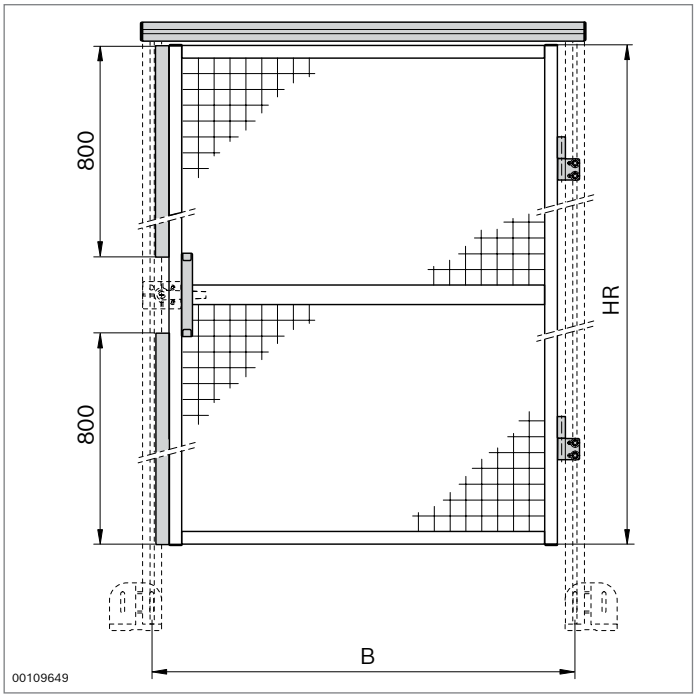


Assembly kit for system door	HR* (mm)	B (mm)	No.
	1800 ... 2350	750	**3 842 523 165**
	1800 ... 2350	1000	**3 842 523 166**

Scope of delivery: 2 x hinge, 2 x stop rail, profile as door lintel, bow-type handle, incl. fastening material

* HR dependent on protective frame (HR)





Selection of suitable protective frames

Frame profile 22.5x45

Protective frame	HR (mm)	B (mm)	No.
Protective frame HF, galvanized	1850	750	**3 842 567 946**
Protective frame HF, black	1850	750	**3 842 567 950**
Protective frame HF[1], galvanized	1850	1000	**3 842 567 953**
Protective frame HF[1], black	1850	1000	**3 842 567 954**

[1] horizontally divided

Material: Aluminum; spot-weld wire grille and fastening material: Steel; zinc-plated

Scope of delivery: Fully assembled


Frame profile 30x30 WG40

Protective frame	HR (mm)	B (mm)	No.
Protective frame, galvanized	1800	750	**3 842 554 283**
Protective frame[1], galvanized	1800	1000	**3 842 554 281**

[1] horizontally divided


Material: Aluminum; woven wire grille and fastening material: Steel; zinc-plated

Scope of delivery: Fully assembled

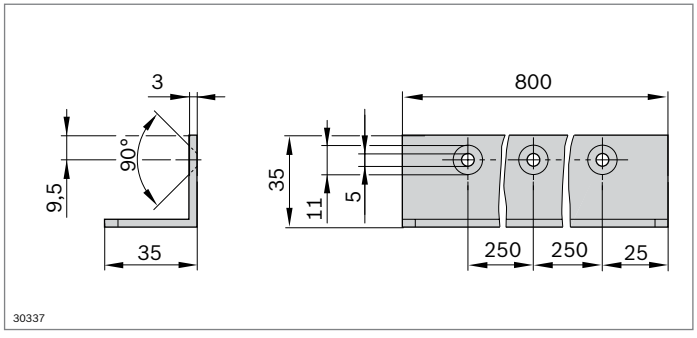

▶ System door stop rail for self-assembly

Stop rail	No.
	3 842 523 170

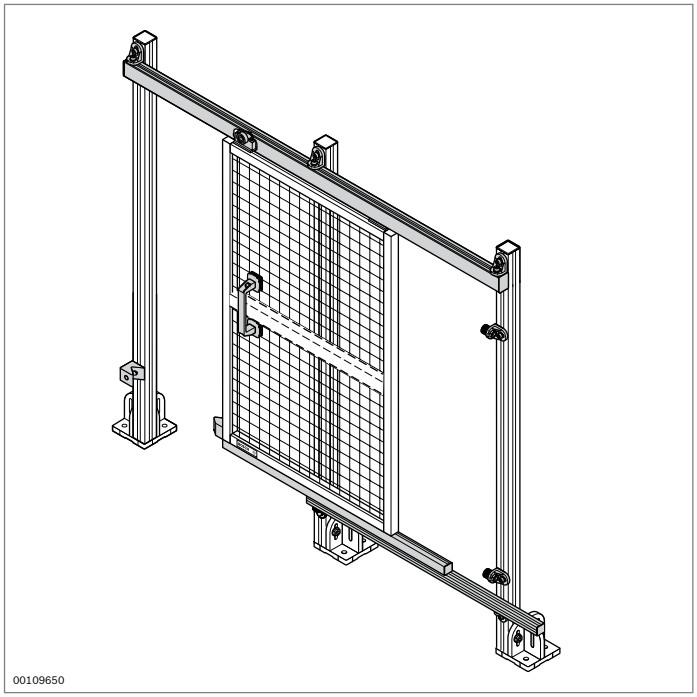


EcoSafe assembly kit for sliding door with superstructure

- Assembly kit for installing an EcoSafe sliding door with superstructure
- Use of finished protective frame as a door
- Easy subsequent installation in a safety fence
- Rollers with ball bearings for smooth running
- For doors that open to the left or right
- Required components:
  - Assembly kit for sliding door with superstructure
  - Protective frame (p. 10-35)
- Also available with leg sets with 45x90L profiles for more stability

Accessories, optional:


- Door lock (p. 8-12, 8-14, 8-16, 8-20)
- Base plate 150x150 (3 842 524 469) with leg set made of 45x90L profiles

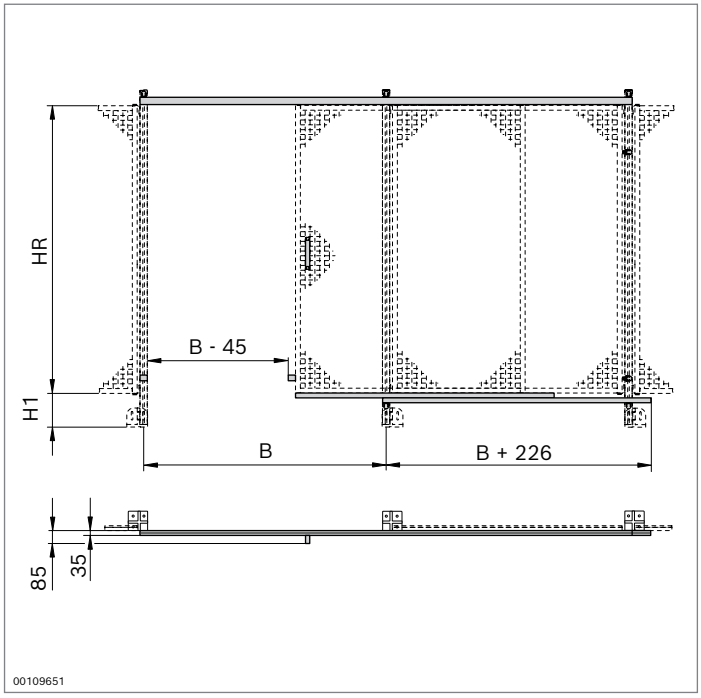


Assembly kit for sliding door with superstructure	**HR*** (mm)	**B** (mm)	**No.**
	1800 … 2350	1000	**3 842 524 163**
	1800 … 2350	1500	**3 842 524 164**

Scope of delivery: 2 x bumper, 2 x slider, 2 x trolley, profile for door superstructure, 7 x mounting bracket, stop kit, 2 x profile for sliding door

* HR dependent on protective frame (HR)





Selection of suitable protective frames

Frame profile 22.5x45


Protective frame	HR (mm)	B (mm)	No.
Protective frame HF, galvanized	1850	1000	**3 842 567 947**
Protective frame HF, black	1850	1000	**3 842 567 951**
Protective frame HF, galvanized	1850	1500	**3 842 567 948**
Protective frame HF, black	1850	1500	**3 842 567 952**

Material: Aluminum; spot-weld wire grille and fastening material: Steel; zinc-plated
Scope of delivery: Fully assembled

Frame profile 30x30 WG40

Protective frame	HR (mm)	B (mm)	No.
Protective frame, galvanized	1800	1000	**3 842 554 284**
Protective frame, galvanized	1800	1500	**3 842 554 285**


Material: Aluminum; woven wire grille and fastening material: Steel; zinc-plated
Scope of delivery: Fully assembled

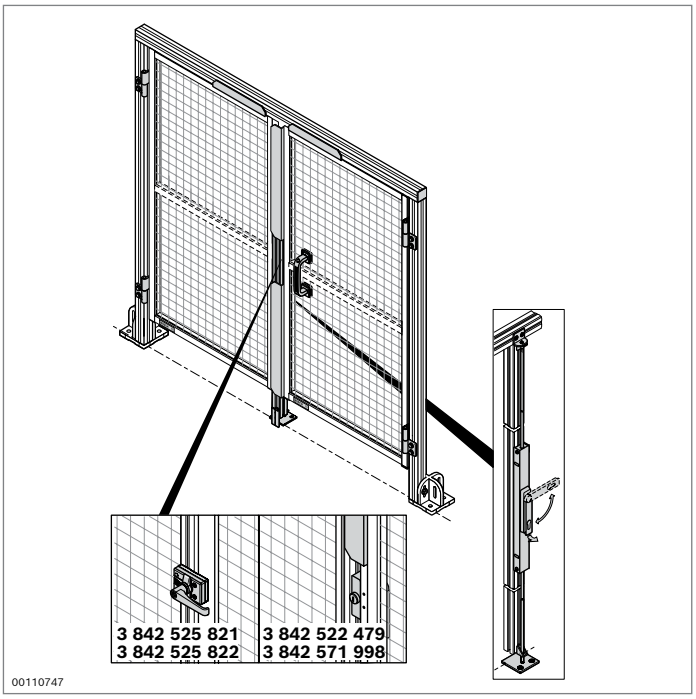

EcoSafe double door kit


- Assembly kit for installing an EcoSafe double door
- Use of finished protective frame as a door
- Easy subsequent installation in a safety fence
- Optional installation of a standard lock cylinder in the lock mechanism for double door
- Required components:
  - Double door kit
  - Two protective frames (p. 10-37)
- Also available with leg sets with 45x90L profiles for more stability


Accessories, optional:
- Door lock (p. 8-12/8-13)
- Attachment kit for safety switch (p. 10-40)
- Conventional lock cylinder 35/35 (not included in the scope of delivery)
- Base plate 150x150 (3 842 524 469) with leg set made of 45x90L profiles

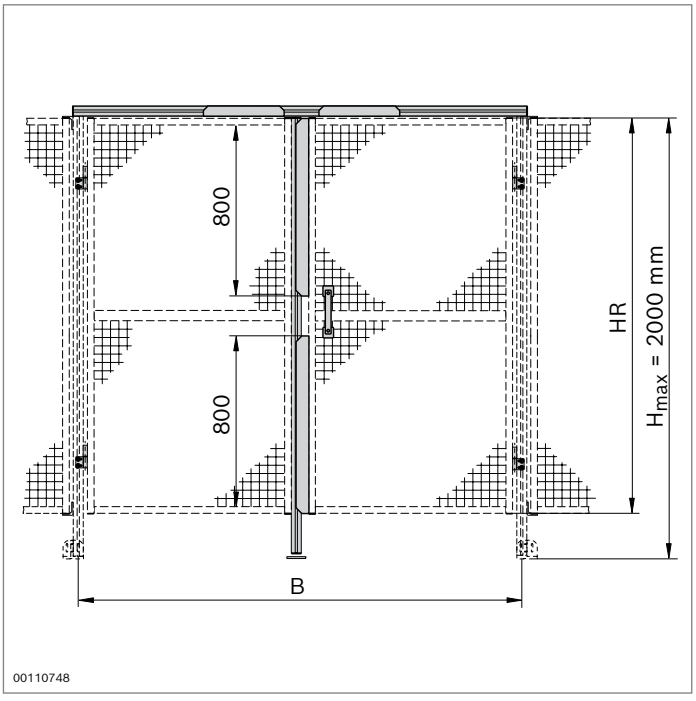

Double door kit	HR (mm)	B (mm)	No.
	1800/1850	1500	**3 842 525 781**
	1800/1850	2000	**3 842 525 782**

Scope of delivery: Lock mechanism assembly kit, profile for door superstructure, profile for door stop, 4x hinges, lock bracket, base plate, bow-type handle, 2x horizontal brackets, 2x vertical brackets, rail, fastening material





Selection of suitable protective frames

Frame profile 22.5x45

Protective frame	HR (mm)	B (mm)	No.
Protective frame HF, galvanized	1850	750	**3 842 567 946**
Protective frame HF, black	1850	750	**3 842 567 950**
Protective frame HF[1], galvanized	1850	1000	**3 842 567 953**
Protective frame HF[1], black	1850	1000	**3 842 567 954**

[1] horizontally divided

Material: Aluminum; spot-weld wire grille and fastening material: Steel; zinc-plated

Scope of delivery: Fully assembled


Frame profile 30x30 WG40

Protective frame	HR (mm)	B (mm)	No.
Protective frame, galvanized	1800	750	**3 842 554 283**
Protective frame[1], galvanized	1800	1000	**3 842 554 281**

[1] horizontally divided

Material: Aluminum; woven wire grille and fastening material: Steel; zinc-plated

Scope of delivery: Fully assembled

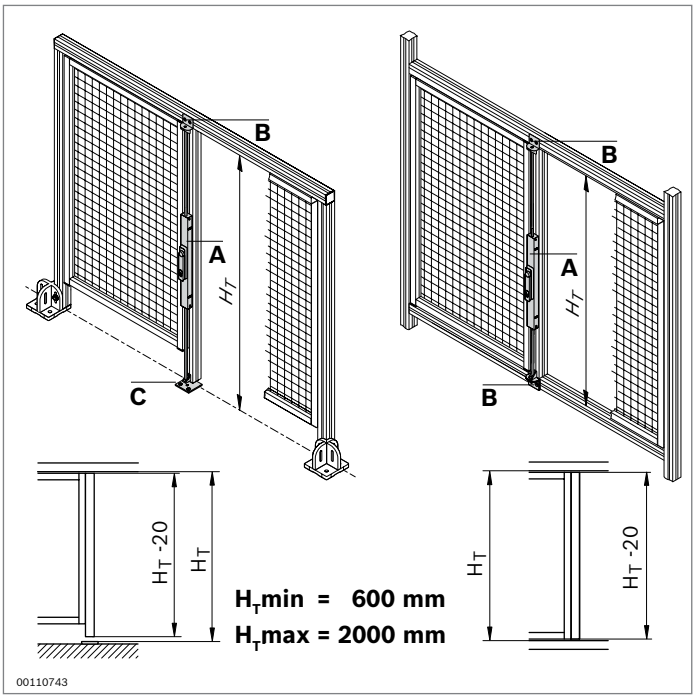



Lock mechanism for double door



- Components for constructing a lock mechanism for double doors
- Optional installation of a standard lock cylinder in the lock mechanism for double door
- Locking mechanism assembly kit (**A**) for individually designed double doors with $H_T$max = 2000 mm
- Lock bracket (**B**) for mounting the lock bolt bar
- Base plate (**C**) for mounting the lock bolt bar; fastened to the floor with supplied dowels. For doors which can be driven through

Accessories, optional:
Conventional lock cylinder 35/35 (not included in the scope of delivery)

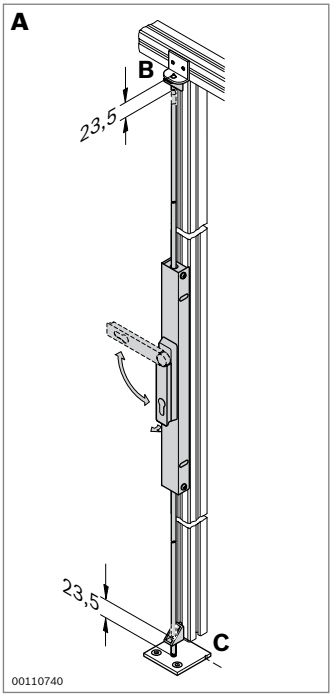

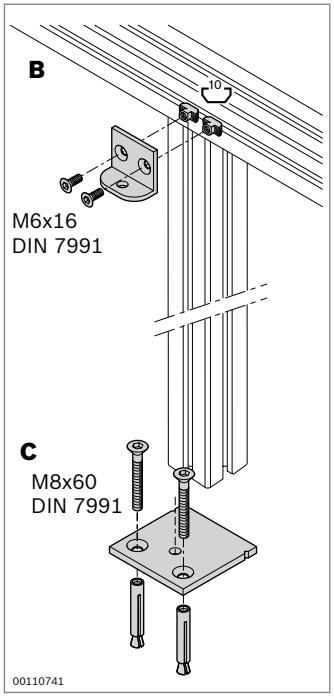

Lock mechanism assembly kit	No.	FS
A	**3 842 525 780**	2xFS1, 2xFS2, 4xFS3

Material:	Housing: Aluminum Door handle: PA; black Lock bolt: Steel; zinc-plated Lock bolt guide bracket: Diecast zinc
Scope of delivery:	Lock mechanism for double door, incl. fastening material (FS)


Lock bracket	No.	FS
B	**3 842 526 786**	2xFS4

Material:	Aluminum; anodized
Scope of delivery:	Incl. fastening material (FS)


Base plate	No.	FS
C	**3 842 526 787**	2xFS5

Material:	Floor plate: Steel; stainless Floor dowel: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)













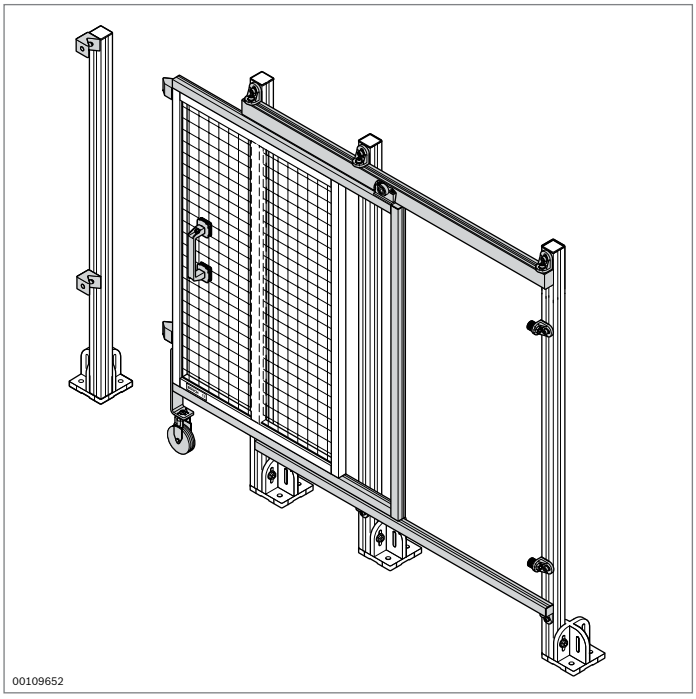

EcoSafe assembly kit for sliding door without superstructure


- Only suitable for frame profile 30x30 WG40
- Assembly kit for installing an EcoSafe sliding door without superstructure
- Use of finished protective frame as a door
- Rollers with ball bearings for smooth running
- For doors that open to the left or right
- Required components:
  - Assembly kit for sliding door without superstructure
  - Protective frame
- Also available with leg sets with 45x90L profiles for more stability


Accessories, optional:
Door lock (p. 8-12/8-14)

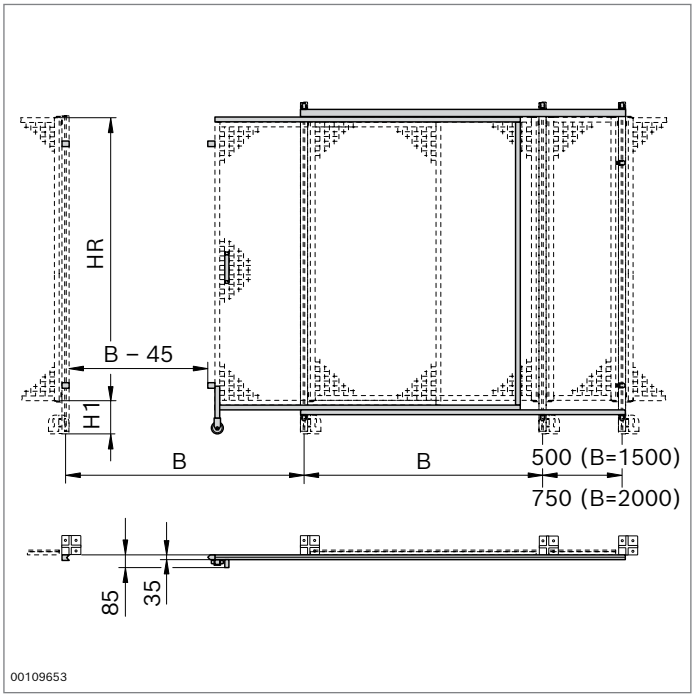

Assembly kit for sliding door without superstructure	HR (mm)	B (mm)	No.
	1800	1500	**3 842 524 165**
	1800	2000	**3 842 524 166**

Scope of delivery: 2 x bumper, 3 x slider, trolley, profile for door superstructure, 8 x mounting bracket, 2 x stop kit, 2 x profile for sliding door, incl. fastening material






Selection of suitable protective frames


Frame profile 30x30 WG40

Protective frame	HR (mm)	B (mm)	No.
Protective frame, galvanized	1800	1500	**3 842 554 285**
Protective frame, galvanized, vertically divided	1800	2000	**3 842 554 280**


Material: Aluminum; woven wire grille and fastening material: Steel; zinc-plated
Scope of delivery: Fully assembled

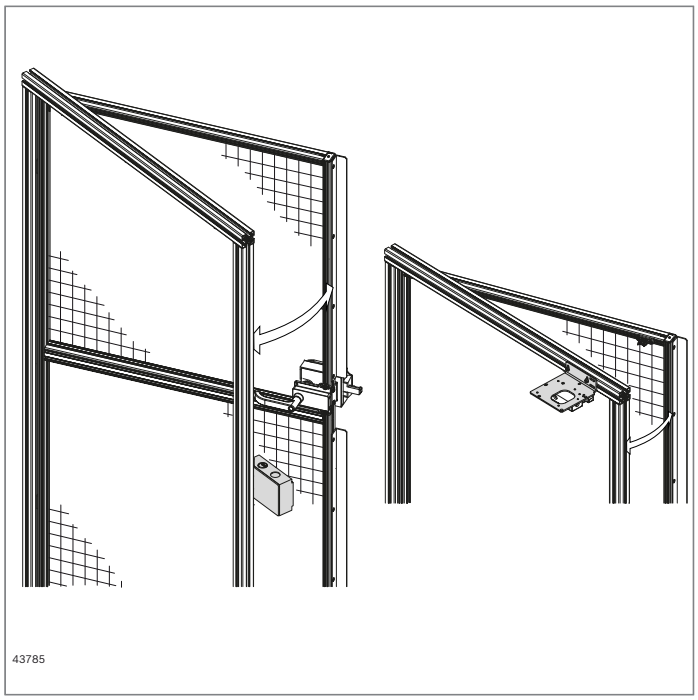


Attachment kits for safety switches



- For installing standard commercially available safety switches on EcoSafe system doors
- For frame profiles 22.5x45 and 30x30 WG40







Attachment kit for safety switch		No.	FS
For safety switch	**For actuator**		
Euchner NZ 1 VZ...	024298; 024299	**3 842 522 475***	2xFS1, 2xFS2
Euchner NZ 2 VZ...	024298; 024299		
Euchner NZ 1 VS...	024298; 024299		
Euchner NZ 2 VS...	024298; 024299		
Schmersal AZ15,...	AZ15/16-B2-1747		
Schmersal AZ16,...	AZ15/16-B2-1747		
Schneider Electric XCS - A...	XCS-Z03		
Schneider Electric XCS - C...	XCS-Z03		
Schneider Electric XCS - PA...	XCS-Z13		
Schneider Electric XCS - TE...	XCS-Z13		
Euchner TZ...	024298; 024299	**3 842 522 476****	2xFS1, 2xFS2
Schneider Electric XCS - LE/ LF...	XCS-Z03		
Schneider Electric XCS - TE...	XCS-Z13		
Schneider Electric XCS - PA...	XCS-Z13; AZM161-86		
Schmersal AZM161...	AZM161-B1		
Schmersal AZM161...	AZM161-B1E	**3 842 522 477****	2xFS1, 2xFS2


*) for 30x30 WG40; **) for 22.5x45 and 30x30 WG40


Material: Steel; zinc-plated
Scope of delivery: Incl. adapter plate, bracket, incl. fastening material (FS)

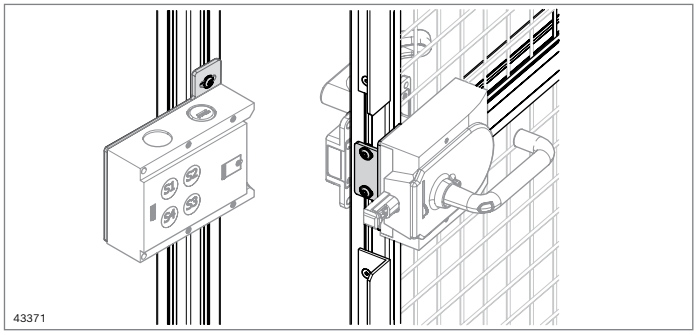



- For frame profiles 30x30WG and 22.5x45
- Adapter plate for attachment of Euchner MGB and MGB2 switches
- Attention: Euchner attachment plate needed for assembly. Order data:
  MGB-A-Mountingplate-L Article number: 109490













Attachment kit Safety Switch PG T4	Slot	ESD	No.	FS
	10/8		**3 842 567 404**	2xFS1 2xFS2 2xFS3 2xFS4 2xFS5

Material:	Steel, galvanized
Scope of delivery:	Incl. fastening material (FS)


Accessories

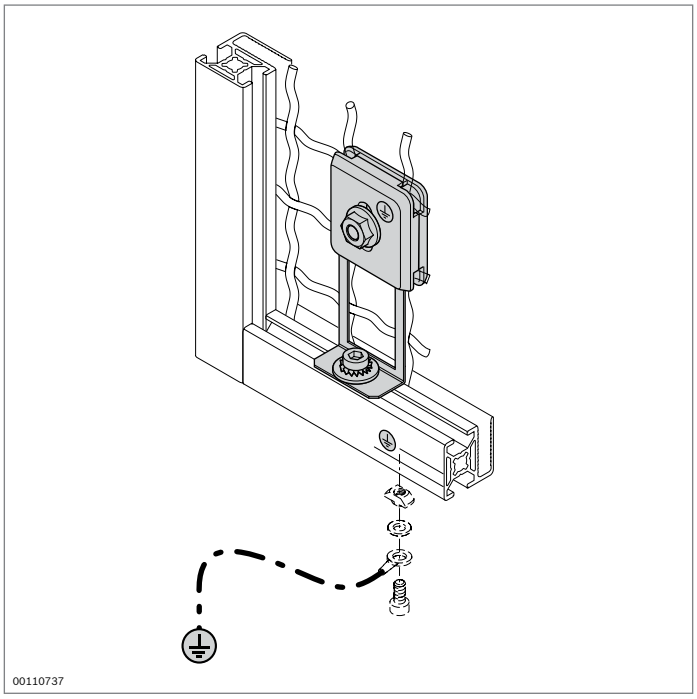


Ground terminal



- Grounding element for making an electrically conductive connection between WG40 woven wire grille or 40x40x3.8 spot-weld wire grille and protective frame
- Guarantees safe conduction of short-circuit currents up to a rated current of 63 A
- For frame profiles 30x30WG and 22.5x45

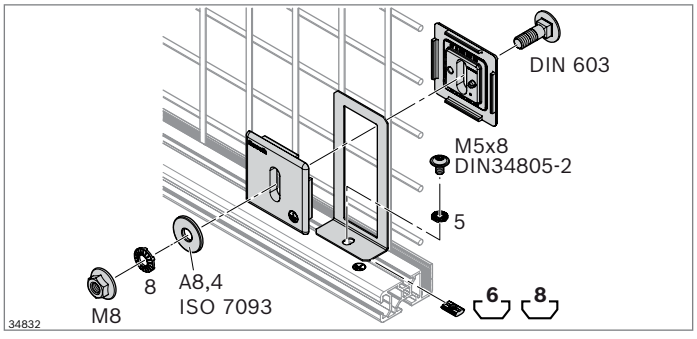


Ground terminal EcoSafe PG	No.
	3 842 567 957
Material:	Ground terminal: Steel; stainless Clamping element: PA; signal gray Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. Fastening material

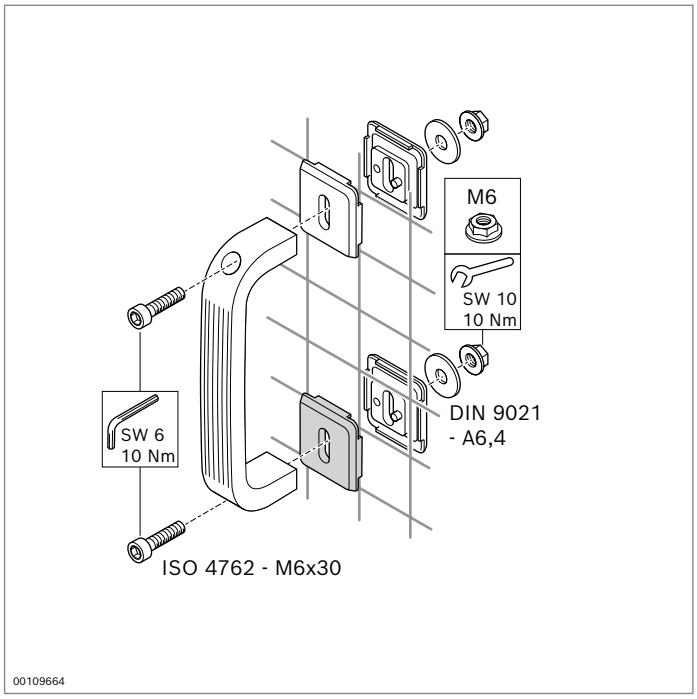

Clamping element

- For attaching handles, information boards or warning signs to woven wire grilles 40x40x4, 30x30x3 and spot welding grille 40x40x3.8
- Clamping with opposing pairs of clamping elements

Required accessories:
Fastening material; see drawing

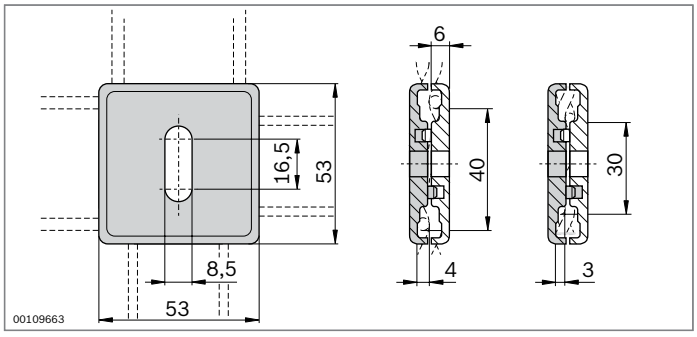


Clamping element			No.
		20	**3 842 555 178**
Material:	PA66; signal gray (RAL 7004)		

10




Edge protector

- For covering edges and wires in cutouts in the protective frame
- For panel elements and grilles with a thickness of 2 mm to 5 mm




Edge protector		L (mm)	No.
		1000	**3 842 567 937**
Material:	PVC with metal clamp band; black		

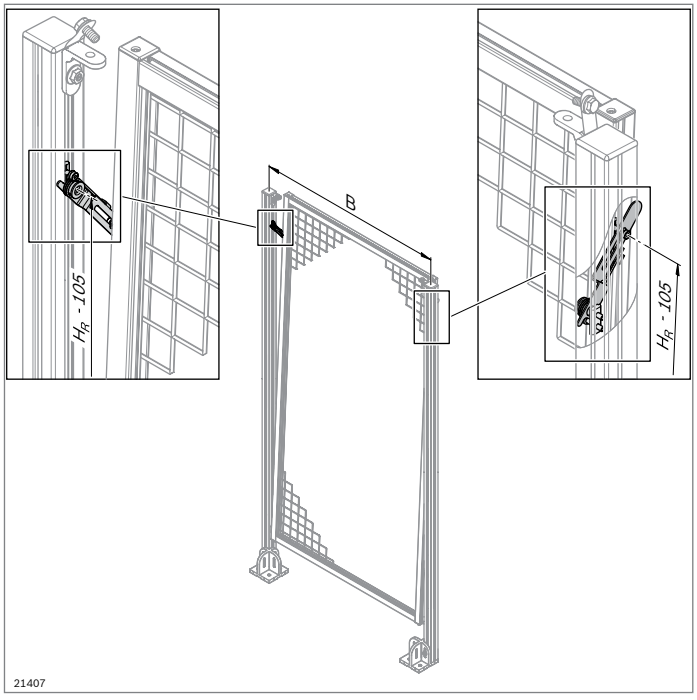


Tilt lever


- For compliance with the requirement in Machinery Directive 2006/42/EC relating to the detaching of protective frames
  - The long-arm spring is designed so that it tilts the protective frame outwards, making it clear that the protective frame is detached
  - Protective frame cannot fall out
- Easily removable EcoSafe protective frames
- Can be retrofitted
- Installation on both sides recommended for EcoSafe protective frames of width B >1500 mm

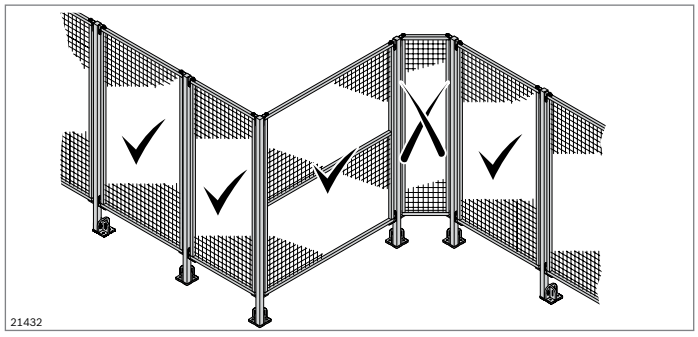

Possible installation situation:


- Not suitable for installing the protective frame across a corner










Tilt lever		No.	FS
		3 842 546 560	FS1, FS2
Material:	Holding plate: Stainless steel Spacer: Aluminum Long-arm spring: Spring steel		
Scope of delivery:	Holding plate, spacer, long-arm spring, fastening material (FS)		






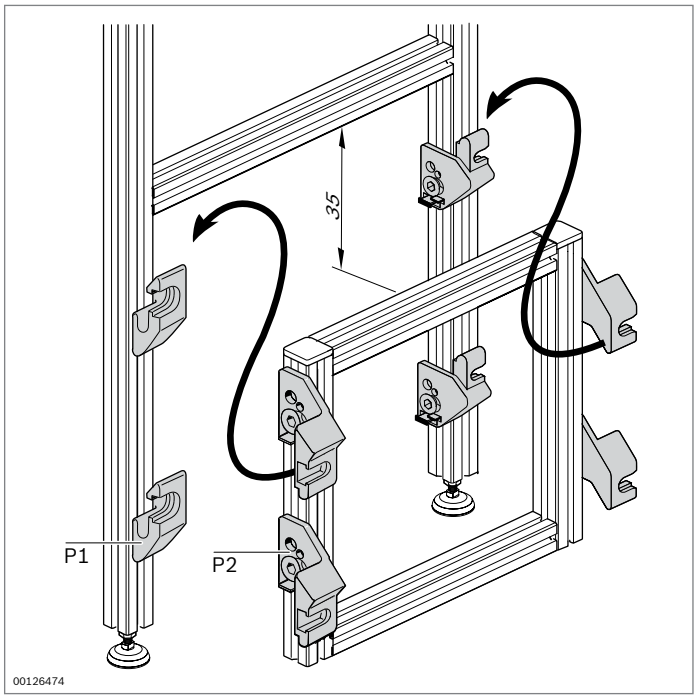



Suspension piece for frames





- Very quick fitting and removal of pre-assembled frames in prepared supporting structures
- Protection against unintentional lifting out due to both parts of the suspension piece being screwed in
- Notes on compliance with the Machinery Directive 2006/42/EC: Please note that fastening parts may work loose during disassembly










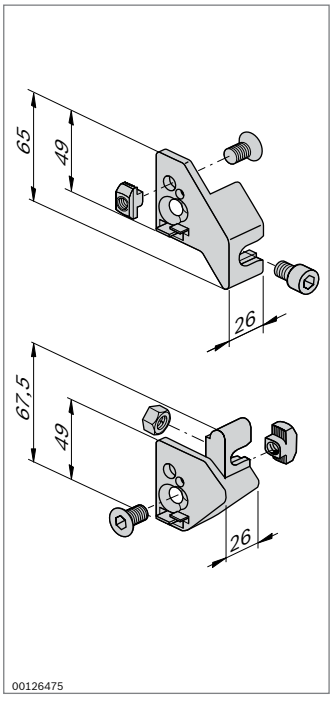


Suspension piece	P1	P2	No.	FS
Set	45	30	**3 842 515 531**	4x FS1, 4x FS2, 4x FS3
Set	45	45	**3 842 515 863**	8x FS2, 4x FS3

Material: Diecast zinc
Scope of delivery: Four suspension pieces, incl. fastening material (FS)


Installation elements




Cable duct, plastic
(p. 11-2)



Cable duct universal
(see 11-3)



Cable duct AL (p. 11-5)



Cable bracket (p. 11-11)




Cable bracket loop
(p. 11-12)



Quick-lock (p. 11-13)


Electrical leads must be laid neatly. This is because electrical faults can only be easily located and rectified if the installation has been carried out in a clear and orderly manner.


Cable ducts and cable brackets are therefore important elements for maintenance-friendly electrical installation on all types of constructions made using the aluminum profile toolkit.

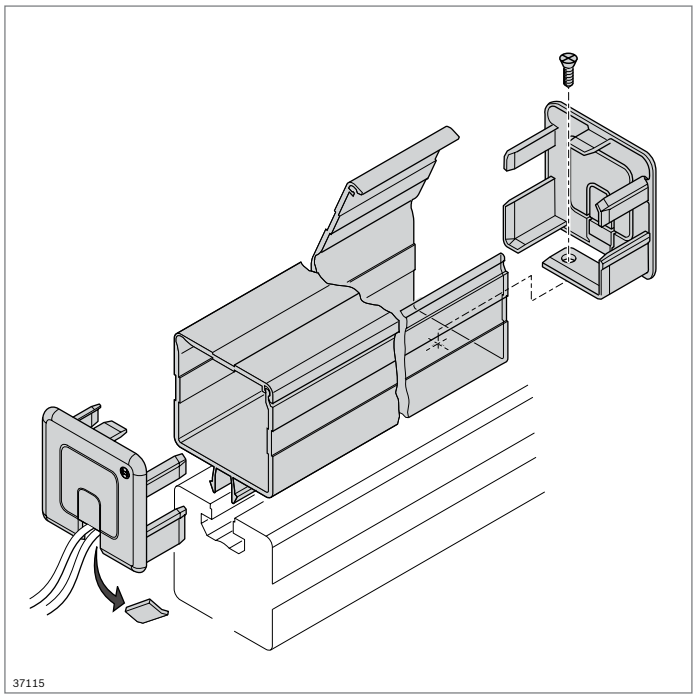

Cable duct, plastic


- Cable duct for routing electrical lines
- Captive cover
- Very easy to access
- Large usable volume
- Simple, fast assembly – just clips into the 10 mm slot
- Cover cap for sealing the cable duct with pre-punched holes for running cables through
- VDE certified
- An ESD-conductive connection made of plastic between the profile and the cable duct must be ensured by a suitable design solution, e.g. screw






	L (mm)	Color	ESD		No.
Cable duct 40x20	2000	Signal gray		1	**3 842 557 443**
Cover cap 40x20		Signal gray		10	**3 842 557 444**
Cable duct 40x20	2000	Black	ESD	1	**3 842 555 670**
Cover cap 40x20		Black	ESD	10	**3 842 555 671**


Material: Cable duct: PVC
Cover cap: PP
Scope of delivery: Cover cap incl. fastening screws






	L (mm)	Color	ESD		No.
Cable duct 40x40	2000	Signal gray		1	**3 842 549 894**
Cover cap 40x40		Signal gray		10	**3 842 551 004**
Cable duct 40x40	2000	Black	ESD	1	**3 842 549 895**
Cover cap 40x40		Black	ESD	10	**3 842 551 005**


Material: Cable duct: PVC
Cover cap: PP
Scope of delivery: Cover cap incl. fastening screws






	L (mm)	Color	ESD		No.
Cable duct 45x45	2000	Signal gray		1	**3 842 549 896**
Cover cap 45x45		Signal gray		10	**3 842 551 006**
Cable duct 45x45	2000	Black	ESD	1	**3 842 549 897**
Cover cap 45x45		Black	ESD	10	**3 842 551 007**


Material: Cable duct: PVC
Cover cap: PP
Scope of delivery: Cover cap incl. fastening screws

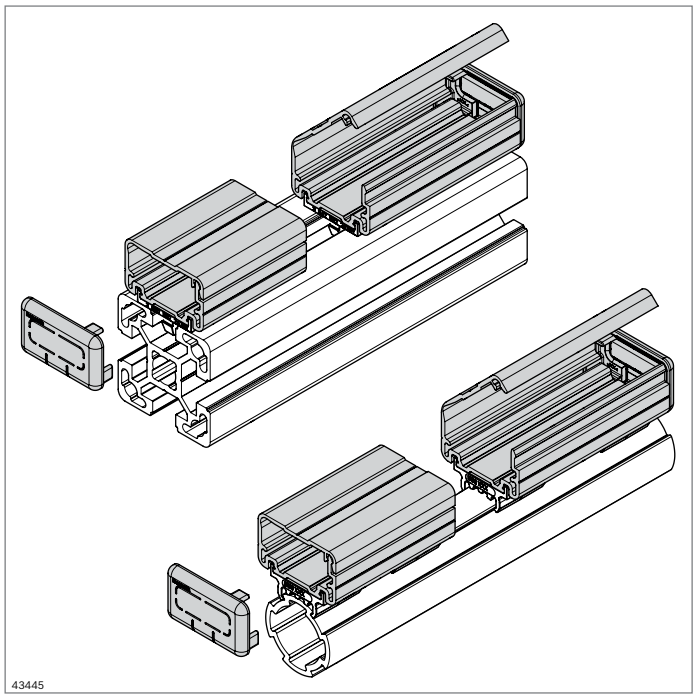

Cable duct, plastic, universal

- Cable duct for laying lines
- Captive cover
- Simple, fast assembly by clicking using assembly base at strut profiles with 8 mm and 10 mm groove or D28L round tube
- Cover cap for sealing the cable duct with pre-punched holes for running cables through
- VDE certified*







	L (mm)	Color	ESD		No.
Cable duct 34x20	2000	Signal gray		1	**3 842 559 336**
Cover cap 34x20		Signal gray		10	**3 842 559 340**
Cable duct 34x20	2000	Black		1	**3 842 559 335**
Cover cap 34x20		Black		10	**3 842 559 339**

Material: Cable duct: PVC
Cover cap: PP


* Cable duct 34x20 not VDE-certified






	L (mm)	Color	ESD		No.
Cable duct 30x30	2000	Signal gray		1	**3 842 562 096**
Cover cap 30x30		Signal gray		10	**3 842 562 100**
Cable duct 30x30	2000	Black		1	**3 842 562 095**
Cover cap 30x30		Black		10	**3 842 562 099**


Material: Cable duct: PVC
Cover cap: PP






	L (mm)	Color	ESD		No.
Cable duct 60x60	2000	Signal gray		1	**3 842 562 098**
Cover cap 60x60		Signal gray		10	**3 842 562 102**
Cable duct 60x60	2000	Black		1	**3 842 562 097**
Cover cap 60x60		Black		10	**3 842 562 101**

Material: Cable duct: PVC
Cover cap: PP

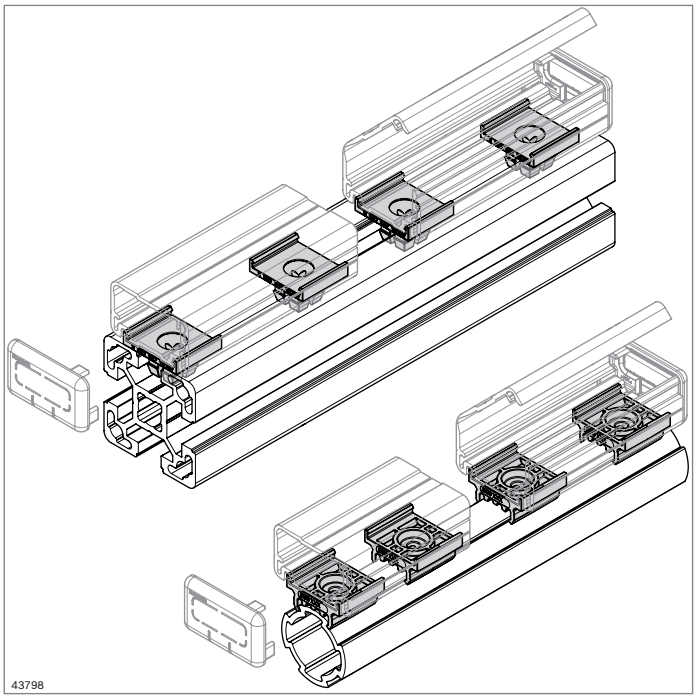


Mounting base

- For machining-free mounting of the cable duct on the support profile
- For “Universal” and “Aluminum” cable ducts
- Insulates the cable duct from the support profile




- “Symmetrical mounting base” design for central installation of the cable duct on profiles

Mounting base	Slot	Color	ESD		No.
Symmetrical	8	Signal gray		10	**3 842 562 121**
	8	Black	⚠	10	**3 842 564 725**
	10	Signal gray		10	**3 842 552 247**
	10	Black	⚠	10	**3 842 564 726**
Material:	PA				



- “Symmetrical mounting base” design for central mounting on profiles with multiple slots on the mounting side and 45 mm modular dimension


Mounting base	Slot	Color	ESD		No.
Asymmetrical	10	Signal gray		10	**3 842 552 248**
	10	Black	⚠	10	**3 842 564 727**
Material:	PA				




- Additional stabilization of D28L mounting bases and establishing an ESD-compliant connection between profile and base can be realized using self-tapping screw (3 842 552 267)

Recommended accessories: Self-tapping screw


Mounting base	Color	ESD		No.
D28L	Signal gray		10	**3 842 559 338**
	Black	⚠	10	**3 842 559 337**
Material:	PA			

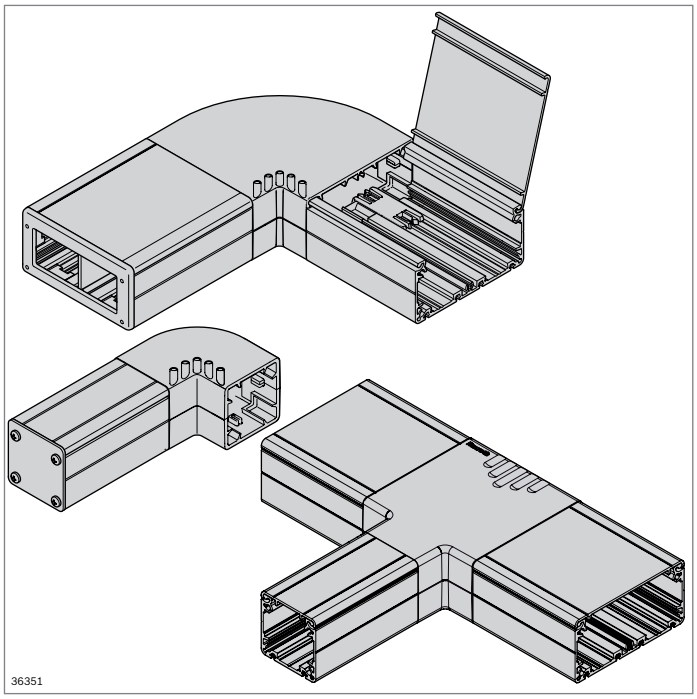


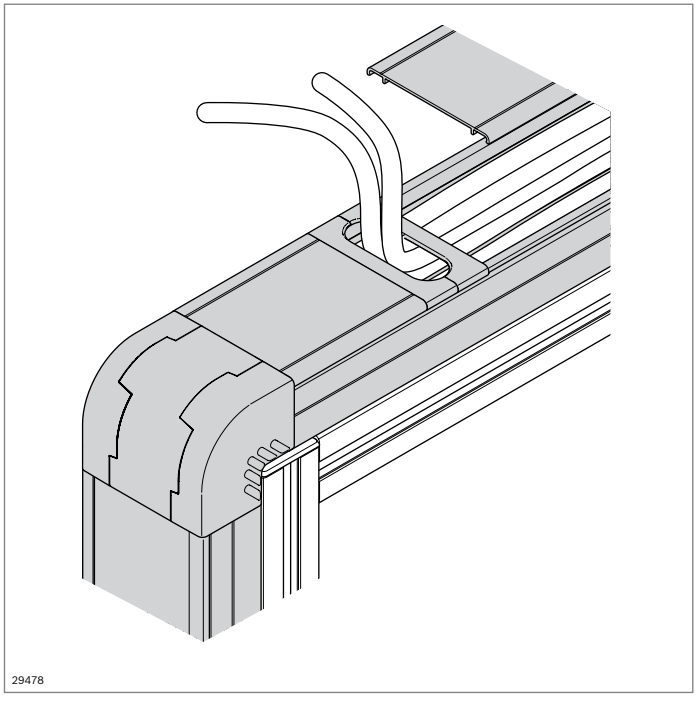



Aluminum cable duct


- Can be either clipped or screwed onto the support profile
- Sizes 40x40, 40x80, 80x40, 80x80
- Drilling aids for easy machining
- Dovetail attachment option
- Suitable for installing on profiles with modular dimensions of 40 and 45 mm
- Interior can be divided for routing different cable types (size 80x40 and 80x80)
- For connection of cable ducts via T-piece (p. 11-9)
- ESD-conductive
- High-quality, attractive external finish thanks to anodized duct surface and cover plate
- Edge protector for protecting the cables/lines from being damaged on rough edges
- PG screw fastenings possible in the side wall and cover plate (mechanical finishing)
- Fitting of sockets, switches etc. possible (mechanical finishing)
- Screw holes for secure fastening of the cover plate
- Cable duct cover can be screwed to the base body
- VDE certified
- Compliant with DIN EN 50085-1 and 50085-2-1 standards














Aluminum cable duct

- Cable duct pre-assembled (cover and base body)
- Usable length 3000 mm (delivered in 3100 mm lengths)
- Cover can be secured with a self-tapping screw

Required accessories:

- Mounting base for clipping in (p. 11-4)
- Mounting kit for screw fastening (p. 11-6)

Accessories, optional:
Self-tapping screw **3 842 552 267**

Cable duct with AL cover plate		ESD	L (mm)	No.
1 pc	**40x40**		100 ... 3000	**3 842 996 356/L**
12 pcs	**40x40**		3000	**3 842 552 268**
1 pc	**40x80**		100 ... 3000	**3 842 996 357/L**
12 pcs	**40x80**		3000	**3 842 552 270**
1 pc	**80x40**		100 ... 3000	**3 842 996 358/L**
12 pcs	**80x40**		3000	**3 842 552 273**
1 pc	**80x80**		100 ... 3000	**3 842 996 359/L**
6 pcs	**80x80**		3000	**3 842 552 275**

Material: Aluminum; anodized

Self-tapping screw

- For securing the cover plate on the cable duct
- Produces conductive connection between the cover plate and cable duct

Self-tapping screw	ESD		No.
Ze. Pi. 3.5x9.5		10	**3 842 552 267**

Material: Steel; zinc-plated


Mounting kit


- For screwing the cable duct to the support profile
- Secure force transmission without deformation of the mounting surface
- Cable duct has to be drilled (diameter: 6.4 mm)
- Recommendation: Insert every 500 mm


Mounting kit	ESD		No.
		10	**3 842 548 997**


Material: Steel; zinc-plated


Scope of delivery: Insert sheet; T-nut M6, 10 mm slot; screw M6x16




















Cover plate

- Seals the end face of the cable duct
- Fastened securely with screws
- Openings for PG screw fastenings can be provided through mechanical finishing

Cover plate	ESD		No.
40x40		10	**3 842 552 249**
40x80		10	**3 842 552 250**
80x40		10	**3 842 552 251**
80x80		10	**3 842 552 252**


Material: Cover plate: Aluminum; anodized
Pressed edges: Aluminum, plain
Screw: Steel; zinc-plated
Scope of delivery: Cover plate incl. fastening screws


Edge protector


- Used to protect the cables if there is an end face cable outlet
- Can be pushed and also screwed into position
- Can be used to protect the cable at lateral outlets


Edge protector		No.
40x40	10	**3 842 552 253**
40x80	10	**3 842 552 254**
80x40	10	**3 842 552 255**
80x80	10	**3 842 552 256**


Material: PP; signal gray RAL 7004

















Curve

- 90° curve in horizontal and vertical direction
- Modular design
- Cable ducts connected together with push-in connection elements
- Cable ducts can be made conductive by using supplied potential equalizer line

Curve	ESD*)		No.
HOR40x40; VER40x40	⚠	1	**3 842 552 257**
HOR40x80; VER80x40	⚠	1	**3 842 552 258**
HOR80x40; VER40x80	⚠	1	**3 842 552 259**
HOR80x80; VER80x80	⚠	1	**3 842 552 260**

Material: PP; signal gray RAL 7004

Scope of delivery: Curve, connection elements, potential equalizer line

*) ESD: Plastic has no conductivity. Using a potential equalizer, 2 cable ducts can be connected in a conductive way (s. p. 11-10).

Dividing strip

- Divides the cable duct into 2 chambers for carrying different electric cables, e.g. electricity and data cables
- Push-in installation
- Bendable, so it can also be used on curves

Dividing strip		No.
H40 L=3000 mm	10	**3 842 552 245**
H80 L=3000 mm	10	**3 842 552 246**


Material: PVC; signal gray RAL 7004

Connection element

- Extension of ends of cable ducts
- For connecting cable duct with curve
- ESD conductivity of both cable ducts can be established by using an overlapping cover and self-tapping screw (p. 11-6)

Connection element		No.
	10	**3 842 552 240**

Material: PA; signal gray RAL 7004

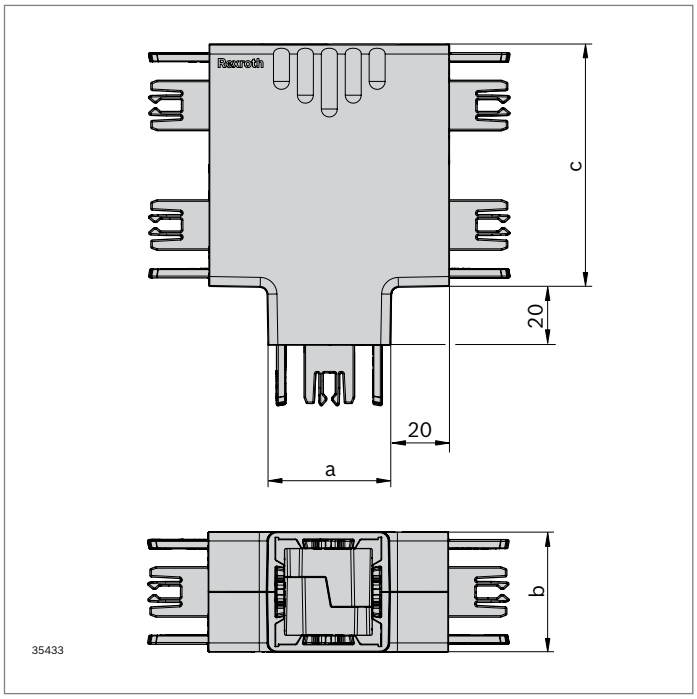

T-piece cable duct


- Modular design
- Cable ducts connected together with push-in connection elements
- Cable ducts can be made conductive by using supplied potential equalizer line
- VDE certified


T-piece cable duct	a (mm)	b (mm)	c (mm)	ESD*)	No.
40x40x40	40	40	40		**3 842 558 644**
40x40x80	40	40	80		**3 842 558 646**
40x80x40	40	80	40		**3 842 558 648**
40x80x80	40	80	80		**3 842 558 650**
80x40x40	80	40	40		**3 842 558 651**
80x40x80	80	40	80		**3 842 558 652**
80x80x40	80	80	40		**3 842 558 653**
80x80x80	80	80	80		**3 842 558 654**

Material: PP; signal gray RAL 7004

Scope of delivery: T-piece, connection elements, potential equalizer line

ESD*: Plastic has no conductivity. Using a potential equalizer, cable ducts can be connected in a conductive way






Cable hole

- For passing cables through within the cover


Cable hole			No.
40		10	**3 842 553 973**
80		10	**3 842 553 974**
Material:	PP; signal gray RAL 7004		




Potential equalizer

- DIN VDE 0100-410 compliant
- For connecting the cable duct to an earthed protective conductor

Potential equalizer			No.
10		10	**3 842 552 263**
Material:	Steel; zinc-plated		
Scope of delivery:	Grounding wire not available		







Cable holder

- For fixing the cable in the cable duct in the case of overhead mounting
- Recommendation: Insert every 200 mm

Cable holder			No.
40		10	**3 842 552 265**
80		10	**3 842 552 266**
Material:	PA6; signal gray RAL 7004		

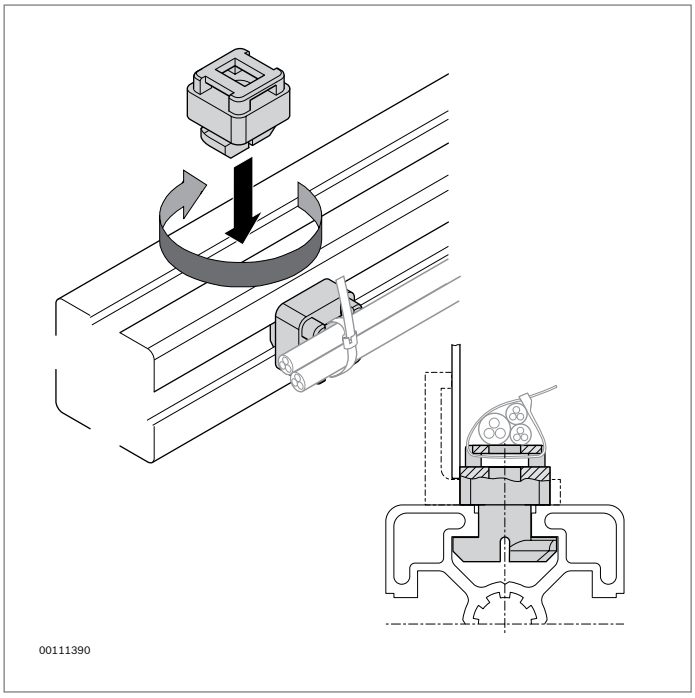


Cable bracket




- Cable bracket for fastening individual cables with cable ties
- For use behind panels or screens
- Dimensioned to match the Variofix block for slot 10 mm

Required accessories:
Cable ties




Cable bracket		Slot		No.
		8	100	**3 842 555 182**
		10	100	**3 842 555 180**
Material:	PA; signal gray RAL 7004			


11

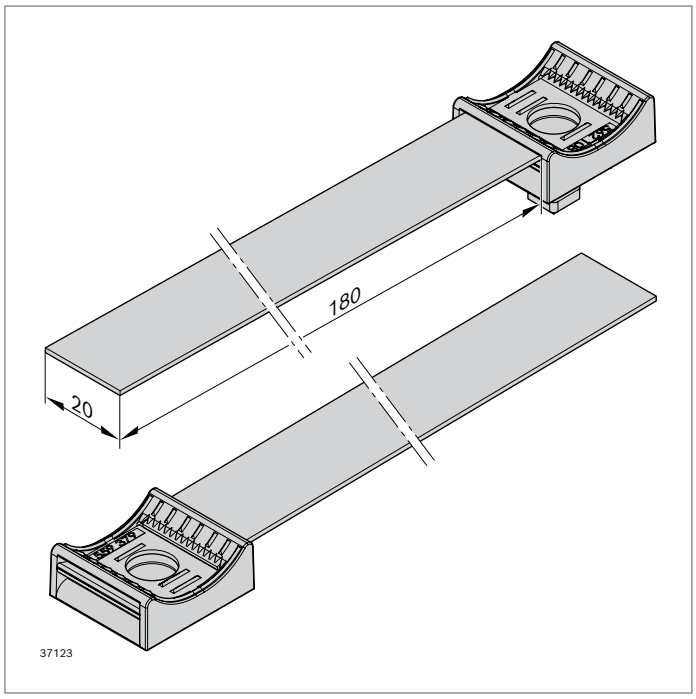

Cable bracket loop




- Cable bracket with Velcro strap for gentle guidance of cables and hoses
- Cable brackets with foot can be screwed into the slot without tools. Installation parallel or vertical to the slot possible.
- Cable bracket loop flat for assembly on panel elements or to EcoShape adapter (3 842 562 115)
- Clamping area: 5 ... 35 mm
- Length: L = 180 mm



Cable bracket loop	Slot		No.
	8	10	**3 842 559 381**
	10	10	**3 842 559 382**


Material:	Cable bracket: PP (conductive), black, UL certified Velcro strap: PP, PA (velour), UL certified
Scope of delivery:	Incl. Velcro strap, pre-assembled



- Accessories: Adapter D28L; countersunk screw

Cable bracket loop flat		No.
	10	**3 842 559 380**


Material:	Cable bracket: PP (conductive), black, UL certified Velcro strap: PP, PA (velour), UL certified
Scope of delivery:	Incl. Velcro strap, pre-assembled

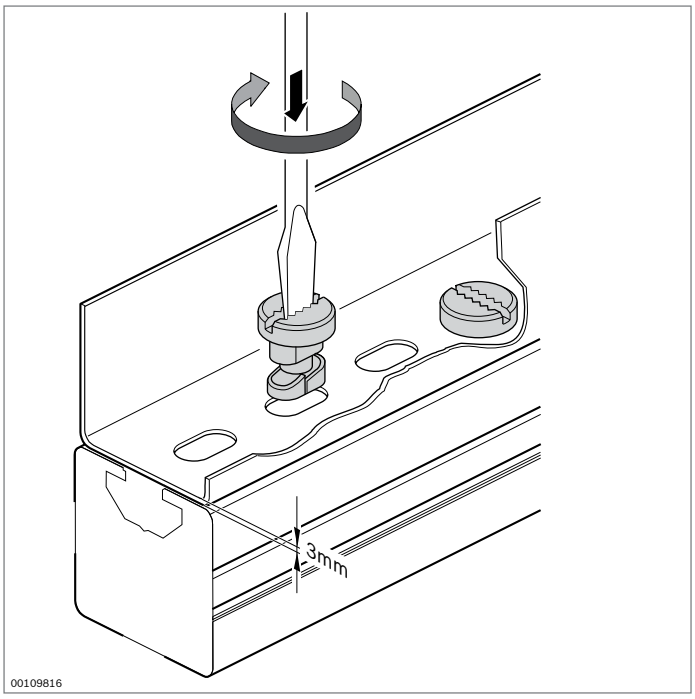

Quick-lock

10

- Quick-lock for fastening standard commercially available cable ducts



Quick-lock		No.
		100 **3 842 146 920**
Material:	PA; black	

11


Elements for manual movement




Slide hangers, snap hooks (p. 12-2)




Sliders for panel element (p. 12-3)



Components for sliding door (p. 12-4)




EcoSlide (p. 12-6)



Sliders for profiles (p. 12-13)




Support wheels (p. 12-17)



Rack, pinion (p. 12-18)




Conveyor track Lean (p. 12-19)




Conveyor track XLean (p. 12-24)



Conveyor track EcoFlow (p. 12-27)



Profiles for installing conveyor media (p. 12-33)

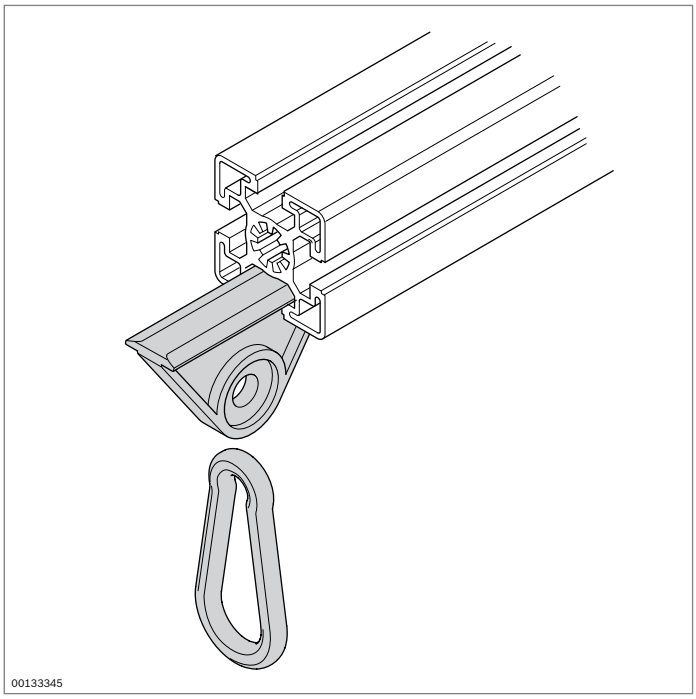

Slide hanger
Snap hook

10


Slide hanger

- Slide hanger as an inexpensive solution for sliding tool hangers
- Maximum load: 150 N
- Guide in the 10 mm profile slot
- Sliding block can be used as a stopper


Accessories: Sliding block as a stopper (see p. 3-7)

Snap hook


- Snap hook for fastening tools to the slide hanger:
  - Quick and easy to change



Slide hanger		No.
		3 842 218 953
Material:	POM; natural	



Snap hook		No.
		0 842 901 309
Material:	Steel; zinc-plated	

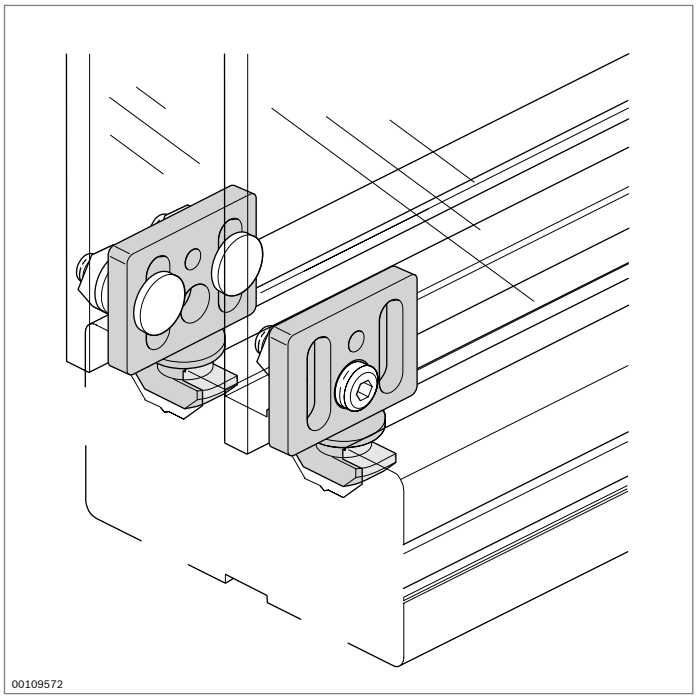


Slider for panel elements


10

- For the construction of sliding and lifting doors
- Good functional reliability
- For any thickness of the panel element or aluminum profile frame


Required accessories:
Screws and nuts/sliding blocks for fastening the panel elements

Accessories, optional:
Counterbalance in the case of lifting doors (p. 9-2)

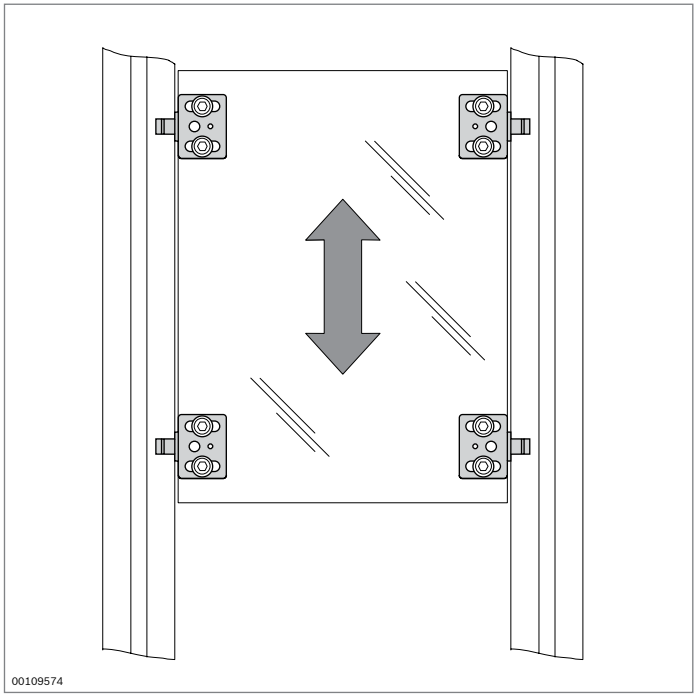




Slider		No.
	10	**3 842 564 170**
Material:	POM; signal gray RAL 7004	

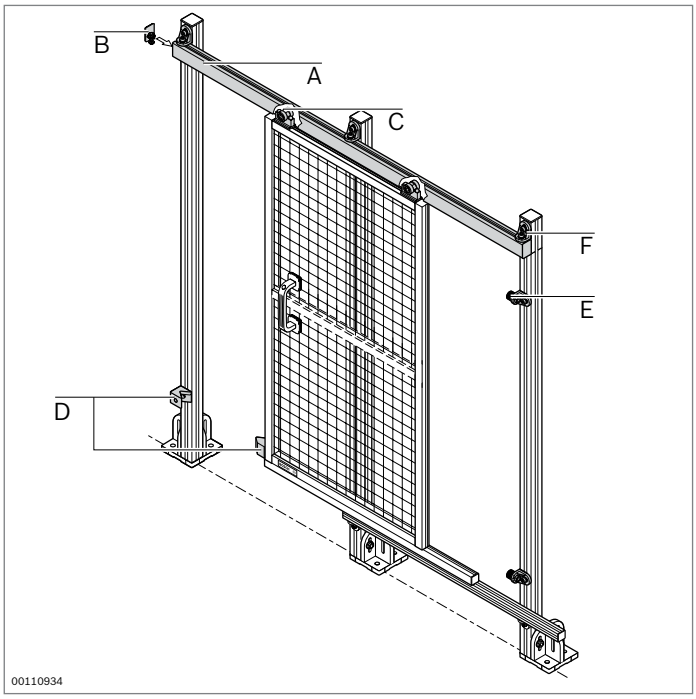

Components for sliding door

10


- Components for constructing sliding doors of different dimensions

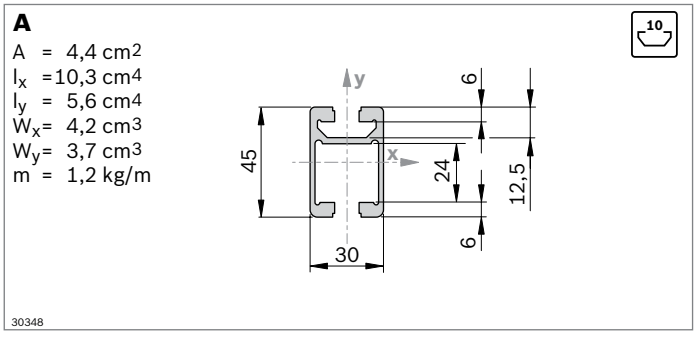


- Profile rail and trolley for movable mounting of parts, e.g. for use as a screwdriver hanger at work tables or for EcoSafe sliding doors (p. 10-34)

Profile rail 30x45C		L (mm)	No.
1 pc		50 ... 6070	**3 842 992 946 / L**
1 pc		6070	**3 842 558 312**
20 pcs		6070	**3 842 557 950**

Material: Aluminum; anodized






- Profile rail end piece for use for trolley as a cover cap with stop
- With screw protection


End piece 30x45C	Color	ESD		No.	FS
	Signal gray		20	**3 842 554 710**	FS1
	Black		20	**3 842 554 711**	FS1

Material: End piece: PA
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

C



FS2




- Trolley with dust-proof ball bearings for smooth sliding motion
- For fastening profiles with a 8 mm slot


Trolley	No.	FS
	3 842 524 153	2xFS2

Material:	PA; black / steel, zinc-plated Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)


D



FS3



FS4




- Stop kit for damped closing of the sliding door

Stop kit	No.	FS
	3 842 524 490	FS3, FS4

Material:	PA; black Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

E




- Bumper for a damped stop


Bumper		No.
	10	**3 842 510 462**

Material:	NBR; hardness 55° Shore A
Accessories:	Bracket set R28x38 for fastening to strut profiles with 10 mm slot


F



FS5



FS6




- Bracket for fastening the profile rail to strut profiles with 10 mm slot


Bracket	Slot	ESD	No.	FS
R28x38 Set (standard)	10 / 10		**3 842 521 580**	2xFS5, 4xFS6

Material:	Diecast zinc Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)


12

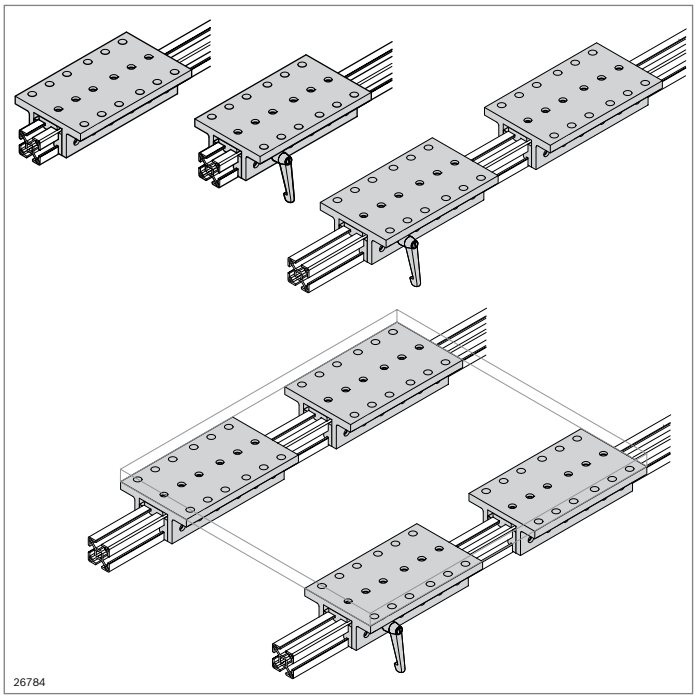


EcoSlide




- Economical linear sliding carriage for horizontal applications
- Runs on sliders for maximal load capacity
- Slider with low moisture absorption, suitable for rough application conditions
- Available for profile widths of 30/45/60/90
- Clamping lever (optional) for arresting in any position
- Easy to assemble
- Spacer washer for tolerance adjustment (carriage/profile)

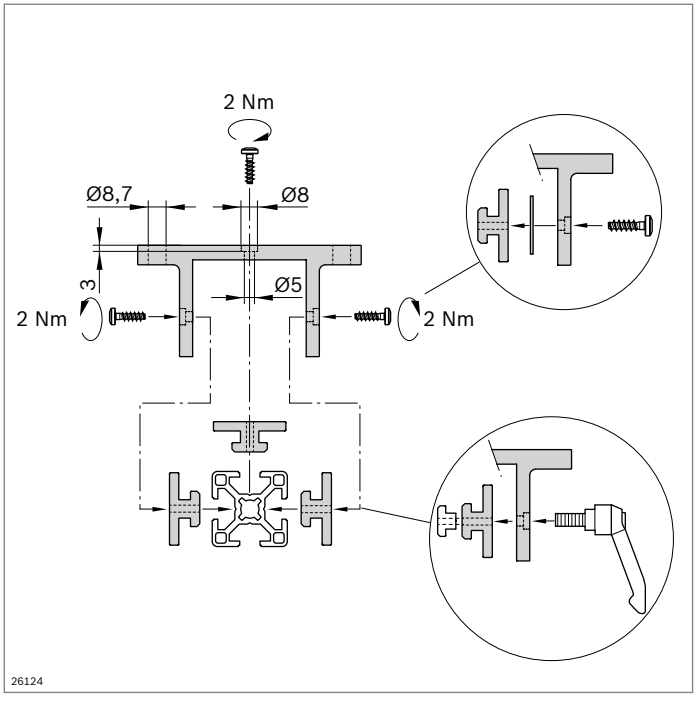

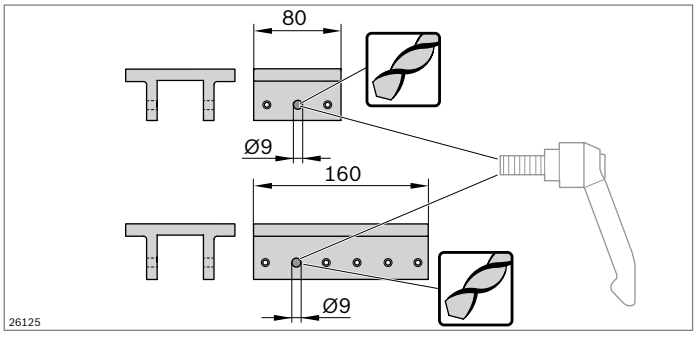

Machining tip

To install the clamping lever, the corresponding 9 mm hole must be drilled in the trolley.

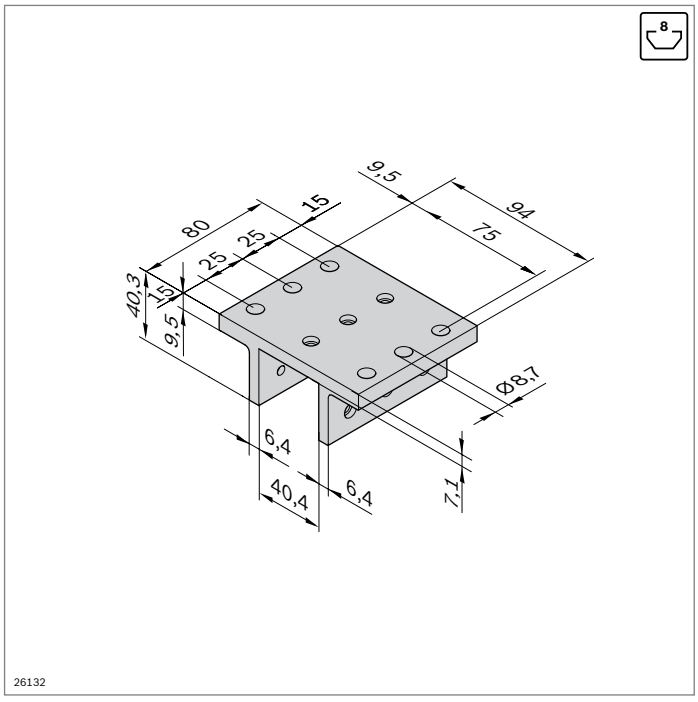

Fmax	Fmax	Mmax	Mmax
750 N	325 N	10 Nm	150 Nm

EcoSlide 30x30x80


- For use with profile width 30 mm
- Maximum sliding speed: 12 m/min

Trolley 30x30x80		No.
	1	**8 981 535 476**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 8 mm flat	10	**3 842 523 212**	3	2	12-13
Slider, slot 8 mm flat lockable	1	**3 842 552 423**	–	1	12-11
Spacer washer Slot 8 mm	4	**8 981 535 891**	X[1)]	X[1)]	12-11
Screw W1451 - 3.5x14 - 10.9	10	**3 842 552 421**	9	8	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 8 mm; M8	100	**3 842 514 931**	–	1	3-7

[1)] If required

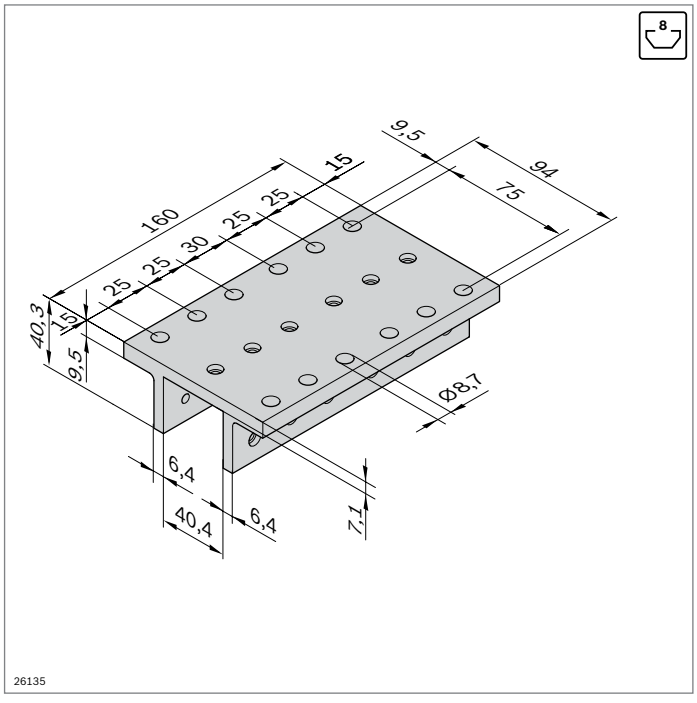

Fmax	Fmax	Mmax	Mmax
1500 N	750 N	20 Nm	200 Nm

EcoSlide 30x30x160


- For use with profile width 30 mm
- Maximum sliding speed: 12 m/min

Trolley 30x30x160		No.
	1	**8 981 535 477**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 8 mm flat	10	**3 842 523 212**	6	5	12-13
Slider, slot 8 mm flat lockable	1	**3 842 552 423**	–	1	12-11
Spacer washer Slot 8 mm	4	**8 981 535 891**	X[1)]	X[1)]	12-11
Screw W1451 - 3.5x14 - 10.9	10	**3 842 552 421**	18	17	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 8 mm; M8	100	**3 842 514 931**	–	1	3-7

[1)] If required

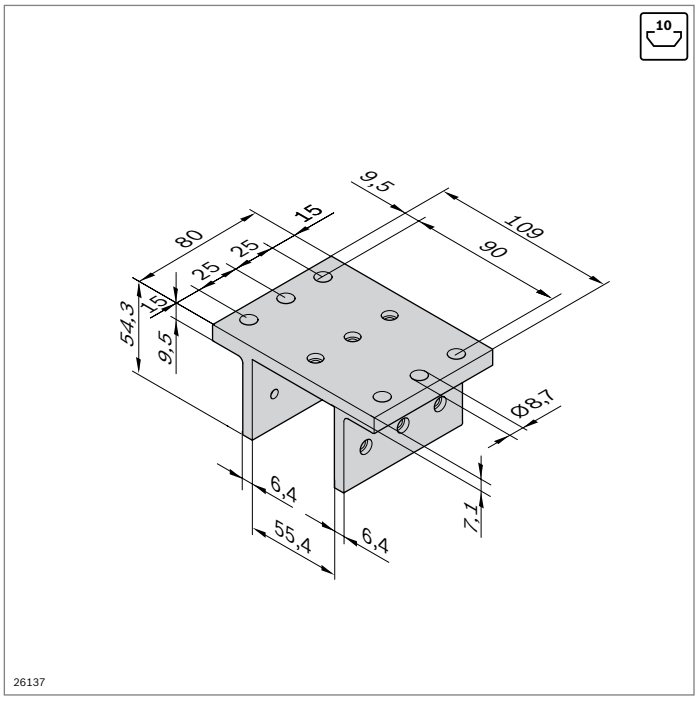

Fmax	Fmax	Mmax	Mmax
1250 N	625 N	40 Nm	150 Nm

EcoSlide 45x45x80


- For use with profile width 45 mm
- Maximum sliding speed: 12 m/min

Trolley 45x45x80		No.
	1	**8 981 535 323**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	3	2	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	9	8	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7

[1)] If required

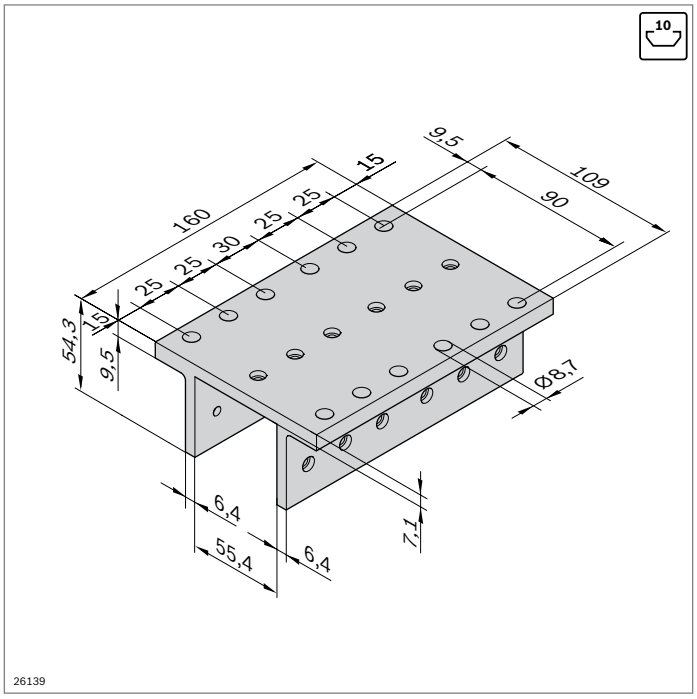

Fmax	Fmax	Mmax	Mmax
2500 N	1250 N	80 Nm	200 Nm

EcoSlide 45x45x160


- For use with profile width 45 mm
- Maximum sliding speed: 12 m/min

Trolley 45x45x160		No.
	1	**8 981 535 324**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	6	5	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	18	17	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7

[1)] If required

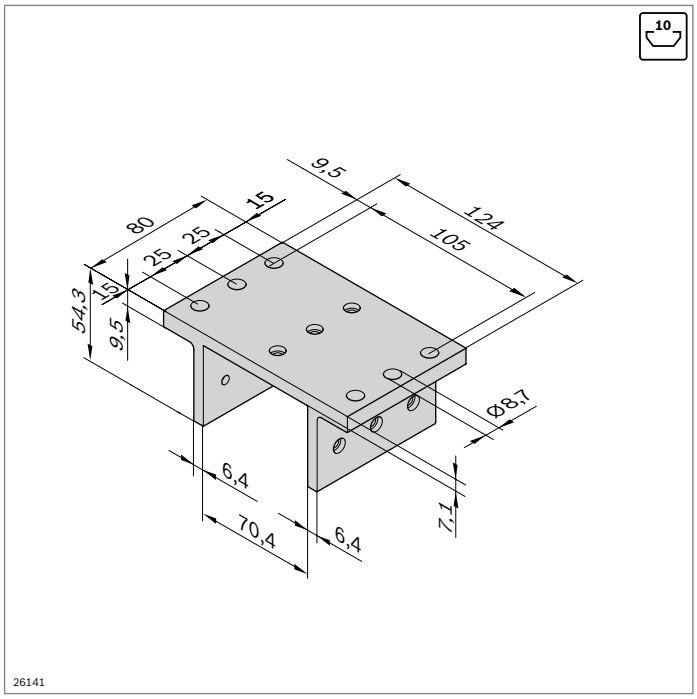

Fmax	Fmax	Mmax	Mmax
1250 N	625 N	40 Nm	150 Nm

EcoSlide 45x60x80


- For use with profile width 60 mm
- Maximum sliding speed: 12 m/min

Trolley 45x60x80		No.
	1	**8 981 535 478**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	3	2	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	9	8	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7

[1)] If required

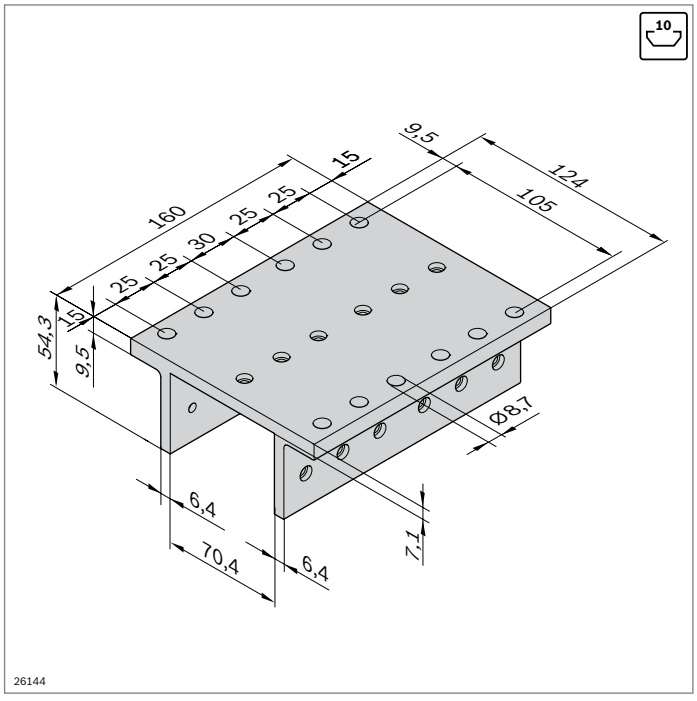

Fmax	Fmax	Mmax	Mmax
2500 N	1250 N	80 Nm	200 Nm

EcoSlide 45x60x160


- For use with profile width 60 mm
- Maximum sliding speed: 12 m/min

Trolley 45x60x160		No.
	1	**8 981 535 479**
Material:	Aluminum; anodized	

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	6	5	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	18	17	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7

[1)] If required

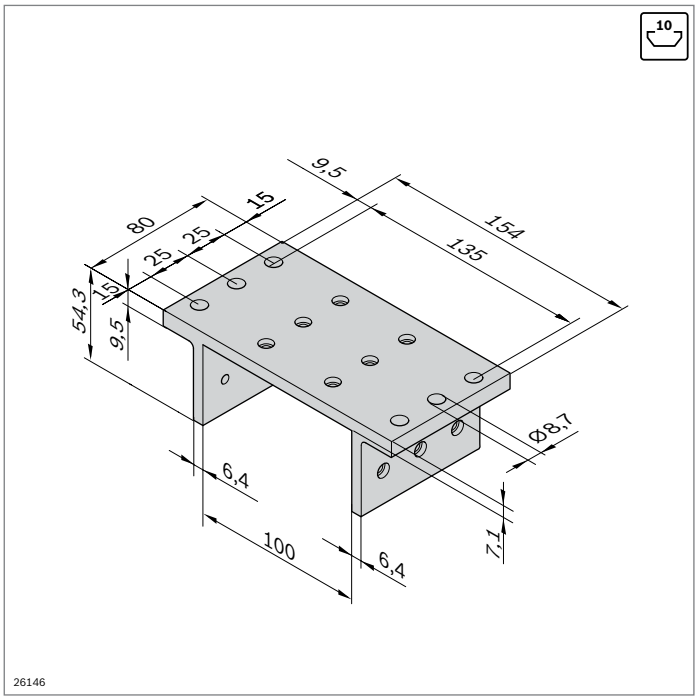

Fmax	Fmax	Mmax	Mmax
2500 N	1250 N	50 Nm	150 Nm

EcoSlide 45x90x80

- For use with profile width 90 mm
- Maximum sliding speed: 12 m/min


Trolley 45x90x80		No.
	1	**8 981 535 325**

Material: Aluminum; anodized

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	4	3	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	12	11	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7

[1)] If required

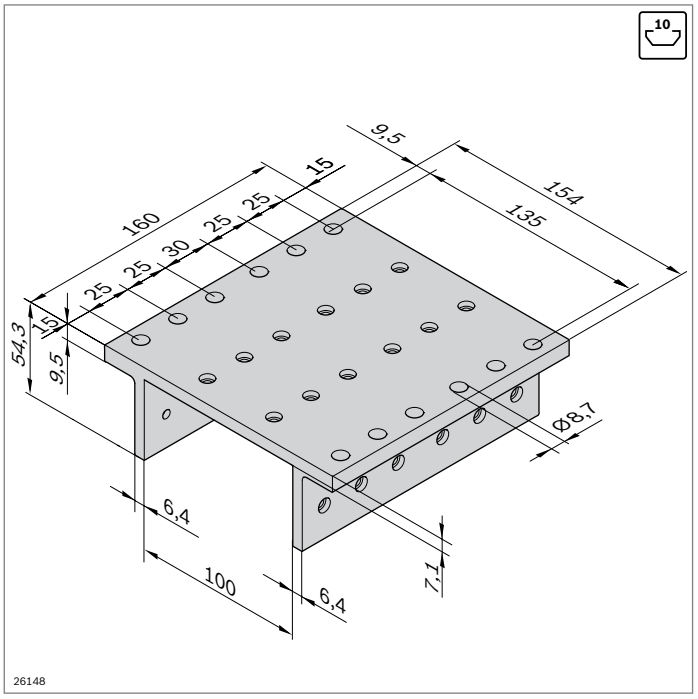

Fmax	Fmax	Mmax	Mmax
5000 N	2500 N	100 Nm	200 Nm

EcoSlide 45x90x160

- For use with profile width 90 mm
- Maximum sliding speed: 12 m/min


Trolley 45x90x160		No.
	1	**8 981 535 326**

Material: Aluminum; anodized

Accessories

		No.	Pcs	Pcs	Page
Slider, slot 10 mm flat	10	**3 842 530 329**	8	7	12-13
Slider, slot 10 mm flat lockable	1	**3 842 552 424**	–	1	12-11
Spacer washer Slot 10 mm	4	**8 981 535 890**	X[1)]	X[1)]	12-12
Screw W1452 - 4x18 - 10.9	10	**3 842 552 422**	24	23	12-12
Clamping lever, 20 mm	1	**3 842 516 846**	–	1	4-15
Sliding block Slot 10 mm, M8	100	**3 842 528 735**	–	1	3-7


[1)] If required

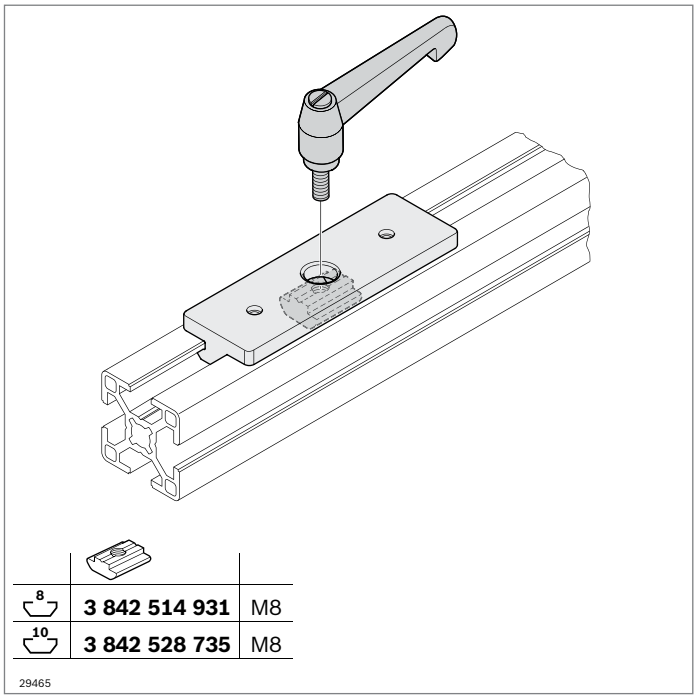

8	**3 842 514 931**	M8
10	**3 842 528 735**	M8


29465

Slider, flat lockable




- Suitable for clamping using a sliding block and a clamping lever
- For constructing low-wear guides

Accessories:
- Sliding blocks (p. 3-7)
- Clamping lever (p. 4-15)




26782




26783

Slider, flat lockable	Slot		No.
	8	1	**3 842 552 423**

Material:	POM; natural
Accessories:	Sliding block, T-nut, slot 8 (M8), 3 842 514 931, p. 3-7




26781




26133

Spacer washer	Slot		No.
77x23	8	4	**8 981 535 891**

Material:	Steel; plain




26779




26780


Slider, flat lockable	Slot		No.
	10	1	**3 842 552 424**

Material:	POM; natural
Accessories:	Sliding block, T-nut, slot 10 (M8), 3 842 528 735, p. 3-7






Spacer washer	Slot		No.
77x36	10	4	**8 981 535 890**
Material: Steel; plain			



Plastic self-tapping screw	Slot		No.
W1451 - 3.5x14 - 10.9	8	10	**3 842 552 421**
W1452 - 4x18 - 10.9	10	10	**3 842 552 422**
Material: Steel; zinc-plated			

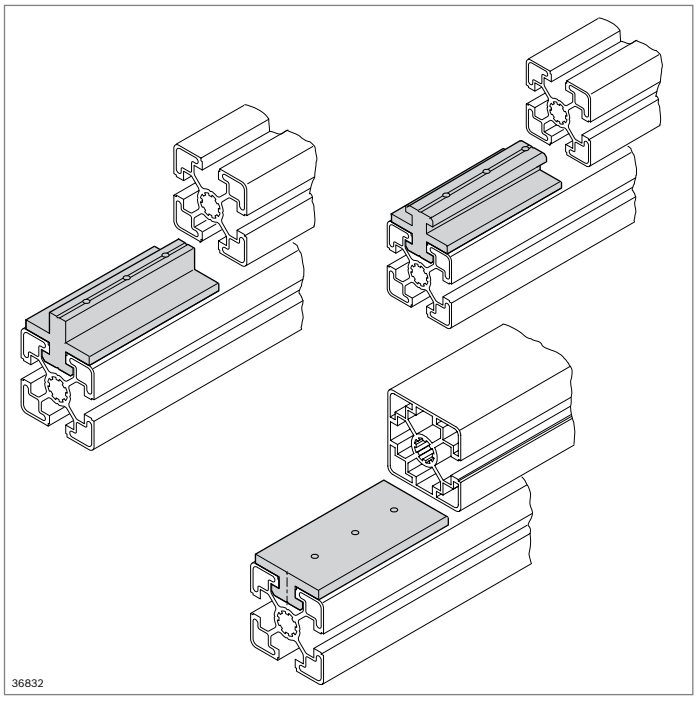


Slider for profiles




Slider


- For the construction of low-wear guides, e.g. for manual sliding and sliding and lifting doors, as well as drawer slides


Accessories, optional:
Self-tapping screws for fastening the slider in a profile slot







Slider, flat		No.
	10	**3 842 523 213**
Material:	POM; natural	







Slider, flat		No.
	10	**3 842 523 212**
Material:	POM; natural	







Slider, flat		No.
	10	**3 842 530 329**
Material:	POM; natural	







Slider, center			No.
		10	**3 842 523 210**
Material:	POM; natural		







Slider, center			No.
		10	**3 842 523 206**
Material:	POM; natural		






Slider, center			No.
		10	**3 842 523 209**
Material:	POM; natural		







Slider, center			No.
		10	**3 842 523 205**
Material:	POM; natural		




Offset sliders


- For constructing multiple sliding doors






Slider, offset		No.
	10	**3 842 523 211**
Material:	POM; natural	






Slider, offset		No.
	10	**3 842 523 207**
Material:	POM; natural	

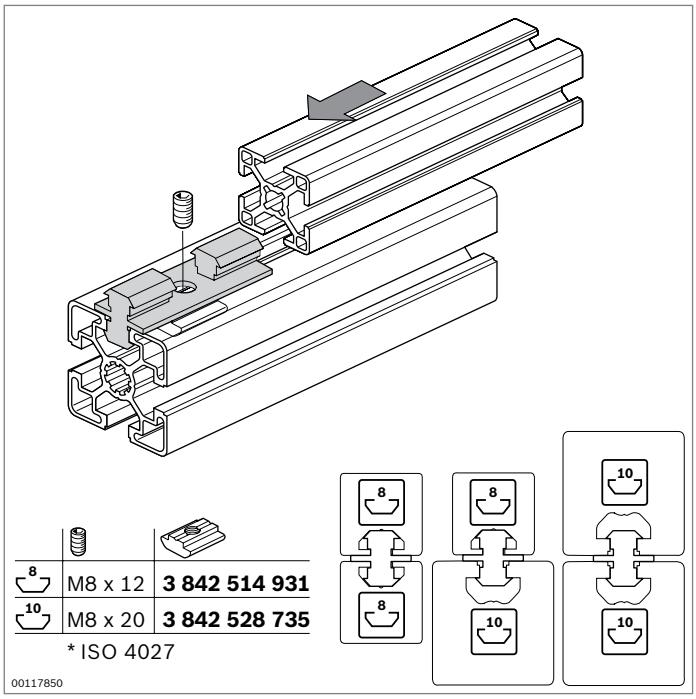



Multi-slider




- Multi-slider for constructing low-wear guides
- Suitable for all profiles with 8 mm and 10 mm slot widths
- Combination of profiles with different slot widths possible

Accessories:
Headless setscrew (ISO 4027) and sliding block (p. 3-7) for fastening the slider in the profile slot







Multi-slider 8/10			No.
		10	**3 842 513 517**
Material:	POM; natural		

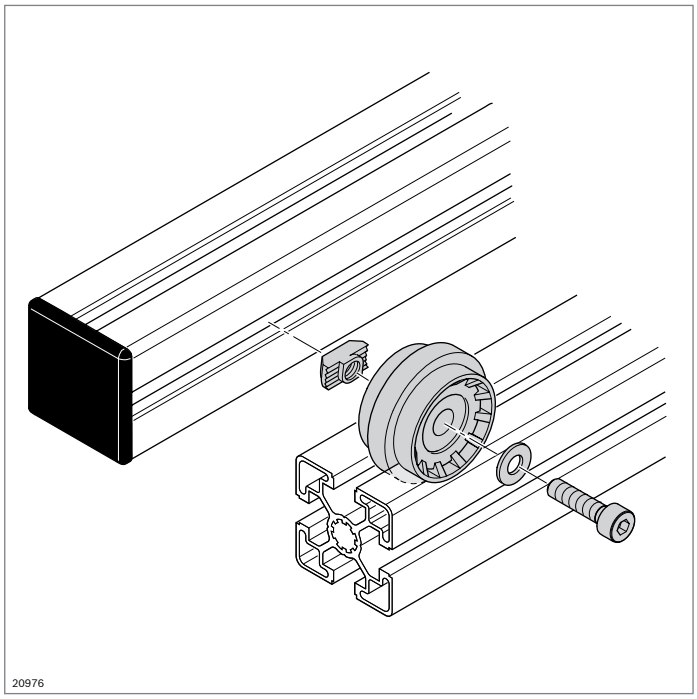


Support wheels

- Support wheel for constructing trolleys or roller sections
- Mounted on profiles with 10 mm slot
- Good running characteristics thanks to deep-groove ball bearing with large diameter
- Support wheel with rim can be guided in 10 mm slot
- ESD-conductive










Support wheel	ESD		No.	FS
	ESD	10	**3 842 218 942**	FS1

Material: PA; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)










Support wheels with center rim	ESD		No.	FS
	ESD	10	**3 842 218 940**	FS1

Material: PA; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)








Support wheels with side rim	ESD		No.	FS
	ESD	10	**3 842 218 941**	FS1

Material: PA; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

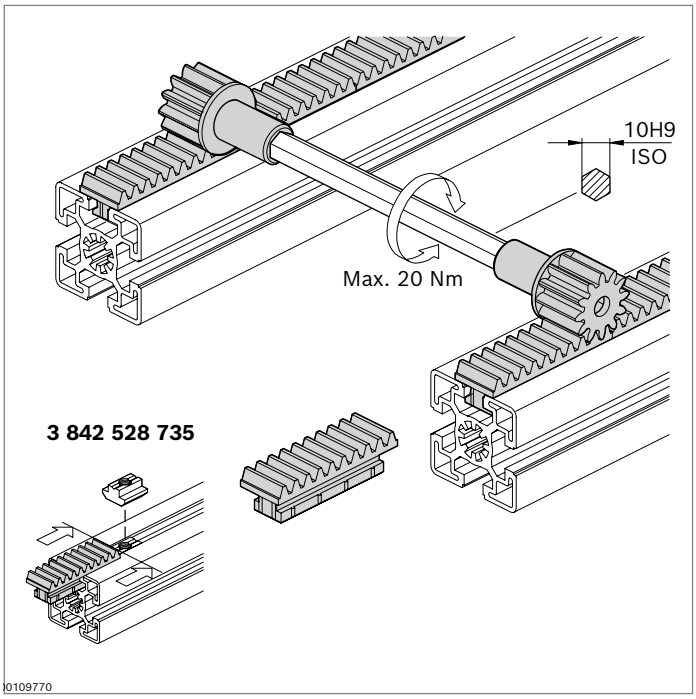


Rack
Pinion

10


- For constructing synchronous shafts to prevent tilting in the case of large guide widths

Required accessories:


- Standard commercially available hexagonal shaft 10H9
- Sliding block for fixing the rack in the slot (p. 3-7)

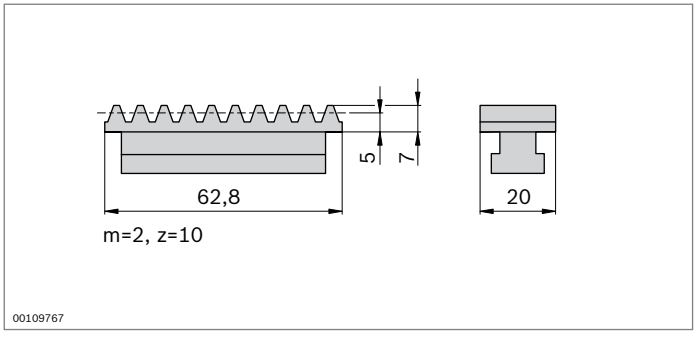

Rack			No.
		10	**3 842 501 578**
Material:	PA; black		

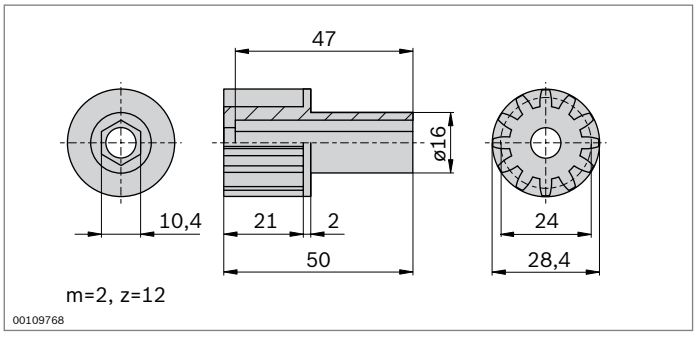

Pinion		No.
		3 842 501 576
Material:	POM; white	

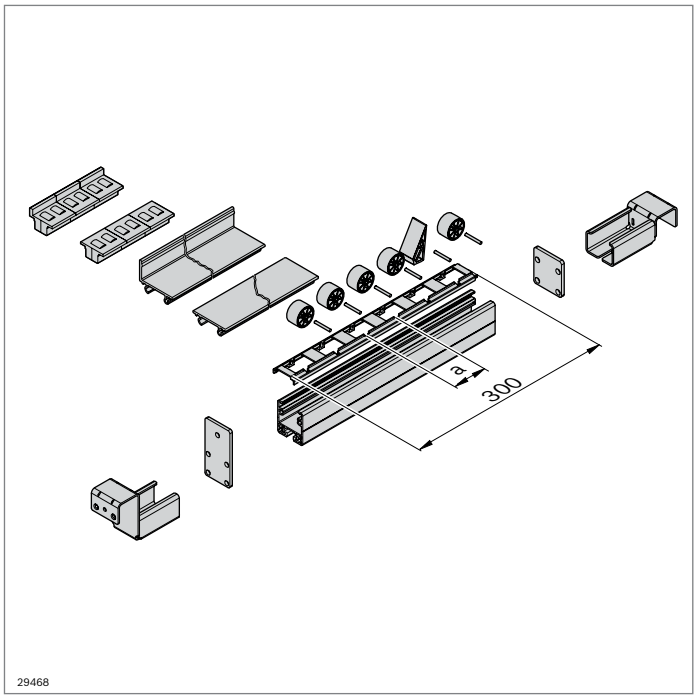


Elements for the construction of conveyor track Lean

- Components for constructing manual conveyor sections
- Based on multi-functional U-profile
- Clip-in conveyor elements for all requirements:
  - Rollers with or without flange; four colors to visually identify inventories (kanban) or to differentiate between good/reject parts
  - Slide rails with or without integrated lateral guide (GSSK, GS)
  - Roller elements with and without roller flange (RE45SK, RE45)

Accessories:
Round tube D28 (p. 2-76)

U-profile


A = 4,4 cm²
I_x = 10,4 cm⁴
I_y = 8,3 cm⁴
W_x = 4,6 cm³
W_y = 4,1 cm³
m = 1,2 kg/m



- U-profile with 10 mm slot

U-profile		L (mm)	ESD	No.
1 pc		30 ... 6070		**3 842 993 316 / L**
1 pc		6070		**3 842 564 223**
20 pcs		6070		**3 842 535 115**
1 pc		30 ... 6070	ESD	**3 842 995 027 / L**
20 pcs		6070	ESD	**3 842 541 814**


Material: U-profile: Aluminum, anodized
U-profile ESD: Aluminum; untreated



- Roller carrier for rollers D32 and D32SK (p. 12-20)

Roller carrier	a (mm)	ESD		No.
D32/37.5	37.5		20	**3 842 537 944**
		ESD	20	**3 842 537 945**
D32/50	50		20	**3 842 532 887**
		ESD	20	**3 842 538 094**
D 32SK/50	50		20	**3 842 532 886**
		ESD	20	**3 842 537 947**


Material: ABS




▶ Steel axle for rollers D32, D32SK

Steel axle	ESD		No.
		100	**3 842 532 862**


Material: Steel; stainless






Roller	Color	ESD		No.
D32	Black		100	**3 842 532 865**
			100	**3 842 537 961**
	Red		100	**3 842 532 866**
			100	**3 842 537 960**
	Yellow		100	**3 842 532 870**
			100	**3 842 537 959**
	Green		100	**3 842 532 752**
			100	**3 842 537 958**


Material: PE; colored / ESD made of PA, colored






Roller	Color	ESD		No.
D32SK	Black		100	**3 842 532 867**
			100	**3 842 537 965**
	Red		100	**3 842 532 883**
			100	**3 842 537 964**
	Yellow		100	**3 842 532 884**
			100	**3 842 537 963**
	Green		100	**3 842 532 880**
			100	**3 842 537 962**

Material: PE; colored / ESD made of PA, colored







Brake	ESD		No.
D32/37.5		20	**3 842 537 948**
D32/50, D32SK/50		20	**3 842 532 881**

Material: Steel; zinc-plated

GS







- Slide rail GS for constructing conveyor tracks with large gradients
- Slide rail for use with heavy containers

Slide rail	Color	L (mm)	ESD		No.
GS	Dusty gray	3000		20	**3 842 535 124**
	Black	3000	⚠	20	**3 842 537 803**
Material:	PVC				

GSSK







- Slide rail with lateral guide GSSK for constructing conveyor tracks with large gradients
- Slide rail for use with heavy containers

Slide rail	Color	L (mm)	ESD		No.
GSSK	Dusty gray	3000		20	**3 842 537 806**
	Black	3000	⚠	20	**3 842 537 807**
Material:	PVC				


RE45SK






Roller element	Color	ESD		No.
RE45SK	Signal gray		100	**3 842 554 748**
	Black	⚠	100	**3 842 538 065**
Material:	PA			


RE45






Roller element	Color	ESD		No.
RE45	Signal gray		100	**3 842 554 746**
	Black	⚠	100	**3 842 538 064**
Material:	PA			


RE39





Roller element	Color	ESD		No.
RE39	Black		10	**3 842 520 000**
	Black	⚠	10	**3 842 538 245**
Material:	PA Axis: Steel			

12




FS1

S6x16-T25

Stop plate with stop	ESD		No.	FS
40x80		20	**3 842 535 121**	4xFS1

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




FS1

S6x16-T25

Stop plate without stop	ESD		No.	FS
40x45		20	**3 842 535 122**	4xFS1

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




FS2

M8x12

10

Rail holder with stop	ESD		No.	FS
		20	**3 842 537 660**	FS2

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




FS2

M8x12

10


Rail holder without stop	ESD		No.	FS
		20	**3 842 537 661**	FS2

Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)




Stopper XLean/Lean	ESD		No.
		10	**3 842 552 151**

Material: PP




FS3




Tube clamp D28		No.	FS
	20	**3 842 535 364**	2xFS3

Material:	Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)




FS4




Holder for strut profile D28x55		No.	FS
	20	**3 842 537 720**	2xFS4

Material:	Diecast aluminum Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)




FS5



- Flexible bridge with maximum tilt (α_{max}) from horizontal:
  - With round tube D28 (p. 2-76): α_{max} = 40°
  - With strut profile D28x55 (p 2-77): α_{max} = 30°

Flexible bridge		No.	FS
	20	**3 842 537 951**	FS5


Material:	Steel; zinc-plated Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)

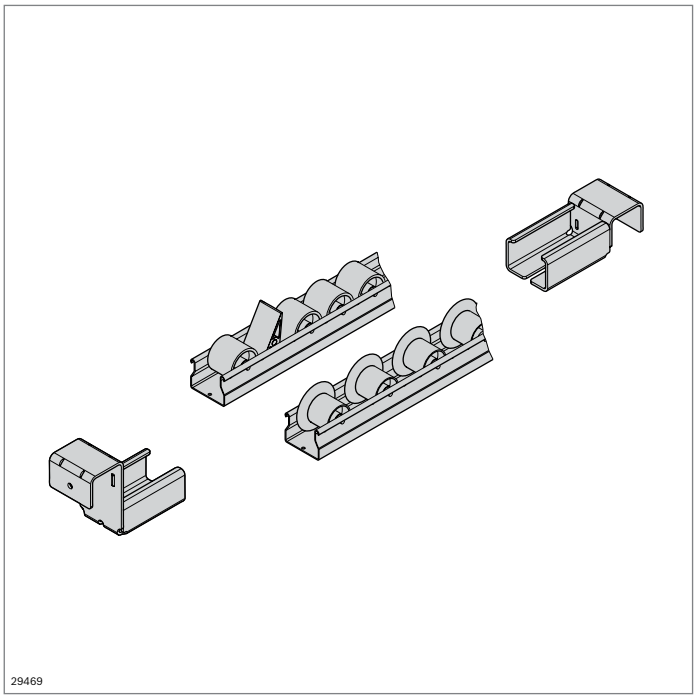

Elements for the construction of conveyor track XLean

- Conveyor track made of steel profiles with plastic rollers and optional roller flange
- Available as ESD-conductive version.
- Self-supporting roller section
- Roller section with drill holes for fastening


Accessories:
Round tube D28 (p. 2-76)






* per roller


Roller section	Color	L (mm)	ESD		No.
D28	Gray	100 ... 4500		1	**3 842 993 321 / L**
		4500		50	**3 842 537 776**
	Black	100 ... 4500		1	**3 842 993 431 / L**
		4500		50	**3 842 537 778**
Material:	Rail: Steel, zinc-plated Roller: PP				






* per roller


Roller section	Color	L (mm)	ESD		No.
D28SK	Gray	100 ... 4500		1	**3 842 993 322 / L**
		4500		50	**3 842 537 777**
	Black	100 ... 4500		1	**3 842 993 432 / L**
		4500		50	**3 842 537 779**
Material:	Rail: Steel, zinc-plated Roller: PP				




Brake		No.
	20	**3 842 532 871**
Material:	Strip steel; galvanized	




Rail holder with stop			No.
		20	**3 842 538 372**
Material:	Steel; zinc-plated		




Rail holder without stop			No.
		20	**3 842 537 687**
Material:	Steel; zinc-plated		




Section link			No.
		20	**3 842 536 722**
Material:	Steel; zinc-plated		




Stopper XLean/Lean		ESD		No.
		✓	10	**3 842 552 151**
Material:	PP			




Bridge			No.
		20	**3 842 536 724**
Material:	Steel; zinc-plated		






- Flexible bridge with maximum tilt (α_{max}) from horizontal:
  - With round tube D28 (p. 2-76): α_{max} = 40°
  - With strut profile D28x55 (p 2-77): α_{max} = 30°


Flexible bridge			No.
		20	**3 842 537 911**
Material:	Steel; zinc-plated		



Mounting			No.
		20	**3 842 537 657**
Material:	Steel; zinc-plated		




Cover cap XLean	Color	ESD		No.
	Black		20	**3 842 562 077**
Material:	PP			

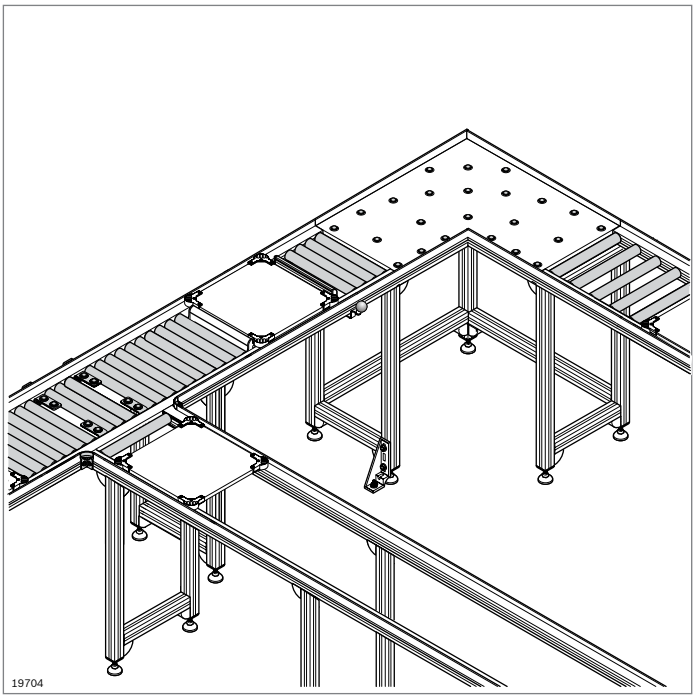


Elements for the construction of conveyor track EcoFlow

- Based on EcoFlow section profile
- For manual slide sections with rollers
- Clip-in guide profiles with lateral guide and clip-in conveyor rollers

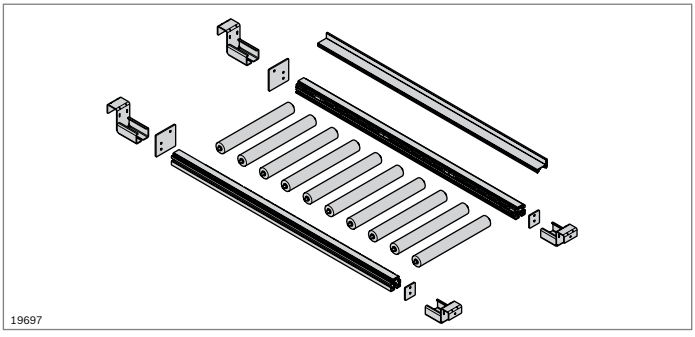


MV45x45


A = 6,2 cm²
I_x = 11,8 cm⁴
I_y = 10,5 cm⁴
W_x = 5,3 cm³
W_y = 4,7 cm³
m = 1,7 kg/m




Section profile MV45x45		L (mm)	No.
1 pc		30 ... 6070	**3 842 993 029 / L**
1 pc		6070	**3 842 537 357**
20 pcs		6070	**3 842 537 321**
Material:	Aluminum; anodized		




Guide profile MV45	Color	L (mm)	ESD		No.
	Signal gray RAL 7004	70 ... 3000		1	**3 842 996 432**
	Signal gray RAL 7004	3000		10	**3 842 554 758**
	Black	70 ... 3000	⚠	1	**3 842 993 512 / L**
	Black	3000	⚠	10	**3 842 526 034**
Material:	PVC				






EcoFlow roller carrier	ESD		No.
	ESD	10	**3 842 535 683**

Material: ABS; black







Roller fixation	Slot		No.	FS
	8	10	**3 842 535 667**	FS1
	10	10	**3 842 535 668**	FS2


Material: Roller fixation: PA6; black
Fastening material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)

FS1





FS2



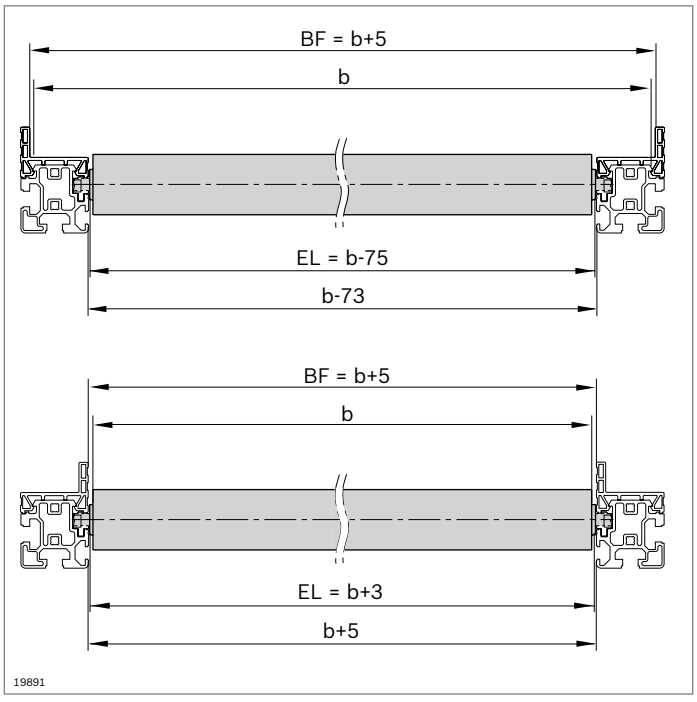


EcoFlow roller	F_{max} (N)	EL (mm)	ESD	No.
Plastic, gray	150	105 ... 605		**3 842 994 989 / L**
		225		**3 842 525 740**
		325		**3 842 525 741**
		425		**3 842 525 742**
		525		**3 842 537 164**
Steel; zinc-plated	500	105 ... 1005	ESD	**3 842 994 988 / L**
		225	ESD	**3 842 525 737**
		325	ESD	**3 842 525 738**
		425	ESD	**3 842 525 739**
		525	ESD	**3 842 537 163**
Stainless steel	150	105 ... 1005		**3 842 995 008 / L**






F_{max}=500 N




- Ball roller for smooth manual movement of goods with large surfaces


Ball roller	ESD		No.
		20	**3 842 541 008**
Material:	Housing: Steel; zinc-plated Ball: Stainless steel		



F_{max}=300 N




Ball roller EcoFlow Plastic		No.
	20	**3 842 564 744**
Material:	Housing: POM Ball: POM	



FS1




Transverse conveyor	ESD		No.	FS
		Set	**3 842 536 055**	8xFS1
Material:	Bracket Steel; zinc-plated Ball: Stainless steel			
Scope of delivery:	Incl. 4 x bracket plates, fastening material (FS) for 8 mm slot			



FS2



Corner piece	ESD		No.	FS
		Set	**3 842 536 056**	4xFS2
Material:	PA; black			
Scope of delivery:	Incl. 2 x corner connector, fastening material (FS) for 10 mm slot			



FS3



FS4



FS5




FS6




Stop		No.	FS
	Set	**3 842 536 057**	2xFS3, 4xFS4, 2xFS5 2xFS6
Material:	Aluminum; anodized		
Scope of delivery:	Incl. 2 x stop, fastening material (FS)		

12

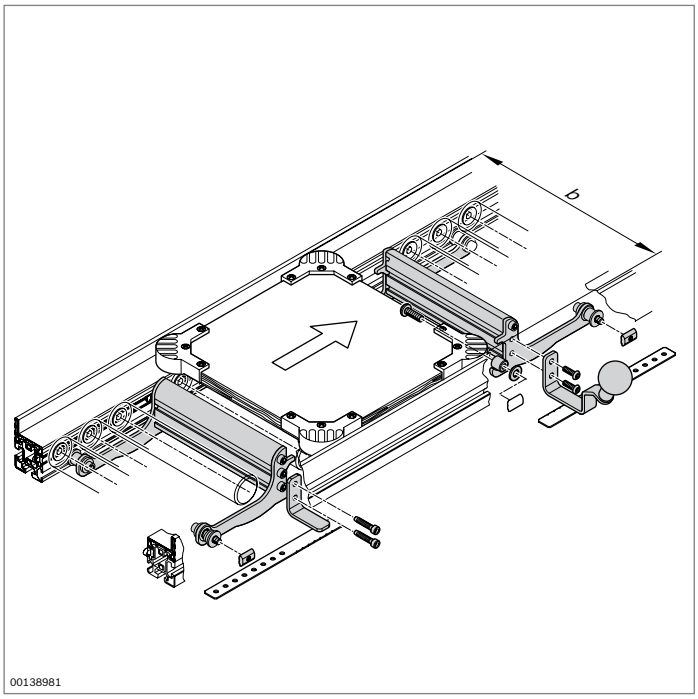


EcoFlow stop gates and return stops

- Stop gate and return stop for positioning workpiece pallets or containers
- At the planning stage remember to leave sufficient leg room. The stop gate and return stop require 45 mm more space below the bottom
- We recommend using a workpiece pallet with corner pieces (p. 12-31) to provide a defined stopping mechanism



Stop gate	**EL** (mm)	**No.**
	105 ... 1005	**3 842 995 007 / EL**
	225	**3 842 537 894**
	325	**3 842 537 895**
	425	**3 842 537 896**
	525	**3 842 537 897**


Scope of delivery: Incl. Fastening material
Condition on delivery: As components (pre-assembled)




Return stop	**EL** (mm)	**No.**
	105 ... 1005	**3 842 995 017 / EL**
	225	**3 842 537 898**
	325	**3 842 537 899**
	425	**3 842 537 900**
	525	**3 842 537 901**

Scope of delivery: Incl. Fastening material
Condition on delivery: As components (pre-assembled)


EcoFlow accessories






- Protective cover to protect the EcoFlow guide profile when loading the conveyor track


Protective cover		No.	FS
Outer slide rail	Set	**3 842 537 583**	4xFS1
Material:	Steel; zinc-plated		
Scope of delivery:	Incl. 2 x protective cover, fastening material (FS)		






- Protective cover to protect the EcoFlow guide profile when loading the conveyor track

Protective cover		No.	FS
Inner slide rail	Set	**3 842 537 584**	4xFS1
Material:	Steel; zinc-plated		
Scope of delivery:	Incl. 2 x protective cover, fastening material (FS)		




- Brake for bringing containers to a stop gently

Brake		No.
	20	**3 842 537 740**
Material:	Steel; zinc-plated	

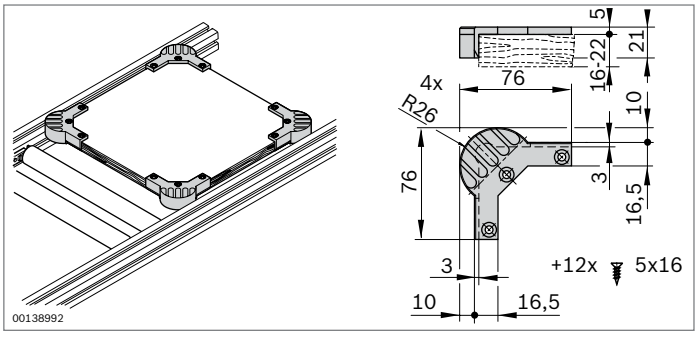

- Corner pieces for assembly of workpiece pallets
- For isolating parts from the pallet queue, well-defined guidance and stopping surfaces, good transition through curves and avoidance of edges where trapping may occur


Corner pieces for workpiece pallets	ESD		No.
		Set	**3 842 536 054**
Material:	PA; black		



FS5
M8x12-10.9-VZ
10 M8

Rail holder with stop		No.	FS
	20	**3 842 537 664**	FS5


Material: Steel; zinc-plated
Accessories: Round tube D28 (p. 2-76)
Scope of delivery: Incl. fastening material (FS)



FS5
M8x12-10.9-VZ
10 M8

Rail holder without stop		No.	FS
	20	**3 842 537 665**	FS5


Material: Steel; zinc-plated
Accessories: Round tube D28 (p. 2-76)
Scope of delivery: Incl. fastening material (FS)



FS6
S6x16-T25

Stop plate with stop		No.	FS
	20	**3 842 537 593**	2xFS6


Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)



FS6
S6x16-T25

Stop plate without stop		No.	FS
	20	**3 842 537 592**	2xFS6


Material: Steel; zinc-plated
Scope of delivery: Incl. fastening material (FS)



- Flexible bridge with maximum tilt (α_{max}) from horizontal:
  - With round tube D28 (p. 2-76): α_{max} = 40°
  - With strut profile D28x55 (p 2-77): α_{max} = 30°

Flexible bridge		No.
	20	**3 842 537 950**

Material: Steel; zinc-plated

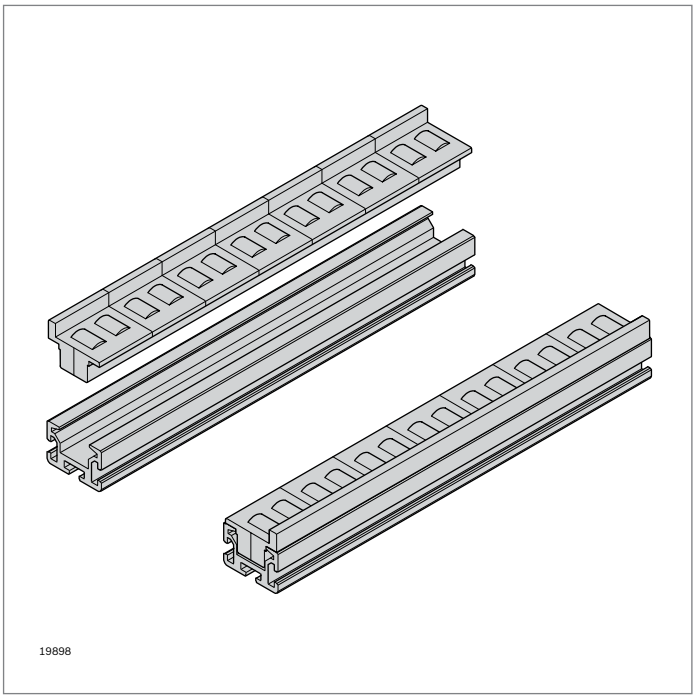


Conveyor track made of section profiles and roller elements

- Economical solution for manual slide sections
- Roller elements can be clipped in

Accessories:
Roller elements (p. 12-21)

SP 2/R

A = 5,2 cm²
I_x = 4,3 cm⁴
I_y = 11,7 cm⁴
W_x = 2,4 cm³
W_y = 5,2 cm³
m = 1,4 kg/m

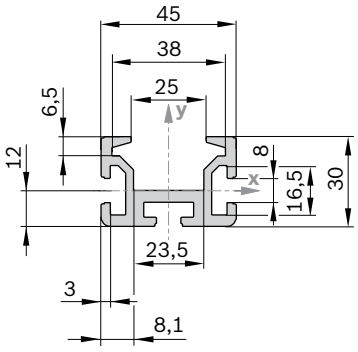


Section profile SP 2/R		L (mm)	No.
		50 ... 6000	**3 842 992 676 / L**
Material:	Aluminum, natural-colored, anodized		

12

SP 2/B

A = 10,4 cm²
I_x = 49,6 cm⁴
I_y = 25,8 cm⁴
W_x = 12,1 cm³
W_y = 11,5 cm³
m = 2,8 kg/m

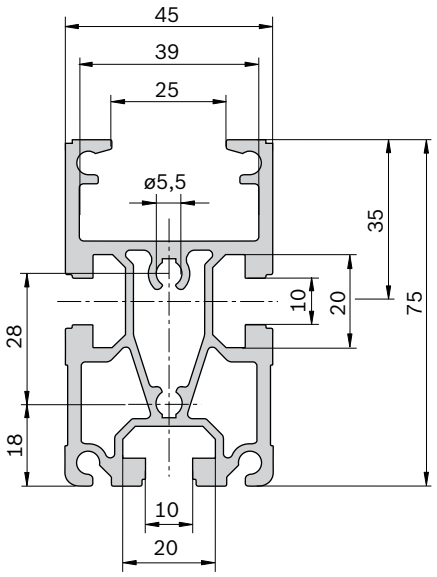


19604

Section profile SP 2/B		Slot	L (mm)	No.
1 pc		10	200 ... 6070	**3 842 992 884 / L**
16 pcs		10	6070	**3 842 532 695**

Material: Aluminum, natural-colored, anodized

SP 2/B-50

A = 6,9 cm²
I_x = 46,2 cm⁴
I_y = 16,9 cm⁴
W_x = 5,3 cm³
W_y = 7,5 cm³
m = 1,9 kg/m




19605

Section profile SP 2/B-50		Slot	L (mm)	No.
1 pc		8 / 10	200 ... 6070	**3 842 992 903 / L**
20 pcs		8 / 10	6070	**3 842 532 697**

Material: Aluminum, natural-colored, anodized

SP 2/B-100

A = 11,9 cm²
I_x = 95,1 cm⁴
I_y = 30,4 cm⁴
W_x = 20,0 cm³
W_y = 13,5 cm³
m = 3,2 kg/m

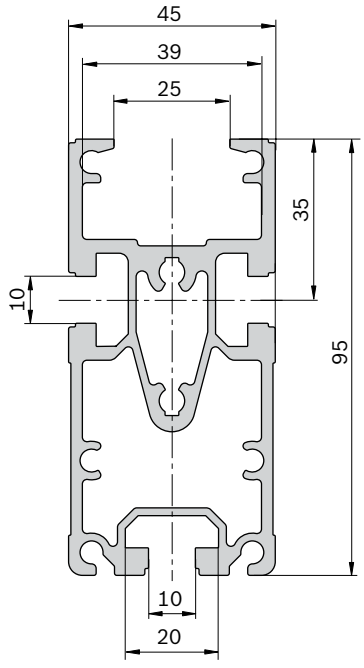


19606

Section profile SP 2/B-100		Slot	L (mm)	No.
1 pc			200 ... 6070	**3 842 993 259 / L**
16 pcs		10	6070	**3 842 532 608sw**

Material: Aluminum, natural-colored, anodized

SP 2/BH

A = 12,4 cm²
I_x = 53,7 cm⁴
I_y = 28,6 cm⁴
W_x = 14,0 cm³
W_y = 13,8 cm³
m = 3,3 kg/m

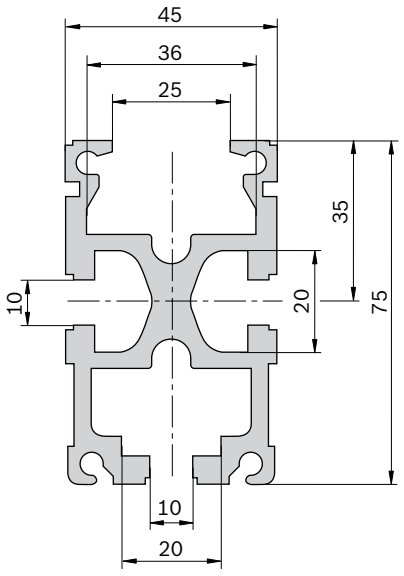


19607

Section profile SP 2/BH	Slot	L (mm)	No.
1 pc	10	200 ... 6070	**3 842 990 409 / L**
16 pcs	10	6070	**3 842 532 696**


Material: Aluminum, natural-colored, anodized

12


Linear guides




Cam roller guide LF6C
(p. 13-6)




Cam roller guide LF12S
(p. 13-11)



Cam roller guide LF12C
(p. 13-18)




Cam roller guide LF20S
(p. 13-25)



Cam roller guide LF20C
(p. 13-32)



Plug-in shafts, synchronous shafts (p. 13-42)




Design (p. 13-44)





Linear guides

- For constructing linear guides based on cam roller guides
- Cam roller guides are suitable for applications with high speeds and medium loads, in particular for the construction of handling equipment, feed systems, guides in work machines, and many other applications.
- Fully pre-assembled in any required length or as individual components for assembly on site
- Without drive or with toothed belt drive for attaching gears and motors

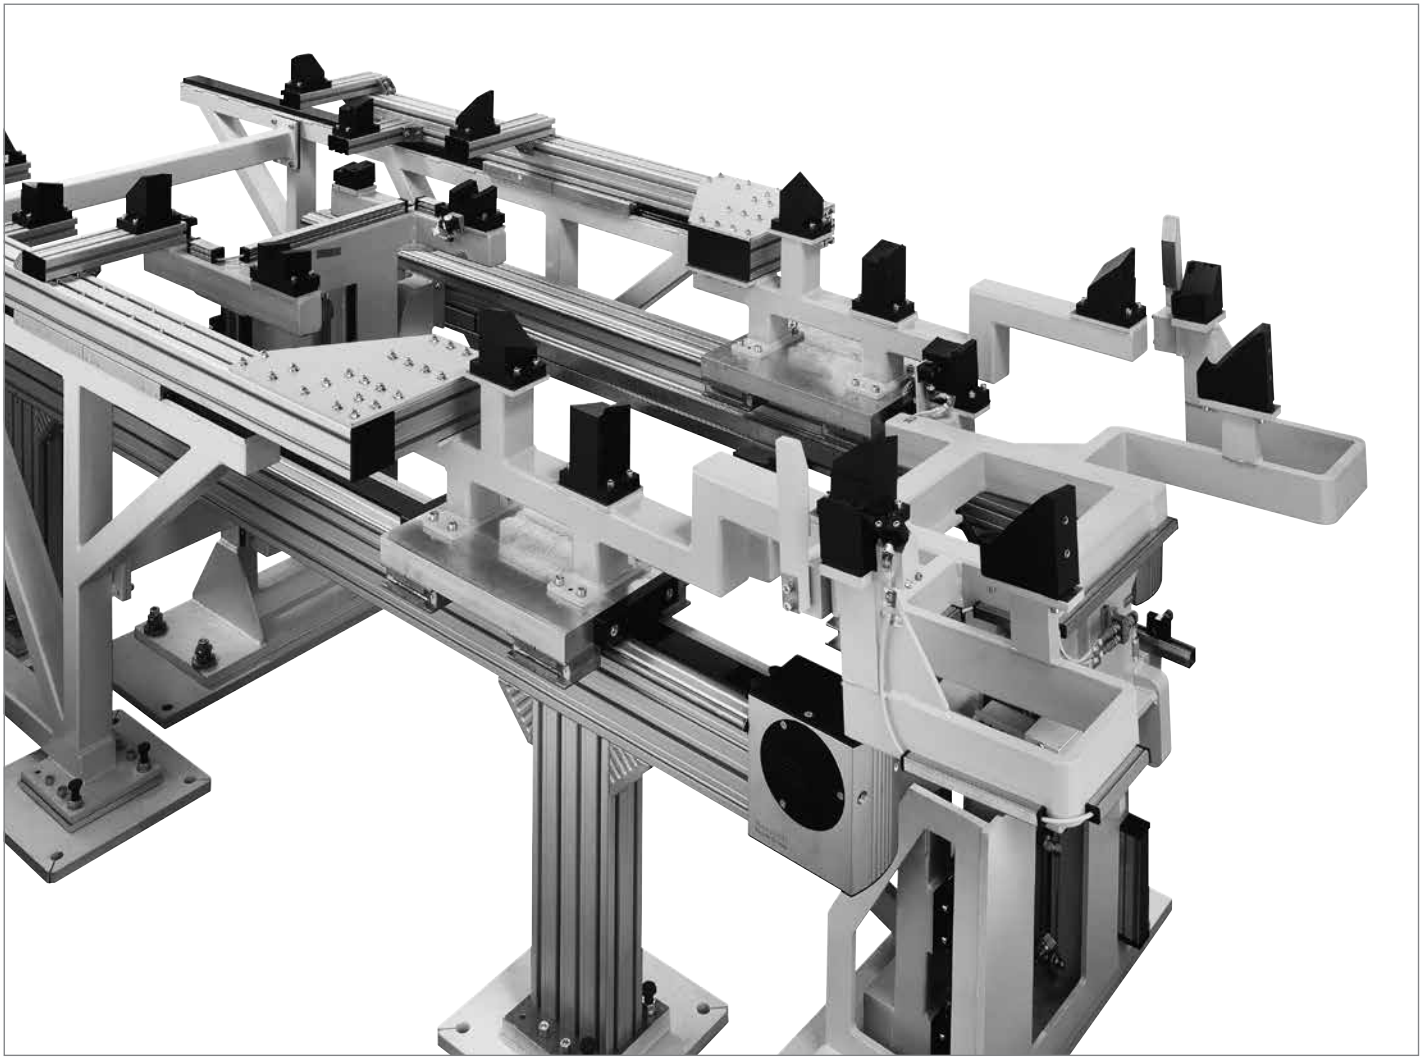


Linear guides – sizes, designs, and loads

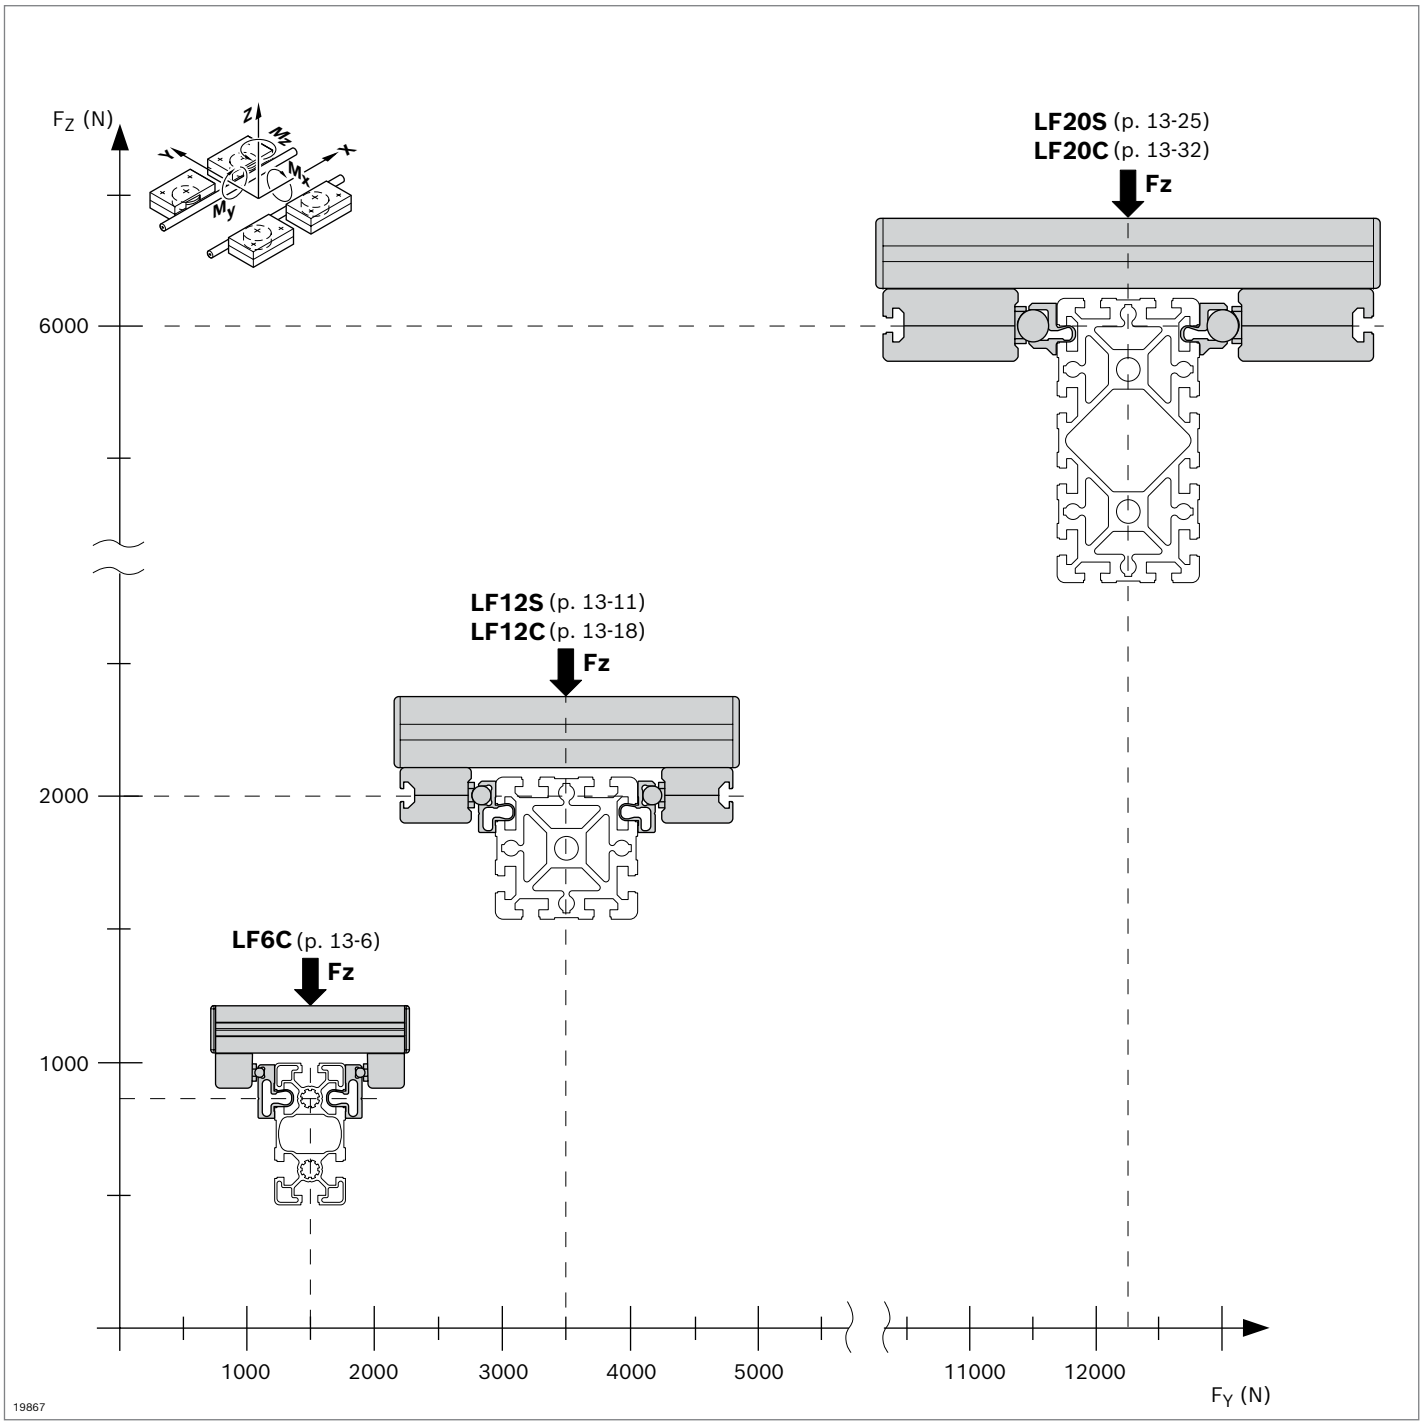




LF...S

- Compact construction
- Fixed track width
- v_{max} = 5 m/s




LF...C


- Freely selectable track width for greater torque absorption
- v_{max} = 5 m/s

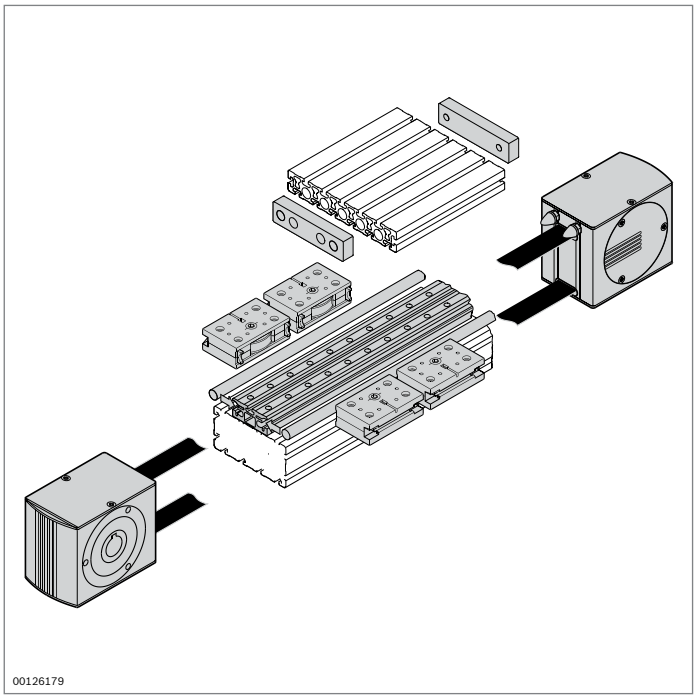

Cam roller guides LF...S


- Cam roller guide LF...S with fixed track widths
- Guide rail made of aluminum with hardened and polished VA guide rods
- Simple mounting on strut profile or directly on flat surface, e.g. on a machine
- High precision, dimensional stability and torsional rigidity
- Lighter and cheaper than steel guides
- Light trolley with good torsional rigidity
- Freely selectable trolley lengths
- Freely selectable stroke lengths possible
- High permissible speed

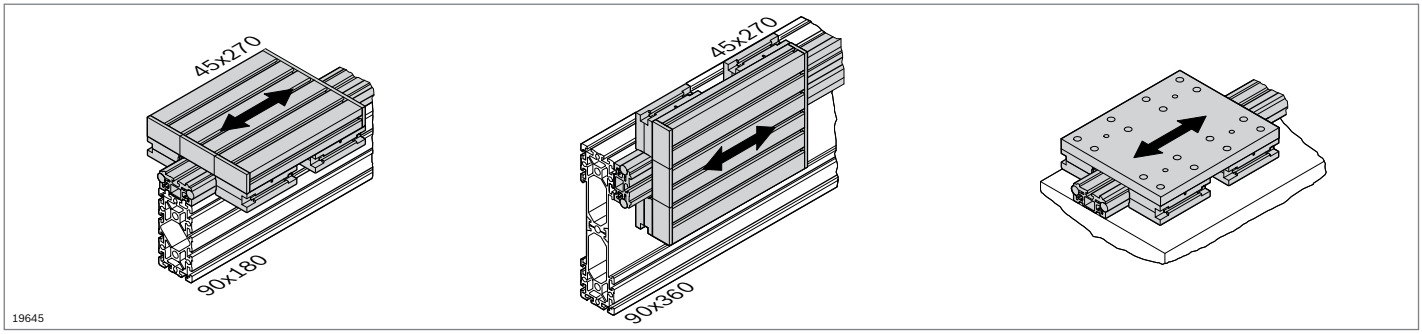




The support profiles shown here are examples

LF12S

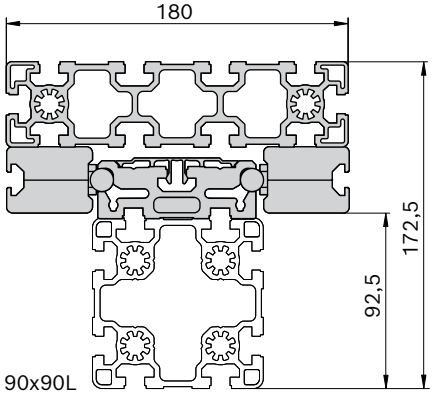


$F_{y\,max}$ = 3500 N
$F_{z\,max}$ = 2000 N
$M_{x\,max}$ = 78 Nm
v_{max} = 5 m/s

LF20S

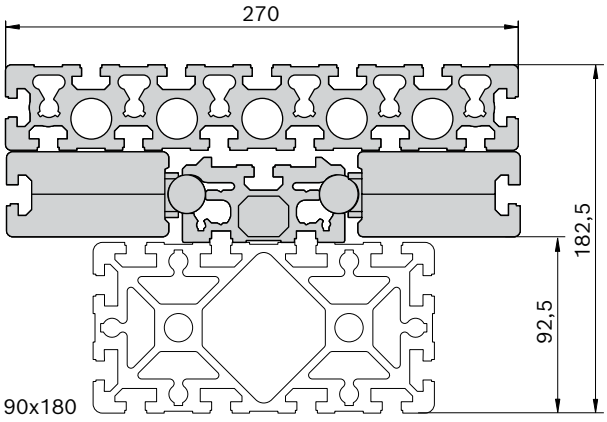


$F_{y\,max}$ = 12500 N
$F_{z\,max}$ = 6000 N
$M_{x\,max}$ = 240 Nm
v_{max} = 5 m/s

19646

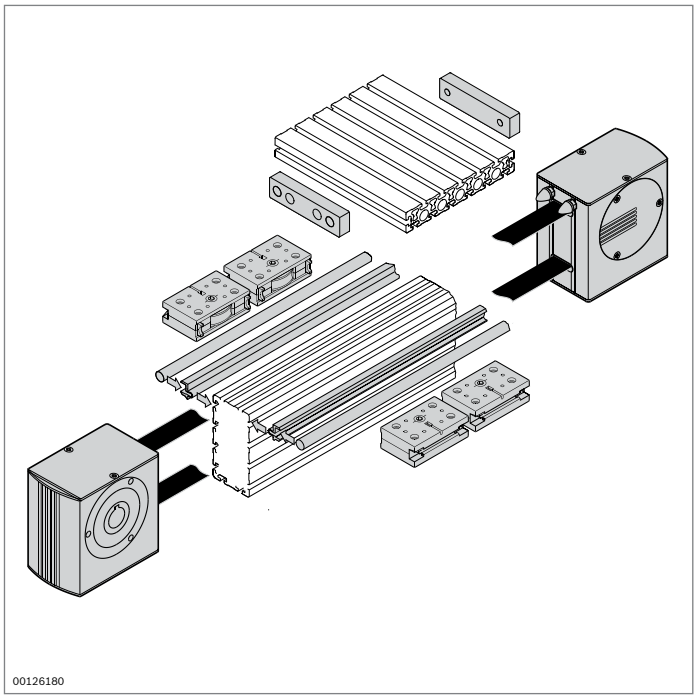


Cam roller guides LF...C


- Cam roller guide LF...C for free choice of track widths and large track widths
- Clamping profile made of aluminum with hardened and polished VA guide rods
- Easy assembly through clipping the clamping profile into the slots of any Rexroth profile with 10 mm slot
- Optimally adjustable to different loads
- Greater torque absorption due to a C construction and free choice of track width
- Light trolley with good torsional rigidity
- Freely selectable trolley lengths and widths
- Freely selectable stroke lengths possible
- High permissible speed

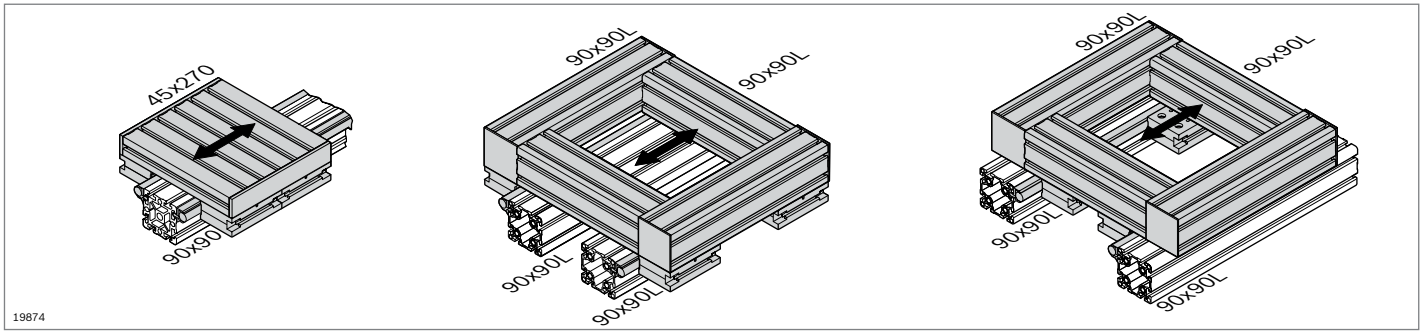

The support profiles shown here are examples




LF6C




$F_{y\,max}$ = 1400 N
$F_{z\,max}$ = 850 N
$M_{x\,max}$ = 0,4 x B Nm
$M_{x\,max}$ = 25,6 Nm (B=64mm)
v_{max} = 5 m/s

LF12C

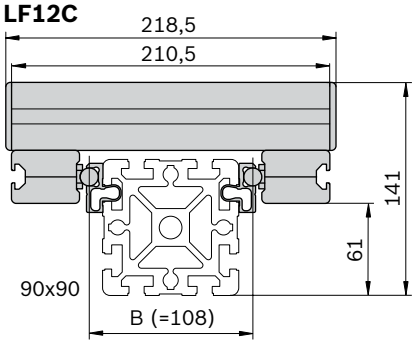


$F_{y\,max}$ = 3500 N
$F_{z\,max}$ = 2000 N
$M_{x\,max}$ = 1,0 xB Nm
$M_{x\,max}$ = 108 Nm (B=108mm)
v_{max} = 5 m/s

LF20C

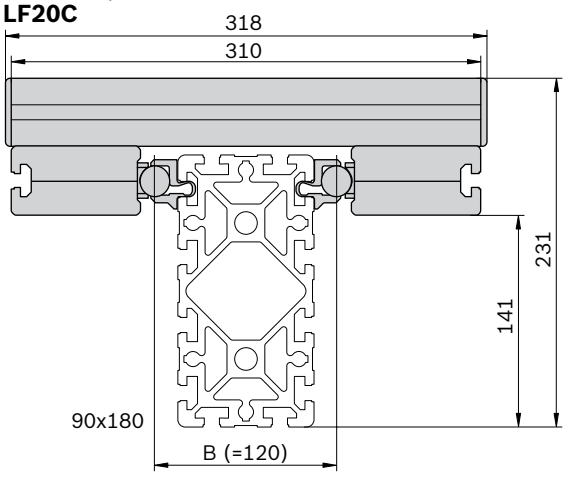


$F_{y\,max}$ = 12500 N
$F_{z\,max}$ = 6000 N
$M_{x\,max}$ = 3,0 x B Nm
$M_{x\,max}$ = 360 Nm (B=120 mm)
v_{max} = 5 m/s


19647

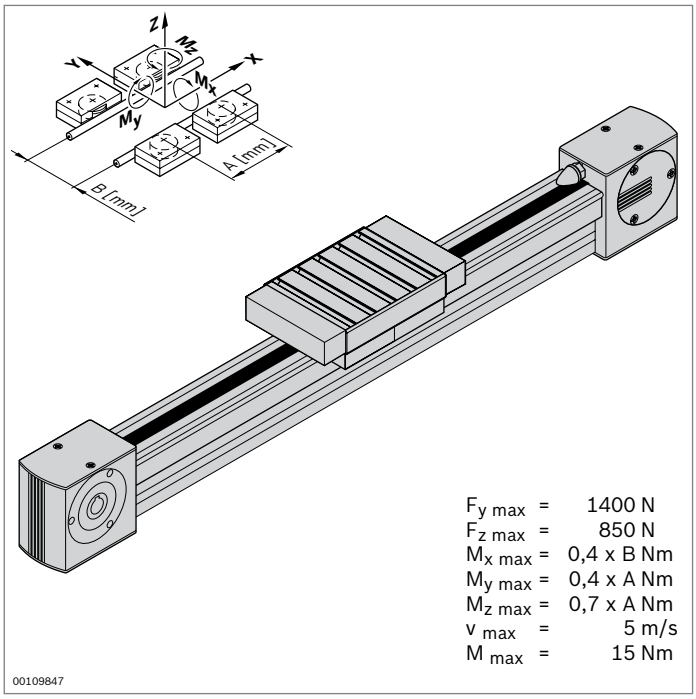

Cam roller guide LF6C – complete axis




- Fully assembled cam roller guide
- Stroke can be individually selected
- Clamping profile clipped into strut profile 45x90L
- Incl. toothed belt drive; additional notes on the drive concept (p. 13-39)

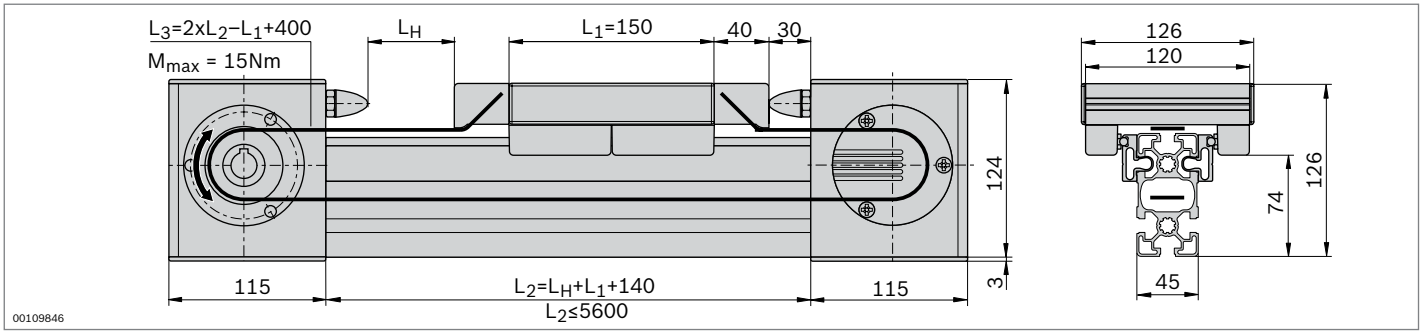

Technical data

For notes on layout and drive, see page 13-45

Complete axis	L_H (mm)	No.
LF6C	50 ... 5310	**3 842 998 496 / L_H**

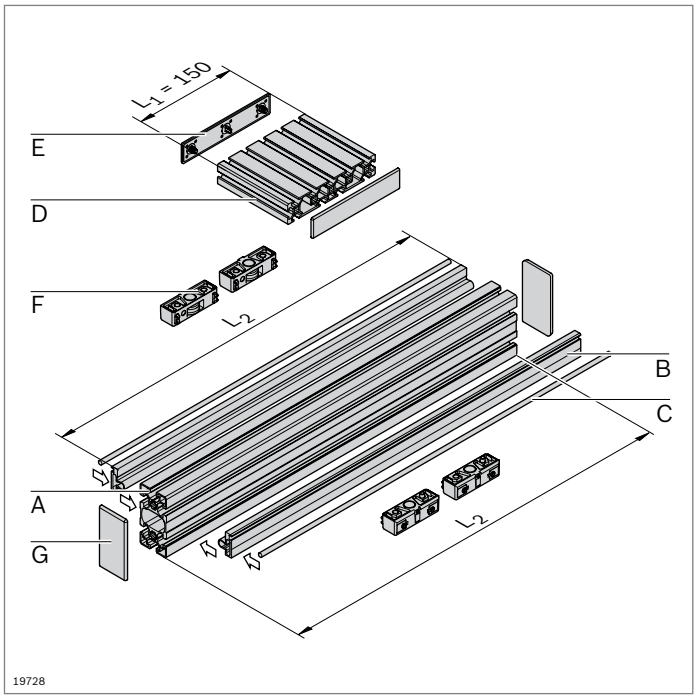


Cam roller guide LF6C – components

- Components for the individual assembly of cam roller guides, with or without drive

Parts list for cam roller guide LF6C without drive


Component		No.	Pcs	Page
A	Profile 45x90L	**3 842 992 432 / L_2**	1	2-43
B	Clamping profile LF6C	**3 842 992 925 / L_2**	2	13-8
C	Guide rod LF6	**3 842 993 967 / L_2**	2	13-8
D	Trolley profile LF6C	**3 842 993 952 / 120 mm**	1	13-8
E	Cover cap LF6C	**3 842 539 120**	2	13-9
F	Guide bearing LF6	**3 842 535 662**	4	13-8
G	Cover cap 45x90	**3 842 548 757**	2	2-43

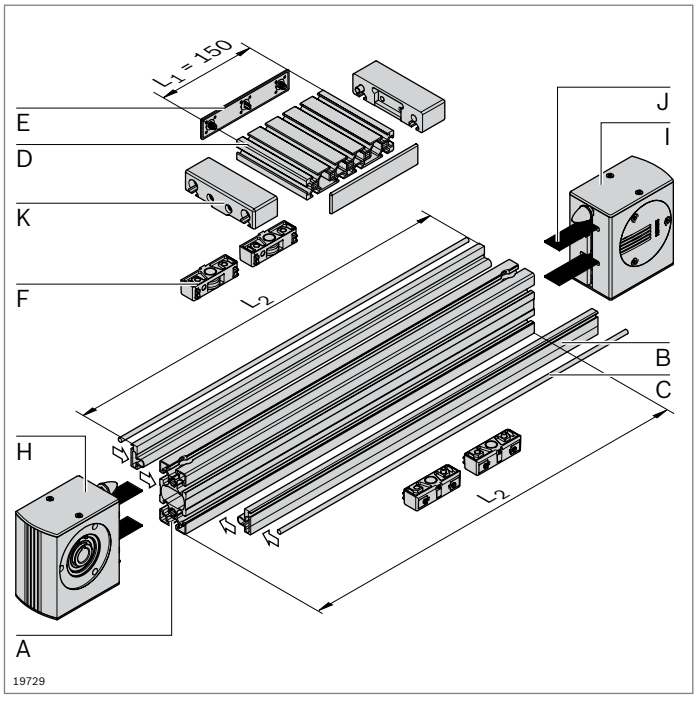


Parts list for cam roller guide LF6C with drive

Component		No.	Pcs	Page
A	Profile 45x90L LF LF	**3 842 993 084 / L_2**	1	2-43
B	Clamping profile LF6C	**3 842 992 925 / L_2**	2	13-8
C	Guide rod LF	**3 842 993 967 / L_2**	2	13-8
D	Trolley profile LF6C	**3 842 993 952 / 120 mm**	1	13-8
E	Cover cap LF6C	**3 842 539 120**	2	13-9
F	Guide bearing LF6	**3 842 535 662**	4	13-8
H	Drive head LF6C	**3 842 526 416**	1	13-9
I	Return head LF6C	**3 842 526 417**	1	13-10
J	Toothed belt LF6C	**3 842 994 711 / L_3**[1)]	1	13-10
K	Belt connector LF6C	**3 842 535 681**	2	13-10

[1)] $L_3 = 2xL_2 - L_1 + 400$

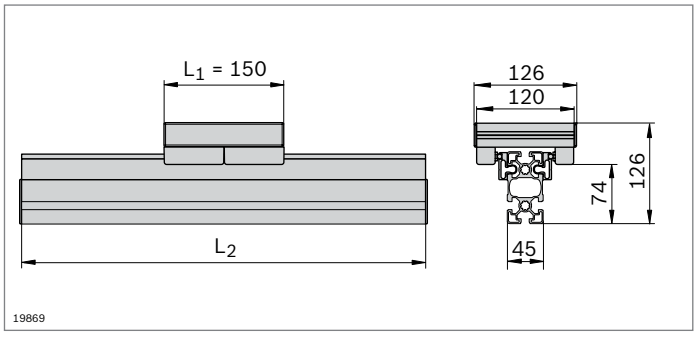


13

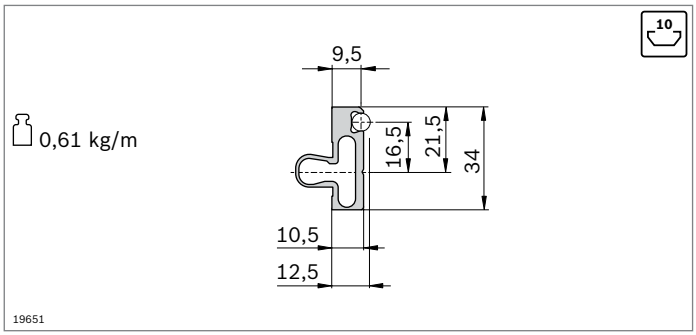


- The clamping profile is clipped into any 10 mm slot of the strut profile and it holds the guide rods

Clamping profile		L_2 (mm)	No.
LF6C	1 pc	150 ... 3000	**3 842 992 925 / L_2**
	20 pcs	3000	**3 842 518 896**
Material:	Aluminum; anodized		

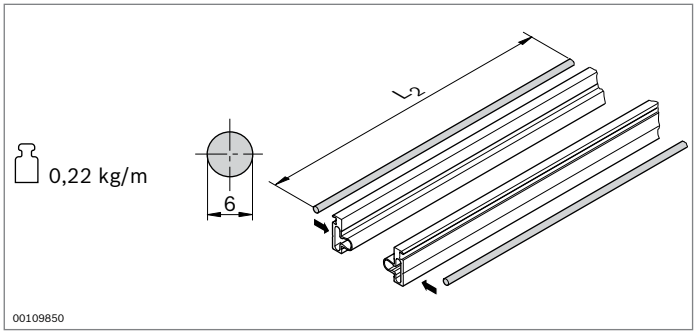

- The guide rod is pressed into the clamping profile
- The guide rod guides the guide bearing


Guide rod	L_2 (mm)		No.
LF6	150 ... 3000	1	**3 842 993 967 / L_2**
	3000	20	**3 842 539 414**
Material:	Solid shaft VA, induction hardened, polished		
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**		

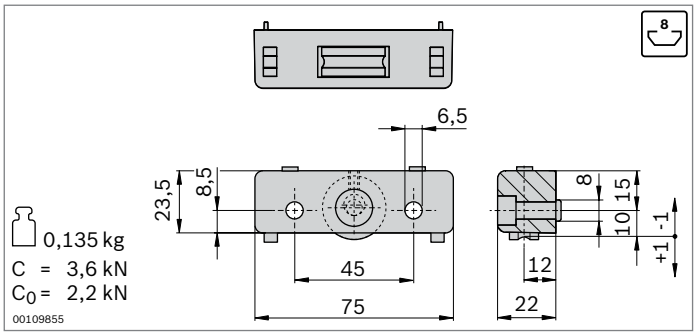


- Guide bearing for trolley construction
- Guiding via guide rod
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts

Guide bearing		No.	FS
LF6	2	**3 842 535 662**	2xFS1
Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished		
Scope of delivery:	Incl. fastening material (FS)		
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**		


FS1



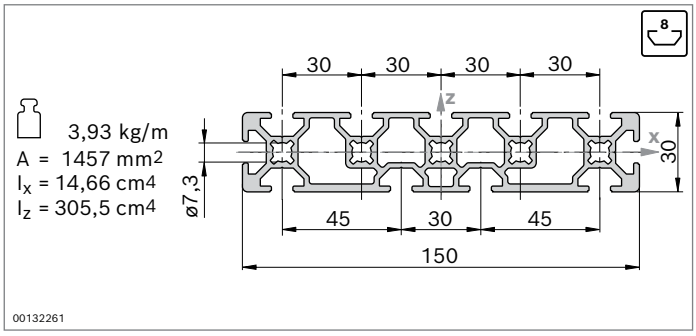


- Trolley profile for the construction of trolley LF6C

Trolley profile	L (mm)	No.
LF6C	150 ... 3000	**3 842 993 952 / L**
Material:	Aluminum; anodized	

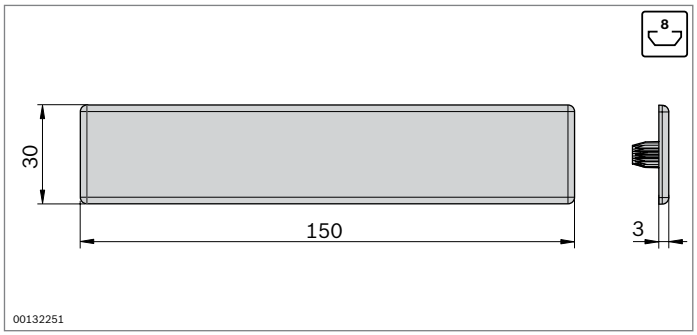

- Cover cap for trolley profile LF6C
- For use on trolleys which are not driven by a toothed belt

Cover cap		No.
LF6C	2	**3 842 539 120**
Material:	PA; black	

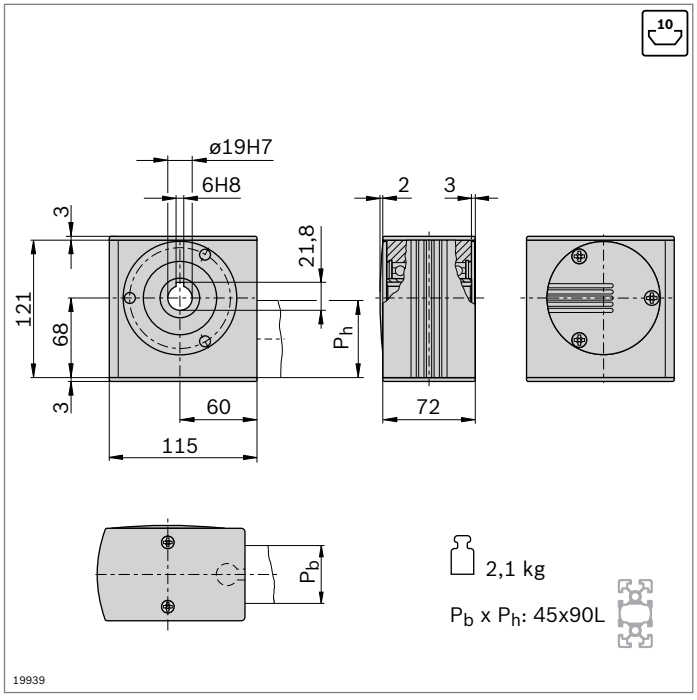


- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a plug-in shaft) for mounting a hollow shaft gear or a coupling (p. 13-41)
- Mounted directly on profile 45x90L using longitudinal end connector
- Profile finishing: LF blind hole drilling for longitudinal end connector

Drive head	No.	FS
LF6C	**3 842 526 416**	2xFS2, FS3
Material:	Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black	
Scope of delivery:	Incl. fastening material (FS), cover caps	

FS2
ISO 7380
M8x40

FS3
ISO 4035
M8-04

13

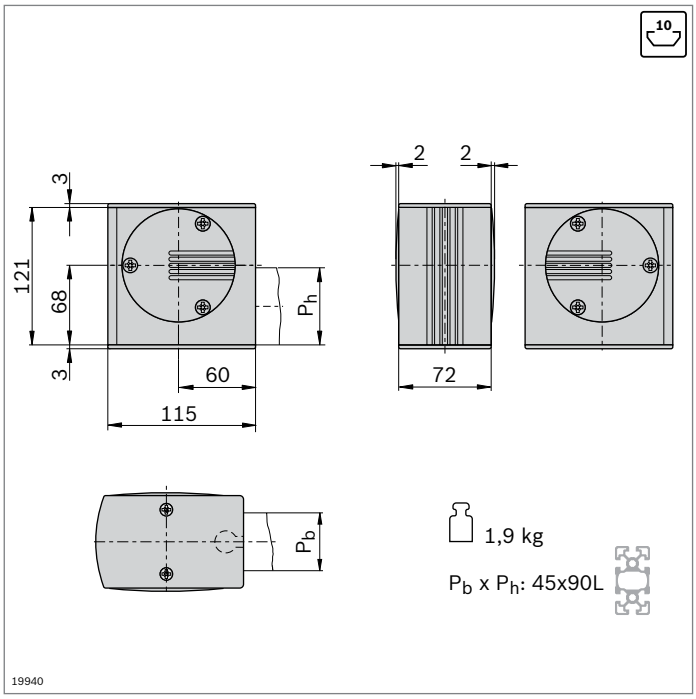


- Return head for tensioning the toothed belt and changing its direction
- Mounted directly on profile 45x90L using longitudinal end connector
- Profile finishing: LF blind hole drilling for longitudinal end connector

Return head	No.	FS
LF6C	**3 842 526 417**	2xFS2, FS3

Material:	Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. fastening material (FS), cover caps

FS2
ISO 7380
M8x40

FS3
ISO 4035
M8-04

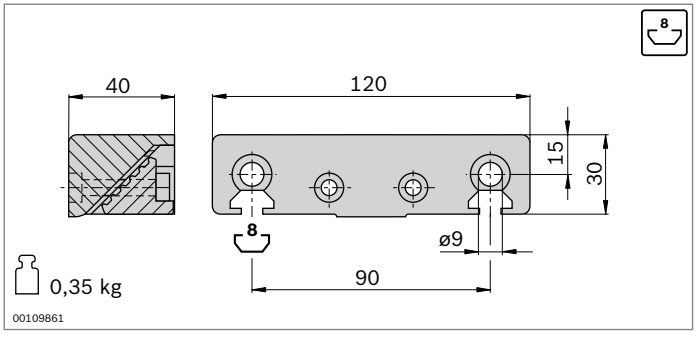

- Belt connector for fastening the toothed belt to the trolley slot
- All connecting parts for mounting on the trolley profile LF6C are included


Belt connector		No.	FS
LF6C	2	**3 842 535 681**	2xFS4, 2xFS5, 2xFS6

Material:	Aluminum, painted black
Scope of delivery:	Incl. fastening material (FS)

FS4
DIN 7984
M6x35
6-FSt
ISO 4032–M6

FS5
DIN 7984
M8x50
8-FSt
8

FS6
DIN 7984
M8x40

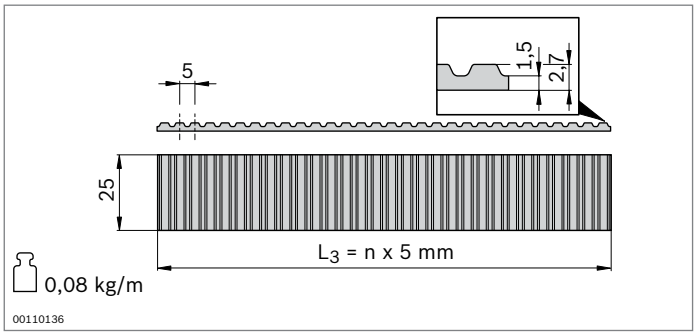


- Toothed belt as a trolley drive
- Pitch: AT5

Toothed belt	L_3 (mm)	No.
LF6C	300 ... 50000	**3 842 994 711 / L_3 [1)]**
	50000	**3 842 518 856**

[1)] $L_3 = 2xL_2 - L_1 + 400$


Material: PU with embedded steel wires

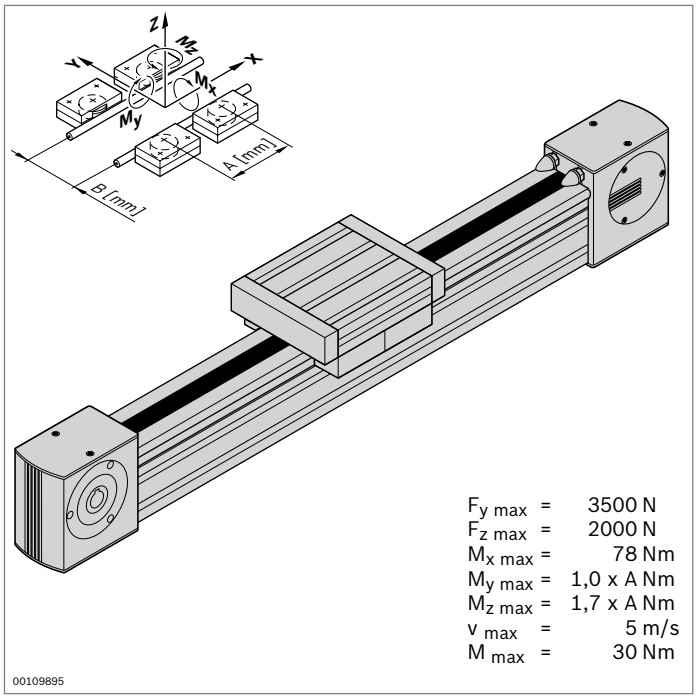

Cam roller guide LF12S – complete axis

10

- Fully assembled cam roller guide
- Stroke and trolley length can be individually selected
- Rail profile screwed onto strut profile 90x90L
- Incl. toothed belt drive; additional notes on the drive concept (p. 13-39)

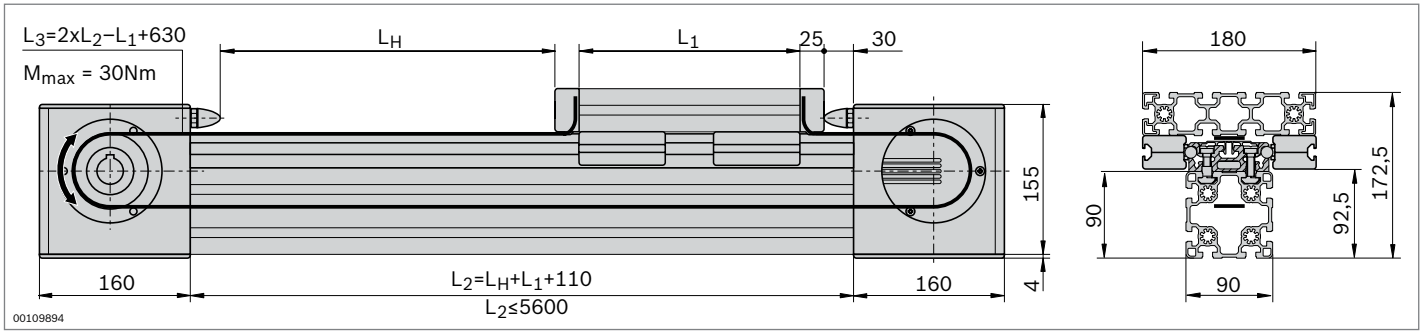


13

Technical data

For notes on layout and drive, see page 13-45

Complete axis	L_H / L_1 (mm)	No.
LF12S	$L_1+50 \le L_H \le 5310$ $180 \le L_1 \le 1000$	**3 842 998 497 / L_H / L_1**

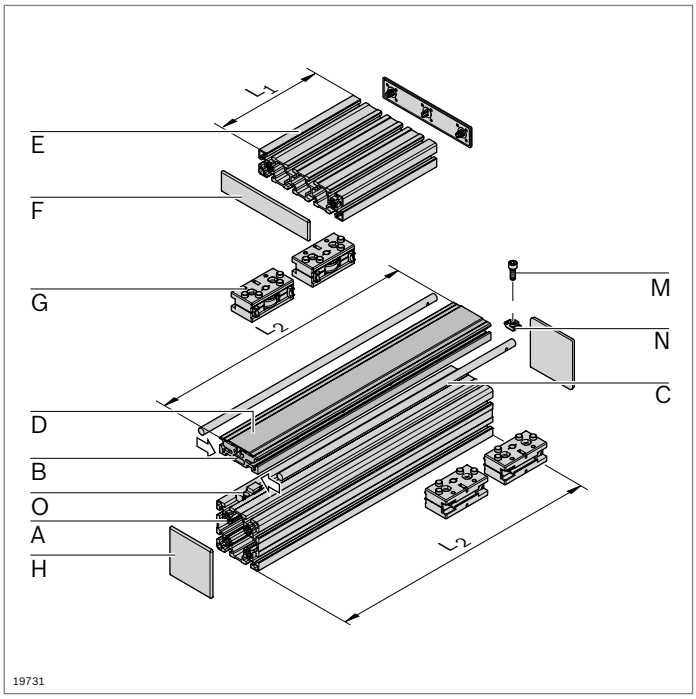


Cam roller guide LF12S – components

- Components for the individual assembly of cam roller guides, with or without drive

Parts list for cam roller guide LF12S without drive

Component		No.	Pcs	Page
A	Profile 90x90L	**3 842 992 415 / L_2**	1	2-48
B	Guide profile LF12S	**3 842 992 438 / L_2**	1	13-13
C	Guide rod LF12	**3 842 993 968 / L_2**	2	13-13
D	Cover profile LF12S	**3 842 993 062 / L_2**	1	13-13
E	Profile 45x180	**3 842 990 335 / L_1**	1	2-46
F	Cover cap 45x180	**3 842 548 795**	2	2-46
G	Guide bearing LF12	**3 842 535 664**	4	13-14
H	Cover cap 90x90L	**3 842 548 759**	2	2-48
M	Cylinder head screw DIN 7984 – M8x30		n[1)]	
N	T-nut M8, 10 mm slot	**3 842 530 287**	n[1)]	3-4
O	Sliding block	**3 842 146 877**	n[1)]	13-13

[1)] For identification see page 13-13

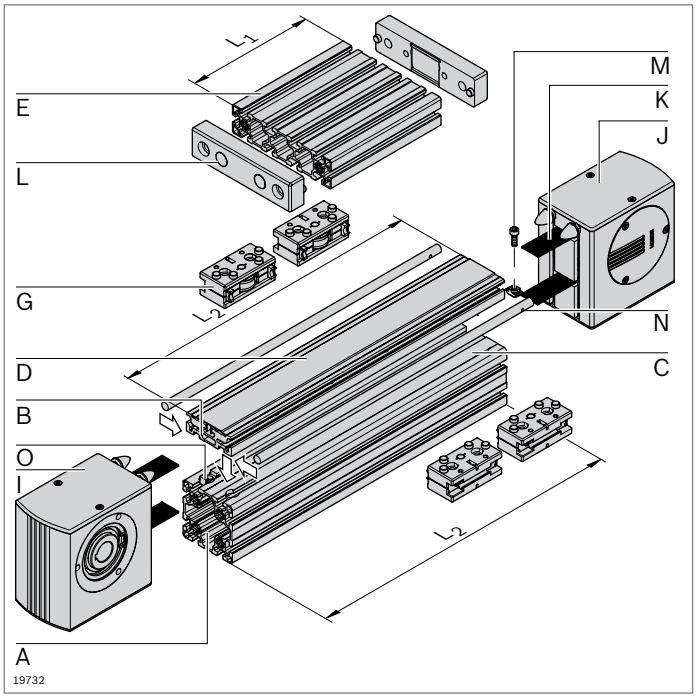



Parts list for cam roller guide LF12S with drive

Component		No.	Pcs	Page
A	Profile 90x90L LF LF	**3 842 992 418 / L_2**	1	2-48
B	Guide profile LF12S	**3 842 992 438 / L_2**	1	13-13
C	Guide rod LF12	**3 842 993 968 / L_2**	2	13-13
D	Cover profile LF12S	**3 842 993 062 / L_2**	1	13-13
E	Profile 45x180 M12 M12	**3 842 990 339 / L_1**	1	2-46
G	Guide bearing LF12	**3 842 535 664**	4	13-14
I	Drive head LF12S	**3 842 526 412**	1	13-16
J	Return head LF12S	**3 842 526 413**	1	13-16
K	Toothed belt	**3 842 994 821 / L_3[1)]**	1	13-17
L	Belt connector	**3 842 535 680**	2	13-17
M	Cylinder head screw DIN 7984 – M8x30		n[2)]	
N	T-nut M8, 10 mm slot	**3 842 530 287**	n[2)]	3-4
O	Sliding block	**3 842 146 877**	n[2)]	13-13

[1)] $L_3 = 2xL_2 - L_1 + 630$


[2)] For identification see page 13-13

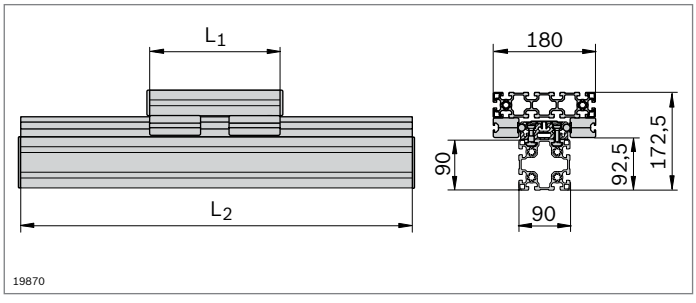

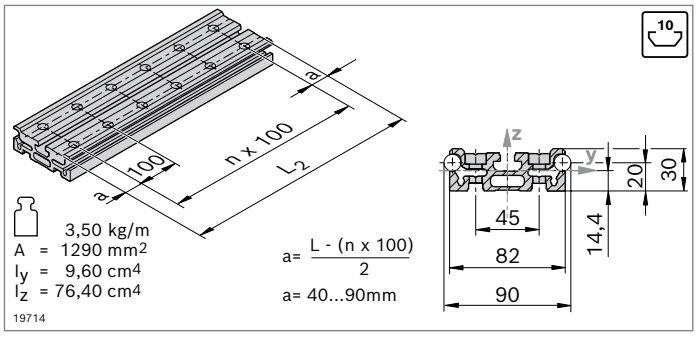


- Guide profile LF12S to hold the guide rods
- Installation on MGE strut profiles with 10 mm slot or directly on a flat surface

Guide profile		L_2 (mm)	No.
LF12S	1 pc	180 ... 6070	**3 842 992 438 / L_2**
	6 pcs	6070	**3 842 557 945**
Material:	Aluminum; anodized		
Accessories:	Cylinder bolt DIN 7984 – M8x30 T-nut M8, 10 mm slot, **3 842 530 287** Sliding block, cover profile, guide rod		

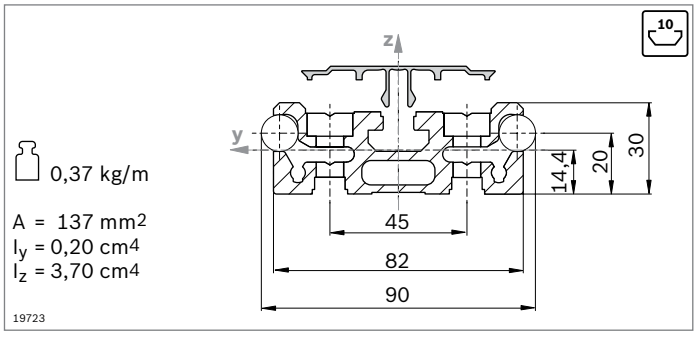


- Cover profile to prevent contamination on threaded connections

Cover profile	L_2 (mm)	No.
LF12S	150 ... 5600	**3 842 993 062 / L_2**
Material:	Aluminum; anodized	

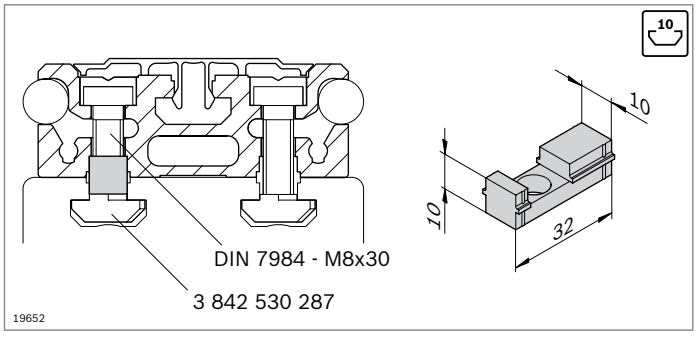


- Sliding block as a centering aid for mounting the guide profile in a 10 mm profile slot

Sliding block		No.
	50	**3 842 146 877**
Material:	PA; black	

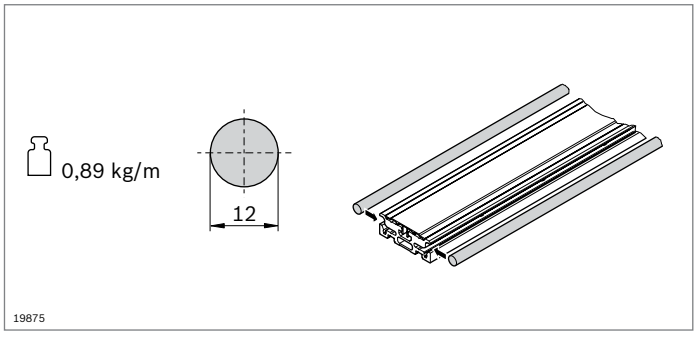


- The guide rod is pressed into the guide profile
- The guide rod guides the guide bearing

Guide rod	L_2 (mm)		No.
LF12	150 ... 2900	1	**3 842 993 968 / L_2**
	2900	20	**3 842 539 415**
Material:	Solid shaft VA, induction hardened and polished		
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**		

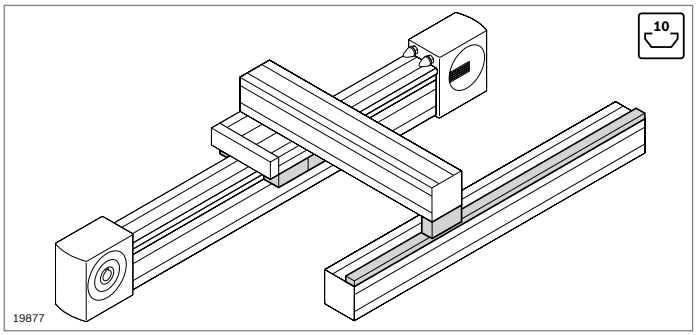

- Guide bearing for trolley construction
- Supporting bearing for brackets for bearing off-center forces
- Guide rail to support supporting bearings (p. 13-15)

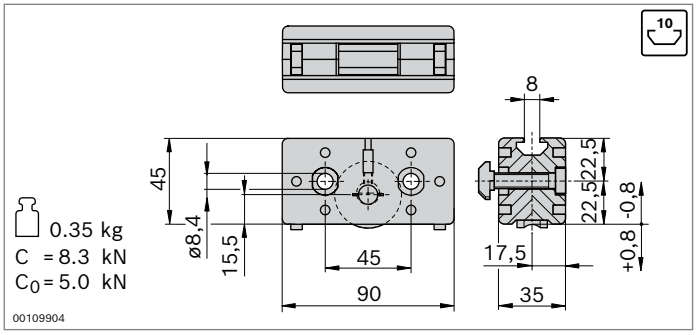

- Guide bearing for trolley construction
- Guiding via guide rod
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

Guide bearing		No.	FS
LF12	2	**3 842 535 664**	2xFS1, 4xFS2


Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

FS1

DIN 7984
M8x40

FS2

ø10xø5x11

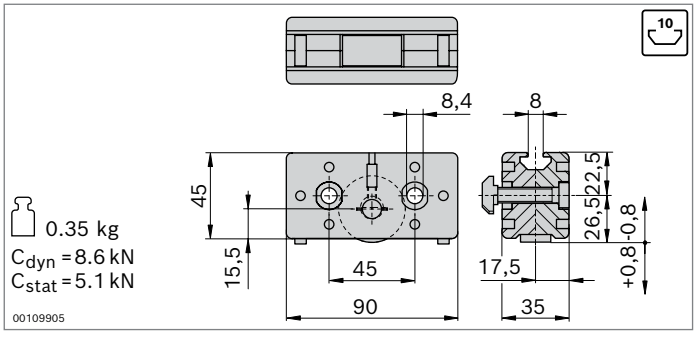

- Supporting bearing for brackets for bearing off-center forces
- For support on the guide rail
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

Supporting bearing		No.	FS
LF12	2	**3 842 535 666**	2xFS3 4xFS2


Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

FS3

DIN 7984
M8x40


FS2

ø10xø5x11

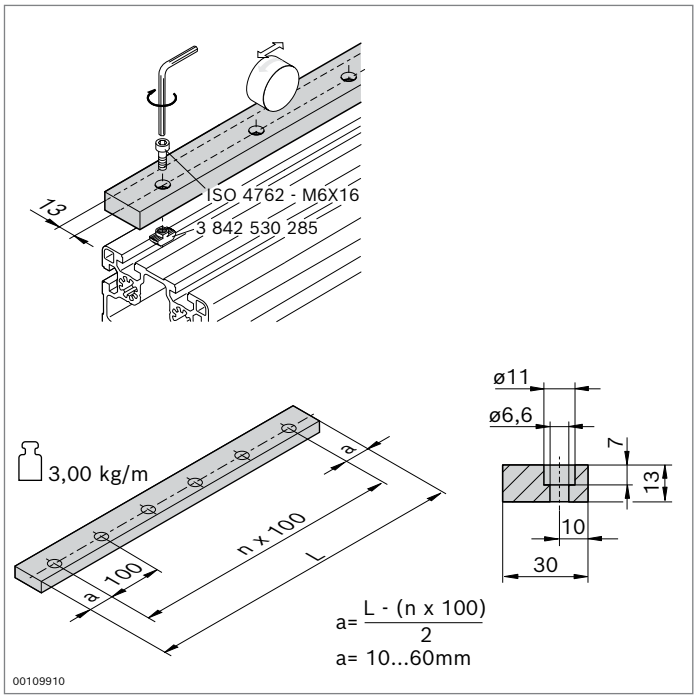

▶ Guide rail to hold supporting bearings

Guide rail	**L** (mm)	**No.**
LF12	120 ... 2000	**3 842 994 702 / L**
Material:	Steel, hardened, polished	
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**	
Accessories:	Cylinder head screw ISO 4762 – M6x16 T-nut M6, 10 mm slot (**3 842 530 285)**	

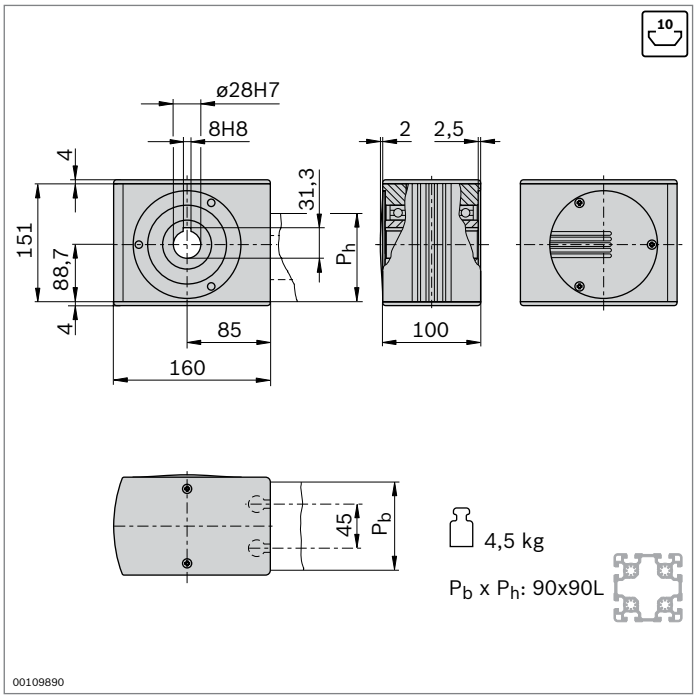


- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a plug-in shaft) for mounting a hollow shaft gear or a coupling (p. 13-41)
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Drive head	No.	FS
LF12S	**3 842 526 412**	2xFS4, 2xFS5

Material:	Drive head: Aluminum; anodized Cover caps: PA; black Hollow shaft: Steel; zinc-plated
Scope of delivery:	Incl. Fastening material (FS), cover caps

FS4
ISO 7380
M8x40

FS5
ISO 4035
M8-04

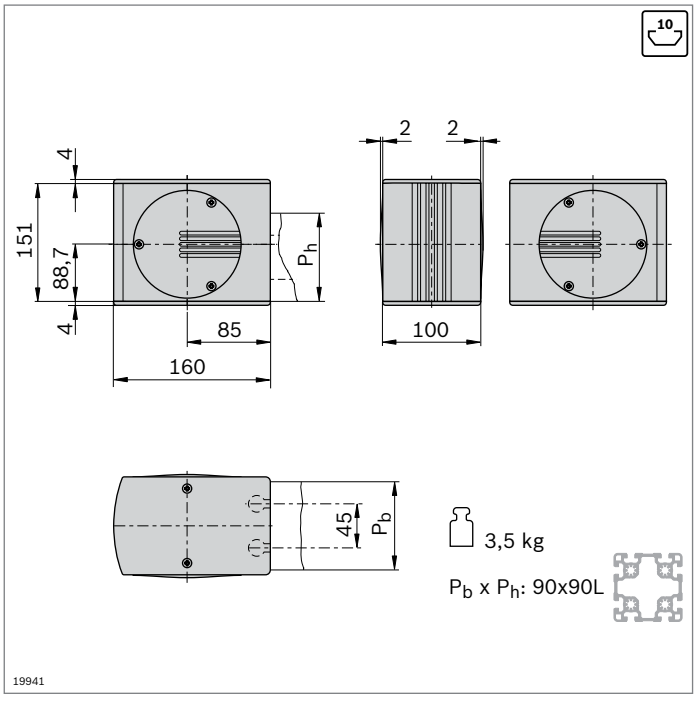


- Return head for tensioning the toothed belt and changing its direction
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Return head	No.	FS
LF12S	**3 842 526 413**	2xFS4, 2xFS5

Material:	Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. Fastening material (FS), cover caps

FS4
ISO 7380
M8x40

FS5
ISO 4035
M8-04

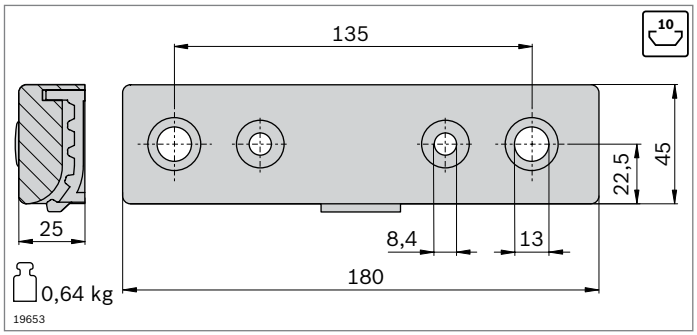

- Belt connector suitable for trolley built out of strut profiles 45x180
- All connecting parts included for mounting on the profile end (LF12S) or in the slot (LF12C)
- Profile finishing for strut profile 45x180 for trolley LF12S: M12

Belt connector		No.	FS
LF12	2	**3 842 535 680**	4xFS2, 2xFS6, 2xFS7, 2xFS8, 2xFS9

Material: Aluminum, painted black
Scope of delivery: Incl. fastening material (FS)


FS2
ø10xø5x11

FS6
DIN7984
M12x40

FS7
DIN 7984
M8x30
DIN 125
A8,4
10

FS8
DIN 7991
M8x30
10

FS9
ø18x7

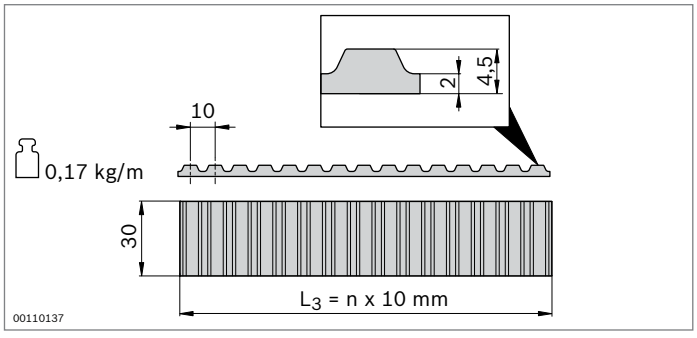


- Toothed belt as a trolley drive
- Pitch: AT10

Toothed belt	L_3 (mm)	No.
LF12	300 ... 50000	**3 842 994 821 / L_3** [1]
	50000	**3 842 526 422**

[1] $L_3 = 2xL_2 - L_1 + 630$
Material: PU with embedded steel wires


13

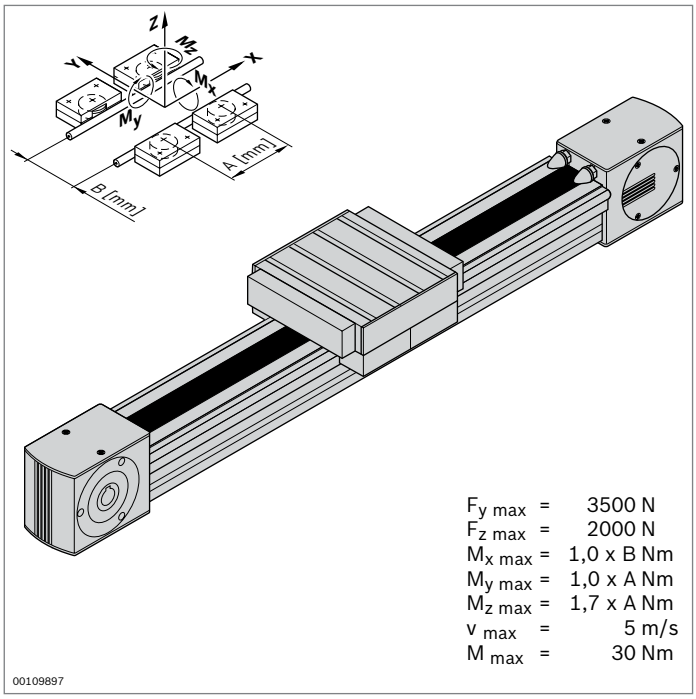

Cam roller guide LF12C – complete axis

10


- Fully assembled cam roller guide
- Stroke can be individually selected
- Clamping profile clipped into strut profile 90x90
- Incl. toothed belt drive; additional notes on the drive concept (p. 13-39)

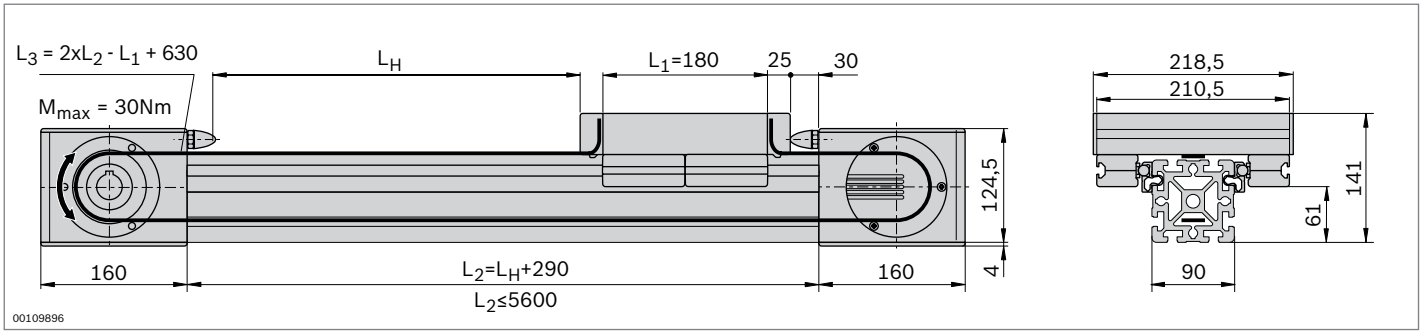

Technical data

For notes on layout and drive, see page 13-45

Complete axis	L_H (mm)	No.
LF12C	50 ... 5310	**3 842 998 498 / L_H**

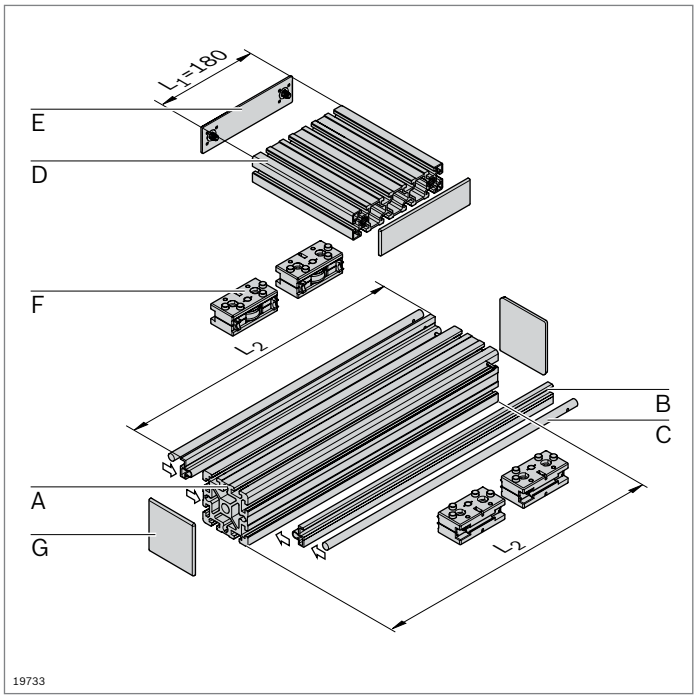


Cam roller guide LF12C – components

- Components for the individual assembly of cam roller guides, with or without drive

Parts list for cam roller guide LF12C without drive


Component		No.	Pcs	Page
A	Profile 90x90	**3 842 990 500 / L_2**	1	2-49
B	Clamping profile LF12C	**3 842 992 440 / L_2**	2	13-20
C	Guide rod LF12	**3 842 993 968 / L_2**	2	13-20
D	Profile 45x180	**3 842 990 335 / 210.5 mm**	1	2-46
E	Cover cap 45x180	**3 842 548 795**	2	2-46
F	Guide bearing LF12	**3 842 535 664**	4	13-21
G	Cover cap 90x90	**3 842 548 761**	2	2-49

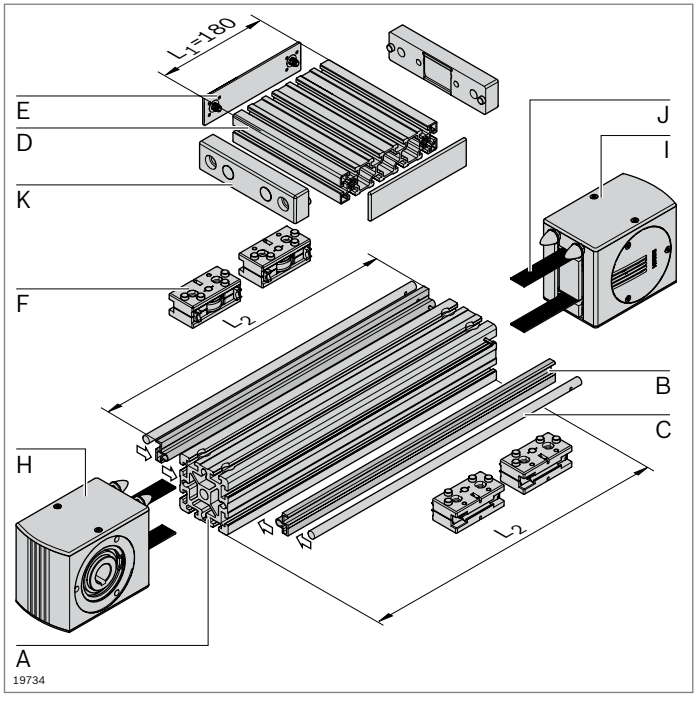


Parts list for cam roller guide LF12C with drive

Component		No.	Pcs	Page
A	Profile 90x90 LF LF	**3 842 993 082 / L_2**	1	2-49
B	Clamping profile LF12C	**3 842 992 440 / L_2**	2	13-20
C	Guide rod LF12	**3 842 993 968 / L_2**	2	13-20
D	Profile 45x180	**3 842 990 335 / 210.5 mm**	1	2-46
E	Cover cap 45x180	**3 842 548 795**	2	2-46
F	Guide bearing LF12	**3 842 535 664**	4	13-21
H	Drive head LF12C	**3 842 526 863**	1	13-23
I	Return head LF12C	**3 842 526 865**	1	13-23
J	Toothed belt LF12	**3 842 994 821 / L_3** [1)]	1	13-24
K	Belt connector LF12	**3 842 535 680**	2	13-24

[1)] $L_3 = 2xL_2 - L_1 + 630$

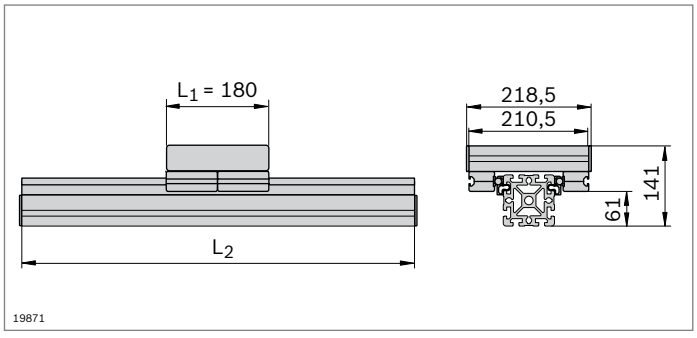


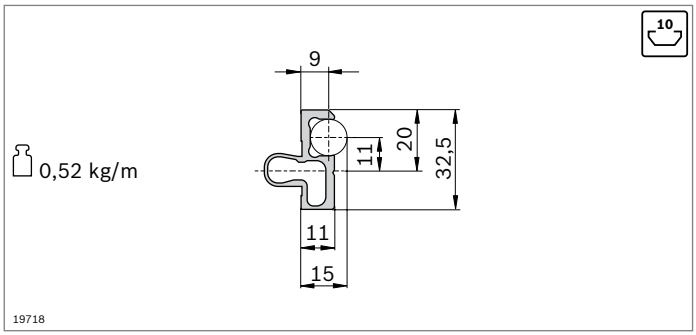

- The clamping profile is clipped into any chosen strut profile with a 10 mm slot and holds the guide rods

Clamping profile		L_2 (mm)	No.
LF12C	1 pc	150 ... 3000	**3 842 992 440 / L_2**
	20 pcs	3000	**3 842 518 897**

Material: Aluminum; anodized

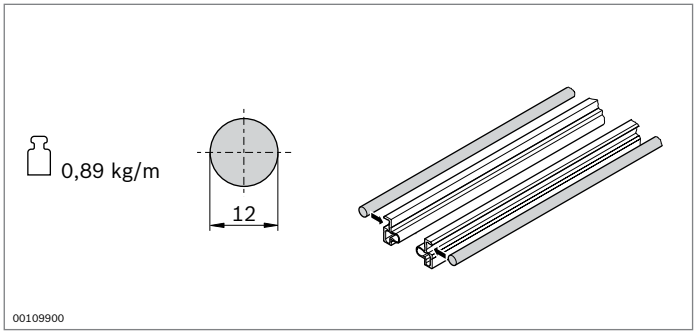


- The guide rod is pressed into the clamping profile
- The guide rod guides the guide bearing


Guide rod	L_2 (mm)		No.
LF12	150 ... 2900	1	**3 842 993 968 / L_2**
	2900	20	**3 842 539 415**

Material: Solid shaft VA, induction hardened and polished

Condition on delivery: Ungreased; greasing according to assembly instructions **3 842 527 226**

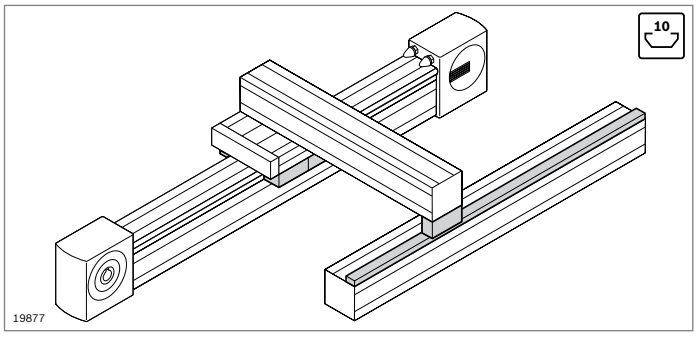

- Guide bearing for trolley construction
- Supporting bearing for brackets for bearing off-center forces
- Guide rail to support supporting bearings (p. 13-22)

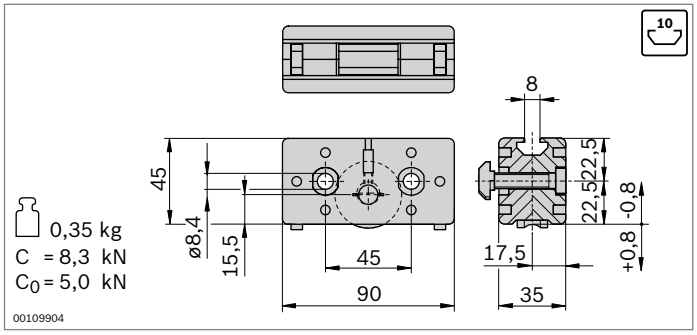


- Guide bearing for trolley construction
- Guiding via guide rod
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

Guide bearing		No.	FS
LF12	2	**3 842 535 664**	2xFS1 4xFS2


Material:	Guide bearing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

FS1



FS2

ø10xø5x11

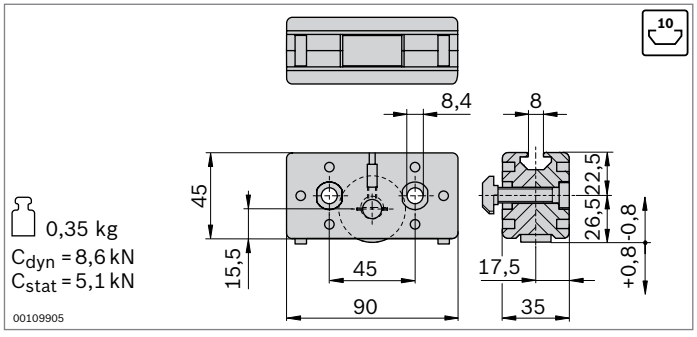


- Supporting bearing for brackets for bearing off-center forces
- For support on the guide rail
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

Supporting bearing		No.	FS
LF12	2	**3 842 535 666**	2xFS1 4xFS2


Material:	Guide bearing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

FS1




FS2

ø10xø5x11

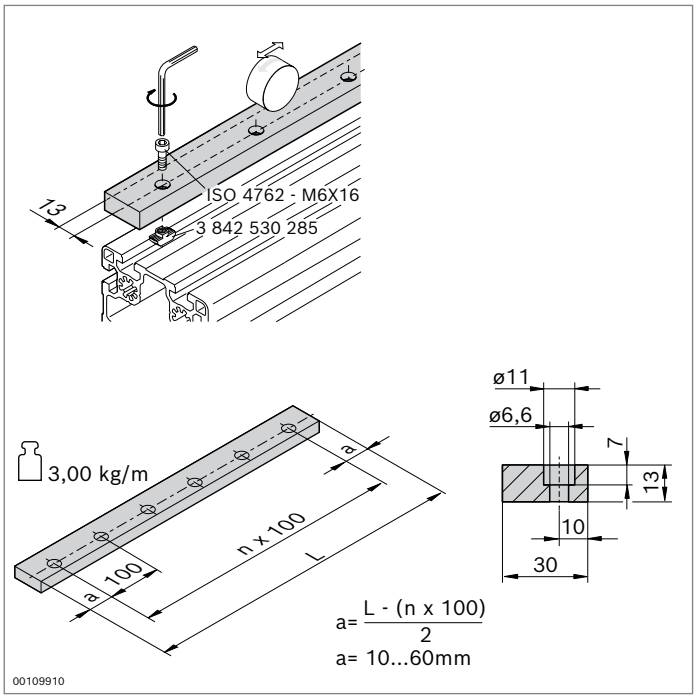

▶ Guide rail to hold supporting bearings

Guide rail	**L** (mm)	**No.**
LF12	120 ... 2000	**3 842 994 702 / L**
Material:	Steel, hardened, polished	
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**	
Accessories:	Cylinder head screw ISO 4762 – M6x16 T-nut M6, 10 mm slot (**3 842 530 285**)	

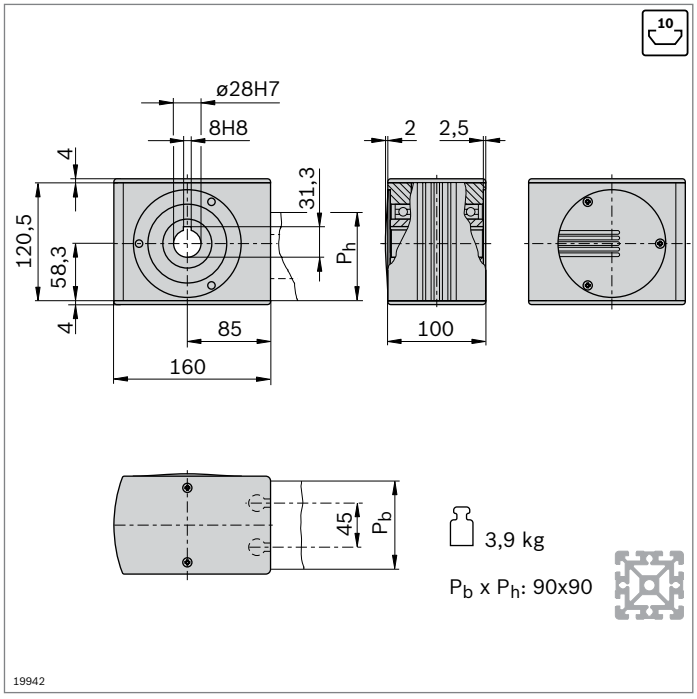


- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a plug-in shaft) for mounting a hollow shaft gear or a coupling (p. 13-41)
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Drive head	No.	FS
LF12C	**3 842 526 863**	4xFS3, 2xFS4

Material:	Drive head: Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3
ISO 7380
M8x40

FS4
ISO 4035
M8-04

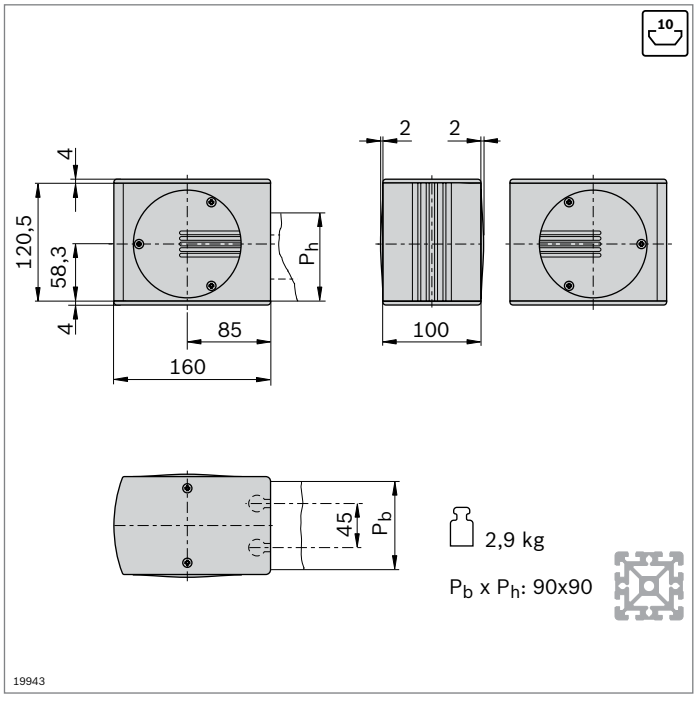

- Return head for tensioning the toothed belt and changing its direction
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector


Return head	No.	FS
LF12C	**3 842 526 865**	4xFS3, 2xFS4

Material:	Return head: Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3
ISO 7380
M8x40

FS4
ISO 4035
M8-04

13

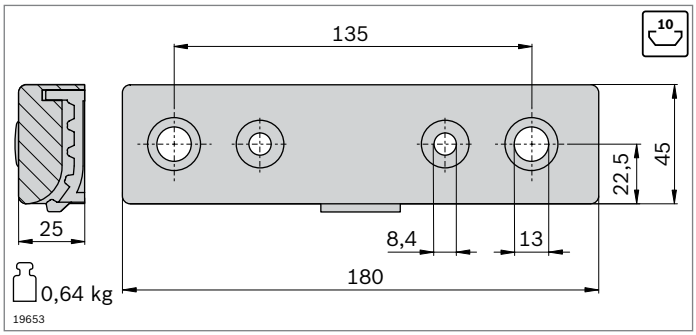

- Belt connector suitable for trolley built out of strut profiles 45x180
- All connecting parts included for mounting at the profile end (LF12S) or the slot (LF12C)
- Profile finishing for strut profile 45x180 for trolley LF12S: M12

Belt connector		No.	FS
LF12	2	**3 842 535 680**	4xFS2, 2xFS5, 2xFS6, 2xFS7, 2xFS8

Material: Aluminum, painted black
Scope of delivery: Incl. fastening material (FS)


FS2
ø10xø5x11

FS5
DIN7984
M12x40

FS6
DIN 7984
M8x30
DIN EN ISO 7089
A8,4
10

FS7
DIN 7991
M8x30
10


FS8
ø18x7

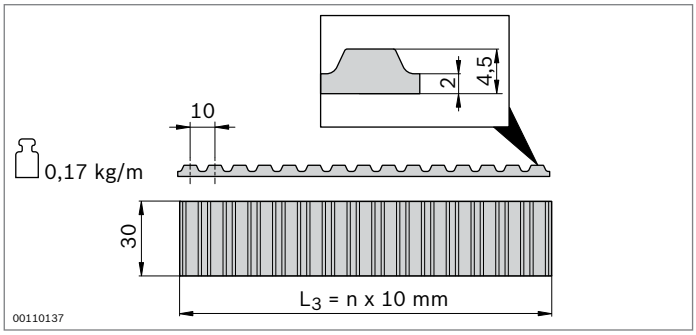

- Toothed belt as a trolley drive
- Pitch: AT10

Toothed belt	L_3 (mm)	No.
LF12	300 ... 50000	**3 842 994 821 / L_3** [1]
	50000	**3 842 526 422**


[1] $L_3 = 2xL_2 - L_1 + 630$
Material: PU with embedded steel wires

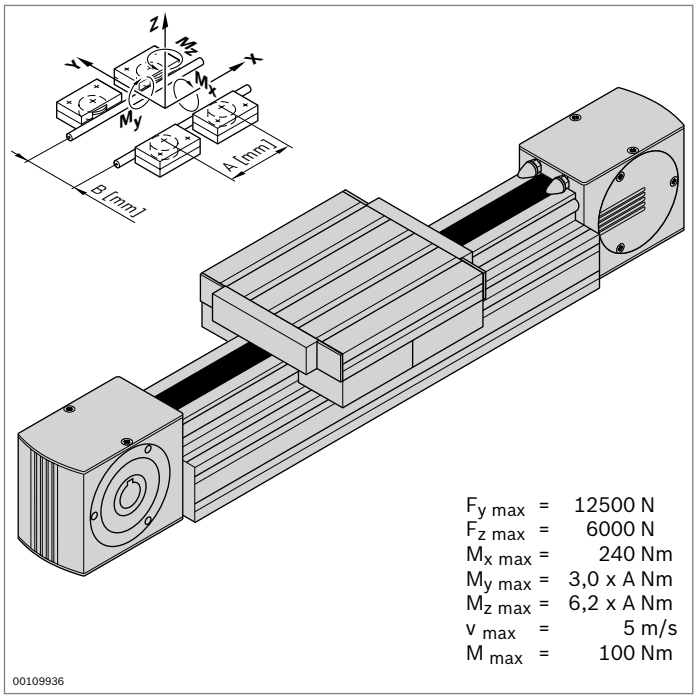

Cam roller guide LF20S – complete axis

10

- Fully assembled cam roller guide
- Stroke and trolley length can be individually selected
- Rail profile mounted on strut profile 90x180
- Incl. toothed belt drive; additional notes on the drive concept (p. 13-39)

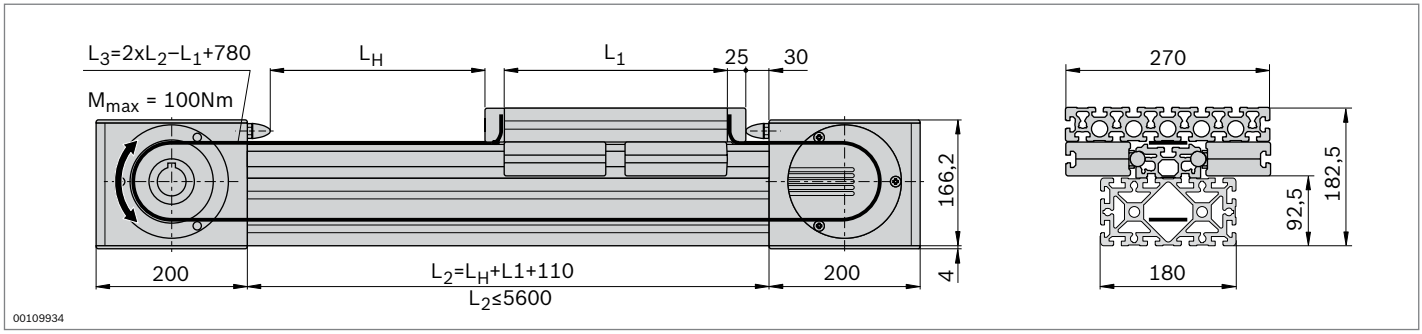



Technical data


For notes on layout and drive, see page 13-45

Complete axis	L_H / L_1 (mm)	No.
LF20S	$L_1+50 \le L_H \le 5220$ $270 \le L_1 \le 1000$	**3 842 998 499 / L_H / L_1**

13

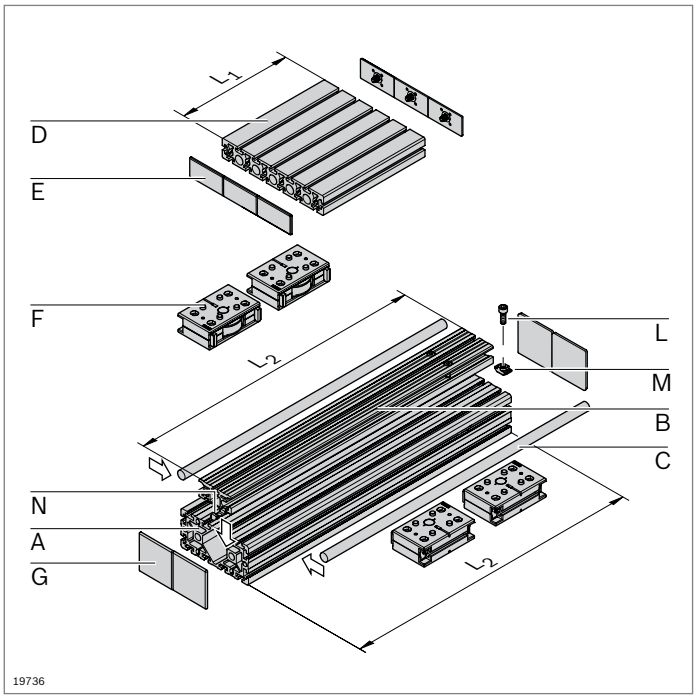

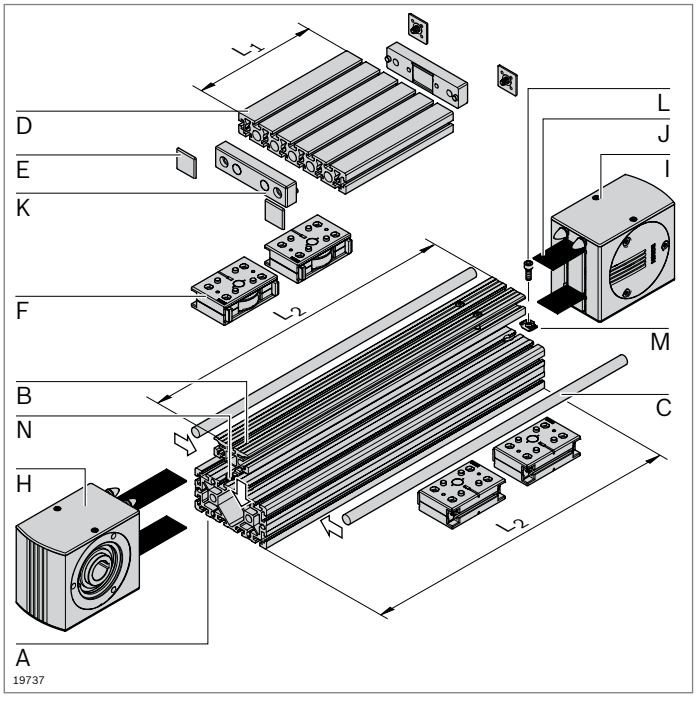

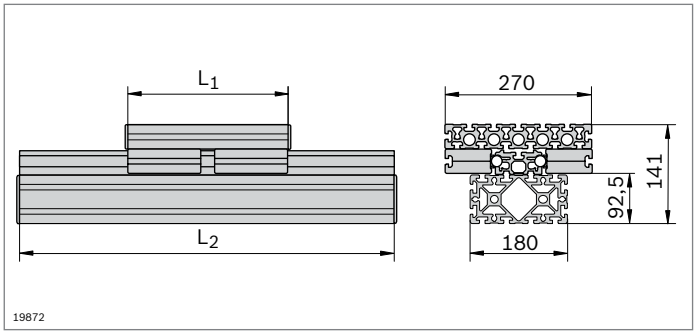

Cam roller guide LF20S – components

- Components for the individual assembly of cam roller guides, with or without drive

Parts list for cam roller guide LF20S without drive

Component		No.	Pcs	Page
A	Profile 90x180	**3 842 990 416 / L_2**	1	2-51
B	Guide profile LF20S	**3 842 993 080 / L_2**	1	13-27
C	Guide rod LF20	**3 842 993 969 / L_2**	2	13-27
D	Profile 45x270	**3 842 992 927 / L_1**	1	2-47
E	Cover cap 45x90	**3 842 548 757**	6	2-47
F	Guide bearing LF20	**3 842 535 663**	4	13-28
G	Cover cap 90x90	**3 842 548 761**	4	2-49
L	Cylinder head screw DIN 7984 – M8x45		n[1)]	
M	T-nut M8, 10 mm slot	**3 842 530 287**	n[1)]	3-4
N	Sliding block	**3 842 146 877**	n[1)]	13-27


[1)] For identification see page 13-27

Parts list for cam roller guide LF20S with drive

Component		No.	Pcs	Page
A	Profile 90x180 LF-S LF-S	**3 842 993 081 / L_2**	1	2-51
B	Guide profile LF20S	**3 842 993 080 / L_2**	1	13-27
C	Guide rod LF20	**3 842 993 969 / L_2**	2	13-27
D	Profile 45x270 M12 M12	**3 842 992 928 / L_1**	1	2-47
E	Cover cap 45x45	**3 842 548 753**	4	2-41
F	Guide bearing LF20	**3 842 535 663**	4	13-28
H	Drive head LF20S	**3 842 526 414**	1	13-30
I	Return head LF20S	**3 842 526 415**	1	13-30
J	Toothed belt LF20	**3 842 994 662 / L_3[1)]**	1	13-31
K	Belt connector LF20	**3 842 535 680**	2	13-31
L	Cylinder head screw DIN 7984 – M8x45		n[2)]	
M	T-nut M8, 10 mm slot	**3 842 530 287**	n[2)]	3-4
N	Sliding block	**3 842 146 877**	n[2)]	13-27

[1)] $L_3 = 2xL_2 - L_1 + 780$


[2)] For identification see page 13-27

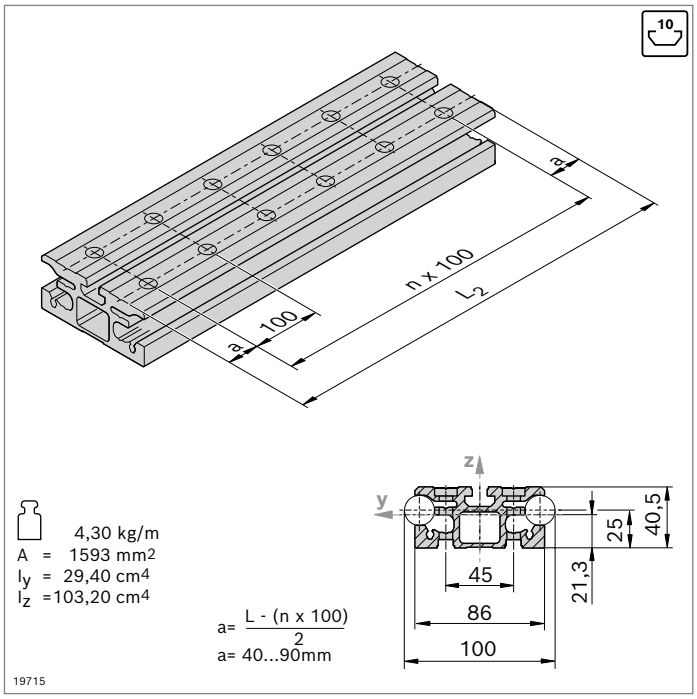

- Guide profile LF20S to hold the guide rods
- Installation on MGE strut profiles with 10 mm slot or directly on a flat surface

Guide profile		L_2 (mm)	No.
LF20S	1 pc	180 ... 6070	**3 842 993 080 / L_2**
	6 pcs	6070	**3 842 557 958**


Accessories: Cylinder head screw DIN 7984 M8x45
T-nut M8, 10 mm slot (p. 3-4)
Sliding block

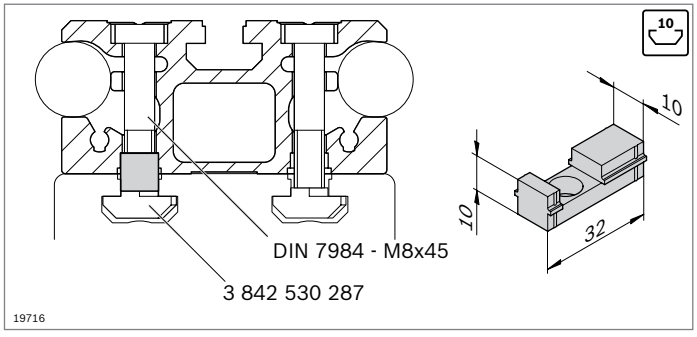

- Sliding block as a centering aid for mounting the guide profile in a 10 mm profile slot

Sliding block		No.
	50	**3 842 146 877**

Material: PA; black

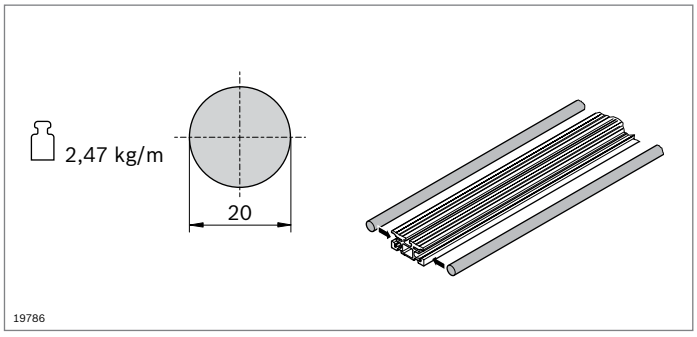


- The guide rod is pressed into the guide profile
- The guide rod guides the guide bearing


Guide rod	L_2 (mm)		No.
LF20	150 ... 2900	1	**3 842 993 969 / L_2**
	2900	20	**3 842 539 416**

Material: Solid shaft VA, induction hardened, polished
Condition on delivery: Ungreased; greasing according to assembly instructions **3 842 527 226**

13

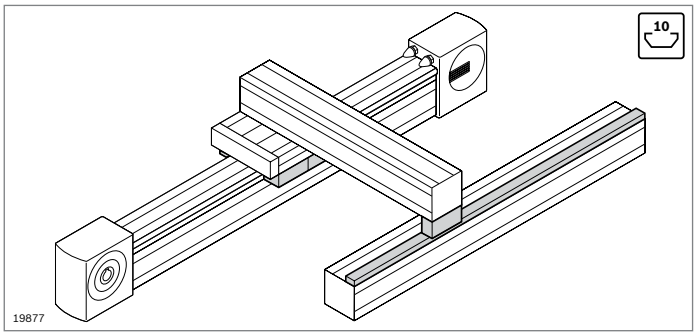

- Guide bearing for trolley construction
- Supporting bearing for brackets for bearing off-center forces
- Guide rail to support supporting bearings (p. 13-29)

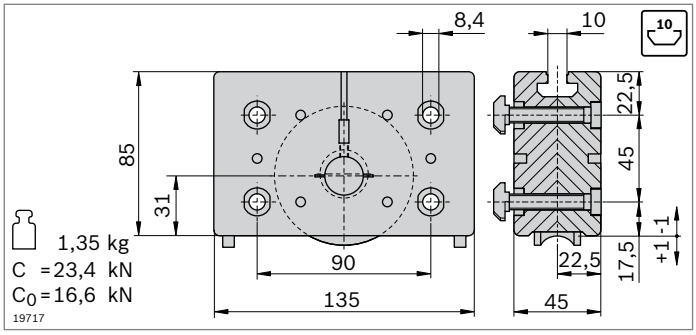


- Guide bearing for trolley construction
- Guiding via guide rod
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

FS1
DIN 7984
M8x50
10

FS2
ø10xø5x11

Guide bearing		No.	FS
LF20	2	**3 842 535 663**	4xFS1 4xFS2

Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

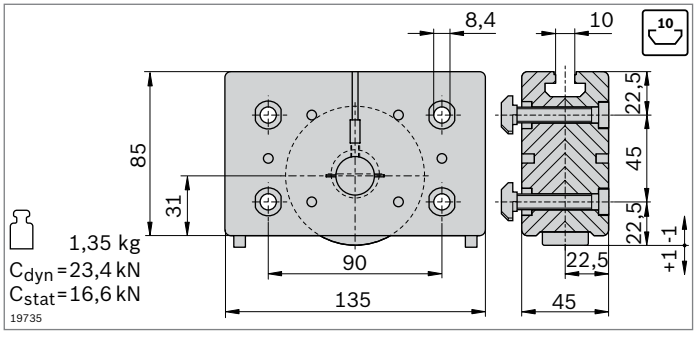


- Supporting bearing for brackets for bearing off-center forces
- For support on the guide rail
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

FS1
DIN 7984
M8x50
10

FS2
ø10xø5x11


Supporting bearing		No.	FS
LF20	2	**3 842 535 665**	4xFS1 4xFS2

Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

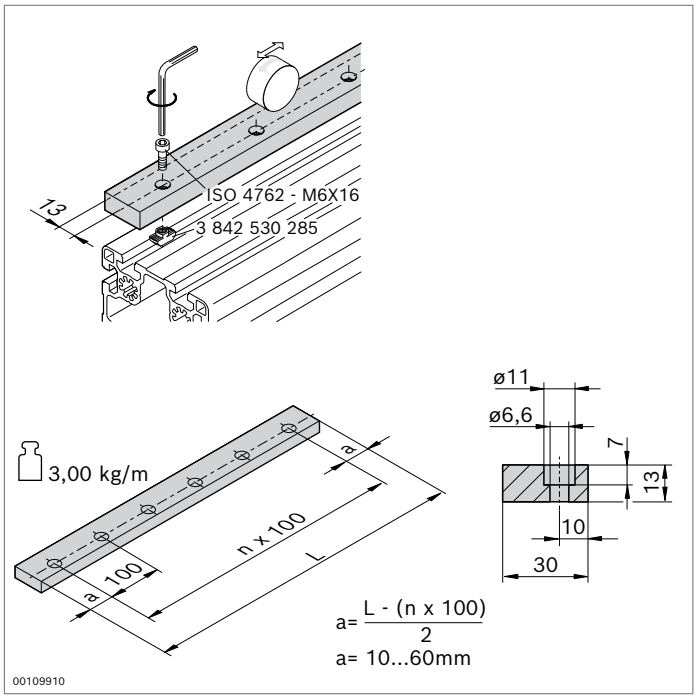

▶ Guide rail to hold supporting bearings

Guide rail	**L** (mm)	**No.**
LF20	120 ... 2000	**3 842 994 702 / L**
Material:	Steel, hardened, polished	
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**	
Accessories:	Cylinder head screw ISO 4762 – M6x16 T-nut M6, 10 mm slot (**3 842 530 285**)	

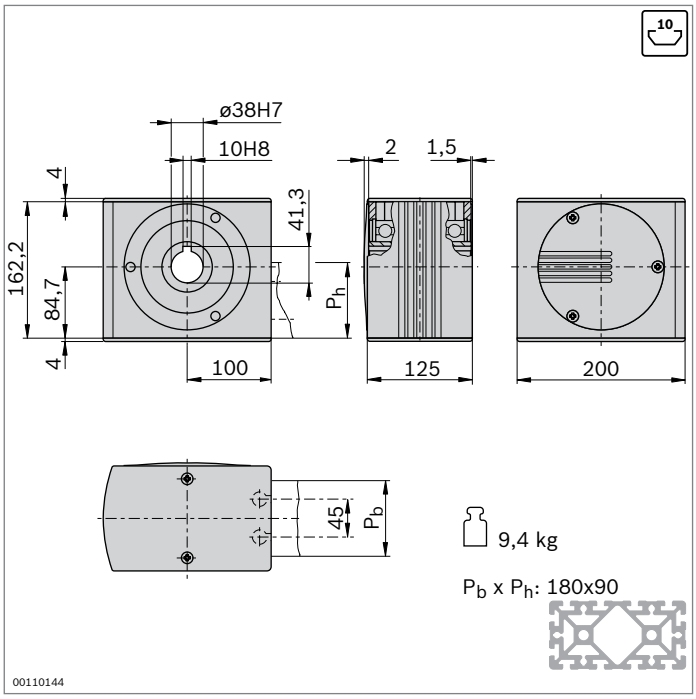



- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a plug-in shaft) for mounting a hollow shaft gear or a coupling (p. 13-41)
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF-S blind hole drilling for longitudinal end connector

Drive head	No.	FS
LF20S	**3 842 526 414**	4xFS3, 2xFS4

Material:	Drive head: Aluminum; anodized Hollow shaft: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3


FS4

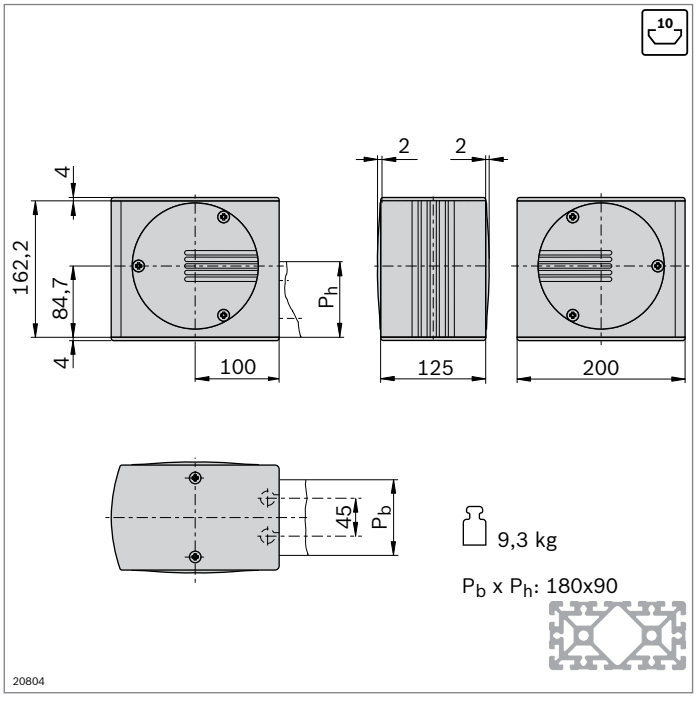




- Return head for tensioning the toothed belt and changing its direction
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF-S blind hole drilling for longitudinal end connector

Return head	No.	FS
LF20S	**3 842 526 415**	4xFS3, 2xFS4

Material:	Return head: Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3


FS4

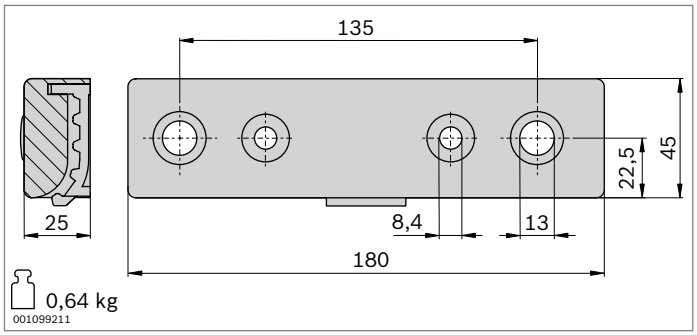


- Belt connector for fixing the toothed belt on the front of the trolley
- Profile finishing for strut profile 45x270 for trolley LF20S: M12
- All connecting parts included for mounting at the profile end (LF20S) or the slot (LF20C)

Belt connector		No.	FS
LF20	2	**3 842 535 680**	4xFS2, 2xFS5, 2xFS6, 2xFS7, 2xFS8

Material: Aluminum, painted black
Scope of delivery: Incl. fastening material (FS)


FS2
ø10xø5x11

FS5
DIN7984
M12x40

FS6
DIN 7984
M8x30
DIN EN ISO 7089
A8,4
10

FS7
DIN 7991
M8x30
10

FS8
ø18x7

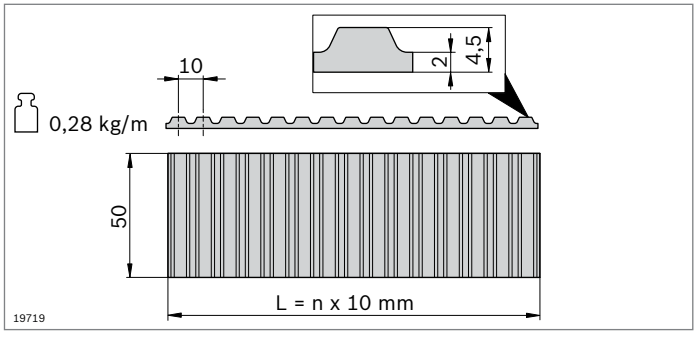


- Toothed belt as a trolley drive
- Pitch: AT10

Toothed belt	L_3 (mm)	No.
LF20	300 ... 50000	**3 842 994 662 / L_3**[1)]
	50000	**3 842 513 648**

[1)] $L_3 = 2xL_2 - L_1 + 780$
Material: PU with embedded steel wires


13

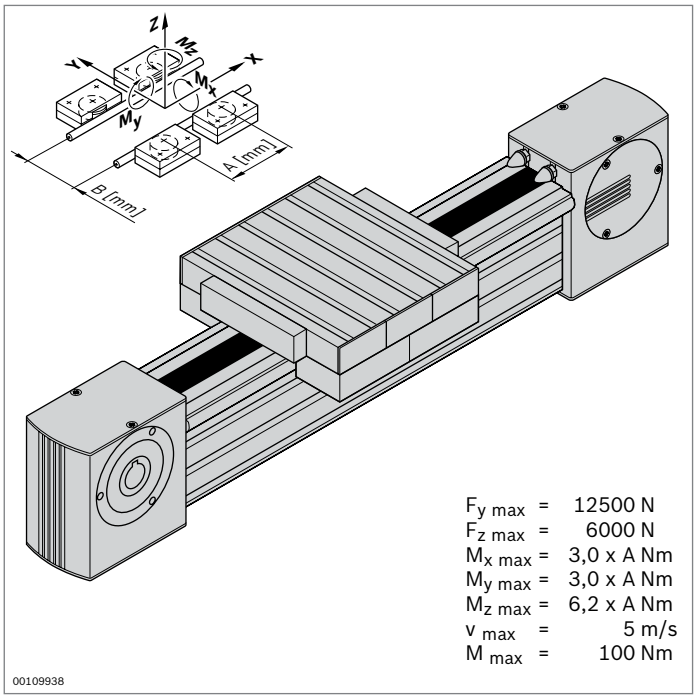

Cam roller guide LF20C – complete axis

10


- Fully assembled cam roller guide
- Stroke can be individually selected
- Clamping profile clipped into strut profile 90x180
- Incl. toothed belt drive; additional notes on the drive concept (p. 13-39)

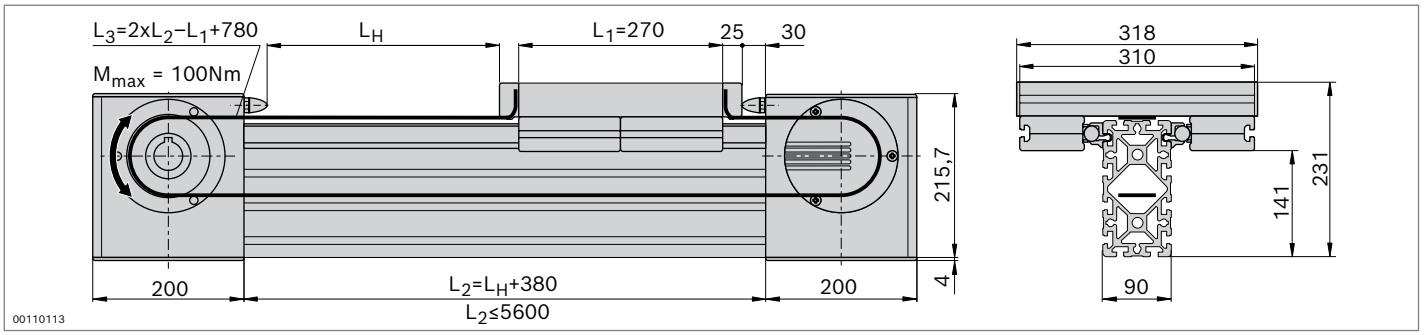

Technical data

For notes on layout and drive, see page 13-45

Complete axis	L_H (mm)	No.
LF20C	50 ... 5220	**3 842 998 500 / L_H**

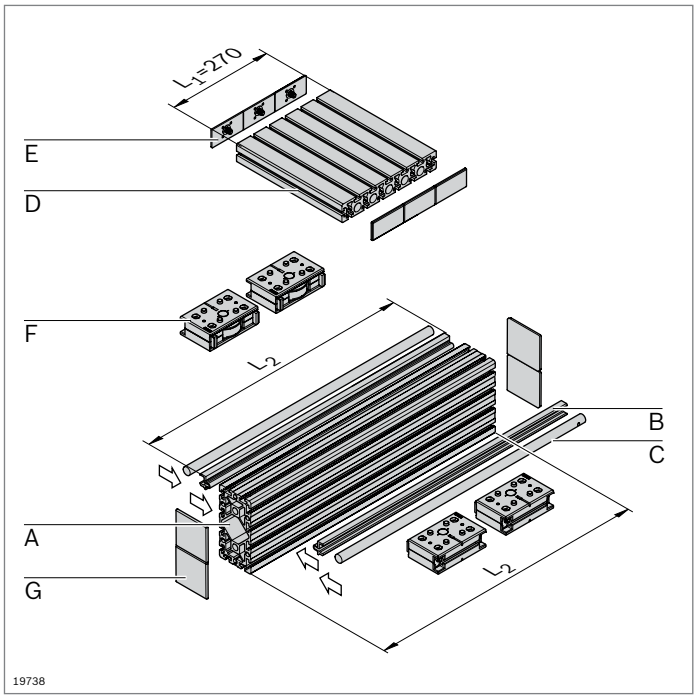


Cam roller guide LF20C – components

- Components for the individual assembly of cam roller guides, with or without drive

Parts list for cam roller guide LF20C without drive


Component		No.	Pcs	Page
A	Profile 90x180	**3 842 990 416 / L_2**	1	2-51
B	Clamping profile LF20C	**3 842 992 441 / L_2**	2	13-34
C	Guide rod LF20	**3 842 993 969 / L_2**	2	13-34
D	Profile 45x270	**3 842 992 927 / 310 mm**	1	2-47
E	Cover cap 45x90	**3 842 548 757**	6	2-47
F	Guide bearing LF20	**3 842 535 663**	4	13-35
G	Cover cap 90x90	**3 842 548 761**	4	2-51

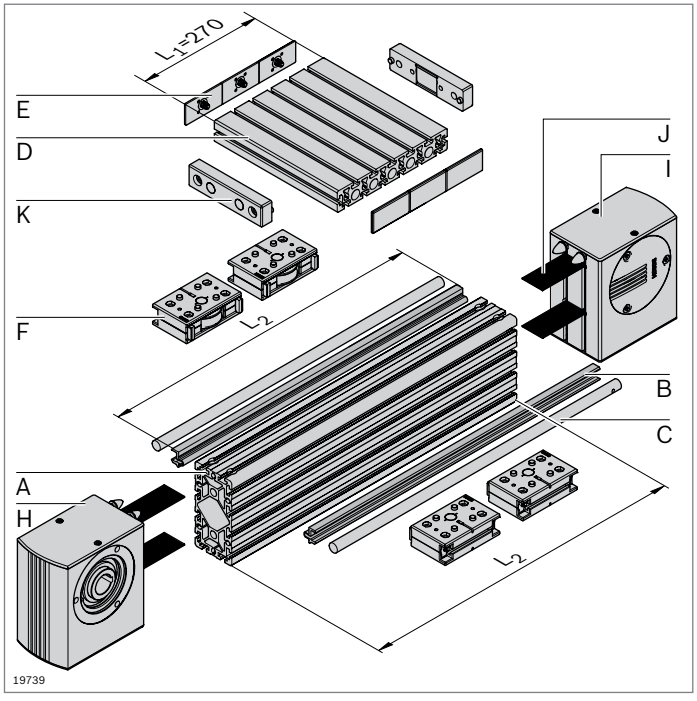


Parts list for cam roller guide LF20C with drive

Component		No.	Pcs	Page
A	Profile 90x180 LF LF	**3 842 992 898 / L_2**	1	2-51
B	Clamping profile LF20C	**3 842 992 441 / L_2**	2	13-34
C	Guide rod LF20	**3 842 993 969 / L_2**	2	13-34
D	Profile 45x270	**3 842 992 927 / 310 mm**	1	2-47
E	Cover cap 45x90	**3 842 548 757**	6	2-47
F	Guide bearing LF20	**3 842 535 663**	4	13-35
H	Drive head	**3 842 526 867**	1	13-37
I	Return head	**3 842 526 869**	1	13-37
J	Toothed belt	**3 842 994 662 / L_3**[1)]	1	13-38
K	Belt connector	**3 842 535 680**	2	13-38


[1)] $L_3 = 2xL_2 - L_1 + 780$

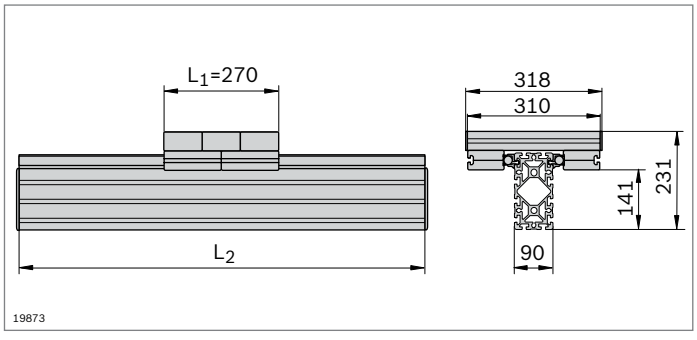

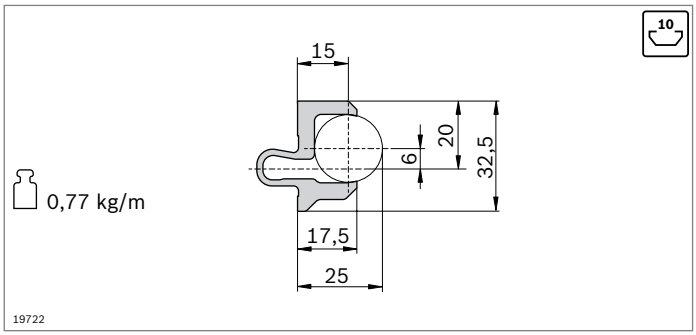


- The clamping profile is clipped into any chosen 10 mm strut profile slot and holds the guide rods

Clamping profile		**L** (mm)	**No.**
LF20C	1 pc	150 ... 3000	**3 842 992 441 / L**
	20 pcs	3000	**3 842 518 898**
Material:	Aluminum; anodized		

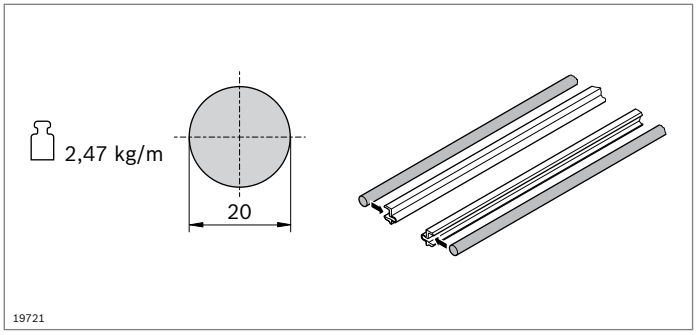


- The guide rod is pressed into the clamping profile
- The guide rod guides the guide bearing

Guide rod	**L** (mm)		**No.**
LF20	150 ... 2900	1	**3 842 993 969 / L**
	2900	20	**3 842 539 416**
Material:	Solid shaft VA, induction hardened, polished		
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**		

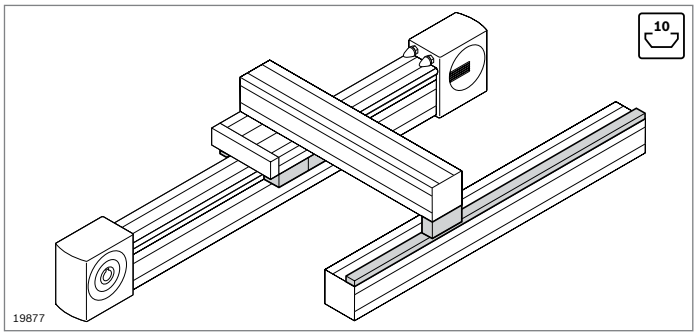

- Guide bearing for trolley construction
- Supporting bearing for brackets for bearing off-center forces
- Guide rail to support supporting bearings (p. 13-36)

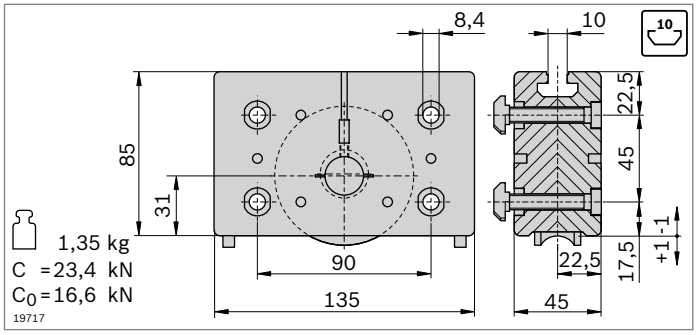


FS1
DIN 7984
M8x50

FS2
ø10xø5x11

- Guide bearing for trolley construction
- Guiding via guide rod
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state

Guide bearing		No.	FS
LF20	2	**3 842 535 663**	4xFS1 4xFS2

Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

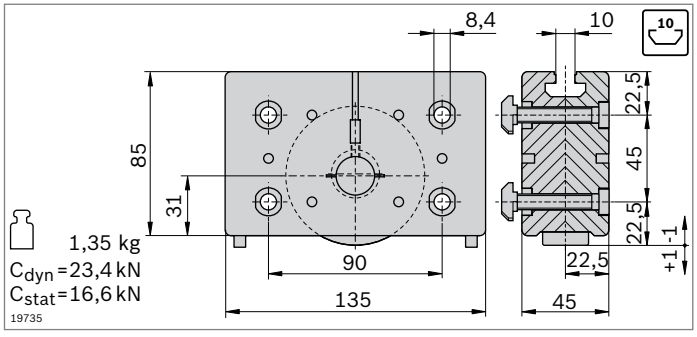


FS1
DIN 7984
M8x50

FS2
ø10xø5x11

- Supporting bearing for brackets for bearing off-center forces
- For support on the guide rail
- Cam rollers with ball bearings, permanently lubricated
- Lubricating felts with guide rod lubrication reservoir
- Play-free cam roller adjustment via eccentric bolts
- Replacement of the lubricating felts possible from rear in installed state


Supporting bearing		No.	FS
LF20	2	**3 842 535 665**	4xFS1 4xFS2

Material:	Housing: Diecast aluminum Cam roller: Steel, hardened, polished
Scope of delivery:	Incl. fastening material (FS)
Condition on delivery:	Lubricating felts ungreased; greasing according to assembly instructions **3 842 527 226**

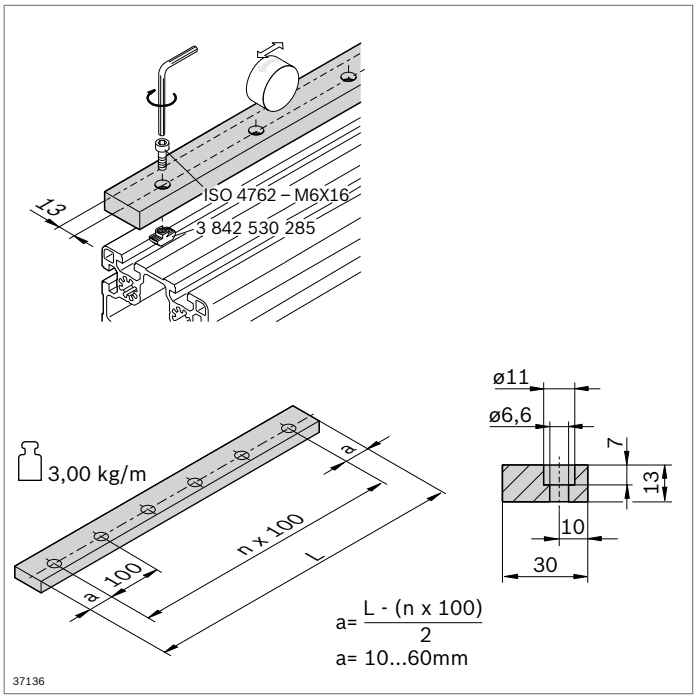

▶ Guide rail to hold supporting bearings

Guide rail	**L** (mm)	**No.**
LF20	120 ... 2000	**3 842 994 702 / L**
Material:	Steel, hardened, polished	
Accessories:	Cylinder head screw ISO 4762 – M6x16 T-nut M6, 10 mm slot (**3 842 530 285**)	
Condition on delivery:	Ungreased; greasing according to assembly instructions **3 842 527 226**	

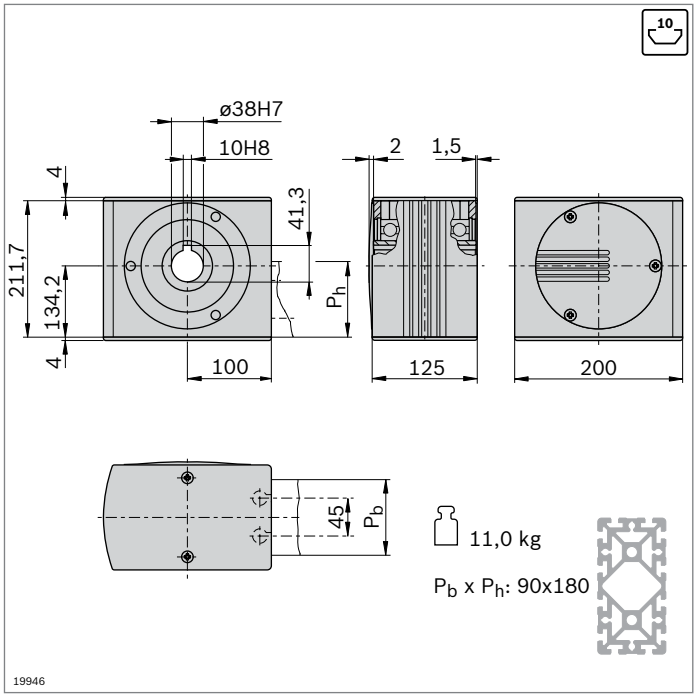


- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a plug-in shaft) for mounting a hollow shaft gear or a coupling (p. 13-41)
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Drive head	No.	FS
LF20C	**3 842 526 867**	4xFS3, 2xFS4

Material:	Drive head: Aluminum; anodized Hollow shaft: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3
ISO 7380
M8x40

FS4
ISO 4035
M8-04

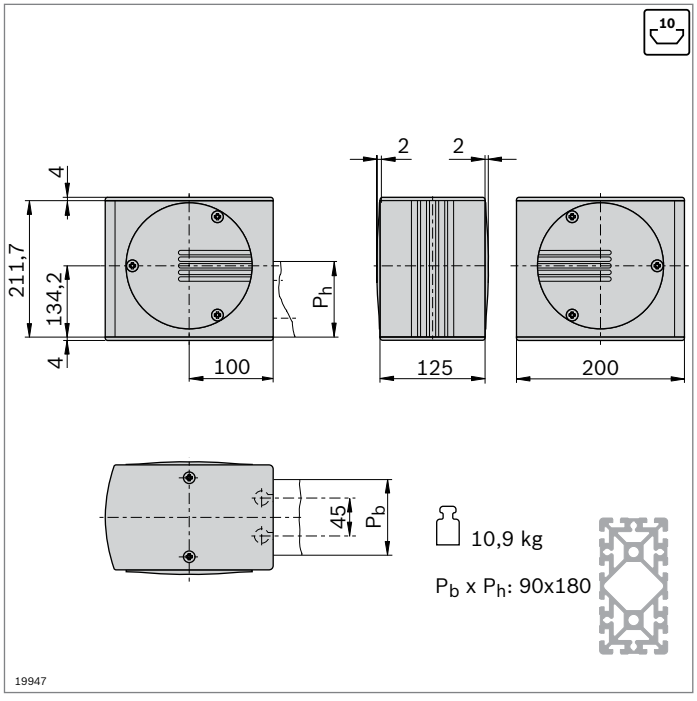

- Return head for tensioning the toothed belt and changing its direction
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector


Return head	No.	FS
LF20C	**3 842 526 869**	4xFS3, 2xFS4

Material:	Return head: Aluminum; anodized Hollow shaft: Steel; zinc-plated Cover caps: PA; black
Scope of delivery:	Incl. fastening material (FS), cover caps

FS3
ISO 7380
M8x40

FS4
ISO 4035
M8-04


13

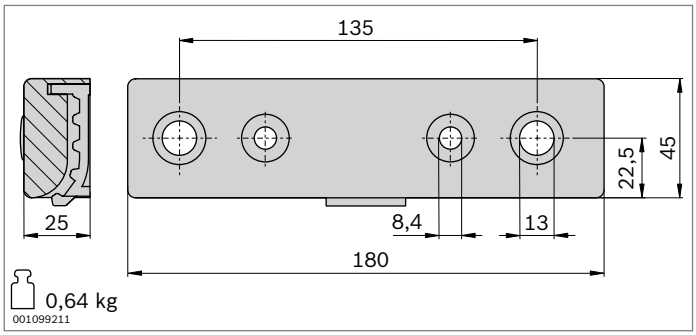



- Belt connector for fastening the toothed belt to the trolley slot
- Profile finishing for strut profile 45x270 for trolley LF20S: M12
- All connecting parts included for mounting at the profile end (LF20S) or the slot (LF20C)

Belt connector		No.	FS
LF20	2	**3 842 535 680**	4xFS2, 2xFS5, 2xFS6, 2xFS7, 2xFS8

Material: Aluminum, painted black
Scope of delivery: Incl. fastening material (FS)

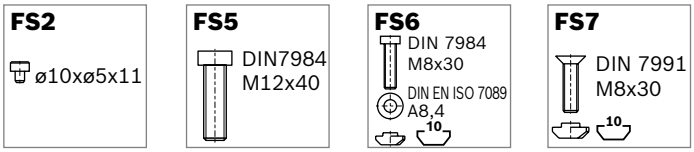




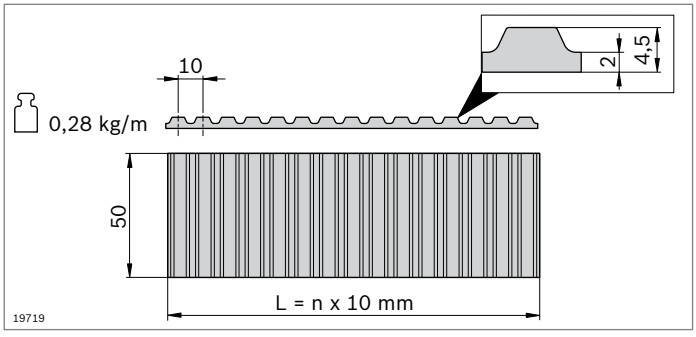

- Toothed belt as a trolley drive
- Pitch: AT10

Toothed belt	L (mm)	No.
LF20	300 ... 50000	**3 842 994 662 / L_3**[1)]
	50000	**3 842 513 648**

[1)] $L_3 = 2xL_2 - L_1 + 780$
Material: PU with embedded steel wires

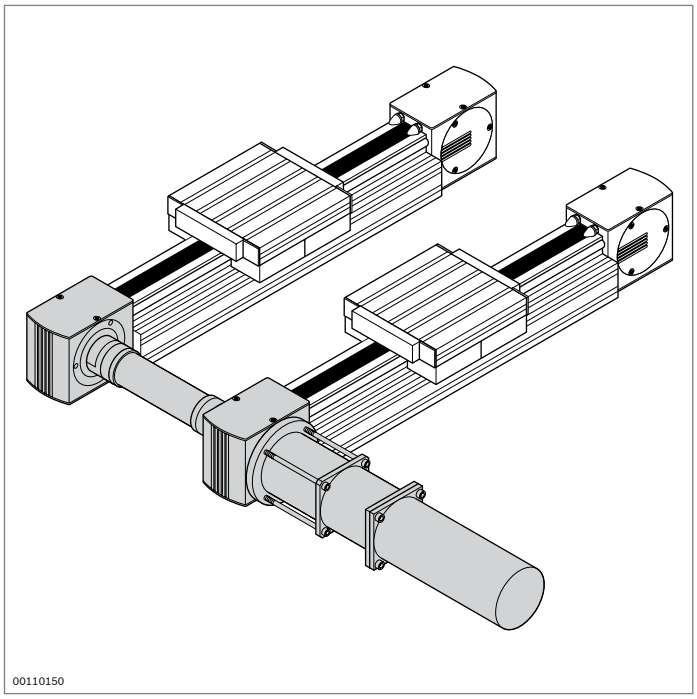


Linear guide drives

Drive concept

The linear guides are driven via the hollow shaft in the drive head. The drive head is used to directly install a motor or alternatively (in connection with a plug-in shaft) a hollow shaft gear or a coupling. Depending on the desired speeds of movement for the application, it is necessary to use various motor types in conjunction with intermediate gears. Due to the multitude of drive components available in the market, there are a large number of possible combinations.

The aluminum modular profile system makes it easy to assemble Bosch Rexroth linear guides through the use of a standard shaft and simple connection dimensions.

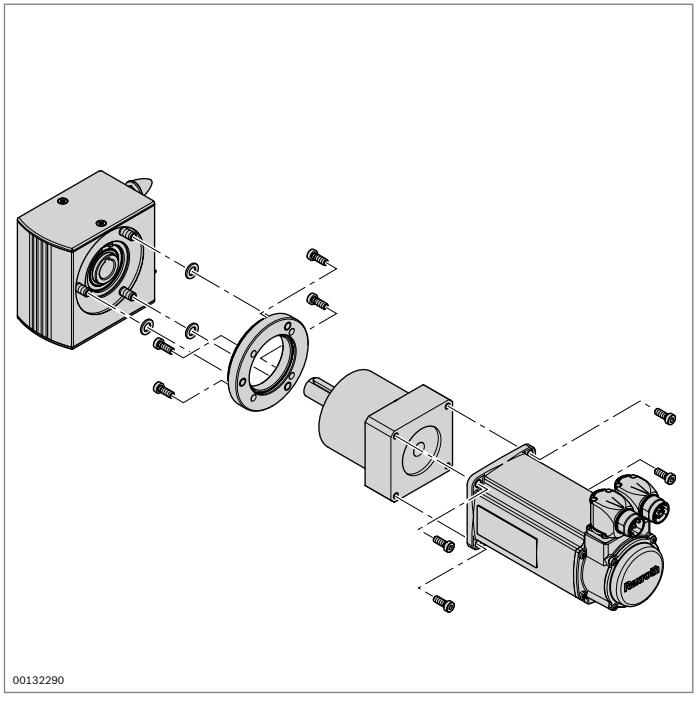

Fastening


The drive head is directly secured on the profile by means of longitudinal end connectors.
The motor, or the intermediate gear flange, can be screwed to the drive head as a complete unit from the left- or right-hand side.


Synchronous shafts

The use of synchronous shafts (p. 13-42) enables several linear axes to be operated with one drive.

Connection dimensions (flanges)

The connection dimensions for the size LF6, LF12 and LF20 linear guides are shown on pages 13-40.



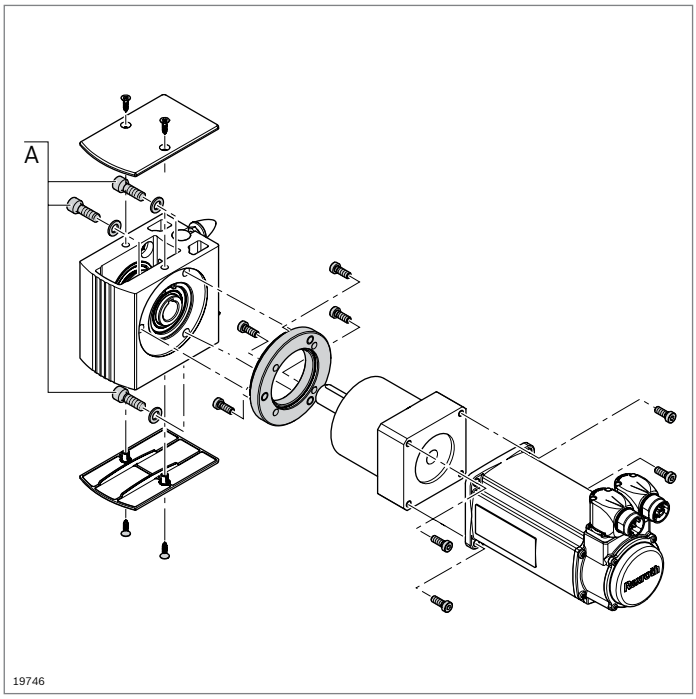

Flange


A flange is generally required for fixing the motor/gear unit in place. The connection dimensions for connection to the drive head are shown below. The connection to the motor/ gear unit depends on the model chosen in each case.

Also see connection dimensions of drive heads
LF6C (p. 13-9),
LF12C (p. 13-23), LF12S (p. 13-16),
LF20C (p. 13-37), LF20S (p. 13-30)

Fastening material flange (A)

Note regarding flange in self-build version. Adapt fastening material to suit differing flange thicknesses.

	LF6 (b = 14.5 mm)	LF12 (b = 20 mm)	LF20 (b = 20 mm)
Drive head – flange	ISO 4762 – M8x22 (3x)	ISO 4762 – M8x25 (3x)	ISO 4762 – M10x30 (3x)
	ISO 7092 – 8 (3x)	ISO 7092 – 8 (3x)	ISO 7092 – 10 (3x)

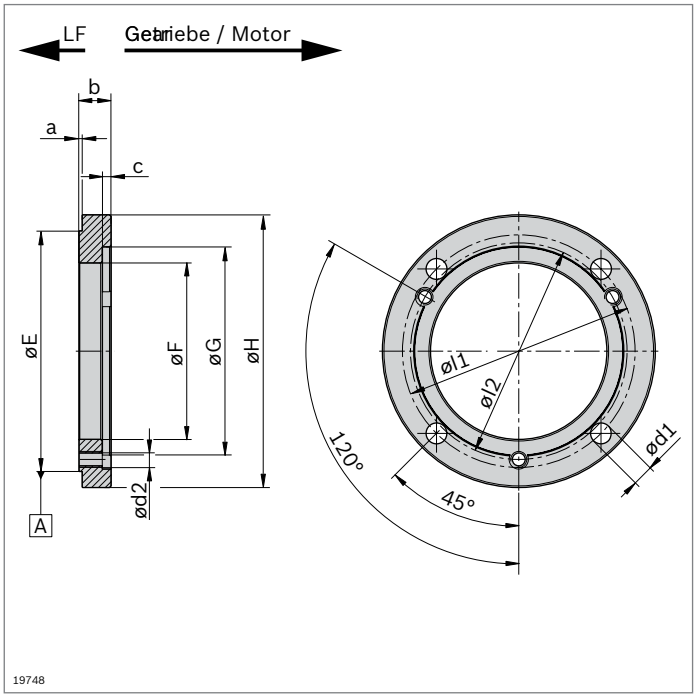



Drawing and dimensions for flange in self-build version. Customer-specific adjustment is necessary, depending on the motor and gear unit. The fastening material must be self-sourced.

Flange

Dimension parameter				LF6 (mm)	LF12 (mm)	LF20 (mm)
a				3.5 ± 0.15	3.5 ± 0.15	2 ± 0.15
b_{min} *)	//	0.05		*)	*)	*)
c*)				*)	*)	*)
E	A			Ø 88 -0.1/-0.3	Ø 111 -0.1/-0.3	Ø 150 -0.1/-0.3
F_{min} *)				Ø *)	Ø *)	Ø *)
G*)	◎	0.05	A	Ø *)	Ø *)	Ø *)
H*)				Ø *)	Ø *)	Ø *)
l1*)				Ø *)	Ø *)	Ø *)
l2				Ø 78	Ø 100	Ø 135
d1*)				Ø *)	Ø *)	Ø *)
d2	⌖	Ø 0.25		M8	M8	M10


*) Dimension according to customer drive.
Notice: The values must be checked by the user.

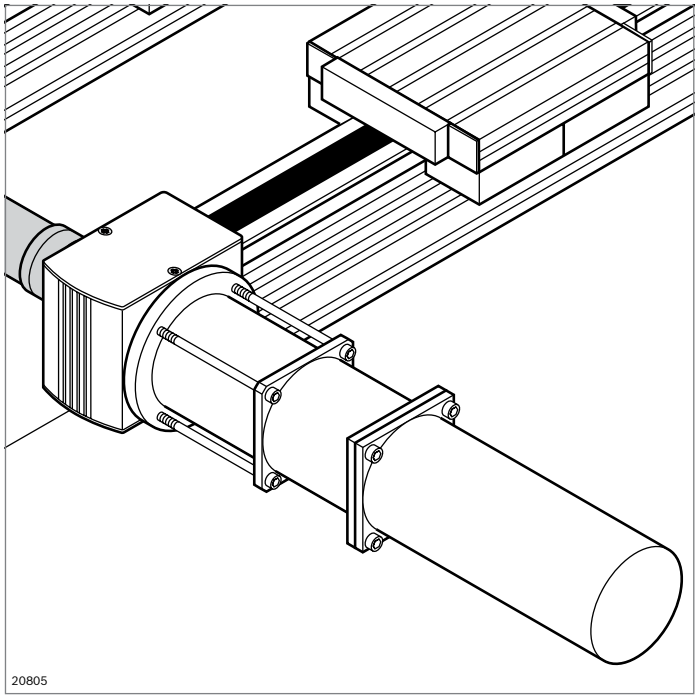

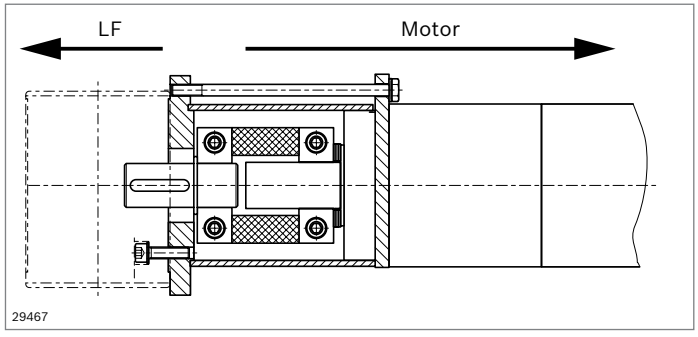

Alternative mounting with coupling

Instead of direct mounting over the section link, a coupling can be inserted. This allows any user truing errors to be rectified. The coupling must be designed and sourced by the customer.

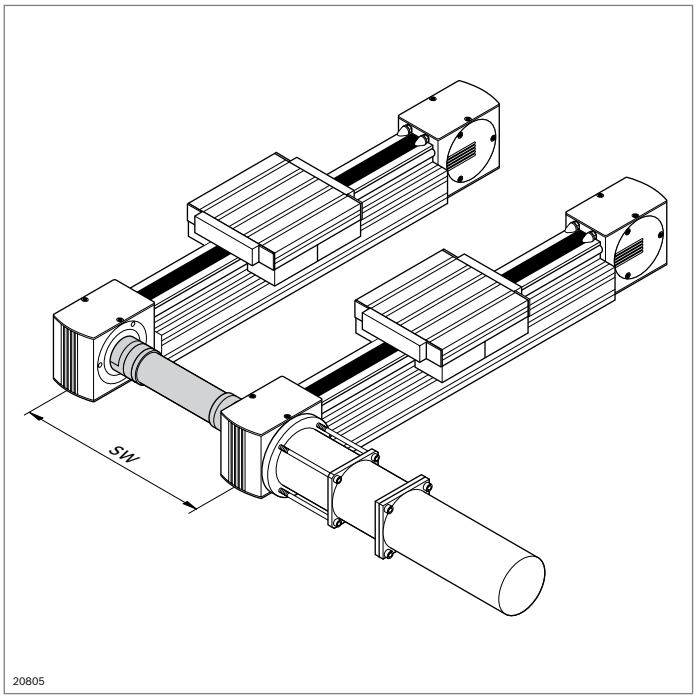

Plug-in shafts, synchronous shafts


Plug-in shafts


- Enable the installation of customized drive solutions

Plug-in shaft	No.
LF6	**3 842 526 893**
LF12	**3 842 526 894**
LF20	**3 842 526 895**

Material: Steel; nickel-plated

SW = support separation

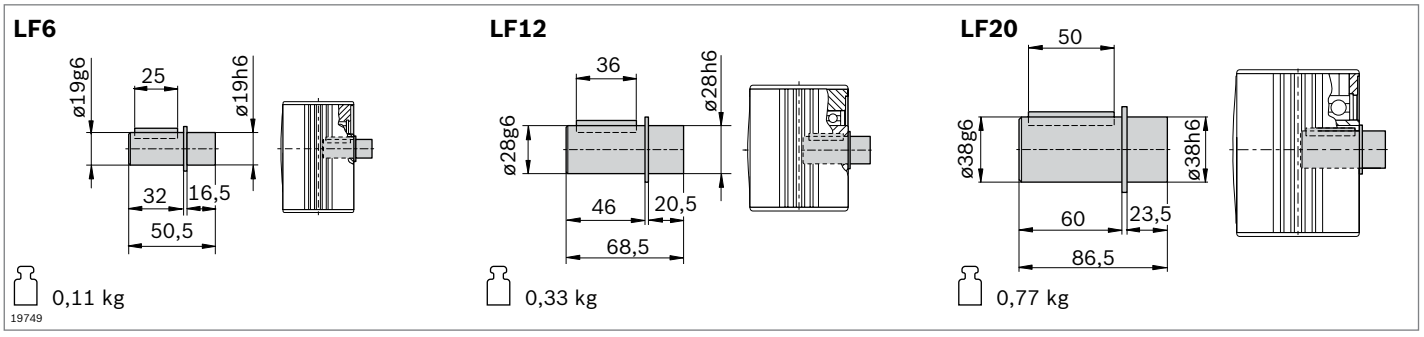

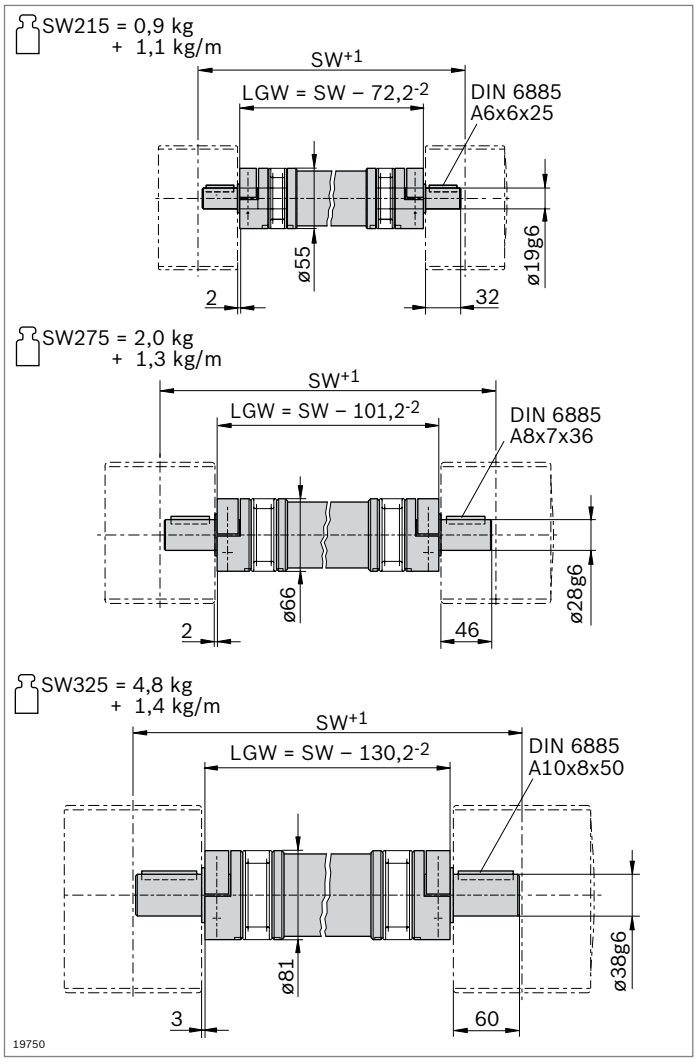

SW = support separation
LGW = length of synchronous shaft

Synchronous shafts

- Allow several linear guides to be operated synchronously while being driven by a common motor
- The synchronous shaft can be replaced without the drive heads having to be disassembled

The selection diagrams on page 13-50, 13-51 specify maximum values without safety margins.

Synchronous shaft	SW (mm)	No.
LF6	215 ... 3000	**3 842 994 811 / SW**
LF12	275 ... 3500	**3 842 994 812 / SW**
LF20	325 ... 3500	**3 842 994 813 / SW**

Material: Steel/aluminum

Technical data for roller, design, mounting

General technical data and calculations

Speed

$v_{max} = 5$ m/s

Acceleration

$a_{max} = 15$ m/s²

Temperature resistance

$-10\ °C < \vartheta < 40\ °C$

Lubrication

All cam roller guide bearings are delivered with built-in lubricating felts.

Condition on delivery

Ungreased (greasing with Klüber Isoflex Topas NCA 52; see assembly instructions **3 842 527 226**)
Lubricating felts with reservoir are not greased.
Guide rods are ungreased.

Definition of dynamic load rating C

The radial loading of constant magnitude and direction which a linear rolling bearing can theoretically withstand for a nominal service life of 100 km distance traveled (acc. to ISO 14728 Part 1).

Note regarding maximum load F_{max}

The maximum loads apply to individual loads. Combining loads decreases the expected service life.

Definition and calculation of the nominal service life

The calculated service life which an individual linear rolling bearing – or a group of apparently identical rolling element bearings operating under the same conditions – can attain with a 90 % probability, based on the materials of normal manufacturing quality that are generally used today and under usual operating conditions (acc. to ISO 14728 Part 1) and optimal installation conditions.


Nominal service life at constant speed


$$L = \left(\frac{C}{F}\right)^3 10^5$$

$$L_h = \left(\frac{L}{2 \cdot s \cdot n_s \cdot 60}\right)$$

L = nominal service life (m)
L_h = nominal service life (h)
C = dynamic load capacity (N)
F = equivalent load (N)
s = length of stroke* (m)
n_S = stroke frequency (double stroke) (rpm)

*) For $s < 2 \cdot L_1$ (trolley length) load capacities are reduced.
Please consult us.





Load-dependent design

- The specified values are maximum single loads, which are reduced when loads are combined


Notice: If cumulative forces and moments arise in your application and load limits may be reached, please contact your Rexroth representative for consultation in design.

	A_{min} [1] (mm)	F_z (N)	F_y (N)	M_x (Nm)	M_z (Nm)	M_y (Nm)	v_{max} (m/s)	M_{max} (Nm)
LF6C	75	850	1400	0.4 · B[2]	0.7 · A[2]	0.4 · A[2]	5	15
LF12S	90	2000	3500	78.0	1.7 · A[2]	1.0 · A[2]	5	30
LF12C	90	2000	3500	1.0 · B[2]	1.7 · A[2]	1.0 · A[2]	5	30
LF20S	135	6000	12500	240.0	6.2 · A[2]	3.0 · A[2]	5	100
LF20C[3]	135	6000	12500	3.0 · B[2]	6.2 · A[2]	3.0 · A[2]	5	100

[1] A_{min} = Length of guide bearing
[2] Notice: A (spacing of support wheels, see image above) in mm; see below for calculation of B (track width)
[3] Maximum values (profile slot load capacity) are only reached with the following profiles: 45x270; 60x90; 90x90; 90x180; 90x360 (see p. 18-15)

Do not exceed the maximum loading of the screwed connections for rails, carriages and fastenings.
Ensure sufficiently stable basic profile and respective substructure.

Take account of the general service life of lubricants!

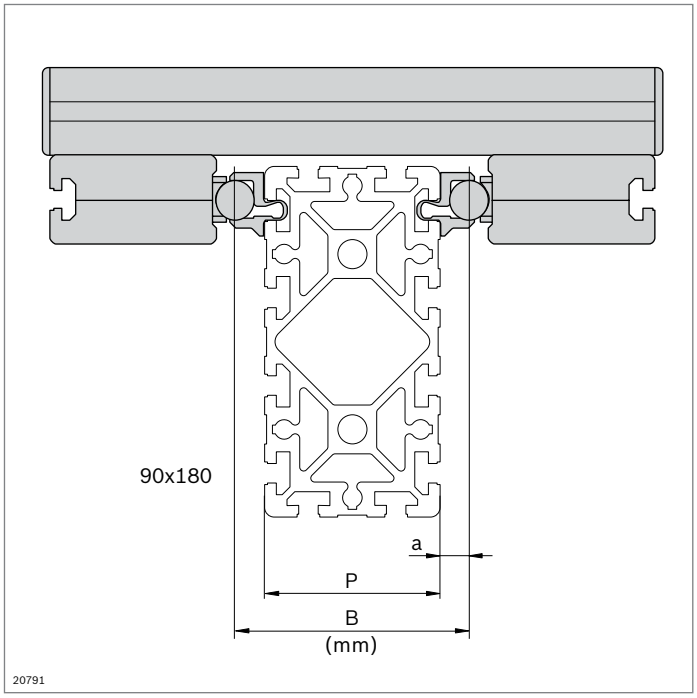

Calculating the track width B

B = P + 2 · a


B = track width (in mm)
P = profile width (in mm)
a = rod spacing (in mm)

LF ... C

Values for a: for LF6C = 9.5 mm (p. 13-8)
for LF12C = 9 mm (p. 13-20)
for LF20C = 15 mm (p. 13-34)

LF ... S

Values for B: for LF12S = 90 – 12 = 78 mm (p. 13-13)
for LF20S = 100 – 20 = 80 mm (p. 13-27)

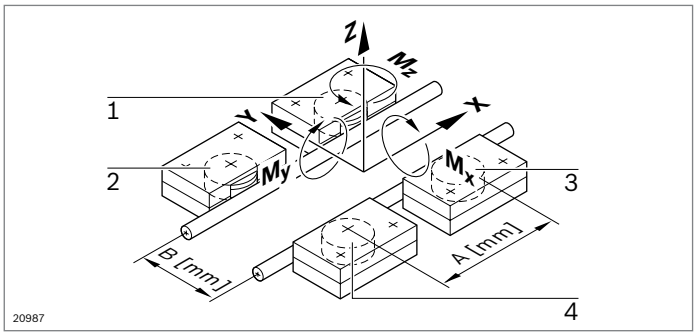

Cam roller 1:

$$F_r = -(\frac{F_y}{2}) - (\frac{M_z}{A})$$

$$F_a = (\frac{F_z}{4}) + (\frac{M_x}{2 \cdot B}) - (\frac{M_y}{2 \cdot A})$$

Cam roller 3:

$$F_r = +(\frac{F_y}{2}) + (\frac{M_z}{A})$$

$$F_a = (\frac{F_z}{4}) - (\frac{M_x}{2 \cdot B}) - (\frac{M_y}{2 \cdot A})$$

Cam roller 2:

$$F_r = -(\frac{F_y}{2}) + (\frac{M_z}{A})$$

$$F_a = (\frac{F_z}{4}) + (\frac{M_x}{2 \cdot B}) + (\frac{M_y}{2 \cdot A})$$

Cam roller 4:

$$F_r = +(\frac{F_y}{2}) - (\frac{M_z}{2})$$

$$F_a = (\frac{F_z}{4}) - (\frac{M_x}{2 \cdot B}) + (\frac{M_y}{2 \cdot A})$$

Table 1: Load factors for cam rollers

	Load case: $F_r \geq \lvert F_a \rvert$				Load case: $F_r < \lvert F_a \rvert$			
	x	y	x_0	y_0	x	y	x_0	y_0
LF6	1	3.1	1.2	3.5	0.5	3.6	1	3.7
LF12	1	4.2	1.2	5.2	0.5	4.7	1	5.4
LF20	1	4	1.2	4.9	0.5	4.5	1.1	5

Table 2: Cam rollers - load capacities

	C for 10^5 m (N)	C_o (N)
LF6	3670	2280
LF12	8300	5000
LF20	23400	16600

Calculation of load on bearing for a trolley

Loading of the individual rollers

- A mm: Spacing of the rollers' rotational axes
- B mm: Center-to-center distance between the guide rods
- Only compressive forces can be transferred between cam rollers and guide rods in the radial direction.
  The following therefore applies in respect of radial forces:
  $F_r \leq 0$: $F_r = 0$
- Cam rollers can be loaded equally in both directions.
  Therefore force F_a is sufficient for calculating P and P_0

Equivalent dynamic and static loads

To calculate the service life of a cam roller guide, the roller with the greatest load has to be considered.
The following must be determined:
$P = \max (P_1,...,P_4)$
$P_0 = \max (P_{01},...,P_{04})$

Equivalent dynamic load P

$$P = x \cdot |F_r| + y \cdot |F_a|$$

Equivalent static load P_0

$$P_0 = x_0 \cdot |F_r| + y_0 \cdot |F_a|$$

F_r (N): radial load of the roller
The following applies: $F_r \leq 0$: $F_r = 0$

F_a(N): axial load of the roller

x, x_0: Radial factor (table 1)
y, y_0: Axial factor (table 1)


C: dynamic load capacity (table 2)
C_0: static load capacity (table 2)

Static safety values:

$$S_0 = (\frac{C_0}{P_0})$$

$S_0 \geq 4$ recommended!

Size selection



Determining the forces and moments which arise

$F_{x\,dyn}$, $F_{y\,dyn}$, $F_{z\,dyn}$ [1)]
$M_{x\,dyn}$, $M_{y\,dyn}$, $M_{z\,dyn}$

[1)] $F_{z\,dyn}$ includes the weight of the trolley


All the influences must be considered, e.g.:


- Net mass and load
- Acceleration forces and moments
- Process forces and moments
- Loads caused by dampers and/or stops

Example

m = 30 kg a = 2.5 m/s²;
L_1 = 150 mm L_2 = 5000 mm
g = 9.81 m/s²

$F_{z\,dyn}$ = m · g = 294 N
$M_{y\,dyn}$ = m · a · 70 mm = 5.25 Nm





Determining the permissible forces and moments

For values see p. 13-50

Example LF 6 C

$F_{z\,dyn\,zul}$ = 850 N > $F_{z\,dyn}$ = 294 N
$M_{y\,dyn\,zul}$ = 0.4 · A = 0.4 · 75 mm
= 30 Nm > $M_{y\,dyn}$ = 5.25 Nm

Selection of the suitable size


$F_{x,\,y,\,z\,dyn}$ < $F_{x,\,y,\,z\,dyn\,zul}$!
$M_{x,\,y,\,z\,dyn}$ < $M_{x,\,y,\,z\,dyn\,zul}$!

If F and M are cumulative:
In case of higher load, the next size is to be used.
In case of doubt, please contact your
Rexroth representative for consultation in design.

Example

$F_{z\,dyn}$ = 294 N < $F_{z\,dyn\,zul}$ = 850 N !
$M_{y\,dyn}$ = 5.25 Nm < $M_{y\,dyn\,zul}$
= 30 Nm !


Calculating the drive



Peripheral force F_u

$$F_u = m \cdot a + m \cdot g + F_0 + \mu \cdot m \cdot g$$
$$F_u \leq F_{u\,zul}\ !$$


F_0: frictional force on return units
μ : coefficient of friction of the guide
see table below.



Alternative calculation formula

$$F_u = m \cdot a + F_0 + \mu \cdot m \cdot g \leq F_{u\,zul}\ !$$

Example of LF6C
m = 30 kg; a = 2.5 m/s²
$F_u = (30 \cdot 2.5)N + 10\ N$
$\quad + (0.025 \cdot 30 \cdot 9.81)N$
$F_u = 75\ N + 10\ N + 0.025 \cdot 294\ N$
$F_u = 92.35\ N < F_{u\,zul} = 600\ N\ !$



Required drive torque M


$$M = ½ \cdot D_0 \cdot F_u \leq M_{zul}\ !$$

Example
$M = ½ \cdot 50.94\ mm \cdot 92.35\ N$
$\quad = 2.4\ Nm$
$M = 2.35\ Nm \leq M_{zul}$
$\quad = 15\ Nm\ !$

	v (m/s)	$\mathbf{F_{u\,zul}}$ (N)	$\mathbf{M_{zul}}$ (Nm)	$\mathbf{F_0}$ (N)	**μ**	$\mathbf{D_0}$ (mm)	$\mathbf{D_0 \times \pi}$ (mm)
LF6C	≤ 5.0	600	15.0	10	0.025	50.94	160
LF12S	≤ 5.0	820	30.0	30	0.020	73.20	230
LF12C	≤ 5.0	820	30.0	30	0.020	73.20	230
LF20S	≤ 5.0	2000	100.0	35	0.015	101.86	320
LF20C	≤ 5.0	2000	100.0	35	0.015	101.86	320

F_0: frictional force on return units; μ : coefficient of friction


Checking the selected size



Preload force F_v of toothed belt

$0.5 \cdot F_u \leq F_v \leq F_u$
Recommendation: $F_v = 0.5 \cdot F_u$


Example
F_u = 92.35 N
F_v = 50 N



Maximum toothed belt force $F_{1\,max}$

$F_{1\,max} = F_v + 0.5 \cdot F_u \leq F_{1\,zul}$!
$F_{2\,min} = F_v - 0.5 \cdot F_u > 0$!

Example of LF6C
$F_{1\,max} = 50\ N + 0.5 \cdot 92.35\ N$
$F_{1\,max} = 96.18\ N < F_{1\,zul} = 900\ N$!
$F_{2\,min} = 50\ N - 0.5 \cdot 92.35\ N$
$F_{2\,min} = 3.825\ N > 0$!



Required preload length ΔI

$\Delta l = 0.5 \cdot F_v \cdot L / C_{spez} \leq \Delta l_{max}$!

Example
$L = 2 \cdot L_2 - L_1 + 400$ mm
L = 10250 mm
$\Delta l = 0.5 \cdot 50\ N \cdot 10250$ mm / 420000 N
$\Delta l = 0.8$ mm $< \Delta l_{max} = 13$ mm !


	$F_{1\,zul}$ (N)	C_{spez} (N)	Δl_{max} (mm)	L (mm)	Page
LF6C	900	420000	13	$2 \cdot L_2 - L_1 + 400$	13-6
LF12S	1230	1250000	16	$2 \cdot L_2 - L_1 + 630$	13-11
LF12C	1230	1250000	16	$2 \cdot L_2 - L_1 + 630$	13-18
LF20S	3000	1870000	23	$2 \cdot L_2 - L_1 + 780$	13-25
LF20C	3000	1870000	23	$2 \cdot L_2 - L_1 + 780$	13-32

C_{spez}: Belt stiffness;
L: Toothed belt length,
see also LF6C (p. 13-6),
LF12S (p. 13-11), LF12C (p. 13-18),
LF20S (p. 13-25), LF20C (p. 13-32)

Dimensioning of synchronous shafts

			LF6	LF12	LF20
Support separation SW	horizontal		215 ... 3000 mm	275 ... 3500 mm	325 ... 3500 mm
	vertical		215 ... 2000 mm	275 ... 2000 mm	325 ... 1100 mm
Rated torque			max. 30 Nm	max. 60 Nm	max. 150 Nm
Permitted rpm			Diagram 3 (p. 13-51) **max. 0.7 · n_k**	Diagram 3 (p. 13-51) **max. 0.7 · n_k**	Diagram 3 (p. 13-51) **max. 0.7 · n_k**
Elasticity	axial		max. 2 mm	max. 3 mm	max. 4 mm
	lateral		Diagram 4 (p. 13-51)	Diagram 4 (p. 13-51)	Diagram 4 (p. 13-51)
	rotation angle		Diagram 5 (p. 13-51)	Diagram 5 (p. 13-51)	Diagram 5 (p. 13-51)

Diagram 1: Torsion stiffness

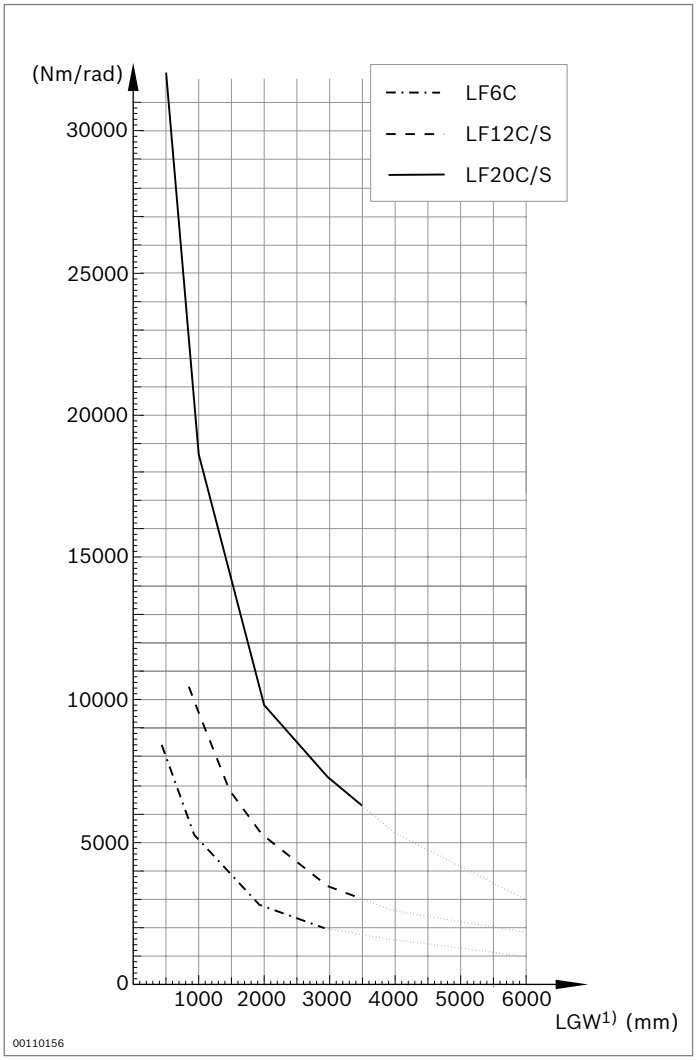

1) Length synchronous shaft LGW

LF6	LGW = SW - 72
LF12	LGW = SW - 101
LF20	LGW = SW - 130

Diagram 2: Mass inertia

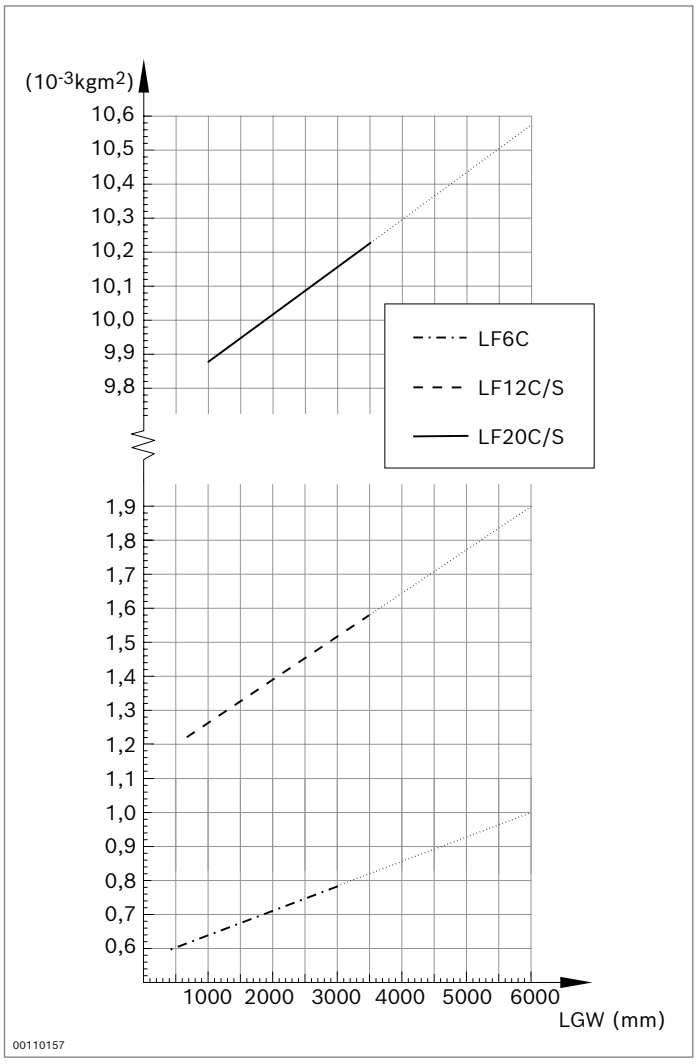


Diagram 3: Critical rpm due to bending n_k


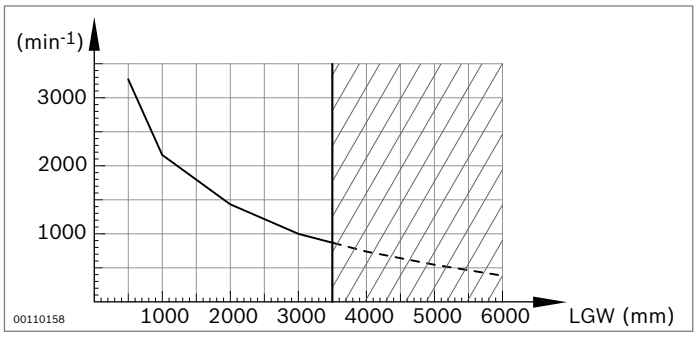


Diagram 4: Lateral offset




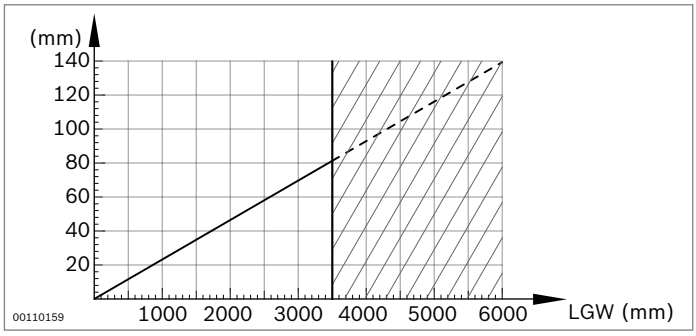

Aligned shafts are recommended.


Diagram 5: rotation angle



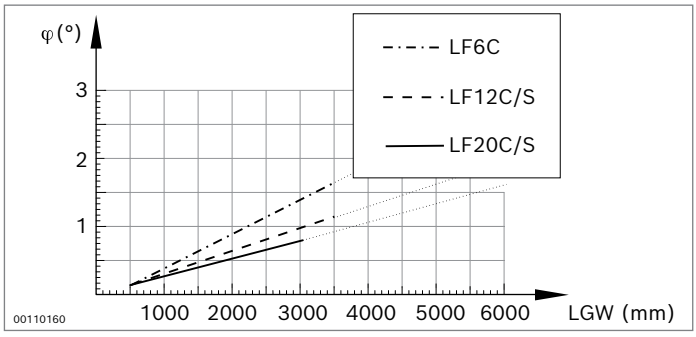


13


Tools



Drilling jigs (p. 14-2)




Torx® offset screwdriver (p. 14-6)



Variofix remover, flexible grinder for anodized surfaces (p. 14-8)




Miter cutter (p. 14-8)



Tool shelf, tool holder (p. 14-9)

Please request information on the complete Bosch power tools range.


Robert Bosch Power Tools GmbH
Max-Lang-Strasse 40-46
70771 Leinfelden-Echterdingen, Germany
www.bosch-pt.com

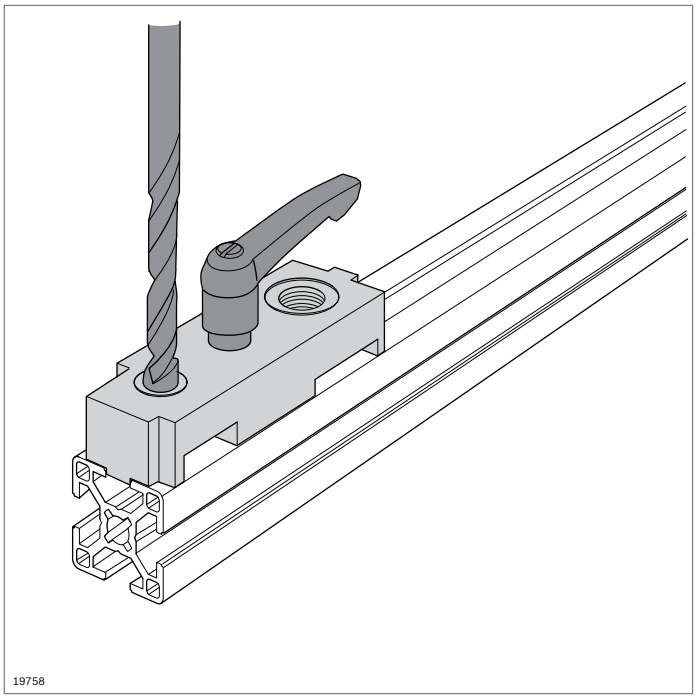

Drilling jigs



- For simple drilling of standard holes for the Rexroth range of connectors
- Stopping surfaces and edges for precise hole positioning
- Lockable

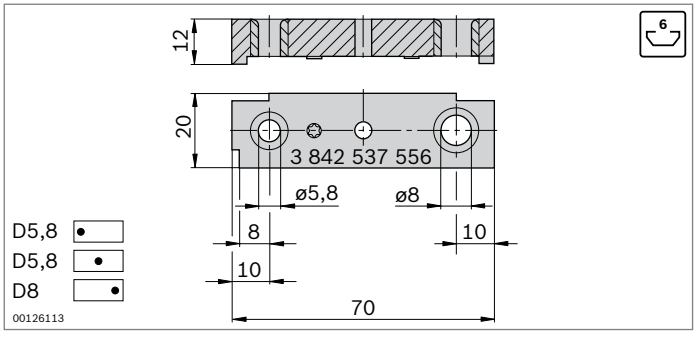


Drilling jigs – slot 6 mm

- For through-holes (ø5.8) for hexagonal-star socket screwdrivers T25
- For fastening holes (ø8) for quick connectors

Drilling jig		No.	FS
Slot 6 mm		**3 842 537 556**	FS1
Material:	Aluminum		
Scope of delivery:	Incl. fastening material (FS)		



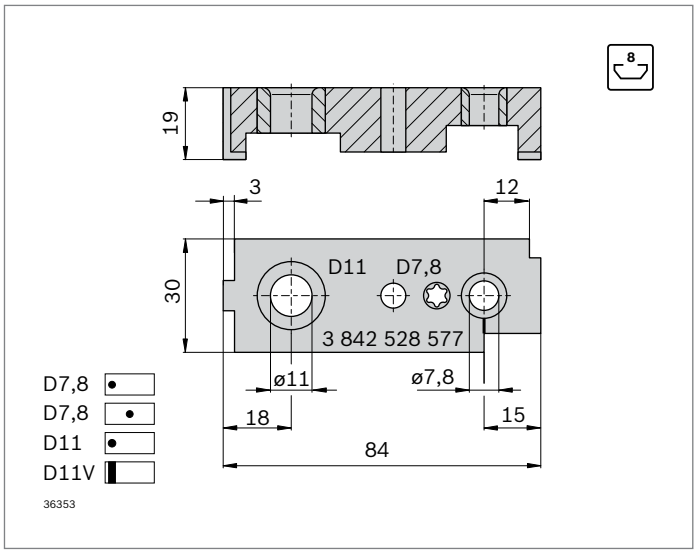



Drilling jigs – slot 8 mm

- For through-holes (ø7.8) for hexagonal-star socket screwdrivers T40
- For fastening holes (ø11) for quick connectors

Drilling jig	No.	FS
Slot 8 mm	**3 842 528 577**	FS2
Material:	Steel; zinc-plated	
Scope of delivery:	Incl. fastening material (FS)	

FS2



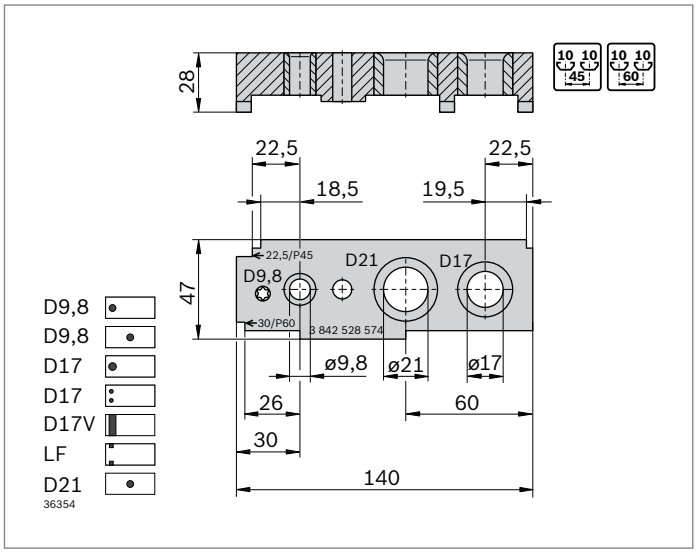



Drilling jigs – slot 10 mm, modular dimensions 45, 60

- For fastening holes (ø17) for bolt connectors, quick connectors, and threaded sleeves
- For through-holes (ø9.8) for hexagonal-star socket screwdrivers T50
- For counterbores (ø21) for pneumatic connections

Drilling jig	No.	FS
Slot 10 mm, modular dimensions 45, 60	**3 842 528 574**	FS3
Material:	Steel; zinc-plated	
Scope of delivery:	Incl. fastening material (FS)	

FS3



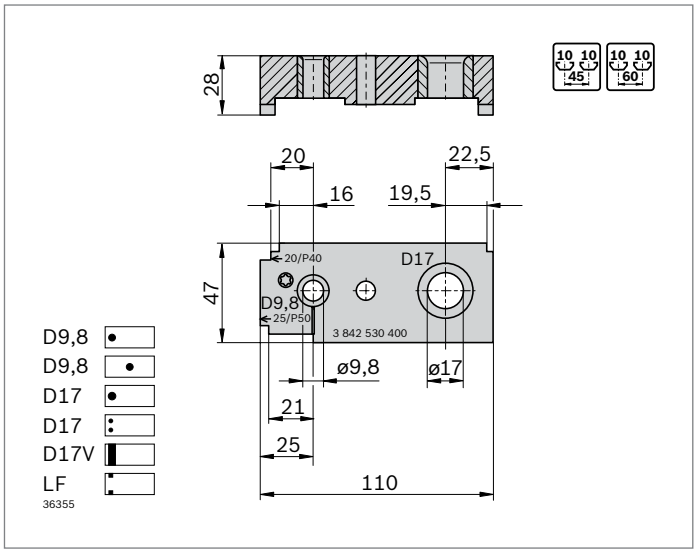



Drilling jigs – slot 10 mm, modular dimensions 40, 50

- For through-holes (ø9.8) for hexagonal-star socket screwdrivers T50
- For fastening holes (ø17) for bolt connectors, quick connectors, and threaded sleeves

Drilling jig	No.	FS
Slot 10 mm, modular dimensions 40, 50	**3 842 530 400**	FS3
Material:	Steel; zinc-plated	
Scope of delivery:	Incl. fastening material (FS)	

FS3



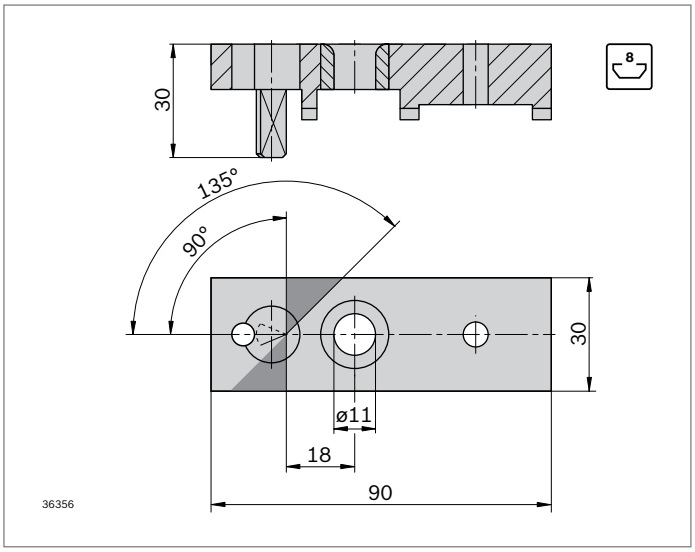


Drilling jig for diagonally sawn profiles – slot 8 mm


- For fastening holes (ø11) for bendable quick connectors

Drilling jig	No.	FS
Slot 8 mm – diagonally sawn profiles	**3 842 516 729**	FS2

Material: Aluminum
Scope of delivery: Incl. fastening material (FS)
Also see bendable quick connector (p. 3-61)

FS2



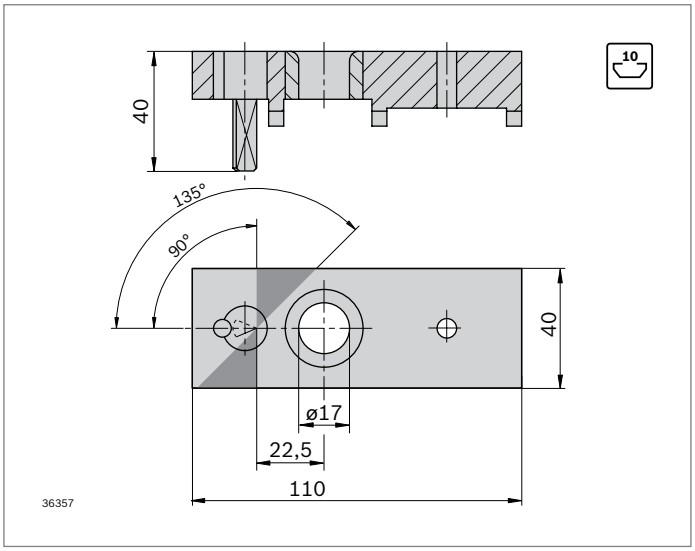


Drilling jig for diagonally sawn profiles – slot 10 mm


- For fastening holes (ø17) for bendable quick connectors

Drilling jig	No.	FS
Slot 10 mm – diagonally sawn profiles	**3 842 516 731**	FS4

Material: Aluminum
Scope of delivery: Incl. fastening material (FS)
Also see bendable quick connector (p. 3-61)

FS4




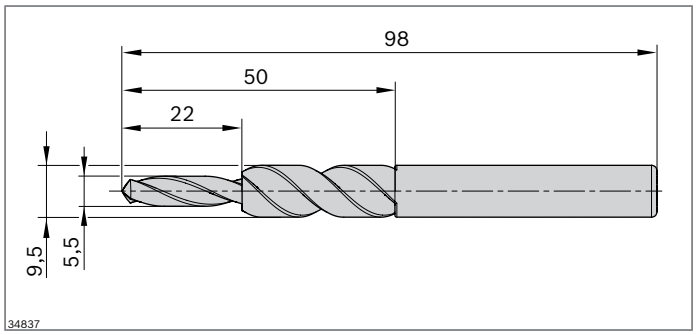

Step drill

- Step drill M5x5.5 - 9.5x22
- For the production of stepped bores for connecting direct panels on the strut profile 45x45(L)
- Efficient production of through holes with flat countersink for screws


Step drill DF	No.
	3 842 567 968
Material:	Steel; coated by chemical vapor deposit

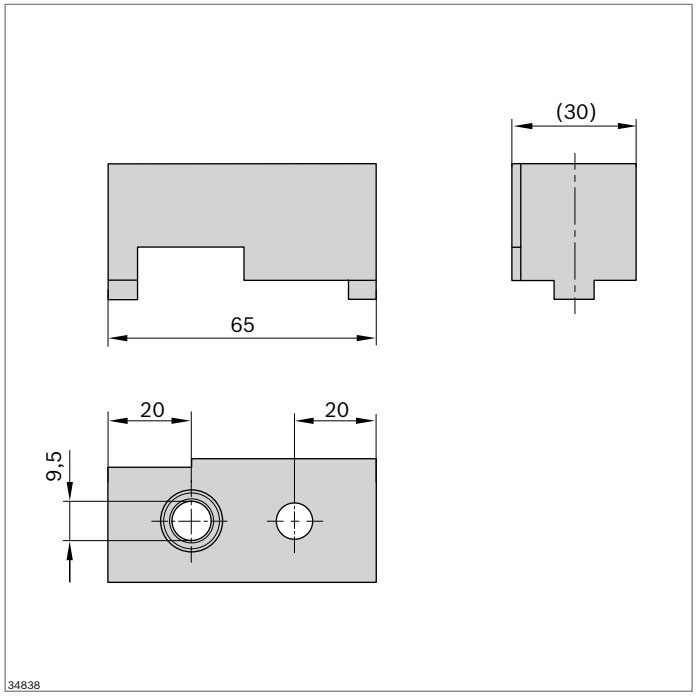

Drilling jigs


- Drilling jig for stepped bore for fastening a frame profile 22.5x45 to a strut profile 45x45(L)
- Stop surfaces and edges for precise positioning
- Stepped bore D5.5-9.5

Drilling jig EcoSafe DF	Slot	ESD	No.
	10		**3 842 567 969**
Material:	Base body: Aluminum; anodized Drilling bush: Steel; hardened Fastening material: Steel; zinc-plated		

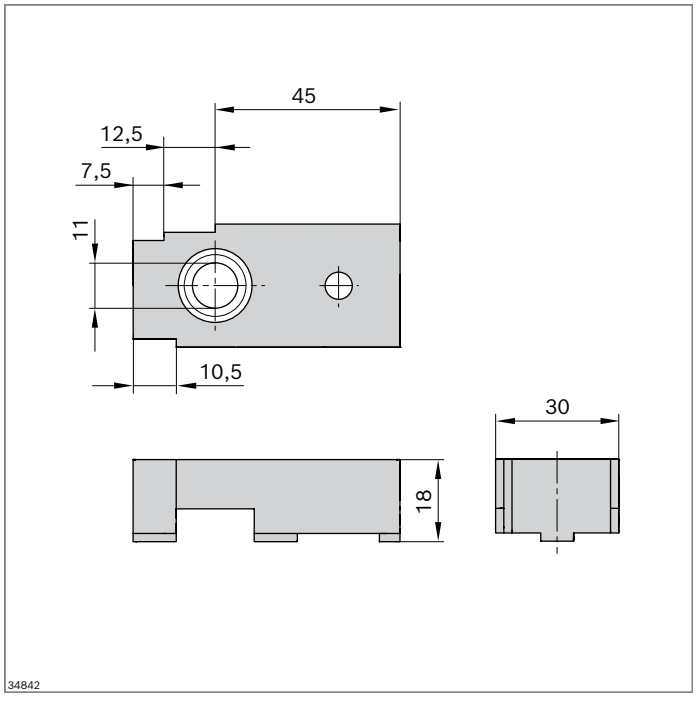

- Drilling jig to establish the corner connection of protective frame of frame profile 22.5x45
- For standard step drill according to DIN1897 (180 degrees, M6, L=195 mm, L1=15 mm, Ds: 11.0)

Drilling jig EcoSafe PG	Slot	No.
	8	**3 842 567 976**
Material:	Base body: Aluminum; anodized Drilling bush: Steel; hardened Clamping lever: Steel; bronzed	

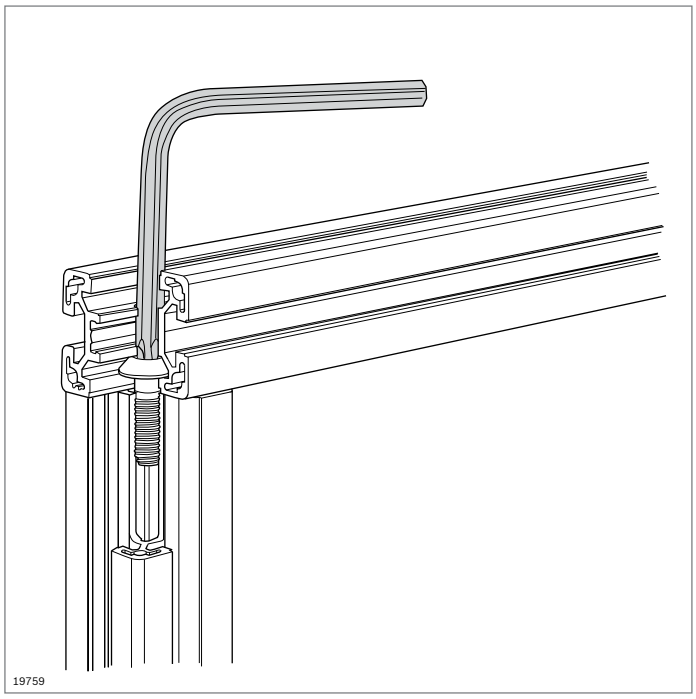


Torx® offset screwdriver




- Offset screwdriver for the central bolts (p. 3-43):
  - S6x16-**T25**
  - S8x25-**T40**
  - S12x30-**T50**, M12x30-**T50**
- Long shank for easy screw head access

T25

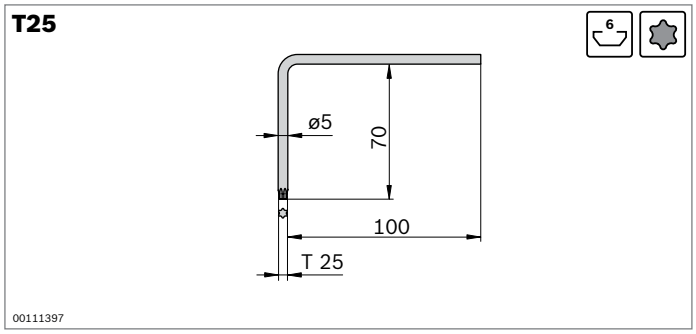


Offset screwdriver T25		No.
	5	**3 842 528 590**
Material:	Chrome vanadium steel	

T40

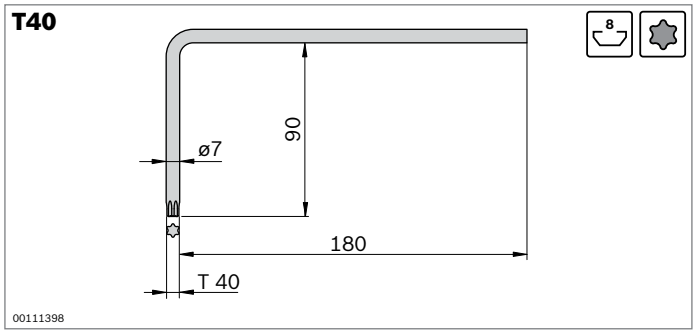


Offset screwdriver T40		No.
	5	**3 842 528 588**
Material:	Chrome vanadium steel	

T50

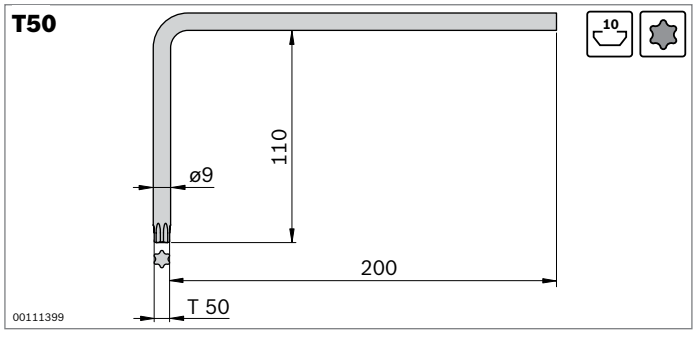


Offset screwdriver T50		No.
	5	**3 842 528 586**
Material:	Chrome vanadium steel	

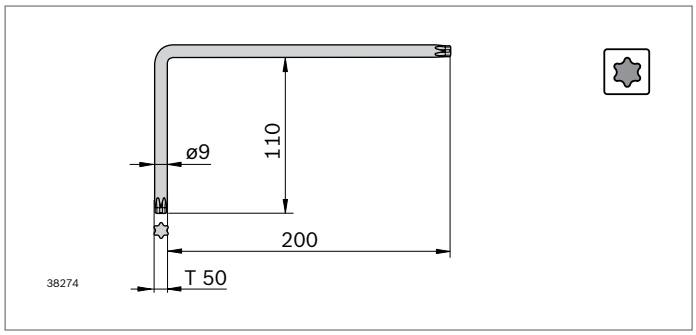

Offset screwdriver T50/T50 L200		No.
	5	**3 842 558 181**


Material: Steel; nickel-plated

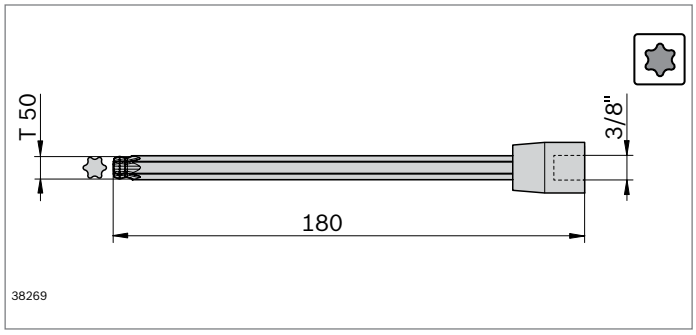

Wrench socket

- For mechanical or manual assembly/torque
- Length adapted to profile joint mounting
- Drive 3/8″ wrench socket, output T50
- Stable ball head for screws without axial access


Wrench socket T50x180, 3/8″		No.
	1	**3 842 558 194**

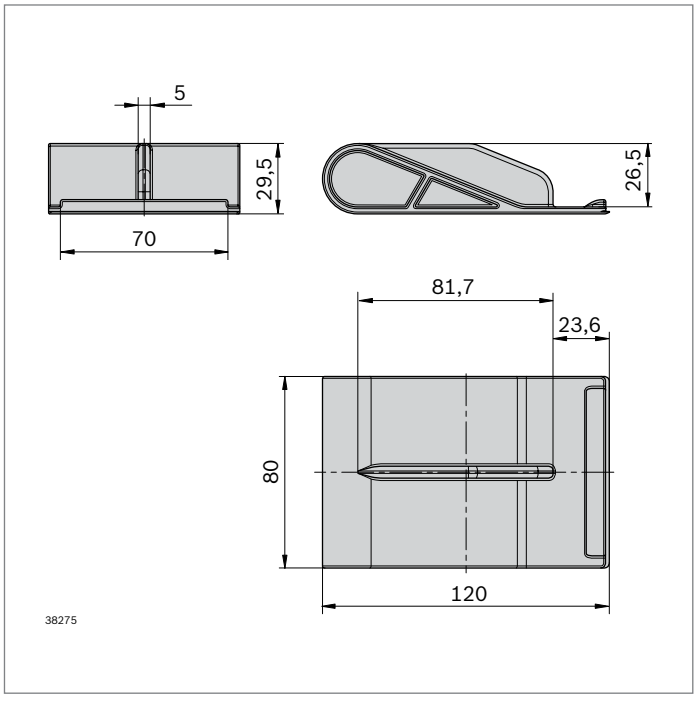

Disassembly tool

- Hand tool for gentle opening of cable guide profiles 40x120x120, 60x120, 120x120 and 120x120 6N


Disassembly tool		No.
	1	**3 842 558 196**

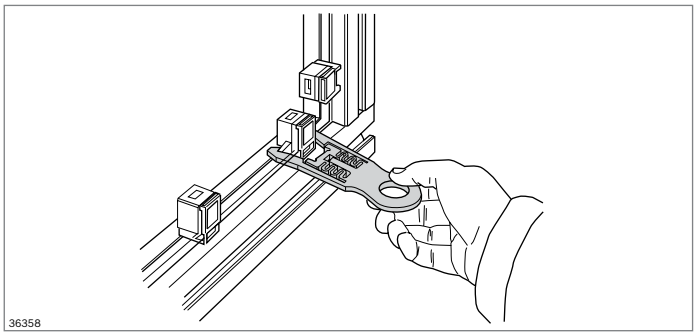

Variofix remover

- For fast, easy removal of the Variofix snap-in clip (p 7-6), even in hard-to-reach places
- The Variofix remover is pushed onto the snap-in clip of the Variofix block so that it spreads the teeth of the clip and can then be removed together with the clip


Variofix remover			No.
		10	**3 842 526 589**
Material:	PA		

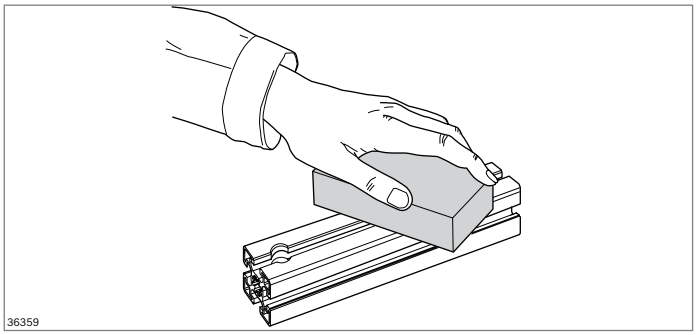

Flexible grinder for anodized surfaces

- Hand grinder for removing light soiling and minor scratches
- Handy grindstone made of flexible base material containing abrasive agents
- Long service life thanks to automatic, continual surface renewal, like an eraser
- Suitable for all natural-colored, anodized surfaces, e.g. also for aluminum windows and doors


Flexible grinder for anodized surfaces		No.
		3 842 518 650
Material:	Silicon carbide 60 % Polyurethane 40 %	

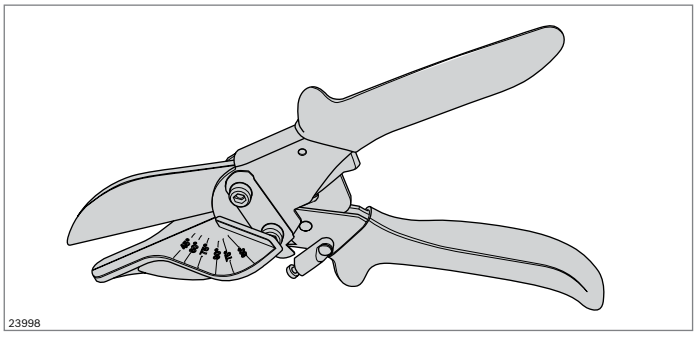

Miter cutter


- For cutting plastic profiles to length, e.g. groove cover profiles

Miter cutter	No.
	3 842 547 982

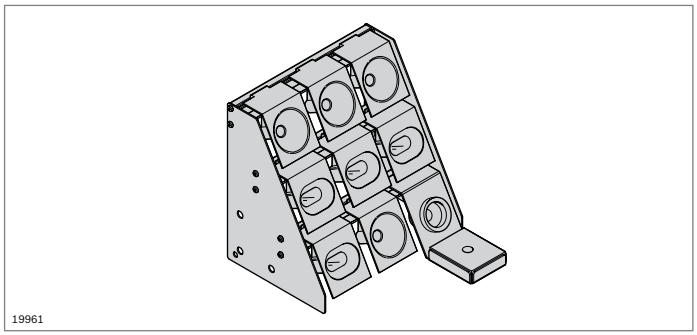


Tool shelf
Tool holder


- Tool shelf and tool holder for ergonomic and handy positioning of tools at the workstation
- Tool shelf can be individually equipped
- Accessories: Container mount (p. 2-65)



Tool shelf	ESD	No.
	ESD	3 842 554 909


Material:	Side parts: Sheet aluminum Suspension profile: Aluminum; anodized






D52 tool holder for D52-9 and D52-15 bucket trays

Tool holder D52	ESD	No.
	ESD	3 842 544 832







Bucket tray D52-9 (without base)	ESD	No.
	ESD	3 842 544 834







Bucket-tray D52-15 (without base)	ESD	No.
	ESD	3 842 544 835






Bucket-tray D52-15 (with base)	ESD	No.
	⚠	3 842 544 836







Tool holder D91 for bucket trays D91-32, D91 Oval53 L100 and D91 Oval53 L136


Tool holder D91	ESD	No.
	⚠	3 842 544 833







Bucket-tray D91-32 (with base)	ESD	No.
	⚠	3 842 544 837






Bucket tray D91 Oval53 L100 (with base)	ESD	No.
	⚠	3 842 546 744






Bucket tray D91 Oval53 L136 (with base)	ESD	No.
	⚠	3 842 546 745




Tool holder for soldering irons	ESD	No.
	⚠	**3 842 514 524**

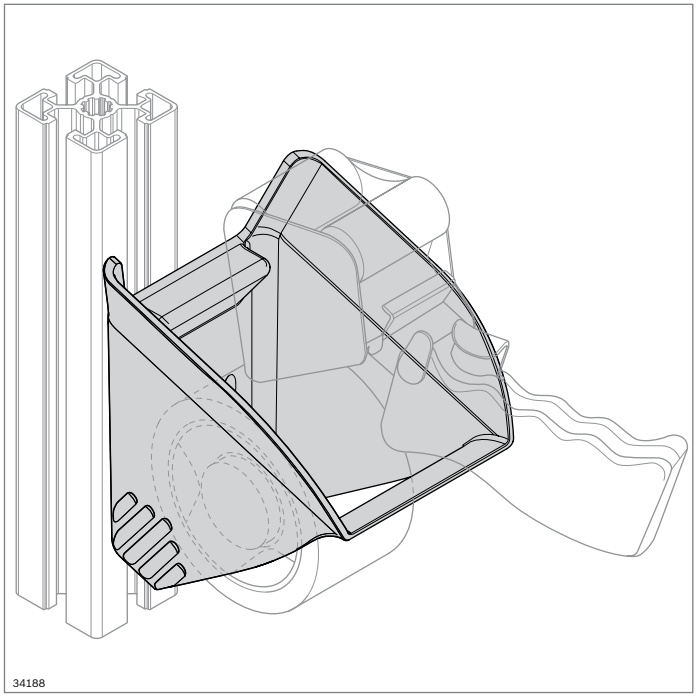


Tool holder TAPE 50 mm



- Tool holder for tape dispenser with a width of 50 mm
- Time savings of 10 % to 20 % based on MTM, achievable with
  - Defined place for faster reaching and picking
  - Docking aids for easy, ergonomic depositing
- Supports 5S principles for order and cleanliness at the workstation via defined place






Tool holder TAPE 50 mm	ESD	No.
	⚠	**3 842 555 673**

Material:	PA 6; black
Scope of delivery:	Incl. fastening material for fastening in 8 mm or 10 mm slots

FiFo station



Guide rail (p. 15-2)



Adapter (p. 15-3)



Right end cap, small (p. 15-3)



Left end cap, small (p. 15-3)





End cap, large (p. 15-3)



FiFo station

- Components for constructing a FiFo station for material shuttles
- Clearly organized and highly transparent production operations through having standardized delivery routes
- Modular system lets you adapt the layout to your needs and to your available space

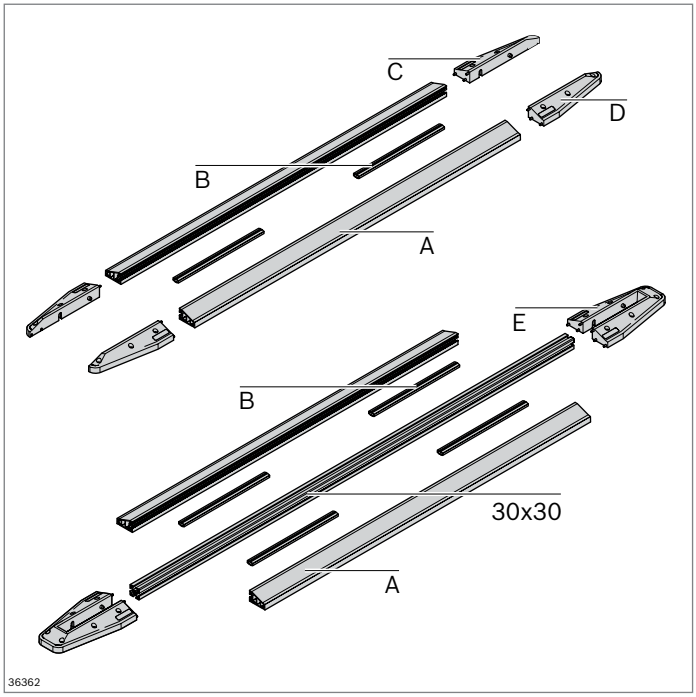




- Adhesive strips for fastening to floor
- Screw fitting to floor possible at end caps


Guide rail	L (mm)		No.
A	1200	10	**3 842 540 012**
	2400	10	**3 842 539 894**

Material: PVC, yellow




- For the parallel connection of guide rails, or a guide rail with a 30x30 profile

Adapter		No.
B	20	**3 842 539 898**
Material:	PP	




- For use as a jointing aid and for fastening the guide rails to the floor

Right-hand end cap, small		No.
C	10	**3 842 539 895**
Material:	PA 6; black	



- For use as a jointing aid and for fastening the guide rails to the floor

Left-hand end cap, small		No.
D	10	**3 842 539 896**
Material:	PA 6; black	



- For installing a 30x30 profile between two guide rails
- The 30 mm profile can be used to construct flow rack systems, information boards, and height limits.
  Since the guide rails are flat-sided, setup can be done using a wide profile (40, 45, 50)

Required accessories:

- Profile 30x30 (p. 2-17)

End cap, large		No.
E	10	**3 842 539 897**
Material:	PA 6; black	

15

Components for lateral guides




Profile rails, sliding rails (p. 16-3)



Holder, fixed (p. 16-6)




Holder, variable (p. 16-8)

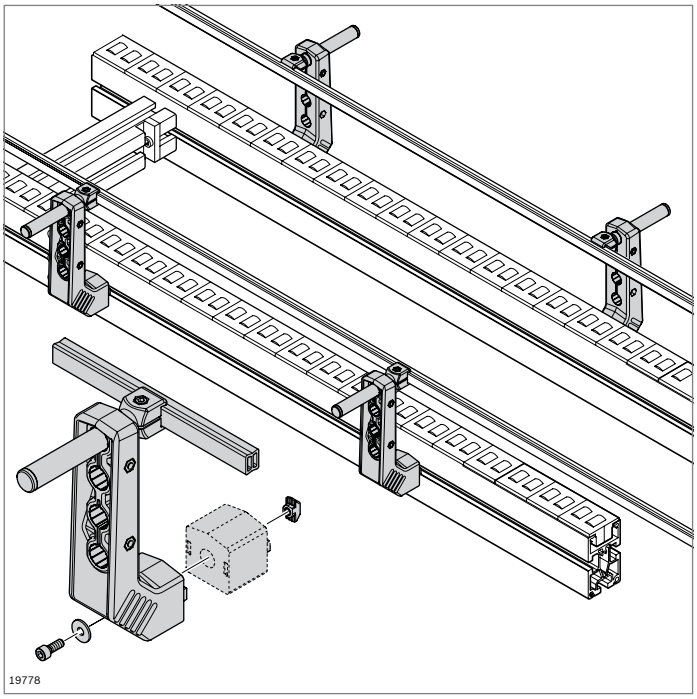


Components for lateral guides

- Wide variety of profile rail and holder combinations for individual solutions
- Easy to clean
- Robust
- Only one tool required for adjustment
- Interface slot 10 mm

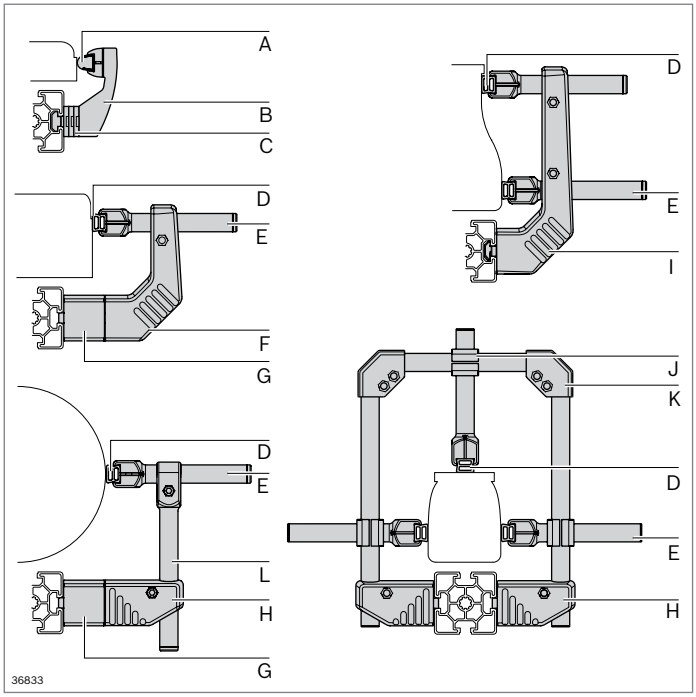


Components		Page
A	Profile rail 17x17.5	16-4
B	Holder, fixed	16-6
C	Spacer plate	16-6
D	Aluminum profile rail	16-3
E	Clamping holder C L100	16-9
F	Holder L134	16-10
G	Spacer	16-11
H	Holder L45	16-11
I	Holder L204	16-10
J	Cross piece	16-12
K	Corner piece	16-12
L	Vertical clamping holder D18 L160	16-11

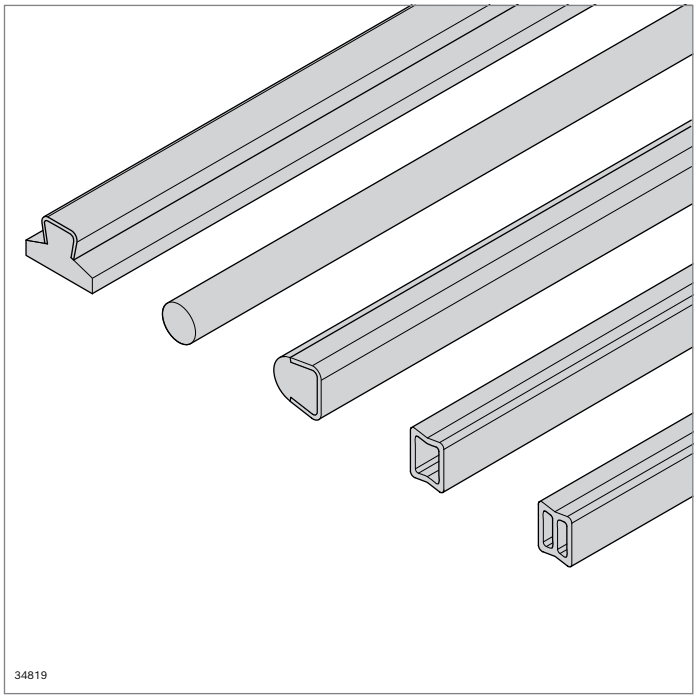

Profile rails and accessories for lateral guides

- Profile rails for lateral guiding of transported material
- Suitable for fixed lateral guide holders (p. 16-6), and variable lateral guide holders (p. 16-8)
- Various materials and geometries for different applications (p. 16-3, 16-4)
- Sliding rails for safe guiding of transported material (p. 16-4)
- Profile connector for profile rail extension (p. 16-5)




- Aluminum profile rail for robust lateral guides

Aluminum profile rail	**L** (mm) **No.**
1 pc	200 ... 3000 **3 842 993 887 / L**
20 pcs	3000 **3 842 538 829**

Material: Aluminum; natural, anodized

Accessories: Narrow sliding rail; high sliding rail; outer profile connector; inner profile connector; cover cap; clamping holder C L100; holder; clamping head




- HDPE profile rail for light applications
- Bendable

HDPE profile rail	**L** (mm) **No.**
1 pc	3000 **3 842 538 388**

Material: HDPE; gray


Accessories: Narrow sliding rail; high sliding rail; outer profile connector; inner profile connector; cover cap; clamping holder C L100; holder; clamping head



- Profile rail 17x17.5 in robust stainless steel version with PE guide for gentle product handling

Profile rail 17x17.5		**L** (mm)	**No.**
1 pc		200 ... 3000	**3 842 994 863 / L**
20 pcs		3000	**3 842 529 850**


Material: Steel, stainless / PE; natural
Accessories: Outer profile connector; clamping holder C L100; holder; clamping head; clamping head



- Profile rail D12 in robust stainless steel version

Profile rail D12		**L** (mm)	**No.**
1 pc		200 ... 3000	**3 842 993 306 / L**
6 pcs		3000	**3 842 533 841**


Material: Steel; stainless
Accessories: Clamping holder D12 L100



- Clip-on sliding rail for aluminum or HDPE profile rail
- For gentle product transport and minimum wear to HDPE profile rail

Sliding rail, narrow		**L** (mm)	**ESD**	**No.**
1 pc		3000		**3 842 538 209**
1 pc		3000		**3 842 539 340**


Material: HDPE; gray
ESD: PE-UHMW, conductive, black



- Clip-on sliding rail for aluminum or HDPE profile rail
- Wide guiding surface
- For gentle product transport and minimum wear to HDPE profile rail

Sliding rail, high		**L** (mm)	**No.**
1 pc		3000	**3 842 538 389**


Material: HDPE; gray



- T-profile rail for simple section separation or lateral guiding of transported material
- In robust version made of non-rusting steel with PE guide for gentle product handling
- Holder distance: Approx. 750 mm, less with accumulation pressure


Profile rail T21x32		**L** (mm)	**No.**
1 pc		3000	**3 842 571 233**

Material: HDPE; gray




- Outer profile connector for aluminum profile rails, HDPE profile rail, 17x17.5 profile rail

Outer profile connector			No.
		10	**3 842 539 613**
Material:	Steel; stainless		
Scope of delivery:	Incl. 2 x headless setscrew		




- Inner profile connector for profile rail in aluminum, HDPE

Internal profile connector		ESD		No.
		ESD	10	**3 842 539 345**
Material:	PA; black, conductive			



- Cover cap for profile rail in aluminum, HDPE


Cover cap		ESD		No.
		ESD	10	**3 842 538 208**
Material:	PA; black, conductive			

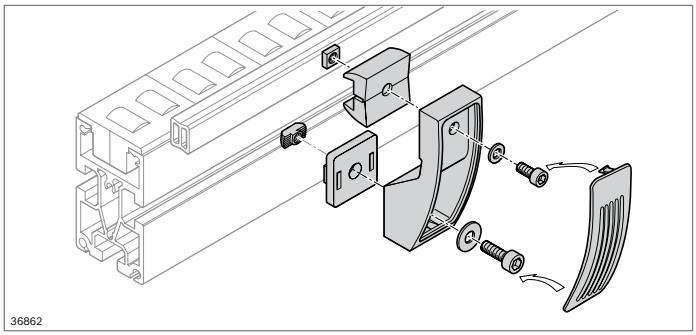



Holder for lateral guide, fixed


10

- Holders for lateral guides with fixed installation height and fixed guide width
- Easy to clean
- Robust

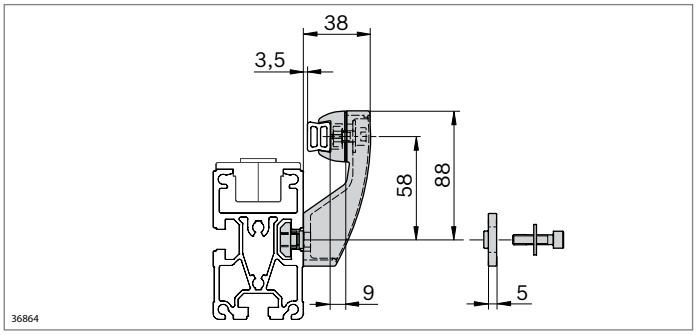

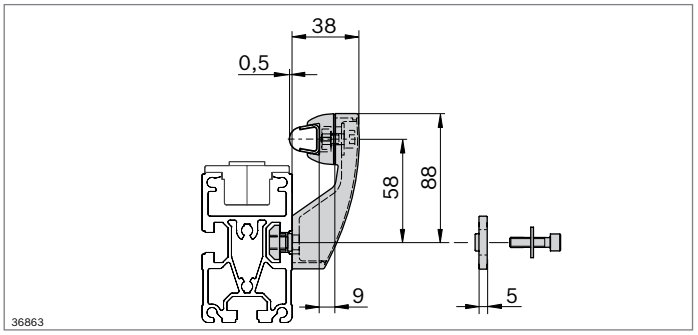







- Holder, fixed, for profile rail in aluminum, HDPE and 17x17.5
- For fixed guide width
- Spacer plate for guide width enlargement

Holder, fixed		No.	FS
Set		**3 842 527 851**	FS1
Material:	PA; black Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. clamping head, fastening material (FS)		



- Spacer plate for holders, fixed, to enlarge the guide width

Spacer plate		No.
	10	**3 842 527 738**
Material:	PA; black	




FS2

DIN 557
M6

- Clamping head for on-site construction of supports for protruding transported material

Clamping head		No.	FS
Set	10	**3 842 536 295**	FS2
Material:	PA; black Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS)		

16

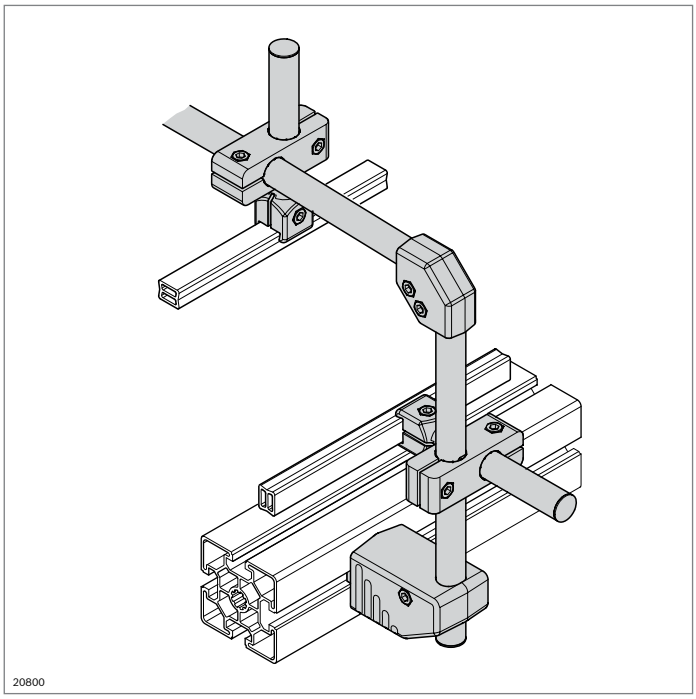


Holder for lateral guide, variable

10


- Holder and clamping holder allow for the variable adjustment of the guide height and width
- Easy to clean

Notice: For stability in the rotational direction, at least 2 holders must be connected with a continuous profile rail.

System dimensions

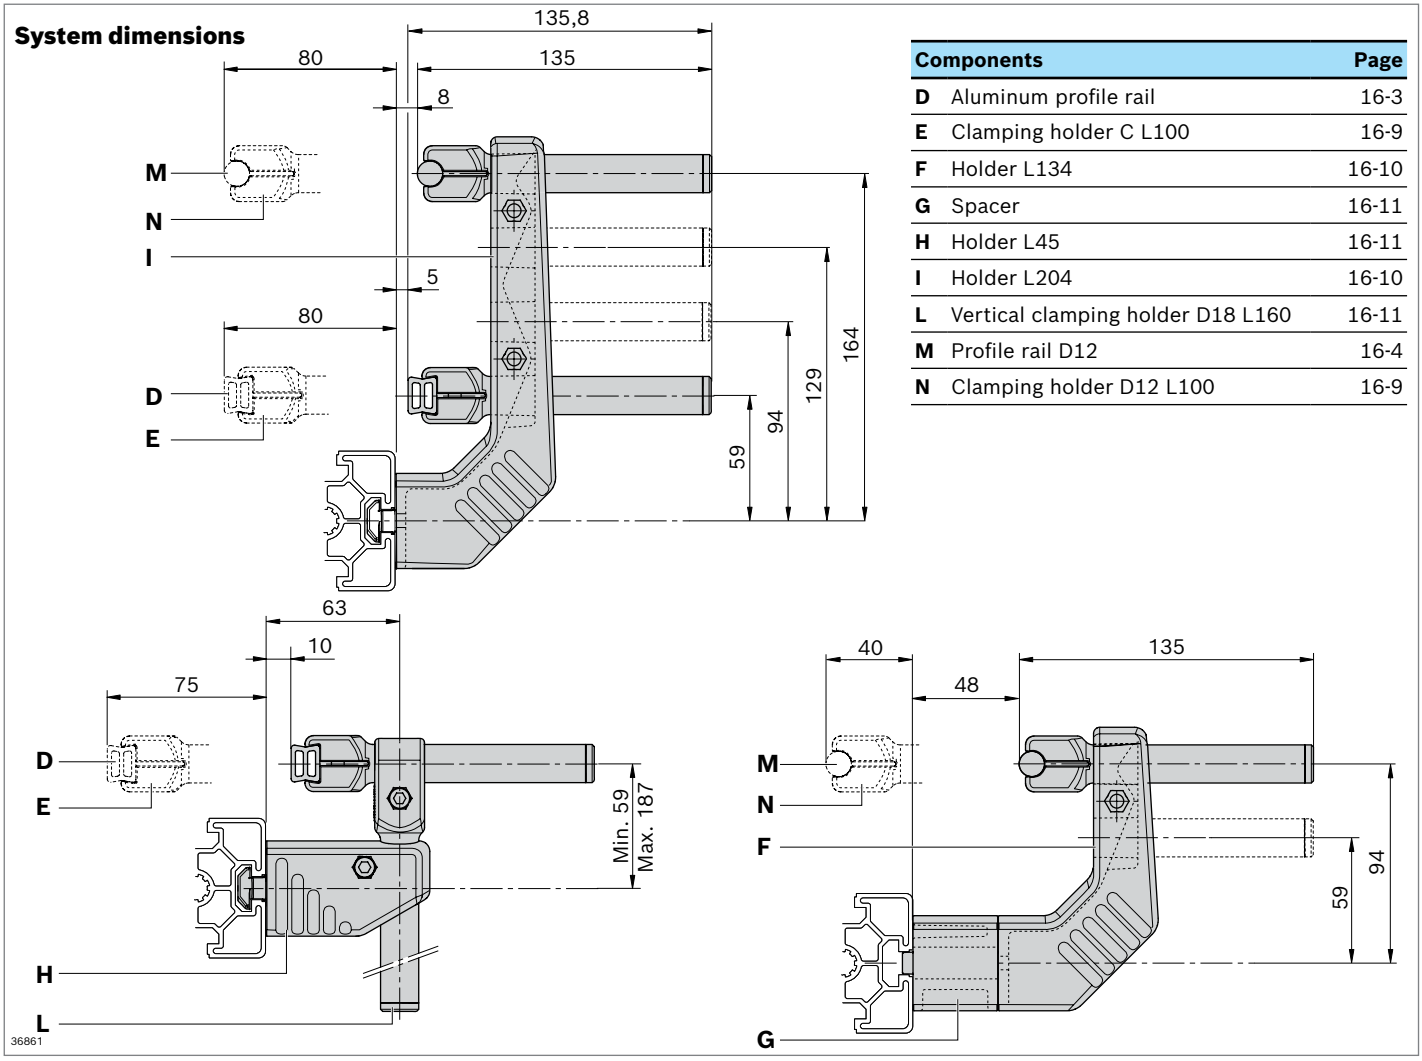


Components		Page
D	Aluminum profile rail	16-3
E	Clamping holder C L100	16-9
F	Holder L134	16-10
G	Spacer	16-11
H	Holder L45	16-11
I	Holder L204	16-10
L	Vertical clamping holder D18 L160	16-11
M	Profile rail D12	16-4
N	Clamping holder D12 L100	16-9




- Clamping holder C L100 for accommodating aluminum, HDPE, or 17x17.5 profile rails
- Scaling in mm and inch for simple alignment


Clamping holder C L100		No.
	10	**3 842 539 499**
Material:	Clamping holder: PA; black Nut, screw: Steel; stainless	
Accessories:	Plug	



- Clamping holder D12 for accommodating D12 profile rails
- Scaling in mm and inch for simple alignment

Clamping holder D12 L100		No.
	10	**3 842 539 498**
Material:	Clamping holder: PA; black Nut, screw: Steel; stainless	
Accessories:	Plug	






- Clamping head for accommodating aluminum, HDPE, or stainless steel profile rails with PE guide
- Direct mounting on profiles with 10 mm slot

Clamping head		No.	FS
Set	10	**3 842 528 009**	FS1
Material:	Clamping holder: PA; black Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS)		

FS1




S6x16-
T25 ESD




- Clamping holder D12 for accommodating D12 profile rails
- In conjunction with tube 18 for constructing longer clamping holders

Clamping holder D12		No.
	10	**3 842 547 227**
Material:	Clamping holder: PA; black Nut, screw: Steel; stainless	
Accessories:	Plug, tube D18	



- Clamping holder C for accommodating aluminum, HDPE, or 17x17.5 profile rails
- In conjunction with tube D18 for constructing longer clamping holders

Clamping holder C		No.
	10	**3 842 547 228**
Material:	Clamping holder: PA; black Nut, screw: Steel; stainless	
Accessories:	Plug, tube D18	




FS2

DIN 912
M6x16
DIN 9021
A 6,4

- Holder for fastening clamping holders C L100 or D12 L100
- Various installation heights possible for clamping holders
- Variable guide widths possible
- Additionally enlarge the guide width with the spacer
- Accessories, optional: Clamping lever M6x40 (p. 4-15)

Holder L204		No.	FS
Set		**3 842 539 494**	FS2
Material:	PA; black Fastening material: Steel; stainless		
Scope of delivery:	Incl. fastening material (FS)		
Accessories:	T-nut M6, 10 mm slot (p. 3-4) Spacer		




FS2

DIN 912
M6x16
DIN 9021
A 6,4

- Holder for fastening clamping holders C L100 or D12 L100
- Various installation heights possible for clamping holders
- Variable guide widths possible
- Additionally enlarge the guide width with the spacer
- Accessories, optional: Clamping lever M6x40 (p. 4-15)

Holder L134		No.	FS
Set		**3 842 539 495**	FS2
Material:	PA; black Fastening material: Steel; stainless		
Scope of delivery:	Incl. fastening material (FS)		
Accessories:	T-nut M6, 10 mm slot (p. 3-4) Spacer		








- Holder L45 for fastening vertical clamping holders or tube D18
- For infinitely height-adjustable lateral guides
- Enlarge the guide width with the spacer
- Accessories, optional: Clamping lever M6x40 (p. 4-15)

Holder L45		**No.**	**FS**
Set	10	**3 842 539 496**	FS2

Material:	PA; black Fastening material: Steel; stainless
Scope of delivery:	Incl. fastening material (FS)
Accessories:	T-nut M6, 10 mm slot (p. 3-4) Spacer








- Spacer for guide width enlargement
- 2 versions can be combined as desired, pluggable
- Centering lug for easy assembly
- Stable connection thanks to stainless steel core

Spacer		**No.**	**FS**
Set 40 mm	10	**3 842 539 497**	FS3
Set 10 mm	10	**3 842 567 773**	FS3


Material:	PA; black Fastening material: Steel; stainless
Scope of delivery:	Incl. Fastening material (except for T-nuts)
Accessories:	T-nut for AL or STS



- Vertical clamping holder for constructing height-adjustable guides
- Accessories, optional: Clamping lever M6x40 (p. 4-15)

Vertical clamping holder D18 L160		**No.**
	10	**3 842 539 500**

Material:	PA; black Nut, screw: Steel; stainless
Accessories:	Plug




- Tube D18 for constructing height-adjustable vertical holders or cross members for upper guides

Tube D18	**L** (mm)	**No.**
	3000	**3 842 539 339**


Material:	Stainless steel
Accessories:	Plug

16




- Corner connecto for the intersecting, right-angled joining of tubes D18 and clamping holders C L100 or D12 L100
- Accessories, optional: Clamping lever M6x40 (p. 4-15)

Cross piece		No.
	10	**3 842 539 501**
Material:	Cross piece: PA; black Nut, screw: Steel; stainless	




- Corner piece for the end face, right-angled joining of tubes D18 and clamping holders C L100 or D12 L100

Corner piece		No.
	10	**3 842 539 505**
Material:	Corner piece: PA; black Nut, screw: Steel; stainless	



- Plug for sealing the clamping holder C L100, clamping holder D12 L100, vertical clamping holder D18 L160 or tube D18

Plug		No.
	10	**3 842 539 826**
Material:	PE; black	




- Reducing adapter for mounting round profiles ø12 in attachments D18

Reducing adapter		No.
	20	**3 842 539 344**
Material:	PA; black	

Components for ESD applications



Set of grounding components (p. 17-2)




Grounding cable (p. 17-2)



Potentialfix (p. 17-3)





Wrist band, connection piece (p. 17-3)

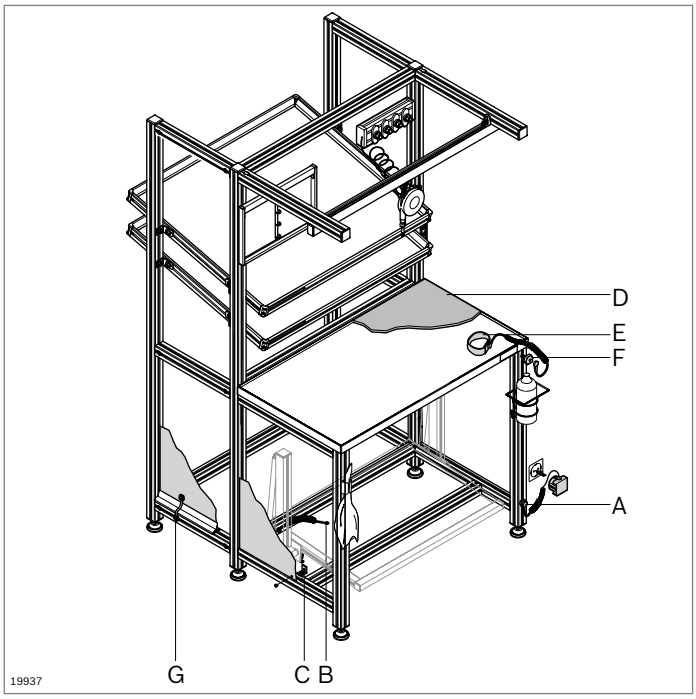

Components for ESD applications

ESD – Electro Static Discharge
Components which, due to their electrical properties and inner structure, are damaged or destroyed by static discharge also cause economic losses running into millions of euros each year.
You can use Rexroth components for ESD applications to protect your products from this type of damage. Look for the ESD mark when selecting products (⚠).








- Set of grounding components for defined grounding of ESD workstations
- Conduction resistance R = 1 x 10^6 Ω

Accessories:
Damping ring or damping plate for insulation from conductive floors makes defined conduction possible (p. 6-4, 6-6)

Set of grounding components	ESD	No.	FS
A	⚠	**3 842 522 087**	FS1
Material:	Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS)		









- Grounding cable to create defined conductive paths between strut profiles in order to protect ESD-sensitive components

Grounding cable	ESD	No.	FS
B	⚠	**3 842 519 465**	2xFS2, FS3
Material:	Fastening material: Steel; zinc-plated		
Scope of delivery:	Incl. fastening material (FS)		








- Potentialfix for defined grounding of panel elements such as side panels

Potentialfix	ESD	No.	FS
C	⏚	**3 842 536 320**	FS4, FS5


Material:	Bracket Aluminum Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)



- ESD mat insert for protecting ESD-sensitive components
- To create a safe, conductive connection, e.g. to ESD material shelves, we recommend using adhesive copper tape
- Conduction resistance R = 10^4 ... 10^9 Ω

ESD mat insert	ESD	No.
D 1220 mm x 855 mm	⏚	**3 842 522 012**

Material:	Rubber (thickness: 2 mm)




- Wrist band for defined grounding of people and protection of ESD-sensitive components

Required accessories:
- Connection piece
- T-nut M6, or swivel-in sliding block, with spring, M6

Wrist band	ESD	No.
E	⏚	**3 842 516 908**

Material:	Textile with woven-in conductive plastic; navy blue





- Connection piece for connecting the wrist band to the profile construction


Connection piece	ESD		No.
F	⏚	10	**3 842 516 905**

Material:	Steel; zinc-plated

17










▶ Potential equalizer for creating electrostatic conduction between panel elements and strut profiles

Potential equalizer	ESD		No.	FS
G		10	**3 842 536 148**	FS6, FS7

Material:	Strip steel, stainless Fastening material: Steel; zinc-plated
Scope of delivery:	Incl. fastening material (FS)








▶ PE conductor connection set for profile structures for the secure connection of a PE connection in Rexroth profile slots

PE conductor connection set							
Slot	**A** (mm)	**B** (mm)	**C** (mm)	**D** (mm)	**E** (mm)	**No.**	**FS**
8	28	21	7.5	9.3	6.5	**3 842 564 106**	FS1
10	31	24	9.5	12	8.5	**3 842 564 107**	FS2

Scope of delivery: Set incl. fastening material




Technical data




Standard profile finishing (Quick & Easy) (p. 18-2)




Individual profile finishing (Quick & Easy) (p. 18-7)




Technical data for strut profiles (p. 18-12)




Profile deflection (p. 18-14)




Profile slot load-bearing capacity (p. 18-15)



Load capacity of profile connection (p. 18-16)



Lifting eye bolt load capacity data (p. 18-22)



EcoShape load capacity (p. 18-23)

18

Standard profile finishing (Quick & Easy)

Standard profile finishing is used for Rexroth connection technology and attachment of accessories:

- Central bolt (corner connection)
- Quick connector
- Bolt connector
- Cross connector
- Feet and wheels

It offers decisive advantages:

- One general material number for all finishing processes at profile cross-sections
- Available for all profiles
- Any combinations possible
- Drilling of blind holes possible















This opens up completely new possibilities!

The order key has a simple structure:
There are fixed specifications for the parameters for exact finishing of each profile. See table.

For information on slot designations and available standard profile finishing, please refer to chapter 2.

Order key for through-holes, blind holes, standard milling:
Material number / length / slot designation = finishing at profile start / finishing at profile end; ...

Order key for threads:
Material number / length / Z = Mx at profile start / Mx at profile end

Standard profile finishing		6	8	10
Through-hole for corner connections with central bolt		**D5.8** 	**D7.8** 	**D9.8** 
Through-hole for bolt connectors and quick connectors		**D8** 	**D11** 	**D17** 
Blind hole For longitudinal end connectors and quick connectors in closed profiles		**DB8** 	**DB11** 	**DB17**  **p** 40 45 50 60 **HT** 31 34 36 41
Threads in all core holes for accessories		**M6** 	**M8** 	**M12**  **M16** 
Standard milling for cross connectors				**F1** 




Through-hole Dx


Use:

- **D5.8; D7.8; D9.8** for corner connections with central bolt
- **D8; D11; D17** for bolt connectors and quick connectors

Fixed specifications:
Distance from profile end (PS)

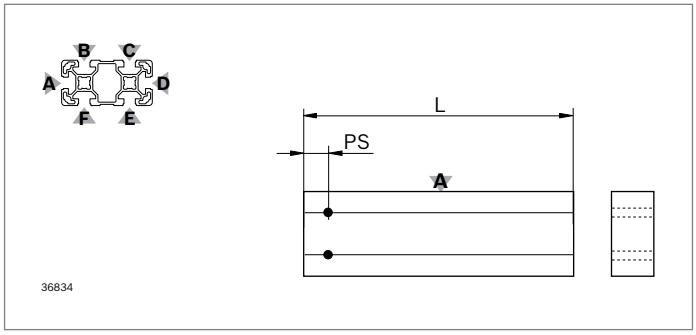


Example:
3 842 993 728 / 255 / B=D17/–; C=D17/–
Profile 40x80L / L = 255 mm /
Slot B: Through-hole D17 at profile start / without finishing at profile end;
Slot C: Through-hole D17 at profile start / without finishing at profile end
Fixed: PS = 22.5 mm (p. 18-2)

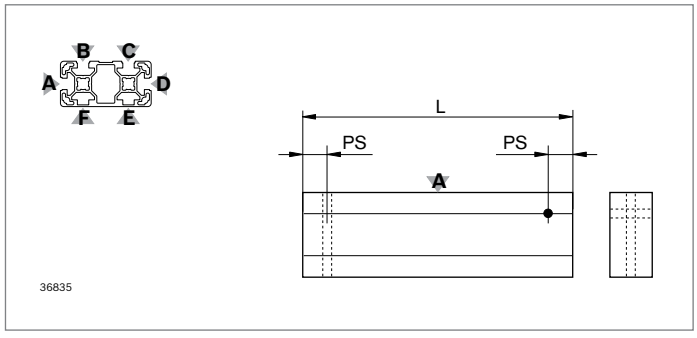


Example:
3 842 993 729 / 255 / B=–/D17; D=D17/–
Profile 40x80L 4N / L = 255 mm /
Slot B: Without finishing at profile start / through-hole D17 at profile end;
Slot D: Through-hole D17 at profile start / without finishing at profile end
Fixed: PS = 22.5 mm (p. 18-2)


Other examples

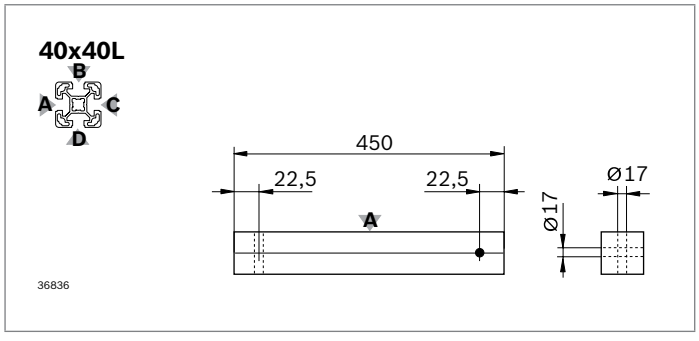

Example:
3 842 993 724 / 450 / A=D17/–; B=–/D17

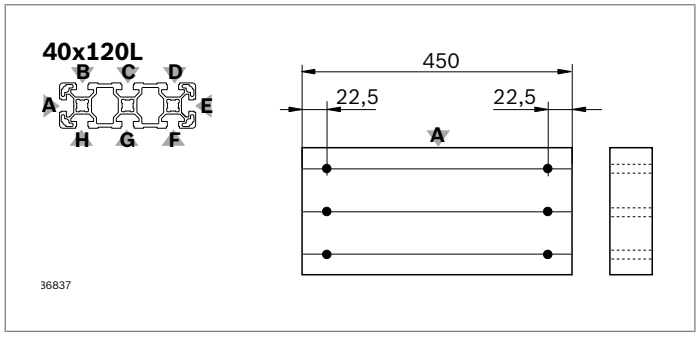

Example:
3 842 993 716 / 450 / B=D17/D17; C=D17/D17; D=D17/D17




Blind hole DBx


Use:
DB8; DB11; DB17 for quick connectors in closed profiles and longitudinal end connectors

Advantage:
In case of closed slots, the profile surface is not broken.

Fixed specifications:
- Distance from profile end (PS)
- Depth of blind hole (HT)

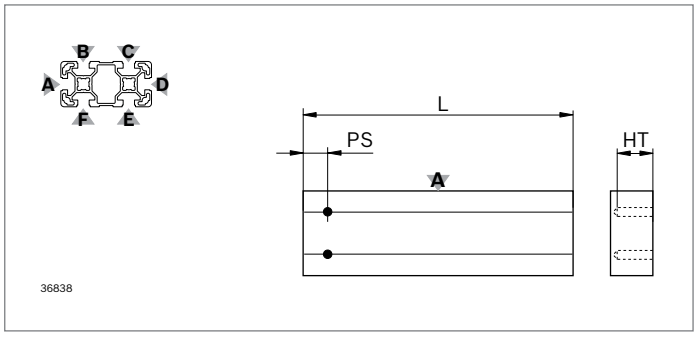

Example:
3 842 993 728 / 255 / B=DB17/–; C=DB17/–
Profile 40x80L / L = 255 mm /
Slot B: Blind hole DB17 at profile start / without finishing at profile end;
Slot C: Blind hole DB17 at profile start / without finishing at profile end
Fixed: PS = 22.5 mm, HT = 34 mm (p. 18-2)

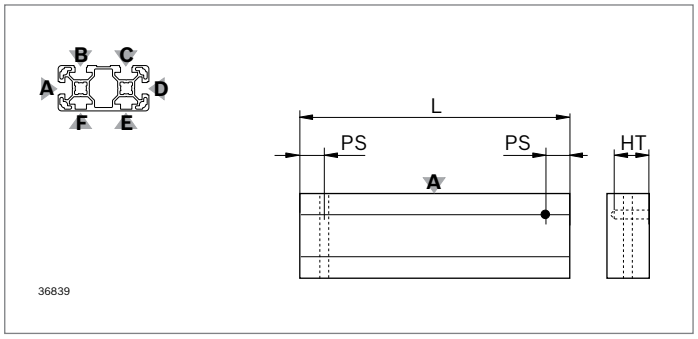


Example:
3 842 993 729 / 255 / B=–/DB17; D=D17/–
Profile 40x80L 4N / L = 255 mm /
Slot B: Without finishing at profile start / blind hole DB17 at profile end;
Slot D: Through-hole D17 at profile start / without finishing at profile end
Fixed: PS = 22.5 mm, HT = 34 mm (p. 18-2)



Thread Mx


Use:
M6; M8; M12; M16 in all core holes of the profile, e.g. for screw fitting of feet and wheels

Fixed specifications:
Thread depth

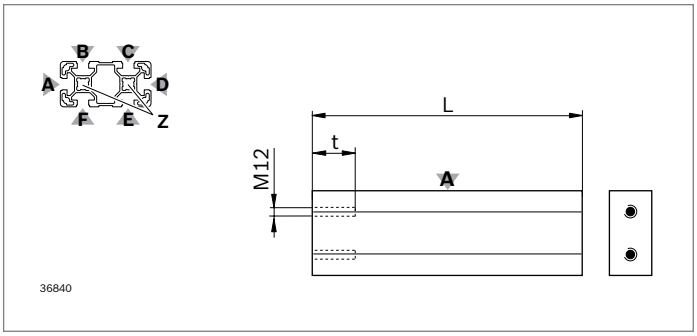

Example:
3 842 993 728 / 255 / Z=M12/–


Profile 40x80L / L = 255 mm /
Thread M12 in all core holes at profile start /
no finishing at profile end
Fixed: Thread depth HT = 55 mm (p. 18-2)

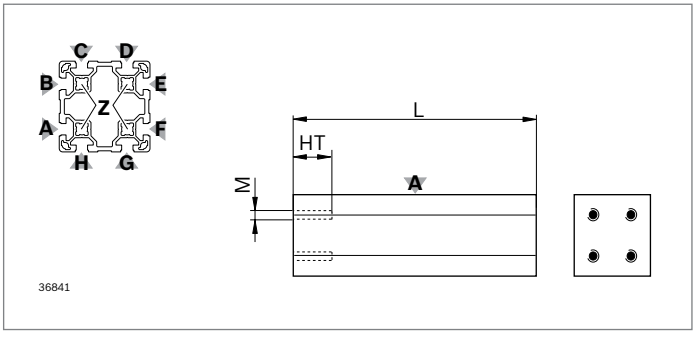


Example:
3 842 993 674 / 255 / Z=M12/–

Profile 80x80L / L = 255 mm /
Thread M12 in all core holes at profile start /
no finishing at profile end
Fixed: Thread depth HT = 55 mm (p. 18-2)


Other examples

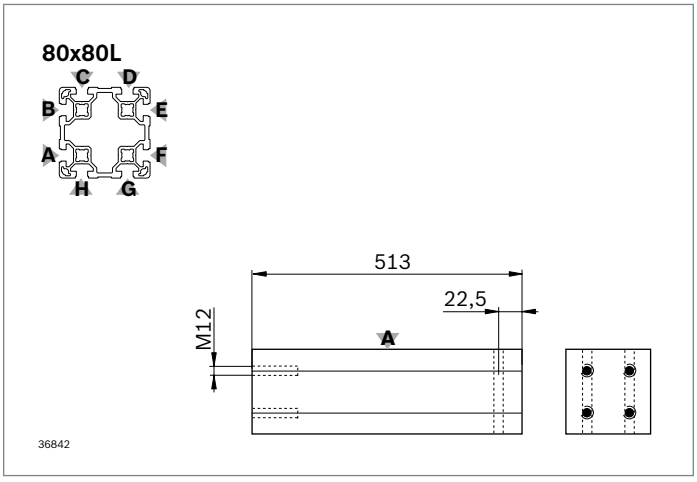

Example:
3 842 993 674 / 513 / Z=M12/–; A=–/D17; B=–/D17

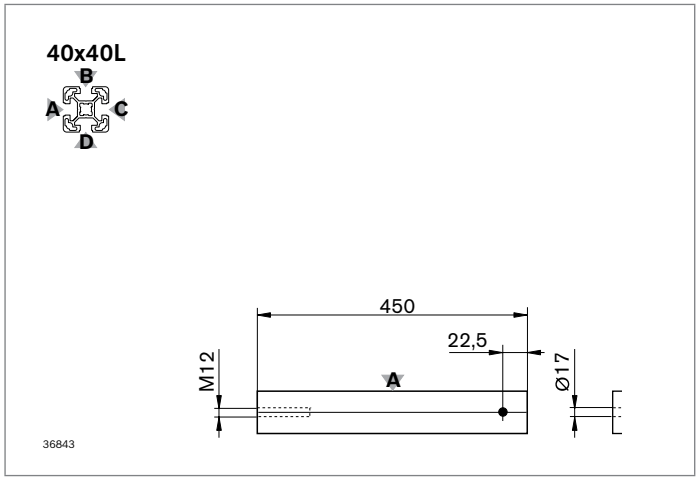


Example:
3 842 993 724 / 450 / Z=M12/–; B=–/D17




Standard milling F1

Use:
F1 for cross connectors

Fixed specifications:
- Start point of milling (PS)
- End point of milling (PE)
- Depth of milling (HT)

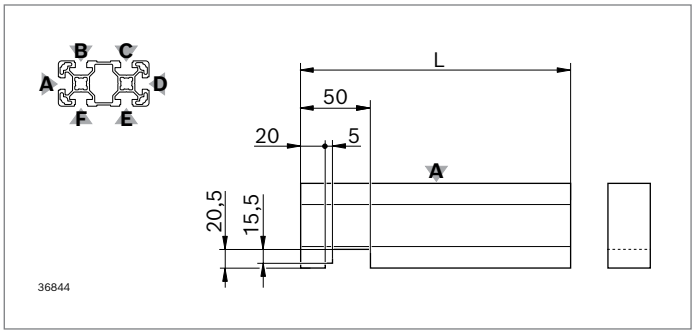


Example:
3 842 993 728 / 383 / D=F1/–
Profile 40x80L / L = 383 mm /
Slot D: Cross milling at profile start /
without finishing at profile end

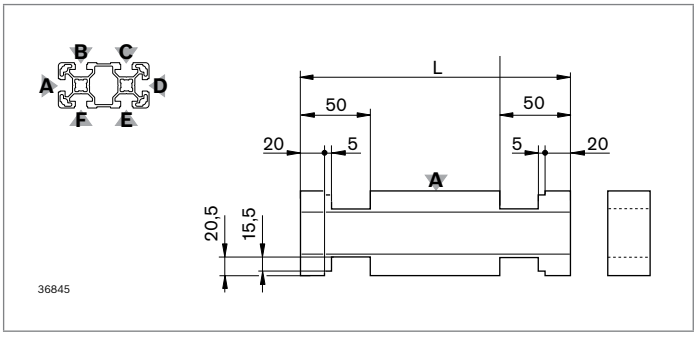


Example:
3 842 993 729 / 383 / A=F1/F1; D=F1/F1
Profile 40x80L 4N / L = 383 mm /
Slot A: Cross milling at profile start / cross milling at profile end
Slot D: Cross milling at profile start / cross milling at profile end

Other examples



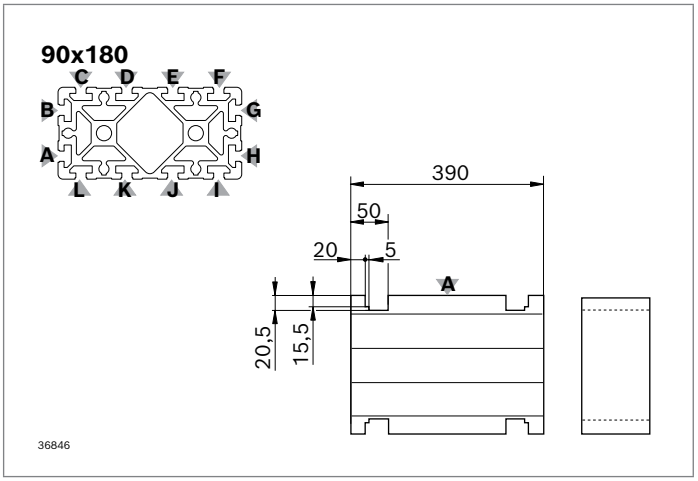



Example:
3 842 993 676 / 390 / A=F1/F1; G=F1/F1

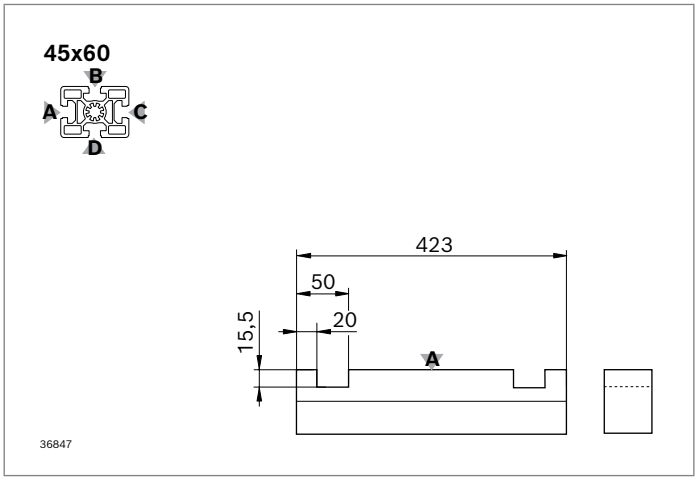

Example:
3 842 993 743 / 423 / A=F1/F1

Individual profile finishing (Quick & Easy)





With individual profile finishing, Quick & Easy offers the following advantages:

- Precise finishing at virtually every point along the profile
- Maximum variance of available finishing procedures
- Available for numerous profiles
- Finishing possible in almost any combination including sequential finishing
- Variable finishing options from one source

The following finishing options are available:


- Through-hole
- Blind holes
- Stepped drilling
- Cross milling (transversely to the longitudinal axis)
- Lengthwise milling (in longitudinal axis)
- Miter cuts

Notice:
Depending on the selected finishing options, minimum and maximum lengths must be observed when ordering.




Order examples for profile 45x90, L = 383 mm


DI **Through-hole next to the slot**
3 842 993 661 / 383 / [B=DI; PS=60; OS=22.5; DM=9.8]

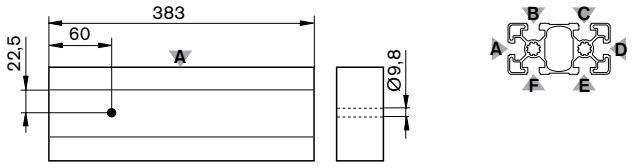


Blind hole
3 842 993 661 / 383 / [B=DI; PS=60; DM=9.8; HT=12.2]

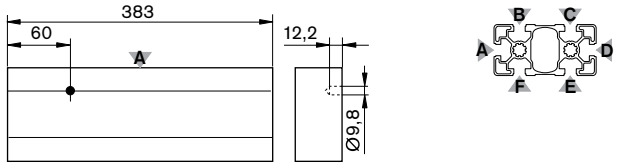

Stepped drilling
3 842 993 661 / 383 / [B=DI; PS=60; DM=11.0; HT=12.2]; [B=DI; PS=60; DM=9.8]

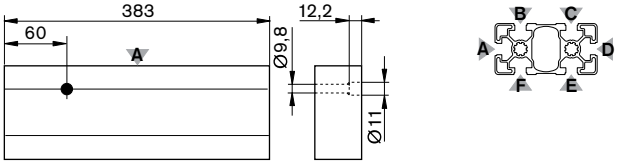

DIS **Sequence of through-holes**
3 842 993 661 / 383 / [B=DIS; PS=60; OS=22.5; DM=9.8; SN=4; SD=35]

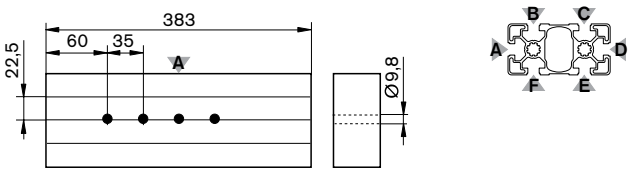

Drill hole


Drill hole DI


- Through-hole with diameter (**DM**) at any points of the profile (**PS, OS**). Please note the information on OS in the table.
- Blind hole by additional specification of drilling depth (**HT**)
- Stepped drilling by two drill holes at the same position of the profile
- Observe required minimum wall thickness (PS_{min}, PS_{max})!

Drilling sequence DIS

- Regular sequence of identical drilling (**SN**, **SD**)
- Observe required minimum wall thickness (SD_{min})!

End finishing	Abbreviation	Parameter	
Drill hole	**DI**	**PS**	Center point of hole
			PS_{min} = DM/2 + 3 mm; PS_{max} = L – (DM/2 + 3 mm)
		OS (optional)	Offset starting point
			Select OS so that the hole does not cut through any slot edges
		DM	Hole diameter
			DM, see table
		HT (optional)	Depth of drilling. Through-holes made if no information provided.
			HT_{max}, see table
Drilling sequence	**DIS**	**PS, OS, DM, HT**	As for drill hole DI
		SN	Number of finishes
			SN_{max} = INT((L – 3 – PS – DM/2)/ SD) + 1
		SD	Distance between adjacent finishes
			SD_{min} = DM + 3





Admissible drilling diameters and depths (in mm)

DM	5.8	6.4	7.8	8.0	8.4	9.8	11.0	17.0
HT_{max}	40.0	45.0	45.0	45.0	45.0	50.0	60.0	75.0


ATTENTION: If HT_{max} is not sufficient to drill through the profile, you must order two opposite bores!

Order key:
Material number / length / [slot designation=DI; PS=...; *OS=...*; **DM=...;** *HT=...*; **]** *[...]*
Material number / length / [slot designation=DIS; PS=...; *OS=...*; **DM=...;** *HT=...*; **SN=...; SD=...];** *[...]*




Order examples for profile 45x90, L = 383 mm

MT **Cross milling on profile side slot D**
3 842 993 661 / 383 / [D=MT; PS=50; HT=12.5; PE=90]

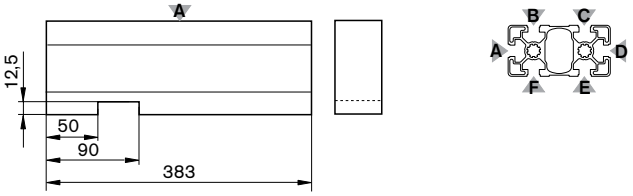

MTS **Cross milling sequence on profile side slot D**
3 842 993 661 / 383 / [D=MTS; PS=50; HT=12.5; PE=90; SN=4; SD=53]

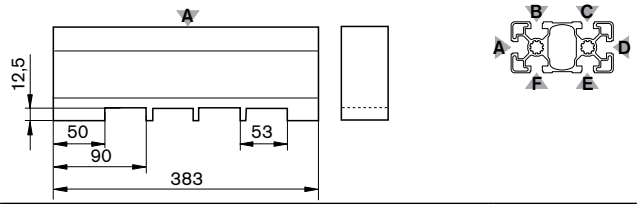

Cross milling


Cross milling MT


- Cross milling at any point of the profile (slot designation **PS**) with variable depth (**HT**) and length (**PE – PS**); the width corresponds to the profile width.
- Observe required minimum wall thickness (PS_{min}, PS_{max})!

Cross milling sequence MTS

- Regular sequence of identical cross milling (**SN**, **SD**)
- Observe required minimum wall thickness (SD_{min})!

End finishing	Abbreviation	Parameter	
Cross milling	**MT**	**PS**	Starting point of milling (Profile cut surface distance – Cross milling leading edge)
			PS_{min} = 8 mm PS_{min} = 60 mm on the underside of the profile
		HT	Depth of milling
			HT_{max} = 5.5 mm (slot 6 mm) HT_{max} = 9.0 mm (slot 8 mm) HT_{max} = 12.5 mm (slot 10 mm)
		PE	Starting point of milling (Profile cut surface distance – Cross milling trailing edge)
			PE_{max} = L – 8 mm 8 mm ≤ PE – PS ≤ 100 mm
Cross milling sequence	**MTS**	**PS, HT, PE**	As for cross milling MT
		SN	Number of finishes
			SN_{max} = INT((L – 8 – PE)/ SD)+1
		SD	Distance between adjacent finishes
			SD_{min} = (PE – PS) + 10






Order key:
Material number / length / [slot designation=MT; PS=...; HT=...; PE=...]; *[...]*
Material number / length / [slot designation=MTS; PS=...; HT=...; PE=...; SN=...; SD=...]; *[...]*




Order examples for profile 45x90, L = 200 mm

MI **Lengthwise milling**
3 842 993 661 / 200 / [B=MI; PS=15; OS=22.5; DM=55; HT=10; PE=80; RG=5]

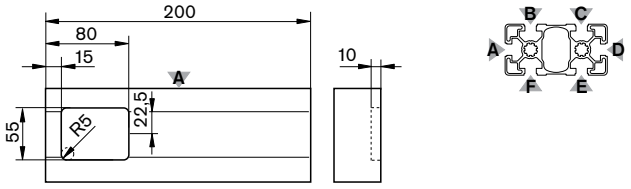

MIS **Sequence of lengthwise milling**
3 842 993 661 / 200 / [C=MIS; PS=15; DM=15; HT=10; PE=80; RG=4; SN=2; SD=85]

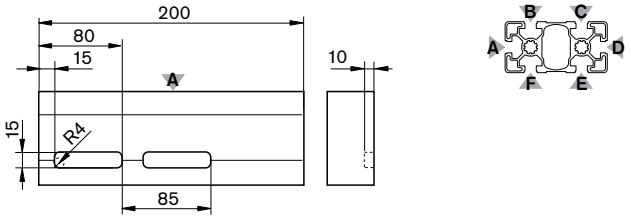

Lengthwise milling


Lengthwise milling MI


- Lengthwise milling at any point of the profile (slot designation **PS**, **OS**) with variable depth (**HT**), width (**DM**) and length (**PE – PS**). The milling corner radius is defined by the radius of the milling tool (**RG**).
- Observe required minimum distances (PS_{min}, PS_{max}, DM_{max})!

Lengthwise milling sequence MIS


- Regular sequence of identical lengthwise milling (**SN**, **SD**)
- Observe required minimum wall thickness! (SD_{min})

End finishing	Abbreviation	Parameter	
Lengthwise milling	**MI**	**PS**	Starting point of milling
			PS_{min} = 8 mm PS_{min} = 60 mm on the underside of the profile (see order tables for guidance)
		OS (optional)	Offset starting point
		DM	Milling width
			DM_{min} = 8 mm DM_{max} = profile width/ height – 6 mm At least 3 mm of profile must remain on both sides
		HT	Depth of milling.
			HT_{max} = 5.5 mm (slot 6 mm) HT_{max} = 9.0 mm (slot 8 mm) HT_{max} = 12.5 mm (slot 10 mm)
		PE	End point of milling
			PE_{max} = L – 8 mm 8 mm ≤ PE – PS ≤ 100 mm
		RG	Radius of milling geometry
			RG = 3 mm; 4 mm; 5 mm; 8 mm
Lengthwise milling sequence	**MIS**	**PS, OS, DM, HT, PE, RG**	As for lengthwise milling MI
		SN	Number of finishes
			SN_{max} = INT(L – 8 – PE/SD) + 1
		SD	Distance between adjacent finishes
			SD_{min} = (PE – PS) + 10

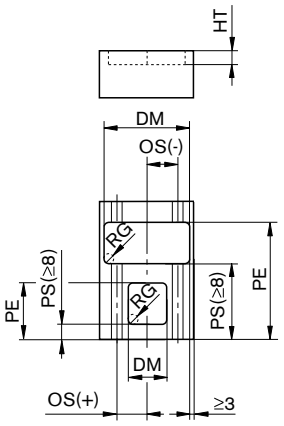




Order key:
Material number / length / [slot designation=MI; PS=...; *OS=...*; **DM=...; HT=...; PE=...; RG=R..];** *[...]*
Material number / length / [slot designation=MIS; PS=...; *OS=...*; **DM=...; HT=...; PE=...; RG=R..; SN=...; SD=...];** *[...]*




Order examples for profile 45x90, L = 383 mm


MT **Miter cut on both sides through side S3 (side with slot D)**
3 842 993 661 / 383 / [FS=S3; DG=45]; [BS=S3; DG=45]

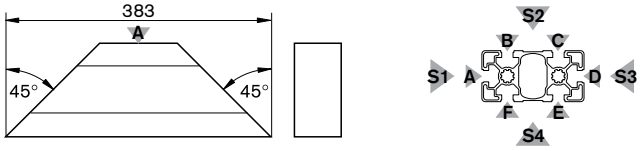

Miter cut on both sides through side S1 (side with slot A)
3 842 993 661 / 383 / [FS=S1; DG=45]; [BS=S1; DG=45]

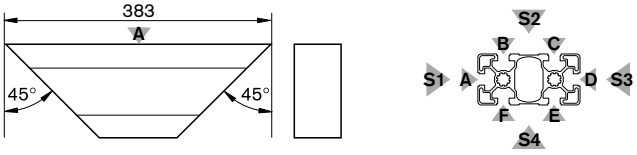

Miter cut on through side S1 (FS) and S3 (BS)
3 842 993 661 / 383 / [FS=S1; DG=45]; [BS=S3; DG=45]

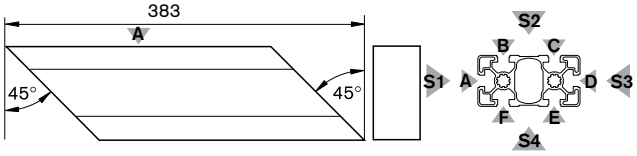


Miter cut

Miter cut

- Cutting of profiles at any angle
- Profile sides are numbered in clockwise direction. S1 is the left profile side according to the illustrated position on the ordered side; the following sides are designated with S2, S3 and S4.
- Miter cut is started at the indicated side. Possible sides: S1 and S3.
- Observe the maximum admissible miter bracket and minimum length

End finishing	Abbreviation	Parameter	
Miter cut	–	**FS**	Front side: Designation of the profile end the miter cut is to be performed at S1, S3: Profile side on which the miter cut begins
			FS = S1; FS = S3
		BS	Back side: Opposite profile end S1, S3: Profile side on which the miter cut begins
			BS = S1; BS = S3
		DG	Miter bracket
			DG > 0 The angle is always specified as a positive value; orientation results from FS/BS and the side on which the miter cut begins. Note the maximum permissible miter angle. For a single-sided miter $L_{min}1$. For a double-sided miter $L_{min}2$.



Order key:
Material number / length / [FS=side; DG=miter angle]; *[BS=side; DG=miter angle]*

Technical data for strut profiles

EN AW – Al MgSi		Material designation according to DIN EN 573 for Rexroth strut profiles
EN AW – 6063		Material number according to DIN EN 573
R_m	= 245 N/mm²	Minimum tensile strength (in direction of pressure)
$R_{p0.2}$	= 195 N/mm²	0.2 % proof stress (in direction of pressure)
A_5 A_{10}	= 10 % = 10 %	Ductile yield A_5 or A_{10}
E	= 70000 N/mm²	Modulus of elasticity E
75 HB		Brinell hardness
$\alpha_{(-50 \ldots +20\ °C)}$ $\alpha_{(+20 \ldots 100\ °C)}$	= 21.8 x 10^{-6} 1/K = 23.4 x 10^{-6} 1/K	Longitudinal expansion coefficient
μ	= 0.34	Poisson's ratio
E6/EV1 – 12 μm – 300 HV		Anodizing process – layer thickness – layer hardness

L_{max}	11–20	22,5–30	40	45–60
t	±0.15	±0.2	+0.6	±0.3


L_{max}	80	90	120	160
t	+0.8	±0.4	+1.0	+1.6

L_{max}	180	270	360
t	±0.6	±1.0	±1.5

L2	6	8	10
t	+0.3	+0.3	+0.4


Ø	5.5	7.3	10	15
t	−0.1 +0.2	−0.1 +0.2	±0.15	±0.15

Permitted dimensional tolerance t (mm) for profiles from different deliveries




00109370

Deviation limits and form tolerances according to DIN EN 12020-2
Rexroth profiles generally fall well within the generally applicable tolerances specified in the standard. They are specifically defined for the individual products.

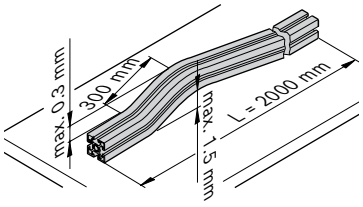

Longitudinal straightness tolerance of profile



00126465


Longitudinal torsional tolerance of profile

Width *b* in (mm)	**Torsional tolerance *T* for nominal length *L* in (mm)**					
	L ≤ 1000	1000 < L ≤ 2000	2000 < L ≤ 3000	3000 < L ≤ 4000	4000 < L ≤ 5000	5000 < L ≤ 6000
≤ 75	1.0	1.2	1.5	1.8	2.0	2.0
75 ... 100	1.0	1.2	1.5	2.0	2.2	2.5
100 ... 125	1.0	1.5	1.8	2.2	2.5	3.0
125 ... 150	1.2	1.5	1.8	2.2	2.5	3.0
150 ... 200	1.5	1.8	2.2	2.6	3.0	3.5
200 ... 350	1.8	2.5	3.0	3.5	4.0	4.5

Resistance table R999002460

The table gives you an overview of the general resistance of Rexroth aluminum profiles in contact with various media.

Profile deflection









$f_{①} = \frac{F \times L^3}{3\ E \times I \times 10^4}$ $f_{②} = \frac{F \times L^3}{48\ E \times I \times 10^4}$ $f_{③} = \frac{F \times L^3}{192\ E \times I \times 10^4}$	Profile deflection due to force F for static load cases ①②③
$f_{①} = \frac{m' \times g \times L^4}{8\ E \times I \times 10^4}$ $f_{②} = \frac{5 \times m' \times g \times L^4}{384\ E \times I \times 10^4}$ $f_{③} = \frac{m' \times g \times L^4}{384\ E \times I \times 10^4}$	Profile deflection due to the profile's own weight
$\sigma_{①} = \frac{(m' \times g \times L + F) \times L}{W \times 10^3}$ $\sigma_{②} = \frac{(m' \times g \times L + F) \times L}{4\ W \times 10^3}$ $\sigma_{③} = \frac{(m' \times g \times L + F) \times L}{8\ W \times 10^3}$	Control of max. occurring bending stress $\sigma_{b\ max}$
$\sigma_{b\ max} < \sigma_{b\ zul.}$! $\sigma_{b\ zul.} = \frac{R_{p0,2}}{S_{F\ erf.}}$	$S_{F\ erf}$: Safety value required to avoid deformation (flow) $\sigma_{b\ zul}$: Max. permissible bending stress

f (mm)	W (cm^3)
F (N)	E = 70000 N/mm^2
L (mm)	m' (kg/mm); m' = m/1000; m (p. 2-3 ... 2-6)
I (cm^4)	g = 9.81 $m/s^2 \approx 10\ m/s^2$

Profile slot load-bearing capacity

Static load limit values of slot (beginning of plastic deformation) **for connectors with the largest thread in each case**


			 T-bolt	 T-nut	 Central bolt	 Swivel-in sliding block	 Sliding block
6		20x20, 20x20R 10x40 20x40, 20x60 20x40x40	1700 N	1700 N	2000 N	–	3000 N
8		30x30, 30x30R 30x30°, 30x45°, 30x60° 11x20, 15x120 30x45, 30x60, 30x60x60 30x90, 30x120	4000 N	4000 N	5000 N	2200 N	6000 N
10		90x90SL 40x40L, 40x40L R 40x30°, 40x45°, 40x60° 40x80L, 40x120L, 40x160L 40x80x80L 80x80L 80x120L, 80x160L 45x45L, 45x45L R 45x30°, 45x45°, 45x60° 15x22.5, 15x180, 22.5x45 45x90L, 45x90x90L 45x135L 50x50L, 50x50L R 50x100L, 50x150L 100x100L, 100x200L 60x60L	6000 N 7000 N	6000 N 7000 N	9000 N 10000 N	8000 N 9000 N	11000 N 12000 N
		45x45 60x60 90x90L 22.5x180 45x60 45x90, 45x180 90x180L 90x135L	12000 N	12000 N	15000 N	13000 N	17000 N
		45x270 60x90 90x90 90x180 90x360	18000 N	18000 N	22000 N	18000 N	24000 N


Load capacity of profile connection


The specified tightening and loading limit values were determined as an example in (dry) trials. Safety factors and building regulations in accordance with the law and accepted engineering practices must be observed.

Static load limit values of the connection (beginning of plastic deformation)


6 8 10	D	Slot			F_{max}	M_{max}
	8	6 / 6	↻	2.5 Nm	450 N	18 Nm
	11	8 / 8	↻	12 Nm	500 N	40 Nm
	11	8 / 10	↻	12 Nm	2000 N	70 Nm
	17	10 / 10	↻	25 Nm	4000 N	140 Nm
Quick connector (p. 3-56)	9.8	10 / 10	↻	6 Nm	800 N	50 Nm

6 8 10	D	Slot			F_{max}	M_{max}
	8	6 / 6	↻	2.5 Nm	250 N	6 Nm
	11	8 / 8	↻	12 Nm	500 N	40 Nm
	11	8 / 10	↻	12 Nm	500 N	40 Nm
Quick connector with round head (p. 3-59)	17	10 / 10	↻	25 Nm	2500 N	140 Nm

8 10	Slot			F_{max}	M_{max}	M_{max}	F_{max}	M_{max}
	30x30	8	↻ 12 Nm	1100 N	35 Nm	24 Nm	650 N	40 Nm
	40x40L	10	↻ 25 Nm	1500 N	110 Nm	100 Nm	1000 N	80 Nm
	45x45L	10	↻ 25 Nm	1500 N	120 Nm	110 Nm	1000 N	95 Nm
	45x45	10	↻ 25 Nm	1500 N	140 Nm	145 Nm	1100 N	180 Nm
Quick connector, bendable (p. 3-61)	50x50L	10	↻ 25 Nm	1500 N	150 Nm	160 Nm	1100 N	180 Nm

		Slot			F_{max}	M_{max}	M_{max}
	ø11, L=30	8	↻	6 Nm	2500 N	60 Nm	20 Nm
	ø17, L=40	10	↻	25 Nm	4000 N	180 Nm	40 Nm
	ø17, L=45	10	↻	25 Nm	4000 N	180 Nm	60 Nm
	ø17, L=50	10	↻	25 Nm	4000 N	200 Nm	65 Nm
	ø17, L=60	10	↻	25 Nm	4000 N	200 Nm	80 Nm
	ø17, L=80	10	↻	25 Nm	5000 N	800 Nm	170 Nm
	ø17, L=90	10	↻	25 Nm	5000 N	800 Nm	200 Nm
	ø17, L=100	10	↻	25 Nm	5000 N	1000 Nm	480 Nm
Bolt connector (p. 3-64)	ø28, L=22.5	10	↻	25 Nm	2000 N	–	–

		Slot			F_{max}	M_{max}
	S6	6	↻	10 Nm	500 N	8 Nm
	S8	8	↻	25 Nm	800 N	43 Nm
	S12	10	↻	35 Nm	1300 N	80 Nm
Central bolt (p. 3-43)	M12	10	↻	35 Nm	3000 N	80 Nm

		Slot				M_{max}	$M_{max}/2$ + $M_{max}/2$
	20/2	6	↻	10 Nm		18 Nm	
	20/3	6	↻	10 Nm			23 Nm
	30/2	8	↻	25 Nm		80 Nm	
	30/3	8	↻	25 Nm			85 Nm
	40/2	10	↻	35 Nm		60 Nm	
	40/3	10	↻	35 Nm			70 Nm
	45/2	10	↻	35 Nm	45x45L	150 Nm	
					45x45	200 Nm	
	45/3	10	↻	35 Nm	45x45L		170 Nm
					45x45		240 Nm
	50/2	10	↻	35 Nm		120 Nm	
Cubic connector (p. 3-45)	50/3	10	↻	35 Nm			140 Nm


		Profile	Slot			F_{max}	M_{max}	M_{max}
	SV8	30x...	8	↻	6 Nm	1000 N	35 Nm	15 Nm
	SV 10L	45x... L	10	↻	15 Nm	3500 N	110 Nm	30 Nm
	SV 10	40x..., 45x...	10	↻	25 Nm (M8) 5 Nm (M5)	3500 N	110 Nm	30 Nm
Tensioning connector (p. 3-13)		60x...	10	↻	15 Nm	3500 N	195 Nm	60 Nm

	Slot			F_{max}	M_{max}	M_{max}
	8 / 8	↻	2.5 Nm (M4) 10 Nm (M8)	1000 N	35 Nm	15 Nm
	8 / 10	↻	2.5 Nm (M4) 10 Nm (M8)	1000 N	35 Nm	15 Nm
Slot connector (p. 3-14)	10 / 10	↻	7 Nm (M6) 12 Nm (M10)	3000 N	110 Nm	30 Nm

	Slot			F_{max}	M_{max}
	8 / 8	↻	12 Nm	2200 N	50 Nm
	10 / 10	↻	15 Nm	2800 N	100 Nm
Inner bracket (p. 3-15)					


	Slot			F_{max}	M_{max}
	6 / 6	↻	3 Nm	600 N	10 Nm
	8 / 8	↻	12 Nm	2500 N	50 Nm
Inner bracket R (p. 3-16)	10 / 10	↻	15 Nm	3000 N	100 Nm



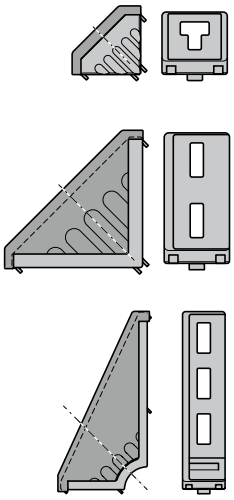


	Slot			F_{max}	M_{max}	M_{max}	M_{max}
20/20	6	↻	3 Nm	700 N	6 Nm	25 Nm	–
20/40	6	↻	3 Nm	1400 N	15 Nm	50 Nm	8 Nm
30/30	8	↻	10 Nm	1250 N	25 Nm	75 Nm	–
30/60	8	↻	10 Nm	2500 N	100 Nm	170 Nm	25 Nm
30/120	8	↻	10 Nm	3750 N	100 Nm		47 Nm
60/60-8	8	↻	10 Nm	5000 N	320 Nm	370 Nm	110 Nm
60/60-10	10	↻	25 Nm	3000 N	125 Nm	150 Nm	–
40/40	10	↻	25 Nm	3000 N	55 Nm	145 Nm	35 Nm
40/80	10	↻	25 Nm	6000 N	180 Nm	400 Nm	60 Nm
40/160	10	↻	25 Nm	9000 N	250 Nm		60 Nm
80/80	10	↻	25 Nm	14000 N	500 Nm	1000 Nm	400 Nm
45/45	10	↻	25 Nm	3000 N	60 Nm	160 Nm	–
45/90	10	↻	25 Nm	6000 N	180 Nm	400 Nm	60 Nm
45/180	10	↻	25 Nm	9000 N	250 Nm		65 Nm
90/90	10	↻	25 Nm	12000 N	370 Nm	800 Nm	200 Nm
43x42	10	↻	25 Nm	2000 N	–	160 Nm	–
50/50	10	↻	25 Nm	4000 N	125 Nm	250 Nm	38 Nm
50/100	10	↻	25 Nm	7500 N	300 Nm	600 Nm	73 Nm
100/100	10	↻	25 Nm	15000 N	550 Nm	1100 Nm	480 Nm

Bracket (p. 3-19)




	Slot			F_{max}	M_{max}	M_{max}
S 20x20	6	↻	2.5 Nm	700 N	3.6 Nm	25 Nm
S 30x30	8	↻	8.5 Nm	1250 N	16 Nm	75 Nm
S 40x40	10	↻	25 Nm	3000 N	36 Nm	160 Nm
S 45x45	10	↻	25 Nm	3000 N	36 Nm	160 Nm

Bracket S (p. 7-8)


8	10		Slot		F_{max}	M_{max}
		30x30	8	25 Nm (M8) / 5 Nm (M5)	4000 N	80 Nm
		40x40	10	35 Nm (S12) / 10 Nm (M6)	9000 N	150 Nm
		45x45	10	35 Nm (S12) / 10 Nm (M6)	9000 N	200 Nm
		50x50	10	35 Nm (S12) / 10 Nm (M6)	10000 N	170 Nm

T-connector (p. 3-53)


8	10		Slot		M_{max}
		30x30	8	25 Nm (M8) / 5 Nm (M5)	81 Nm
		40x40	10	35 Nm (S12) / 10 Nm (M6)	170 Nm
		45x45	10	35 Nm (S12) / 10 Nm (M6)	200 Nm
		50x50	10	35 Nm (S12) / 10 Nm (M6)	180 Nm

End connector (p. 3-51)

Profile connection load capacity with radial compensation (p. 2-94)

			Slot		F_{max}	M_{max}	M_{max}
	30x30	S8	8	25 Nm	600 N	37 Nm	28 Nm
			8 / 8	12 Nm	600 N	37 Nm	28 Nm
	40x40	M12 S12	10	30 Nm	1000 N	47 Nm	55 Nm
			10 / 10	22 Nm	1000 N	47 Nm	55 Nm
	45x45	S12 M12	10	35 Nm	1200 N	53 Nm	59 Nm
			10 / 10	25 Nm	1200 N	53 Nm	59 Nm





	Slot		
M4	6	↻	3 Nm
M4	8	↻	3 Nm
M5	8	↻	5 Nm
M6	8	↻	10 Nm
M4	10	↻	3 Nm
M5	10	↻	5 Nm
M6	10	↻	10 Nm
M8	10	↻	25 Nm

T-nut (p. 3-4)



	Slot		
M8	10	↻	25 Nm

Collar screw (p. 3-5)






	Slot		
M6	8	↻	10 Nm
M8	10	↻	25 Nm

Flange nut,
T-bolt (p. 3-6)





	Slot		
M4	6	↻	3 Nm
M5	6	↻	5 Nm
M4	8	↻	3 Nm
M5	8	↻	5 Nm
M6	8	↻	10 Nm
M8	8	↻	25 Nm
M5	10	↻	5 Nm
M6	10	↻	10 Nm
M8	10	↻	25 Nm

Sliding block (p. 3-7)
Swivel-in sliding block (p. 3-8)


Lifting eye bolt load capacity data

	Page	 One cable, vertical	 Two cables, vertical	 Two cables, ß 0 ... 45	 Two cables, ß 45 ... 60	 Two cables, asymmetrical	 Three or four cables, ß 0 ... 45	 Three or four cables, ß 45 ... 60	 Three or four cables, asymmetrical
Lifting eye bolt M12x40	3-67	750 kg	1500 kg	1000 kg	750 kg	750 kg	1400 kg	1100 kg	750 kg
Lifting eye bolt with plate 45x90	3-68	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg	1100 kg	750 kg
Lifting eye bolt with plate 90x90	3-68	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg	1100 kg	750 kg
Lifting eye bolt with plate 40x80	3-68	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg	1100 kg	750 kg
Lifting eye bolt with plate 80x80	3-68	750 kg	1500 kg	1000 kg	750 kg	750 kg	1500 kg	1100 kg	750 kg

EcoShape load capacity

The specified tightening and loading limit values were determined as an example in (dry) trials. Safety factors and building regulations in accordance with the law and accepted engineering practices must be observed.

Static load limit values of the connection (beginning of plastic deformation)

Page		↻							
2-81	Threaded sleeve D28L, M12	25 Nm	–	–	–	–	2400 N	300 N	–
2-81	90° connector D28L	10 Nm	2500 N	50 Nm	25 Nm	15 Nm	–	–	–
2-81	90° connector D28L, inside	10 Nm	2500 N	30 Nm	20 Nm	–	–	–	–
2-81	Parallel connector D28L	10 Nm	2500 N	35 Nm	16 Nm	–	–	–	–
2-82	45° connector D28L	10 Nm	2500 N	–	–	–	–	–	–
2-82	45° connector D28L, inside	10 Nm	2500 N	–	–	–	–	–	–
2-82	Strut D28L, 45°	10 Nm	+2500 N	200 Nm	–	–	–	–	–
2-82	Cross connector D28L	10 Nm	2500 N	30 Nm	35 Nm	–	–	–	–
2-83	0°-90° connector D28L	10 Nm	–	–	–	–	–	–	–
2-83	D28L corner bracket	10 Nm	–	20 Nm	20 Nm	–	–	–	–
2-83	90° connector R25, inside	10 Nm	–	–	–	–	–	–	–
2-84	Retaining ring D28L	2 Nm	500 N	–	–	–	–	–	–
2-85	Adapter N10/45	5 Nm	3000 N	–	–	–	–	–	–
2-85	Adapter N10/30	5 Nm	800 N	–	–	–	–	–	–
2-86	Adapter mount D28L	–	35 N	–	–	–	–	–	–
2-86	Container mount	1.8 Nm	35 N	–	–	–	–	–	–
2-87	Tube clamp D28L, N10	25 Nm	1800 N	100 Nm	–	–	–	–	–
2-87	Hinge D28L/D28L	10 Nm	300 N	–	–	–	–	–	–
2-87	D28L/- hinge	10 Nm	300 N	–	–	–	–	–	–
2-88	Variofix block Zn	10 Nm	1500 N	–	–	–	–	–	–
2-88	Mounting bracket D28L	–	200 N	–	–	–	–	–	–
2-89	Ring D50	–	–	–	–	–	–	–	200 N

Material number overview

0 842 901 309	12-2
1 845 719 000	2-96
3 842 146 813	3-34, 3-35
3 842 146 815	3-36
3 842 146 848	3-36
3 842 146 877	13-12, 13-13, 13-26, 13-27
3 842 146 920	11-13
3 842 146 972	3-66
3 842 184 738	7-6
3 842 191 175	3-52
3 842 191 182	2-93
3 842 191 194	8-32
3 842 218 940	12-17
3 842 218 941	12-17
3 842 218 942	12-17
3 842 218 953	12-2
3 842 259 790	6-23
3 842 259 791	6-23
3 842 259 792	6-23
3 842 259 793	6-23
3 842 259 794	6-23
3 842 305 766	7-13
3 842 305 767	7-13
3 842 305 768	7-13
3 842 311 950	6-5
3 842 311 951	6-5
3 842 311 956	6-5
3 842 345 081	3-6, 10-31
3 842 348 526	3-27
3 842 352 009	3-27
3 842 352 061	6-5
3 842 352 085	5-4
3 842 500 287	9-5
3 842 501 576	12-18
3 842 501 578	12-18
3 842 501 587	3-21
3 842 501 751	3-4
3 842 501 752	3-4
3 842 501 753	3-4
3 842 502 137	3-21
3 842 502 257	6-4
3 842 502 683	4-3
3 842 502 684	4-8
3 842 502 687	4-10
3 842 502 688	4-10
3 842 503 242	5-6
3 842 504 760	3-32
3 842 504 790	6-7
3 842 505 144	4-8, 4-10, 4-15
3 842 508 087	5-5
3 842 508 088	5-5
3 842 510 078	3-7
3 842 510 145	5-5
3 842 510 165	9-5
3 842 510 462	9-5, 12-5
3 842 510 464	9-5
3 842 511 352	6-6
3 842 511 893	6-5
3 842 513 517	12-16
3 842 513 576	2-52
3 842 513 581	2-22
3 842 513 648	13-31, 13-38
3 842 514 524	14-11
3 842 514 567	6-10
3 842 514 568	6-5
3 842 514 928	3-7
3 842 514 929	3-7
3 842 514 930	3-7, 10-17
3 842 514 931	3-7, 12-7
3 842 515 244	7-14
3 842 515 366	6-18
3 842 515 367	6-18
3 842 515 457	6-15
3 842 515 459	6-15
3 842 515 473	3-31
3 842 515 531	10-46
3 842 515 547	3-31
3 842 515 863	10-46
3 842 516 175	6-10, 6-12, 6-14
3 842 516 598	8-27
3 842 516 669	3-9
3 842 516 685	3-9
3 842 516 694	8-29
3 842 516 715	8-11
3 842 516 729	14-4
3 842 516 731	14-4
3 842 516 837	7-12
3 842 516 838	7-12
3 842 516 845	4-15
3 842 516 846	4-15, 12-7, 12-8, 12-9, 12-10
3 842 516 847	4-5, 4-15
3 842 516 848	4-15
3 842 516 849	4-16
3 842 516 850	4-16
3 842 516 851	4-16
3 842 516 905	17-3
3 842 516 908	17-3
3 842 517 132	3-45, 3-46
3 842 517 178	2-14
3 842 517 179	2-12
3 842 517 180	2-13
3 842 517 183	2-13
3 842 517 543	3-46
3 842 518 204	2-17, 2-92
3 842 518 205	2-37, 2-92
3 842 518 367	2-93
3 842 518 368	2-93
3 842 518 369	2-93
3 842 518 424	3-32
3 842 518 427	3-41
3 842 518 492	8-27
3 842 518 650	14-8
3 842 518 743	6-4
3 842 518 797	9-3
3 842 518 798	9-3
3 842 518 856	13-10
3 842 518 896	13-8
3 842 518 897	13-20
3 842 518 898	13-34
3 842 519 318	3-49
3 842 519 319	3-49
3 842 519 321	3-50
3 842 519 465	17-2
3 842 519 658	2-13
3 842 520 000	12-21
3 842 520 802	3-54
3 842 520 922	2-66
3 842 521 216	3-41
3 842 521 510	2-71
3 842 521 580	3-31, 12-5
3 842 521 817	6-5
3 842 522 012	17-3
3 842 522 087	17-2
3 842 522 124	4-15
3 842 522 301	6-5
3 842 522 303	6-5
3 842 522 345	10-17, 10-19, 10-20, 10-21, 10-22, 10-28, 10-41
3 842 522 475	10-40
3 842 522 476	10-40
3 842 522 477	10-40
3 842 522 479	8-13
3 842 522 481	10-30
3 842 523 014	11-2, 11-3
3 842 523 092	5-4
3 842 523 093	5-6
3 842 523 094	5-6
3 842 523 097	5-3
3 842 523 098	5-3
3 842 523 102	5-6
3 842 523 135	3-4
3 842 523 140	3-7
3 842 523 142	3-7
3 842 523 145	3-9
3 842 523 165	10-32
3 842 523 166	10-32
3 842 523 170	10-33
3 842 523 205	12-14
3 842 523 206	12-14
3 842 523 207	12-15
3 842 523 209	12-14
3 842 523 210	12-14
3 842 523 211	12-15
3 842 523 212	12-7, 12-13
3 842 523 213	12-13
3 842 523 241	2-14
3 842 523 243	8-12
3 842 523 254	2-93
3 842 523 256	2-93
3 842 523 258	2-93
3 842 523 308	10-17, 10-18, 10-43, 10-44
3 842 523 320	8-13
3 842 523 438	3-7
3 842 523 493	7-3
3 842 523 494	7-3
3 842 523 508	3-20
3 842 523 511	3-20
3 842 523 516	3-20
3 842 523 517	3-20
3 842 523 520	3-20
3 842 523 525	3-21
3 842 523 528	3-21
3 842 523 530	3-21
3 842 523 532	3-21
3 842 523 537	3-21, 3-22, 3-23
3 842 523 538	3-22
3 842 523 541	3-22
3 842 523 546	3-23
3 842 523 549	3-23
3 842 523 551	3-23
3 842 523 553	3-23
3 842 523 558	3-25
3 842 523 561	3-25
3 842 523 567	3-26
3 842 523 570	3-26
3 842 523 575	3-27
3 842 523 578	3-27
3 842 523 583	3-26
3 842 523 587	3-22
3 842 523 593	3-25
3 842 523 872	3-46
3 842 523 873	3-46
3 842 523 874	3-48
3 842 523 875	3-45
3 842 523 876	3-46
3 842 523 877	3-47
3 842 523 920	3-6
3 842 523 921	3-6
3 842 523 922	3-6
3 842 523 925	3-6
3 842 524 012	3-5
3 842 524 025	7-5
3 842 524 027	7-5
3 842 524 058	2-59
3 842 524 061	2-59
3 842 524 064	2-59
3 842 524 067	2-59
3 842 524 153	2-71, 12-5
3 842 524 163	10-34
3 842 524 164	10-34
3 842 524 165	10-39
3 842 524 166	10-39
3 842 524 469	6-11
3 842 524 476	3-53
3 842 524 490	12-5
3 842 524 499	6-18
3 842 524 500	6-18
3 842 524 622	8-27
3 842 524 623	8-27
3 842 524 986	9-8
3 842 525 014	10-29
3 842 525 443	12-27
3 842 525 481	8-24
3 842 525 737	12-28
3 842 525 738	12-28
3 842 525 739	12-28
3 842 525 740	12-28
3 842 525 741	12-28
3 842 525 742	12-28
3 842 525 767	8-24
3 842 525 780	10-38
3 842 525 781	10-36
3 842 525 782	10-36
3 842 525 821	8-12
3 842 525 822	8-12
3 842 525 823	8-12
3 842 525 833	10-42
3 842 525 946	8-14
3 842 525 947	8-14
3 842 526 003	3-51
3 842 526 034	12-27
3 842 526 412	13-12, 13-16
3 842 526 413	13-12, 13-16
3 842 526 414	13-26, 13-30
3 842 526 415	13-26, 13-30
3 842 526 416	13-7, 13-9
3 842 526 417	13-7, 13-10
3 842 526 422	13-17, 13-24
3 842 526 560	3-36, 6-13
3 842 526 561	6-13
3 842 526 589	14-7, 14-8
3 842 526 626	2-68
3 842 526 627	2-68
3 842 526 628	2-68
3 842 526 660	2-70
3 842 526 665	2-70
3 842 526 671	2-67
3 842 526 672	2-67
3 842 526 673	2-67
3 842 526 786	10-38
3 842 526 787	10-38
3 842 526 817	2-15
3 842 526 863	13-19, 13-23
3 842 526 865	13-19, 13-23
3 842 526 867	13-33, 13-37
3 842 526 869	13-33, 13-37
3 842 526 893	13-42

3 842 526 894	13-42
3 842 526 895	13-42
3 842 527 174	3-43
3 842 527 186	6-5
3 842 527 553	6-11, 10-31
3 842 527 738	16-6
3 842 527 851	16-6
3 842 528 009	16-9
3 842 528 189	6-14
3 842 528 191	6-14
3 842 528 539	4-15
3 842 528 540	4-15
3 842 528 574	14-3, 14-5
3 842 528 577	14-3, 14-5
3 842 528 586	14-6
3 842 528 588	14-6
3 842 528 590	14-6
3 842 528 593	3-43
3 842 528 715	3-6
3 842 528 718	3-6
3 842 528 721	3-6, 10-31
3 842 528 724	3-6
3 842 528 727	3-6
3 842 528 730	3-6
3 842 528 735	3-7, 12-8, 12-9, 12-10
3 842 528 738	3-7
3 842 528 741	3-7
3 842 528 744	3-7
3 842 528 746	3-42
3 842 528 967	3-23
3 842 529 005	3-24
3 842 529 006	3-24
3 842 529 010	3-47
3 842 529 011	3-47
3 842 529 012	3-48
3 842 529 013	3-48
3 842 529 020	3-31
3 842 529 024	6-5
3 842 529 025	6-4
3 842 529 294	3-9
3 842 529 295	3-9
3 842 529 296	3-9
3 842 529 297	3-9
3 842 529 298	3-9
3 842 529 299	3-9
3 842 529 300	3-9
3 842 529 319	3-8
3 842 529 320	3-8
3 842 529 321	3-8
3 842 529 323	3-8
3 842 529 324	3-8
3 842 529 325	3-8
3 842 529 327	3-8
3 842 529 339	2-26
3 842 529 341	2-30
3 842 529 345	2-33
3 842 529 347	2-34
3 842 529 349	2-36
3 842 529 351	2-54
3 842 529 352	2-54
3 842 529 355	2-55
3 842 529 357	2-56
3 842 529 359	2-29
3 842 529 361	2-26
3 842 529 363	2-27
3 842 529 365	2-27
3 842 529 367	2-27
3 842 529 371	2-28
3 842 529 373	2-28
3 842 529 375	2-28
3 842 529 381	2-29
3 842 529 383	3-23
3 842 529 386	3-24
3 842 529 404	3-50
3 842 529 416	6-6
3 842 529 417	6-6
3 842 529 761	7-5
3 842 529 850	16-4
3 842 529 881	3-42
3 842 530 231	3-25
3 842 530 235	3-43
3 842 530 236	3-43, 3-47, 3-48, 10-31
3 842 530 241	9-7
3 842 530 259	3-28
3 842 530 260	3-28
3 842 530 281	3-4
3 842 530 283	3-4
3 842 530 285	3-4
3 842 530 287	3-4, 13-12, 13-26
3 842 530 306	2-96
3 842 530 316	3-8
3 842 530 321	3-8
3 842 530 325	3-44
3 842 530 326	3-44
3 842 530 329	12-8, 12-9, 12-10, 12-13
3 842 530 352	8-15
3 842 530 353	8-15
3 842 530 360	3-25
3 842 530 361	3-29
3 842 530 381	3-28
3 842 530 382	3-28
3 842 530 400	14-3, 14-5
3 842 530 460	3-29
3 842 532 195	3-53
3 842 532 196	3-51
3 842 532 198	3-54
3 842 532 199	3-52
3 842 532 274	3-31
3 842 532 363	11-2, 11-3
3 842 532 608	2-73, 12-34
3 842 532 695	2-73, 12-34
3 842 532 696	2-74, 12-35
3 842 532 697	2-73, 12-34
3 842 532 699	2-74
3 842 532 752	12-20
3 842 532 862	12-20
3 842 532 865	12-20
3 842 532 866	12-20
3 842 532 867	12-20
3 842 532 870	12-20
3 842 532 871	12-24
3 842 532 878	2-76
3 842 532 879	2-76
3 842 532 880	12-20
3 842 532 881	12-20
3 842 532 883	12-20
3 842 532 884	12-20
3 842 532 886	12-19
3 842 532 887	12-19
3 842 533 310	6-5
3 842 533 841	16-4
3 842 535 115	2-72, 12-19
3 842 535 118	2-76
3 842 535 121	12-22
3 842 535 122	12-22
3 842 535 124	12-21
3 842 535 136	2-95
3 842 535 176	2-22
3 842 535 364	12-23
3 842 535 458	3-57
3 842 535 459	3-57
3 842 535 464	3-57
3 842 535 465	3-58
3 842 535 466	3-58
3 842 535 571	3-17
3 842 535 572	3-15
3 842 535 573	3-16
3 842 535 574	3-15
3 842 535 575	3-16
3 842 535 576	3-17
3 842 535 577	3-17
3 842 535 578	3-15
3 842 535 617	3-65
3 842 535 619	3-65
3 842 535 625	3-18
3 842 535 626	3-18
3 842 535 627	3-18
3 842 535 629	3-62
3 842 535 630	3-61
3 842 535 634	3-61
3 842 535 635	3-62
3 842 535 637	2-62
3 842 535 662	13-7, 13-8
3 842 535 663	13-26, 13-28, 13-33, 13-35
3 842 535 664	13-12, 13-14, 13-19, 13-21
3 842 535 665	13-28, 13-35
3 842 535 666	13-14, 13-21
3 842 535 667	12-28
3 842 535 668	12-28
3 842 535 669	6-15
3 842 535 670	6-15
3 842 535 676	11-2, 11-3
3 842 535 680	13-12, 13-17, 13-19, 13-24, 13-26, 13-31, 13-33, 13-38
3 842 535 681	13-7, 13-10
3 842 535 683	12-28
3 842 535 684	8-4, 8-6
3 842 535 719	5-4
3 842 535 721	5-3
3 842 535 835	2-76, 2-77
3 842 535 921	11-2, 11-3
3 842 536 002	2-76
3 842 536 054	12-31
3 842 536 055	12-29
3 842 536 056	12-29
3 842 536 057	12-29
3 842 536 119	3-34
3 842 536 120	3-34
3 842 536 121	3-34
3 842 536 122	3-34
3 842 536 123	3-34
3 842 536 124	3-34
3 842 536 125	3-34
3 842 536 126	3-34
3 842 536 148	7-12, 17-4
3 842 536 207	6-9
3 842 536 295	16-7
3 842 536 320	17-3
3 842 536 470	6-5
3 842 536 472	2-20
3 842 536 475	2-12
3 842 536 478	2-12
3 842 536 481	2-35, 2-45
3 842 536 484	2-30
3 842 536 489	7-8
3 842 536 490	7-8
3 842 536 491	7-8
3 842 536 531	8-30
3 842 536 532	8-30
3 842 536 533	8-33
3 842 536 536	8-33
3 842 536 537	8-33
3 842 536 540	8-33
3 842 536 560	6-6
3 842 536 562	6-6
3 842 536 564	6-6
3 842 536 566	6-6
3 842 536 581	6-8
3 842 536 599	3-4
3 842 536 600	3-4
3 842 536 601	3-4
3 842 536 602	3-4
3 842 536 603	3-4
3 842 536 604	3-4
3 842 536 605	3-4
3 842 536 606	3-4
3 842 536 669	3-8
3 842 536 670	7-8
3 842 536 671	7-8
3 842 536 672	7-8
3 842 536 673	3-9
3 842 536 675	3-9
3 842 536 676	3-9
3 842 536 694	6-3
3 842 536 695	6-3
3 842 536 696	6-3
3 842 536 701	6-20
3 842 536 722	12-25
3 842 536 724	12-26
3 842 536 729	3-33
3 842 536 730	2-77
3 842 536 736	6-19
3 842 536 737	6-19
3 842 536 738	6-19
3 842 536 746	6-9
3 842 536 787	3-41
3 842 536 811	6-2
3 842 536 812	6-2
3 842 537 013	3-56, 3-59, 3-60
3 842 537 100	2-48
3 842 537 101	2-48
3 842 537 102	2-42
3 842 537 113	2-95
3 842 537 116	2-95
3 842 537 119	2-95
3 842 537 163	12-28
3 842 537 164	12-28
3 842 537 206	6-3
3 842 537 220	6-2
3 842 537 222	6-2
3 842 537 223	6-2
3 842 537 224	6-2
3 842 537 225	6-2
3 842 537 226	6-2
3 842 537 227	6-2
3 842 537 228	6-2
3 842 537 229	6-2
3 842 537 230	6-2
3 842 537 231	6-2
3 842 537 232	6-2
3 842 537 321	12-27
3 842 537 477	2-77
3 842 537 556	14-2
3 842 537 583	12-31
3 842 537 584	12-31
3 842 537 592	12-32
3 842 537 593	12-32
3 842 537 650	2-95

3 842 537 651	2-95	3 842 538 299	2-43	3 842 539 895	15-3	3 842 543 401	4-5
3 842 537 652	2-95	3 842 538 330	2-31	3 842 539 896	15-3	3 842 543 402	4-5
3 842 537 657	12-26	3 842 538 334	2-35, 2-45	3 842 539 897	15-3	3 842 543 403	4-7
3 842 537 660	12-22	3 842 538 372	12-25	3 842 539 898	15-3	3 842 543 404	4-7
3 842 537 661	12-22	3 842 538 388	16-3	3 842 540 012	15-2	3 842 543 480	2-82, 2-83
3 842 537 664	12-32	3 842 538 389	16-4	3 842 540 173	6-13	3 842 543 494	2-87, 2-89
3 842 537 665	12-32	3 842 538 489	3-13	3 842 540 668	6-13	3 842 544 525	8-7
3 842 537 679	2-64	3 842 538 490	3-13	3 842 540 954	2-26	3 842 544 526	8-7
3 842 537 680	2-64	3 842 538 491	3-13	3 842 540 955	2-37	3 842 544 527	8-7
3 842 537 687	12-25	3 842 538 555	6-3	3 842 541 008	12-29	3 842 544 528	8-7
3 842 537 718	2-76, 2-77	3 842 538 556	6-3	3 842 541 173	2-81	3 842 544 529	8-7
3 842 537 720	12-23	3 842 538 557	6-3	3 842 541 175	2-81	3 842 544 530	8-7
3 842 537 740	12-31	3 842 538 558	6-3	3 842 541 178	2-82, 2-83	3 842 544 531	8-7
3 842 537 776	12-24	3 842 538 559	6-3	3 842 541 181	2-82, 2-83	3 842 544 562	8-10
3 842 537 777	12-24	3 842 538 607	4-4, 4-6, 4-7, 4-9, 4-15	3 842 541 183	2-81	3 842 544 637	2-87, 2-89
3 842 537 778	12-24	3 842 538 656	3-51	3 842 541 185	2-80	3 842 544 661	8-3
3 842 537 779	12-24	3 842 538 657	3-51	3 842 541 187	2-84	3 842 544 797	2-65, 2-85
3 842 537 803	12-21	3 842 538 658	3-52	3 842 541 190	2-84	3 842 544 832	14-9
3 842 537 806	12-21	3 842 538 673	6-3	3 842 541 226	6-18	3 842 544 833	14-10
3 842 537 807	12-21	3 842 538 674	6-3	3 842 541 228	6-18	3 842 544 834	14-9
3 842 537 812	2-53	3 842 538 675	6-3	3 842 541 230	6-18	3 842 544 835	14-9
3 842 537 816	2-14	3 842 538 676	6-3	3 842 541 232	6-18	3 842 544 836	14-10
3 842 537 818	2-14	3 842 538 677	6-3	3 842 541 234	6-18	3 842 544 837	14-10
3 842 537 819	2-14	3 842 538 678	6-3	3 842 541 236	6-18	3 842 544 875	6-13
3 842 537 821	2-23	3 842 538 679	6-3	3 842 541 238	6-18	3 842 546 519	9-4
3 842 537 823	2-47	3 842 538 680	6-3	3 842 541 240	6-18	3 842 546 560	10-45
3 842 537 824	2-32, 2-50	3 842 538 683	4-3	3 842 541 242	6-18	3 842 546 564	4-4, 4-9
3 842 537 825	2-54	3 842 538 684	4-5	3 842 541 244	6-18	3 842 546 625	3-37
3 842 537 826	2-55	3 842 538 685	4-5	3 842 541 246	3-5	3 842 546 626	3-37
3 842 537 827	2-31, 2-32	3 842 538 686	4-7	3 842 541 296	2-85	3 842 546 627	3-37
3 842 537 828	2-36	3 842 538 687	4-7	3 842 541 393	3-9	3 842 546 628	3-38
3 842 537 861	3-33	3 842 538 696	3-53	3 842 541 409	3-5	3 842 546 629	3-38
3 842 537 862	3-33	3 842 538 697	3-53	3 842 541 410	3-58	3 842 546 630	3-38
3 842 537 894	12-30	3 842 538 698	3-54	3 842 541 412	3-57	3 842 546 632	3-39
3 842 537 895	12-30	3 842 538 703	3-31	3 842 541 807	2-26, 2-92	3 842 546 717	6-14
3 842 537 896	12-30	3 842 538 704	3-31	3 842 541 814	2-72, 12-19	3 842 546 718	6-14
3 842 537 897	12-30	3 842 538 705	3-31	3 842 541 937	2-21	3 842 546 744	14-10
3 842 537 898	12-30	3 842 538 706	3-32	3 842 541 939	2-21	3 842 546 745	14-10
3 842 537 899	12-30	3 842 538 829	16-3	3 842 542 146	10-30	3 842 547 227	16-9
3 842 537 900	12-30	3 842 538 832	6-3	3 842 542 328	7-9	3 842 547 228	16-10
3 842 537 901	12-30	3 842 538 833	6-3	3 842 542 329	7-9	3 842 547 461	3-40
3 842 537 911	12-26	3 842 538 834	6-3	3 842 542 330	7-9	3 842 547 806	3-9
3 842 537 944	12-19	3 842 538 835	6-3	3 842 542 667	6-8	3 842 547 807	3-9
3 842 537 945	12-19	3 842 538 836	6-3	3 842 542 668	6-9	3 842 547 808	3-9
3 842 537 947	12-19	3 842 538 932	6-3	3 842 542 669	6-9	3 842 547 811	3-7
3 842 537 948	12-20	3 842 538 934	6-3	3 842 542 692	3-7	3 842 547 812	3-7
3 842 537 950	12-32	3 842 538 955	2-93	3 842 542 693	3-7	3 842 547 813	3-7
3 842 537 951	12-23	3 842 538 957	2-93	3 842 542 694	3-7	3 842 547 814	3-7
3 842 537 958	12-20	3 842 539 120	13-7, 13-9	3 842 542 696	2-66	3 842 547 815	3-7
3 842 537 959	12-20	3 842 539 339	16-11	3 842 542 698	2-66	3 842 547 816	3-7
3 842 537 960	12-20	3 842 539 340	16-4	3 842 542 736	3-11, 3-12	3 842 547 817	3-7
3 842 537 961	12-20	3 842 539 344	16-12	3 842 542 737	3-11	3 842 547 821	3-9
3 842 537 962	12-20	3 842 539 345	16-5	3 842 543 272	2-84	3 842 547 822	3-9
3 842 537 963	12-20	3 842 539 414	13-8	3 842 543 311	2-86	3 842 547 823	3-9
3 842 537 964	12-20	3 842 539 415	13-13, 13-20	3 842 543 321	8-8	3 842 547 824	3-9
3 842 537 965	12-20	3 842 539 416	13-27, 13-34	3 842 543 322	8-8	3 842 547 825	3-8
3 842 538 064	12-21	3 842 539 494	16-10	3 842 543 323	8-8	3 842 547 826	3-8
3 842 538 065	12-21	3 842 539 495	16-10	3 842 543 324	8-8	3 842 547 827	2-48
3 842 538 093	2-95	3 842 539 496	16-11	3 842 543 325	8-8	3 842 547 835	6-18
3 842 538 094	12-19	3 842 539 497	16-11	3 842 543 326	8-8	3 842 547 836	6-18
3 842 538 208	16-5	3 842 539 498	16-9	3 842 543 327	8-8	3 842 547 837	6-18
3 842 538 209	16-4	3 842 539 499	16-9	3 842 543 328	8-8	3 842 547 838	6-18
3 842 538 241	8-22	3 842 539 500	16-11	3 842 543 329	8-8	3 842 547 839	6-18
3 842 538 245	12-21	3 842 539 501	16-12	3 842 543 330	8-8	3 842 547 840	6-18
3 842 538 275	4-14	3 842 539 505	16-12	3 842 543 331	8-8	3 842 547 868	4-13
3 842 538 276	4-14	3 842 539 613	16-5	3 842 543 332	8-8	3 842 547 869	4-13
3 842 538 287	2-35, 2-45	3 842 539 799	4-10	3 842 543 333	8-8	3 842 547 890	6-21
3 842 538 296	2-49	3 842 539 800	4-10	3 842 543 334	8-8	3 842 547 982	14-8
3 842 538 297	2-49	3 842 539 826	16-12	3 842 543 371	8-3	3 842 548 117	2-80
3 842 538 298	2-44	3 842 539 894	15-2	3 842 543 372	8-3	3 842 548 118	2-81

3 842 548 119	2-81
3 842 548 120	2-85
3 842 548 123	2-82, 2-83
3 842 548 126	2-86
3 842 548 127	2-86
3 842 548 128	2-87, 2-89
3 842 548 129	2-80
3 842 548 130	2-80
3 842 548 131	2-87, 2-89, 2-91
3 842 548 132	2-88, 2-90, 2-91
3 842 548 700	3-45, 3-46
3 842 548 701	3-46
3 842 548 702	3-47, 3-48
3 842 548 703	3-48
3 842 548 704	3-45, 3-46
3 842 548 705	3-46
3 842 548 706	3-47, 3-48
3 842 548 707	3-48
3 842 548 708	3-49
3 842 548 709	3-49
3 842 548 710	3-50
3 842 548 711	3-50
3 842 548 712	3-49
3 842 548 713	3-49
3 842 548 714	3-50
3 842 548 715	3-50
3 842 548 716	3-49
3 842 548 717	3-49
3 842 548 718	3-50
3 842 548 719	3-50
3 842 548 720	3-49
3 842 548 721	3-49
3 842 548 722	3-50
3 842 548 723	3-50
3 842 548 742	2-12, 2-14
3 842 548 743	2-12, 2-14
3 842 548 744	2-17, 2-20, 2-21
3 842 548 745	2-17, 2-20, 2-21
3 842 548 746	2-26, 2-32, 2-35, 2-45, 2-50
3 842 548 747	2-26, 2-32, 2-35, 2-45, 2-50
3 842 548 748	2-30, 2-32, 2-33, 2-35, 2-45, 2-50
3 842 548 749	2-30, 2-32, 2-33, 2-35, 2-50
3 842 548 750	2-34, 2-36
3 842 548 751	2-34, 2-36
3 842 548 752	2-37, 2-41
3 842 548 753	2-37, 2-41, 10-31, 13-26
3 842 548 754	2-42
3 842 548 755	2-42
3 842 548 756	2-42, 2-43, 2-46, 2-47
3 842 548 757	2-42, 2-43, 2-46, 2-47, 13-7, 13-26, 13-33
3 842 548 758	2-48, 2-51
3 842 548 759	2-48, 2-51, 13-12
3 842 548 760	2-49, 2-51, 2-52
3 842 548 761	2-49, 2-51, 2-52, 13-19, 13-26, 13-33
3 842 548 766	2-15
3 842 548 767	2-15
3 842 548 768	2-23
3 842 548 769	2-23
3 842 548 770	2-53
3 842 548 771	2-53
3 842 548 772	2-53
3 842 548 773	2-53
3 842 548 774	2-17, 2-20, 2-21
3 842 548 775	2-17, 2-20, 2-21
3 842 548 776	2-19
3 842 548 777	2-19
3 842 548 778	2-22
3 842 548 779	2-22
3 842 548 780	2-20, 2-21
3 842 548 781	2-20, 2-21
3 842 548 782	2-26
3 842 548 783	2-26
3 842 548 784	2-29
3 842 548 785	2-29
3 842 548 786	2-29
3 842 548 787	2-29
3 842 548 788	2-30
3 842 548 789	2-30
3 842 548 790	2-31
3 842 548 791	2-31
3 842 548 792	2-36
3 842 548 793	2-36
3 842 548 794	2-46
3 842 548 795	2-46, 13-12, 13-19
3 842 548 796	2-37, 2-41
3 842 548 797	2-37, 2-41
3 842 548 798	2-40
3 842 548 799	2-40
3 842 548 800	2-40
3 842 548 801	2-40
3 842 548 802	2-42
3 842 548 803	2-42
3 842 548 804	2-42, 2-43, 2-46
3 842 548 805	2-42, 2-43, 2-46
3 842 548 806	2-47
3 842 548 807	2-47
3 842 548 808	2-56, 2-57
3 842 548 809	2-56, 2-57
3 842 548 810	2-56, 2-57
3 842 548 811	2-56, 2-57
3 842 548 812	2-57
3 842 548 813	2-57
3 842 548 814	2-49, 2-51, 2-52
3 842 548 815	2-49, 2-51, 2-52
3 842 548 816	2-52
3 842 548 817	2-52
3 842 548 818	2-55
3 842 548 819	2-55
3 842 548 820	2-54
3 842 548 821	2-54
3 842 548 822	2-54
3 842 548 823	2-54
3 842 548 824	2-55, 2-56
3 842 548 825	2-55, 2-56
3 842 548 826	2-13
3 842 548 827	2-13
3 842 548 828	2-14
3 842 548 829	2-14
3 842 548 830	2-53
3 842 548 831	2-53
3 842 548 832	7-6
3 842 548 834	7-6
3 842 548 836	7-7, 7-11
3 842 548 838	7-7
3 842 548 840	7-7
3 842 548 842	3-20
3 842 548 843	3-20
3 842 548 844	3-20
3 842 548 845	3-20
3 842 548 846	3-21
3 842 548 847	3-21
3 842 548 848	3-22
3 842 548 849	3-22
3 842 548 850	3-22
3 842 548 851	3-22
3 842 548 852	3-23
3 842 548 853	3-23
3 842 548 854	3-23
3 842 548 855	3-23
3 842 548 856	3-24
3 842 548 857	3-24
3 842 548 858	3-24
3 842 548 859	3-24
3 842 548 860	3-25
3 842 548 861	3-25
3 842 548 862	3-25
3 842 548 863	3-25
3 842 548 864	3-26
3 842 548 865	3-26
3 842 548 866	3-26
3 842 548 867	3-26
3 842 548 868	3-27
3 842 548 869	3-27
3 842 548 870	3-28
3 842 548 871	3-28
3 842 548 872	3-28
3 842 548 873	3-28
3 842 548 874	3-29
3 842 548 875	3-29
3 842 548 876	2-93
3 842 548 877	2-93
3 842 548 878	2-93
3 842 548 879	2-93
3 842 548 898	2-93
3 842 548 934	3-57
3 842 548 935	3-57
3 842 548 936	3-57
3 842 548 937	3-58
3 842 548 938	3-58
3 842 548 955	3-30
3 842 548 965	8-17
3 842 548 970	8-16
3 842 548 971	8-16
3 842 549 858	3-45
3 842 549 859	3-45
3 842 549 860	3-46
3 842 549 861	3-46
3 842 549 862	3-46
3 842 549 863	3-46
3 842 549 864	3-46
3 842 549 865	3-46
3 842 549 866	3-47
3 842 549 867	3-47
3 842 549 868	3-47
3 842 549 869	3-47
3 842 549 870	3-47
3 842 549 871	3-47
3 842 549 872	3-48
3 842 549 873	3-48
3 842 549 874	3-48
3 842 549 876	3-48
3 842 549 877	2-93
3 842 549 878	2-93
3 842 549 879	2-93
3 842 549 880	2-93
3 842 549 881	2-93
3 842 549 888	2-93
3 842 549 896	11-2
3 842 551 006	11-2
3 842 551 008	2-18
3 842 551 009	2-18
3 842 551 010	2-19
3 842 551 011	2-19
3 842 551 012	2-19
3 842 551 013	2-19
3 842 551 014	2-28
3 842 551 015	2-28
3 842 551 016	2-28
3 842 551 017	2-28
3 842 551 018	2-28
3 842 551 019	2-28
3 842 551 020	2-39
3 842 551 021	2-39
3 842 551 022	2-39
3 842 551 023	2-39
3 842 551 024	2-40
3 842 551 025	2-40
3 842 551 026	2-94
3 842 551 028	2-94
3 842 551 030	2-94
3 842 551 032	3-44
3 842 551 034	3-44
3 842 551 036	3-44
3 842 551 038	3-56
3 842 551 040	3-58
3 842 551 042	3-58
3 842 551 044	2-22
3 842 551 045	2-22
3 842 551 046	2-22
3 842 551 047	2-22
3 842 551 050	2-57
3 842 551 051	2-57
3 842 551 052	3-65
3 842 551 053	3-65
3 842 551 054	3-65
3 842 551 055	3-65
3 842 551 564	2-61
3 842 551 565	2-61
3 842 551 582	2-64
3 842 551 583	2-64
3 842 551 596	3-20
3 842 551 597	3-20
3 842 551 598	3-21
3 842 551 599	3-21
3 842 551 600	3-21
3 842 551 601	3-22
3 842 551 602	3-22
3 842 551 603	3-23
3 842 551 604	3-24
3 842 551 605	3-24
3 842 551 606	3-25
3 842 551 607	3-26
3 842 551 608	3-26
3 842 551 609	3-23
3 842 551 610	3-23
3 842 551 611	3-23
3 842 551 612	3-25
3 842 551 613	3-27
3 842 551 662	8-32
3 842 552 151	12-22, 12-25
3 842 552 234	2-117
3 842 552 240	11-8
3 842 552 245	11-8
3 842 552 246	11-8
3 842 552 247	11-4
3 842 552 249	11-7
3 842 552 250	11-7
3 842 552 251	11-7
3 842 552 252	11-7
3 842 552 253	11-7
3 842 552 254	11-7
3 842 552 255	11-7
3 842 552 256	11-7
3 842 552 257	11-8

3 842 552 258	11-8
3 842 552 259	11-8
3 842 552 260	11-8
3 842 552 263	11-10
3 842 552 265	11-10
3 842 552 266	11-10
3 842 552 267	11-6
3 842 552 268	11-6
3 842 552 270	11-6
3 842 552 273	11-6
3 842 552 275	11-6
3 842 552 421	12-7, 12-12
3 842 552 422	12-8, 12-9, 12-10, 12-12
3 842 552 423	12-7, 12-11
3 842 552 424	12-8, 12-9, 12-10, 12-11
3 842 553 611	2-37
3 842 553 612	2-43
3 842 553 613	2-48
3 842 553 614	2-41
3 842 553 615	2-46
3 842 553 616	2-46
3 842 553 617	2-51
3 842 553 630	8-22
3 842 553 631	8-22
3 842 553 639	8-18
3 842 553 640	8-18
3 842 553 967	6-21
3 842 553 973	11-10
3 842 553 974	11-10
3 842 554 134	8-19
3 842 554 149	6-5
3 842 554 150	8-20
3 842 554 151	8-20
3 842 554 156	2-64
3 842 554 157	2-64
3 842 554 280	10-26, 10-39
3 842 554 281	10-26, 10-33, 10-35, 10-37
3 842 554 282	10-25
3 842 554 283	10-25, 10-33, 10-35, 10-37
3 842 554 284	10-25
3 842 554 285	10-25, 10-39
3 842 554 402	3-64
3 842 554 404	4-11
3 842 554 406	4-11
3 842 554 408	4-11
3 842 554 410	4-11
3 842 554 412	4-11
3 842 554 414	4-11
3 842 554 416	4-11
3 842 554 418	4-11
3 842 554 420	4-12
3 842 554 422	4-12
3 842 554 424	4-12
3 842 554 426	4-12
3 842 554 428	4-12
3 842 554 430	4-12
3 842 554 432	4-12
3 842 554 434	4-12
3 842 554 440	3-63
3 842 554 442	3-63, 3-67
3 842 554 444	3-63, 3-68
3 842 554 446	3-55
3 842 554 447	3-55
3 842 554 448	3-55
3 842 554 449	3-55
3 842 554 450	3-55
3 842 554 451	3-55
3 842 554 452	3-55
3 842 554 453	3-55
3 842 554 454	3-55
3 842 554 455	3-55
3 842 554 456	3-55
3 842 554 457	3-55
3 842 554 458	8-5
3 842 554 460	8-5
3 842 554 462	8-5
3 842 554 464	8-5
3 842 554 466	8-5
3 842 554 468	8-5
3 842 554 470	8-5
3 842 554 472	8-5
3 842 554 490	2-63
3 842 554 491	2-63
3 842 554 708	2-61
3 842 554 709	2-61
3 842 554 710	2-71, 12-4
3 842 554 711	2-71, 12-4
3 842 554 716	8-24
3 842 554 718	8-24
3 842 554 720	8-24
3 842 554 724	8-31
3 842 554 726	8-32
3 842 554 746	12-21
3 842 554 748	12-21
3 842 554 750	2-80
3 842 554 752	2-80
3 842 554 754	2-80
3 842 554 771	2-93
3 842 554 774	3-10
3 842 554 776	3-10
3 842 554 778	3-10
3 842 554 909	14-9
3 842 555 180	11-11, 11-12
3 842 555 182	11-11, 11-12
3 842 555 226	8-28, 12-3
3 842 555 260	8-29
3 842 555 262	8-29
3 842 555 268	2-93
3 842 555 270	7-2
3 842 555 272	7-2
3 842 555 274	7-2
3 842 555 276	7-2
3 842 555 282	7-3
3 842 555 284	7-4
3 842 555 286	7-4
3 842 555 288	7-5
3 842 555 290	7-5
3 842 555 292	7-5
3 842 555 550	7-10
3 842 555 552	7-10
3 842 555 554	8-26
3 842 555 556	8-26
3 842 555 558	8-26
3 842 555 560	8-26
3 842 555 562	8-26
3 842 555 564	8-25
3 842 555 568	9-6
3 842 555 570	9-8
3 842 555 572	8-9
3 842 555 574	8-9
3 842 555 576	8-9
3 842 555 584	3-64
3 842 555 586	3-64
3 842 555 588	3-64
3 842 555 590	3-64
3 842 555 592	3-64
3 842 555 594	3-64
3 842 555 596	3-64
3 842 555 598	3-64
3 842 555 610	6-22
3 842 555 616	3-30
3 842 555 649	2-31
3 842 555 650	2-30
3 842 555 651	2-34
3 842 555 652	2-44
3 842 555 653	2-92, 6-15
3 842 555 659	4-2, 4-6
3 842 555 665	4-2
3 842 555 670	11-2, 11-3
3 842 555 671	11-2, 11-3
3 842 555 673	14-11
3 842 557 200	2-42
3 842 557 201	2-49
3 842 557 202	2-57
3 842 557 203	2-22
3 842 557 204	2-56
3 842 557 205	2-20
3 842 557 206	2-17
3 842 557 207	2-57
3 842 557 208	2-17
3 842 557 209	2-18
3 842 557 220	2-17
3 842 557 221	2-18
3 842 557 222	2-38
3 842 557 223	2-38
3 842 557 224	2-38
3 842 557 225	2-39
3 842 557 226	2-51
3 842 557 227	10-16, 10-28
3 842 557 228	10-28
3 842 557 229	10-28
3 842 557 240	10-28
3 842 557 241	2-20
3 842 557 242	2-53
3 842 557 243	2-80
3 842 557 244	2-80
3 842 557 254	2-60
3 842 557 255	2-60
3 842 557 256	3-60
3 842 557 257	3-60
3 842 557 259	3-9
3 842 557 260	3-9
3 842 557 261	3-9
3 842 557 262	3-9
3 842 557 433	2-69
3 842 557 434	2-69
3 842 557 435	2-69
3 842 557 443	11-2, 11-3
3 842 557 444	11-2, 11-3
3 842 557 941	2-62
3 842 557 942	2-63
3 842 557 943	8-31
3 842 557 944	2-53
3 842 557 945	13-13
3 842 557 946	2-61
3 842 557 947	2-19
3 842 557 948	2-40
3 842 557 949	2-47
3 842 557 950	2-71, 12-4
3 842 557 951	2-18
3 842 557 952	2-19
3 842 557 953	2-19
3 842 557 954	2-39
3 842 557 955	2-39
3 842 557 956	2-40
3 842 557 957	2-40
3 842 557 958	13-27
3 842 557 960	2-58
3 842 558 190	2-101
3 842 558 212	2-114
3 842 558 218	2-115
3 842 558 220	2-116
3 842 558 222	2-118
3 842 558 226	2-116
3 842 558 228	2-104
3 842 558 229	2-103
3 842 558 233	2-103
3 842 558 241	2-101
3 842 558 242	2-100
3 842 558 243	2-102
3 842 558 244	2-118
3 842 558 245	2-118
3 842 558 246	2-106
3 842 558 248	2-117
3 842 558 249	2-106
3 842 558 250	2-114
3 842 558 305	8-31
3 842 558 312	12-4
3 842 558 323	9-6
3 842 558 328	2-68
3 842 558 329	2-68
3 842 558 330	2-68
3 842 558 331	2-70
3 842 558 332	2-67
3 842 558 333	2-67
3 842 558 334	2-67
3 842 558 473	2-107
3 842 558 474	2-109
3 842 558 475	2-109
3 842 558 476	2-110
3 842 558 477	2-110
3 842 558 478	2-111
3 842 558 479	2-111
3 842 558 485	2-106
3 842 558 487	2-106
3 842 558 494	2-109
3 842 558 495	2-109
3 842 558 496	2-110
3 842 558 497	2-110
3 842 558 498	2-111
3 842 558 499	2-111
3 842 558 501	2-105
3 842 558 502	2-108
3 842 558 503	2-114
3 842 558 505	2-114
3 842 558 506	2-112
3 842 558 507	2-112
3 842 558 508	2-112
3 842 558 509	2-112
3 842 558 510	2-113
3 842 558 511	2-113
3 842 558 512	2-113
3 842 558 513	2-113
3 842 558 566	3-14
3 842 558 567	3-14
3 842 558 568	3-14
3 842 558 644	11-9
3 842 558 646	11-9
3 842 558 648	11-9
3 842 558 650	11-9
3 842 558 651	11-9
3 842 558 652	11-9
3 842 558 653	11-9
3 842 558 654	11-9
3 842 559 310	2-70
3 842 559 337	11-4
3 842 559 338	11-4
3 842 559 345	2-88

3 842 559 346	2-88	3 842 990 323	2-46	3 842 992 388	2-47	3 842 992 924	2-13
3 842 562 090	2-96	3 842 990 325	2-46	3 842 992 397	2-17	3 842 992 925	13-7, 13-8
3 842 564 090	4-15	3 842 990 329	2-46	3 842 992 398	2-18	3 842 992 926	2-20
3 842 564 106	17-4	3 842 990 331	2-46	3 842 992 399	2-17	3 842 992 927	2-47, 13-26, 13-33
3 842 564 107	17-4	3 842 990 335	2-46, 13-12, 13-19	3 842 992 400	2-18	3 842 992 928	2-47, 13-26
3 842 564 113	3-59	3 842 990 336	2-46	3 842 992 401	2-38	3 842 992 945	2-40
3 842 564 114	3-59	3 842 990 339	2-46, 13-12	3 842 992 402	2-38	3 842 992 946	2-71, 12-4
3 842 564 130	8-6	3 842 990 342	2-46	3 842 992 403	2-38	3 842 992 953	2-37
3 842 564 142	3-59	3 842 990 344	2-46	3 842 992 404	2-39	3 842 992 954	2-37
3 842 564 223	12-19	3 842 990 345	2-53	3 842 992 411	2-62	3 842 992 956	2-37
3 842 564 686	2-69	3 842 990 350	2-57	3 842 992 412	2-63	3 842 992 960	2-37
3 842 564 687	2-69	3 842 990 351	2-57	3 842 992 415	2-48, 13-12	3 842 992 961	2-49
3 842 564 688	2-69	3 842 990 352	2-57	3 842 992 416	2-48	3 842 992 962	2-57
3 842 564 725	11-4	3 842 990 353	2-57	3 842 992 417	2-48	3 842 992 963	2-57
3 842 564 726	11-4	3 842 990 354	2-57	3 842 992 418	2-48, 13-12	3 842 992 965	2-17
3 842 564 727	11-4	3 842 990 355	2-57	3 842 992 419	2-48	3 842 992 967	2-37
3 842 564 735	3-68	3 842 990 357	2-57	3 842 992 420	2-48	3 842 992 969	2-41
3 842 564 736	3-68	3 842 990 359	2-57	3 842 992 421	2-48	3 842 992 970	10-16, 10-28
3 842 564 737	3-68	3 842 990 370	2-57	3 842 992 422	2-48	3 842 992 971	10-16, 10-28
3 842 567 387	2-80	3 842 990 373	2-57	3 842 992 423	2-48	3 842 992 972	10-28
3 842 567 773	16-11	3 842 990 409	2-74, 12-35	3 842 992 425	2-37, 10-31	3 842 992 973	10-16, 10-28
3 842 567 902	10-11	3 842 990 416	2-51, 13-26, 13-33	3 842 992 426	2-37	3 842 992 977	10-28
3 842 567 903	10-11	3 842 990 417	2-51	3 842 992 427	2-37	3 842 992 978	10-28
3 842 567 904	10-11	3 842 990 418	2-51	3 842 992 430	2-22	3 842 992 991	2-14
3 842 567 905	10-11	3 842 990 419	2-51	3 842 992 431	2-22	3 842 992 992	2-14
3 842 567 906	10-11	3 842 990 421	2-51	3 842 992 432	2-43, 13-7	3 842 992 999	2-40
3 842 567 907	10-11	3 842 990 450	2-57	3 842 992 433	2-43	3 842 993 001	2-40
3 842 567 908	10-11	3 842 990 453	2-57	3 842 992 435	2-43	3 842 993 010	2-18
3 842 567 909	10-11	3 842 990 454	2-57	3 842 992 436	2-43	3 842 993 011	2-19
3 842 567 910	10-11	3 842 990 464	2-57	3 842 992 437	2-43	3 842 993 012	2-19
3 842 567 911	10-11	3 842 990 472	2-57	3 842 992 438	13-12, 13-13	3 842 993 013	2-39
3 842 567 945	10-11	3 842 990 478	2-57	3 842 992 440	13-19, 13-20	3 842 993 014	2-39
3 842 567 946	10-11, 10-33, 10-37	3 842 990 481	2-57	3 842 992 441	13-33, 13-34	3 842 993 015	2-40
3 842 567 947	10-11, 10-35	3 842 990 500	2-49, 13-19	3 842 992 443	2-56	3 842 993 016	2-20
3 842 567 948	10-11, 10-35	3 842 990 501	2-49	3 842 992 444	2-56	3 842 993 017	2-59
3 842 567 949	10-11	3 842 990 502	2-49	3 842 992 445	2-56	3 842 993 018	2-59
3 842 567 950	10-11, 10-33, 10-37	3 842 990 505	2-49	3 842 992 446	2-56	3 842 993 019	2-59
3 842 567 951	10-11, 10-35	3 842 990 507	2-49	3 842 992 447	2-56	3 842 993 020	2-59
3 842 567 952	10-11, 10-35	3 842 990 517	2-41	3 842 992 448	2-56	3 842 993 029	12-27
3 842 567 953	10-13, 10-33, 10-37	3 842 990 518	2-41	3 842 992 449	2-56	3 842 993 033	2-22
3 842 567 954	10-13, 10-33, 10-37	3 842 990 519	2-41	3 842 992 452	2-43	3 842 993 062	13-12, 13-13
3 842 567 955	10-13	3 842 990 520	2-41	3 842 992 453	2-43	3 842 993 063	2-64
3 842 567 956	10-13	3 842 990 521	2-41	3 842 992 457	2-20	3 842 993 071	2-67
3 842 567 961	8-17	3 842 990 570	2-42	3 842 992 458	2-20	3 842 993 072	2-67
3 842 567 962	8-19	3 842 990 571	2-42	3 842 992 459	2-20	3 842 993 073	2-67
3 842 567 963	8-21	3 842 990 572	2-42	3 842 992 460	2-20	3 842 993 077	2-15
3 842 571 233	16-4	3 842 990 573	2-42	3 842 992 462	2-20	3 842 993 078	2-23
3 842 990 087	2-53	3 842 990 575	2-42	3 842 992 463	2-20	3 842 993 079	2-53
3 842 990 090	2-53	3 842 990 584	2-42	3 842 992 473	2-52	3 842 993 080	13-26, 13-27
3 842 990 091	2-53	3 842 990 640	2-41	3 842 992 474	2-52	3 842 993 081	2-51, 13-26
3 842 990 092	2-49	3 842 990 642	2-41	3 842 992 475	2-52	3 842 993 082	2-49, 13-19
3 842 990 093	2-49	3 842 990 644	2-41	3 842 992 476	2-22	3 842 993 084	2-43, 13-7
3 842 990 094	2-49	3 842 990 646	2-41	3 842 992 493	2-61	3 842 993 085	2-42
3 842 990 097	2-57	3 842 990 648	2-41	3 842 992 676	12-33	3 842 993 120	2-26
3 842 990 098	2-57	3 842 990 670	2-42	3 842 992 857	2-51	3 842 993 121	2-26
3 842 990 099	2-57	3 842 990 672	2-42	3 842 992 858	2-51	3 842 993 122	2-26
3 842 990 111	9-5	3 842 990 674	2-42	3 842 992 859	2-51	3 842 993 123	2-26
3 842 990 115	8-31	3 842 990 688	2-42	3 842 992 860	2-51	3 842 993 124	2-26
3 842 990 116	8-31	3 842 990 690	2-42	3 842 992 861	2-51	3 842 993 125	2-26
3 842 990 292	2-53	3 842 990 720	2-17	3 842 992 864	2-51	3 842 993 126	2-26
3 842 990 300	2-46	3 842 990 721	2-17	3 842 992 884	2-73, 12-34	3 842 993 127	2-36
3 842 990 301	2-46	3 842 990 722	2-17	3 842 992 888	2-12, 2-13	3 842 993 128	2-36
3 842 990 302	2-46	3 842 990 723	2-17	3 842 992 889	2-13	3 842 993 129	2-26
3 842 990 303	2-46	3 842 990 724	2-17	3 842 992 890	2-13	3 842 993 130	2-30
3 842 990 304	2-46	3 842 990 725	2-17	3 842 992 891	2-14	3 842 993 131	2-30
3 842 990 305	2-46	3 842 990 726	2-17	3 842 992 896	2-19	3 842 993 132	2-30
3 842 990 307	2-46	3 842 992 375	2-42	3 842 992 897	2-40	3 842 993 133	2-34
3 842 990 309	2-46	3 842 992 376	2-42	3 842 992 898	2-51, 13-33	3 842 993 134	2-34
3 842 990 311	2-46	3 842 992 378	2-51	3 842 992 903	2-73, 12-34	3 842 993 135	2-30
3 842 990 313	2-46	3 842 992 387	2-47	3 842 992 913	2-58	3 842 993 136	2-30

3 842 993 137	2-30	3 842 993 229	2-36	3 842 993 679	2-49	3 842 993 758	2-35, 2-45		
3 842 993 138	2-30	3 842 993 230	2-12	3 842 993 680	2-48	3 842 993 759	2-42		
3 842 993 139	2-32, 2-50	3 842 993 231	2-12	3 842 993 681	2-48	3 842 993 760	2-26		
3 842 993 140	2-32, 2-50	3 842 993 256	2-29	3 842 993 682	2-47	3 842 993 761	2-37		
3 842 993 141	2-32	3 842 993 257	2-29	3 842 993 683	2-15	3 842 993 762	2-21		
3 842 993 142	2-32	3 842 993 259	2-73, 12-34	3 842 993 684	2-23	3 842 993 763	2-21		
3 842 993 143	2-33	3 842 993 306	16-4	3 842 993 685	2-55	3 842 993 764	2-48		
3 842 993 144	2-33	3 842 993 316	2-72, 12-19	3 842 993 686	2-53	3 842 993 767	2-31		
3 842 993 145	2-33	3 842 993 317	2-76	3 842 993 687	2-56	3 842 993 768	2-30		
3 842 993 146	2-33	3 842 993 321	12-24	3 842 993 688	2-22	3 842 993 769	2-34		
3 842 993 147	2-34	3 842 993 322	12-24	3 842 993 689	2-52	3 842 993 770	2-44		
3 842 993 148	2-34	3 842 993 336	2-66	3 842 993 690	2-12	3 842 993 887	16-3		
3 842 993 149	2-34	3 842 993 337	2-66	3 842 993 691	2-12	3 842 993 952	13-7, 13-8		
3 842 993 150	2-34	3 842 993 411	2-64	3 842 993 692	2-13	3 842 993 967	13-7, 13-8		
3 842 993 151	2-34	3 842 993 420	2-20	3 842 993 693	2-13	3 842 993 968	13-12, 13-13, 13-19,		
3 842 993 152	2-36	3 842 993 421	2-12	3 842 993 694	2-12		13-20		
3 842 993 153	2-36	3 842 993 422	2-12	3 842 993 695	2-13	3 842 993 969	13-26, 13-27, 13-33,		
3 842 993 154	2-36	3 842 993 423	2-35, 2-45	3 842 993 696	2-14		13-34		
3 842 993 155	2-36	3 842 993 424	2-30	3 842 993 697	2-14	3 842 994 244	10-11		
3 842 993 156	2-54	3 842 993 425	8-30	3 842 993 698	2-14	3 842 994 039	2-101		
3 842 993 157	2-54	3 842 993 426	8-30	3 842 993 699	2-53	3 842 994 054	2-101		
3 842 993 158	2-54	3 842 993 427	8-33	3 842 993 700	2-53	3 842 994 059	2-101		
3 842 993 159	2-54	3 842 993 428	8-33	3 842 993 703	2-17	3 842 994 175	2-44		
3 842 993 160	2-54	3 842 993 429	8-33	3 842 993 704	2-17	3 842 994 176	2-48		
3 842 993 161	2-54	3 842 993 430	8-33	3 842 993 705	2-17	3 842 994 662	13-26, 13-31, 13-33,		
3 842 993 162	2-54	3 842 993 431	12-24	3 842 993 706	2-18		13-38		
3 842 993 163	2-54	3 842 993 432	12-24, 12-26	3 842 993 707	2-18	3 842 994 702	13-15, 13-22, 13-29,		
3 842 993 164	2-54	3 842 993 434	2-52	3 842 993 708	2-18		13-36		
3 842 993 165	2-54	3 842 993 435	2-52	3 842 993 709	2-19	3 842 994 711	13-7, 13-10		
3 842 993 166	2-54	3 842 993 436	2-52	3 842 993 710	2-22	3 842 994 742	10-11, 10-13, 10-25		
3 842 993 167	2-54	3 842 993 446	2-67	3 842 993 711	2-19	3 842 994 744	10-26		
3 842 993 168	2-54	3 842 993 449	2-48	3 842 993 712	2-20	3 842 994 745	10-26		
3 842 993 169	2-54	3 842 993 450	2-42	3 842 993 713	2-20	3 842 994 811	13-43		
3 842 993 170	2-54	3 842 993 489	2-77	3 842 993 714	2-19	3 842 994 812	13-43		
3 842 993 171	2-55	3 842 993 493	2-12	3 842 993 715	2-20	3 842 994 813	13-43		
3 842 993 172	2-55	3 842 993 494	2-12	3 842 993 716	2-32, 2-50	3 842 994 821	13-12, 13-17, 13-19,		
3 842 993 173	2-55	3 842 993 495	2-12	3 842 993 717	2-33		13-24		
3 842 993 174	2-55	3 842 993 496	2-12	3 842 993 718	2-28	3 842 994 863	16-4		
3 842 993 175	2-55	3 842 993 497	2-14	3 842 993 719	2-26	3 842 994 979	2-96		
3 842 993 176	2-55	3 842 993 498	2-14	3 842 993 720	2-27	3 842 994 988	12-28		
3 842 993 177	2-55	3 842 993 499	2-14	3 842 993 721	2-27	3 842 994 989	12-28		
3 842 993 178	2-56	3 842 993 500	2-14	3 842 993 722	2-27	3 842 995 007	12-30		
3 842 993 179	2-56	3 842 993 501	2-14	3 842 993 723	2-29	3 842 995 008	12-28		
3 842 993 180	2-56	3 842 993 511	12-27	3 842 993 724	2-26	3 842 995 017	12-30		
3 842 993 181	2-56	3 842 993 512	12-27	3 842 993 725	2-29	3 842 995 027	2-72, 12-19		
3 842 993 182	2-56	3 842 993 517	2-67	3 842 993 726	2-28	3 842 996 191	2-80		
3 842 993 183	2-56	3 842 993 527	2-67	3 842 993 727	2-28	3 842 996 192	2-80		
3 842 993 184	2-29	3 842 993 621	2-49	3 842 993 728	2-30	3 842 996 356	11-6		
3 842 993 185	2-26	3 842 993 628	2-49	3 842 993 729	2-30	3 842 996 357	11-6		
3 842 993 186	2-26	3 842 993 635	2-44	3 842 993 730	2-31, 2-32	3 842 996 358	11-6		
3 842 993 187	2-27	3 842 993 644	2-43	3 842 993 731	2-46	3 842 996 359	11-6		
3 842 993 188	2-27	3 842 993 653	2-35, 2-45	3 842 993 732	2-47	3 842 996 360	2-101		
3 842 993 189	2-27	3 842 993 654	2-31	3 842 993 733	2-39	3 842 996 361	2-100		
3 842 993 190	2-27	3 842 993 658	2-35, 2-45	3 842 993 734	2-41	3 842 996 362	2-102		
3 842 993 191	2-27	3 842 993 661	2-46	3 842 993 735	2-39	3 842 996 364	2-100		
3 842 993 192	2-27	3 842 993 662	2-43	3 842 993 736	2-40	3 842 996 365	2-100		
3 842 993 193	2-31, 2-32	3 842 993 663	2-54	3 842 993 737	2-37	3 842 996 366	2-101		
3 842 993 194	2-55	3 842 993 664	2-55	3 842 993 738	2-38	3 842 996 367	2-101		
3 842 993 195	2-28	3 842 993 665	2-54	3 842 993 739	2-38	3 842 996 368	2-102		
3 842 993 196	2-55	3 842 993 668	2-57	3 842 993 740	2-38	3 842 996 369	2-102		
3 842 993 197	2-28	3 842 993 669	2-22	3 842 993 741	2-39	3 842 998 496	13-6		
3 842 993 198	2-28	3 842 993 670	2-56	3 842 993 742	2-40	3 842 998 497	13-11		
3 842 993 199	2-55	3 842 993 671	2-57	3 842 993 743	2-42	3 842 998 498	13-18		
3 842 993 200	2-55	3 842 993 672	2-36	3 842 993 744	2-40	3 842 998 499	13-25		
3 842 993 201	2-36	3 842 993 673	2-36	3 842 993 751	2-43	3 842 998 500	13-32		
3 842 993 202	2-36	3 842 993 674	2-34	3 842 993 752	2-44	8 981 535 323	12-8		
3 842 993 203	2-36	3 842 993 675	2-35, 2-45	3 842 993 753	2-31	8 981 535 324	12-8		
3 842 993 204	2-36	3 842 993 676	2-51	3 842 993 755	2-49	8 981 535 325	12-10		
3 842 993 225	2-32	3 842 993 677	2-51	3 842 993 756	2-49	8 981 535 326	12-10		
3 842 993 226	2-36	3 842 993 678	2-52	3 842 993 757	2-35, 2-45	8 981 535 476	12-7		

8 981 535 477	12-7
8 981 535 478	12-9
8 981 535 479	12-9
8 981 535 890	12-8, 12-9, 12-10, 12-12
8 981 535 891	12-7, 12-11

Index

▶ **A**
Accessories for protective equipment 9-1
Air-supply elements 5-2
Al angle profile 19″ 2-60
Angle profile 2-63
Anti-torsion element 3-43
Attachment kit for safety switch 10-40

▶ **B**
Ball catch 9-8
Base plate 2-115
– 120x120 6-11
– 135x135 6-10, 6-12
– 150x150 6-11
– 270x360 6-10
– Steel 6-8
Bearing pedestal 4-13
Bearing ring 2-92
Bolt connector 3-64
Bow-type handle 8-24
Bracket 2-75, 3-19
– R 3-31
– S 7-8
Bumper 9-5

▶ **C**
Cable bracket 11-11, 11-12
Cable duct
– AL 11-5
– PA 11-2, 11-3
Cable guide profiles 2-100
Cable hole 2-114
Cam roller guide LF6C
– Complete axis 13-6
– Components 13-7
Cam roller guide LF12C
– Complete axis 13-18
– Components 13-19
Cam roller guide LF12S
– Complete axis 13-11
– Components 13-12
Cam roller guide LF20C
– Complete axis 13-32
– Components 13-33
Cam roller guide LF20S
– Complete axis 13-25
– Components 13-26
Cam roller guides LF...C 13-5
Cam roller guides LF...S 13-4
Central bolt 3-43
Chamber lock for swing and sliding doors 8-20
Clamp bushing 7-14
Clamping element 10-43
Clamping lever 4-15
Clamping profile 2-59, 10-18
Cloth holder 2-96
Collar screw 3-5
Components
– For ESD applications 17-1, 17-2
– For lateral guides 16-1, 16-2
Components for ESD applications 17-1
Components for lateral guides 16-1
Components for sliding door 12-4
Connection bracket 2-107
Connection elements 3-1
– Selection criteria 3-3
Connection kit 10-19
Connection piece 5-4
Connection screw fitting M12-1/4″ 5-4
Connector 45° 3-55
Container mount 2-65
Conveyor media
– Profiles for installing 2-72
Conveyor track
– EcoFlow 12-27
– Lean 12-19
– XLean 12-24
Conveyor track made of section profiles and roller elements 12-33
Corner bracket 3-49
Counterbalance 9-2
Coupling 3-13
Cover 2-112
Cover cap 2-92, 3-43, 3-56, 3-58, 8-31
– Made of diecast zinc 2-92
– With hole 2-92
Cover caps 2-109
Cover plate 2-103
Cover profiles 2-93
Cover rail 2-112
Cubic connector 3-45
Customized profile finishing 18-7
– Cross milling 18-9
– Drill hole 18-8
– Lengthwise milling 18-10
– Miter cut 18-11

▶ **D**
Damping ring 6-4
Dimensioning of synchronous shafts 13-50
Direct panel 10-10
Dividing strip 2-118
Door handle profile 8-33
Door kits 10-32
Door lock 8-13
– “Compact” for swing doors 8-18
– For EcoSafe sliding doors 8-14
– For swing and sliding doors 8-12
– For swing doors 8-15
– “Multi Use” for swing and sliding doors 8-16
Doors and fittings 8-1
Double ball stop latch 9-7
Double wheel 6-15
Drilling jigs 14-2

▶ **E**
EcoFlow 12-27
– Accessories 12-31
– Conveyor track 12-27
– Stop gate and return stop 12-30
EcoFlow accessories 12-31
EcoFlow stop gates and return stops 12-30
EcoSafe assembly kit
– Double door 10-36
– Sliding door without superstructure 10-39
– Sliding door with superstructure 10-34
– System door 10-32
EcoSafe components for constructing safety fences 10-6, 10-23, 10-31
EcoShape load capacity 18-23
EcoShape tubular framing system 2-78
EcoSlide 12-6
– 30x30x80 12-7
– 30x30x160 12-7
– 45x45x80 12-8
– 45x45x160 12-8
– 45x60x80 12-9
– 45x60x160 12-9
– 45x90x80 12-10
– 45x90x160 12-10
Edge protector 2-105, 8-33, 10-44
Elements for manual movement 12-1
End connector 3-51
End piece 8-31
ESD applications,
– Components for 17-1
eShop 2-9
Expanding nut 3-10

▶ **F**
Feet and wheels 6-1
FiFo station 15-1
Flange 13-40
Flanged plate 5-3
Flange nut 3-6
Flexible grinder for anodized surfaces 14-7, 14-8
Floor dowel 6-13
Folding door element 8-11
Foot 6-4
– AL 6-13
Foundation bracket 3-36
Frame profile
– 22.5x30 2-61
– 22.5x45 2-62
Frame profiles 10-14, 10-27

▶ **G**
Grab container base 2-67
Grab ledge 2-67
Ground terminal 10-42

▶ **H**
Handle bar 9-5
Heavy-duty connector 180x180 dynamic load 3-30
Heavy-duty wheel 6-19
Hinge 8-4, 8-6

– Adjustable 8-10
– Aluminum 8-7
– LIFTOFF 8-8
– Plastic 8-5
– Removable 8-9
Hinge profile 8-3
Holder
– AL 3-37
– For lateral guide, fixed 16-6
– For lateral guide, variable 16-8
Hopper 2-67

▶ **I**
Individual profile finishing (Quick & Easy) 18-7
Inner bracket 3-15
– R 3-16
Installation elements 11-1

▶ **J**
Joint
– 20x20 4-2
– 30x30 4-3
– 40x40 4-5, 4-7, 4-8
– 40x40 support 4-5, 4-7
– 45x45 lockable 4-4, 4-6, 4-9
– 60x45 4-10
– 60x60 4-10
Joints 4-1

▶ **K**

▶ **L**
Labeling clips 2-95
Lateral guides
– Components for 16-2
– Holders for, fixed 16-6
– Holders for, variable 16-8
– Profile rails for 16-3
Leveling foot 6-4
Lifting eye bolt 3-67
Lifting eye bolt load capacity data 18-22
Lifting wheel 6-21
– Rotatable Pedal 6-22
Linear guide drives 13-39
Linear guides 13-1
– Sizes, designs, and loads 13-3
– Technical data for roller, design, mounting 13-44
Load capacity data
– For EcoSafe protective frame 18-23
– For EcoSafe support 18-23
Load capacity of profile connection 18-16
Load-dependent design 13-45
Locking ring 7-9
Lock mechanism for double door 10-38
Longitudinal end connection 5-5
Longitudinal end connector 3-63
Longitudinal end connector 45 Pneu 5-6

▶ **M**
Magnet catch 9-6
Manual movement,
– Elements for 12-1
Material chute 2-67
Material number overview 19-1
Metal bracket 3-34, 3-35
Miter bracket 3-18
Miter cutter 14-8
Modular leveling feet 6-2
Mortise lock
– For swing doors 8-22
Mounting cap 10-19
Mounting kit 10-19
Mounting of panel elements 7-1
Mounting rim profile 7-2
– Cleanroom 7-3
Mounting with coupling 13-41
Multi-slider 12-16

▶ **P**
Panel elements
– Mounting of 7-1
Parallel connector 3-11, 3-12
Pinion 12-18
Plate 6-6
Plug-in shafts 13-42
Positioning pin 2-105
Potential equalizer 7-12
Potential equalizer line 2-117
Profile connector 3-41
Profile deflection 18-14
Profile finishing 2-8, 2-10
Profile joints 3/4 and 1/2 2-105
Profile rail 2-71
Profile rails and accessories
– For lateral guides 16-3
Profiles for installing conveyor media 2-72
Profile slot load-bearing capacity 18-15
Protective equipment,
– accessories for 9-1
Protective equipment and partition walls EcoSafe 10-1
Protective grille profiles 7-13
Protective hose 2-117
Protective pane profile
– Cleanroom 7-5
– PVC 7-4

▶ **Q**
Quick connector
– Bendable – end-to-end 3-61
– Bendable – end-to-slot 3-62
– Slot 6 mm, 0°, 90° 3-56, 3-59, 3-60
– Slot 8/10 mm, 0° 3-57, 18-18
– Slot 8/10 mm, 90° 3-58
Quick & Easy 2-9
Quick-lock 11-13
QV mounting kit 3-66

▶ **R**
Rack 12-18
Radial compensation 2-94
Rectangular tube 2-58
Refill end-piece 2-67
Refill end-piece and grab ledge 2-67
Roller 6-16
– With mounting flange 6-23
Round tube D28 2-75
Rubber profile 2-96

▶ **S**
Safety catch 9-4
Safety handle 8-25
Safety Strip loss prevention 10-21
Safety Strip safety kit 10-30
Screw bar profile 7-10
Seal 5-6
Sealing profile 8-27
Sealing strip 8-26
Selection guide
– Rollers 6-17
Slide hanger 12-2
Slider 8-28
– Flat lockable 12-11
– For panel element 12-3
– For profiles 12-13
Sliding block 3-7
Sliding block profile 3-7
Sliding door
– Components for 12-4
Sliding door profile
– Al 45 8-31
– Al Clip 8-30
– PVC 8-29
Slot connector 3-14
Slotted plate 30x100 2-66
Snap hook 12-2
Spacers 2-107
Spring 3-8
Spring clamping element 10-29
Standard profile finishing 18-2
– Blind hole DBx 18-4
– Standard milling F1 18-6
– Thread Mx 18-5
– Through-hole Dx 18-3

Standard profile finishing (Quick & Easy) 18-2
Standards for protective equipment 10-4
Star knob 4-15
Steel bracket 3-33
Strut profile D28x55 2-75
Strut profiles 2-1
– Technical data 18-12
– With 8 mm slot 2-16
– With 10 mm slot 2-24
– With 10 mm slot, 40 mm modular dimension 2-26
– With 10 mm slot, 45 mm modular dimension 2-37
– With 10 mm slot, 50 mm modular dimension 2-54
– With 10 mm slot, 60 mm modular dimension 2-56
– With slot 6 mm 2-11
Supporting arm joint 4-12
Supporting bracket 3-34
– AL 3-39
– AL, lateral 3-40
Support wheels 12-17
Suspension bracket 10-30
Suspension bracket set 10-21
Suspension panel 10-12, 10-25
Suspension piece for frames 10-46
Suspension profile 2-64
Swivel bearing 4-11
Swivel-in sliding block 3-8
Swivel-in sliding block profile 3-8
Swivel mounting 180° 4-14
Synchronous shafts 13-42

▶ **T**
T-bolt 3-6
T-connector
– 45 Pneu 5-6
– Connection elements 3-53
– D28 2-75
Technical data 18-1
– Customized profile finishing 18-7
– LF, layout, assembly 13-44
– Load capacity data for EcoSafe protective frame and EcoSafe support 18-23
– Load capacity of profile connection 18-16
– Profile deflection 18-14
– Profiles 2-3
– Profile slot load-bearing capacity 18-15
– Standard profile finishing 18-2
– Strut profiles 18-12
Threaded sleeve 6-7
Tilt lever 10-45
T-nut 3-4
Tool holder 14-9
– TAPE 50 mm 14-11
Tools 14-1
Tool shelf 14-9
Torx® offset screwdriver 14-6
Torx®, offset screwdriver 14-6
Trolley 2-71

▶ **U**
Universal plate 7-12

▶ **V**
Variofix block 7-6
Variofix block S 7-7, 7-11
Variofix remover 14-8

▶ **W**
Washer 6-13

Notes

Bosch Rexroth AG
Asperger Str. 24
74321 Bietigheim, Germany
www.boschrexroth.com

Find your local contact person here:
www.boschrexroth.com/contact



The data specified only serves to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Material no.: 3 842 540 392 (2025-10)
© Bosch Rexroth AG 2025
Subject to change without notice!