






Bolt connector

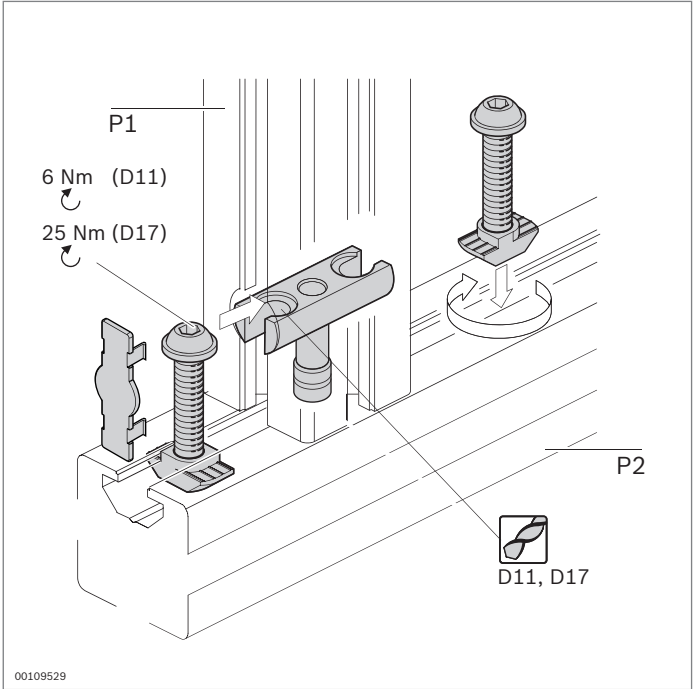

- For right-angled connections between two profiles
- Designed for heavy loads and torsion
- Can be installed in closed frames
- Profile finishing: through hole D11, D17

Technical data (p. 19-7)

Accessories:
 Drilling jig (p. 14-2)



Bolt connector	P1/P2	L (mm)	l ₂ (mm)	ESD	No.
D11x30	8/8	30	18		10 3 842 535 624
	8/10	30	18		10 3 842 535 583

Material: Bolt connector: steel, galvanized
 Centering bolt, caps: PA, black

Scope of delivery: Incl. 2 caps



Bolt connector	P1/P2	L (mm)	l ₂ (mm)	ESD	No.
D17x40	10/10	40	23		10 3 842 535 620
D17x45	10/10	45	28		10 3 842 500 921
D17x50	10/10	50	33		10 3 842 535 621
D17x60	10/10	60	43		10 3 842 500 922
D17x80	10/10	80	63		10 3 842 535 622
D17x90	10/10	90	73		10 3 842 500 923
D17x100	10/10	100	83		10 3 842 535 618

Material: Bolt connector: steel, galvanized
 Centering bolt, caps: PA, black



Scope of delivery: Incl. 2 caps

Size			
30	2500 N	60 Nm	20 Nm
40	4000 N	180 Nm	40 Nm
45	4000 N	180 Nm	60 Nm
50	4000 N	200 Nm	65 Nm

Size			
60	4000 N	200 Nm	80 Nm
80	5000 N	800 Nm	170 Nm
90	5000 N	800 Nm	200 Nm
100	5000 N	1000 Nm	480 Nm



Bolt connector	P1/P2	ESD		No.
D11x11	8/8		10	3 842 535 617
Material: Steel, galvanized				



Bolt connector	P1/P2	ESD		No.
D17x15	10/10		10	3 842 535 619
Material: Steel, galvanized				